

Compact Offset-Free Interaction-Error MPC with Applied-Torque Constraints for Physical Human–Robot Interaction

Anonymous Authors

Abstract—Reference-holding physical human–robot interaction requires compliant transient response without retaining a static deflection under sustained load. We present a compact offset-free model-predictive controller for torque-controlled manipulators. Operational-space cancellation reduces the translational tracking error to a double integrator with a configuration-independent transition matrix. A recursive Kalman filter estimates the persistent interaction and model mismatch in force coordinates, and a 30-variable quadratic program predicts the error while constraining the complete first applied joint-torque command. In a 1 kHz MuJoCo simulation of a 7-DOF Franka FR3, adding the disturbance state to an otherwise identical 100 Hz MPC reduces repeated-step steady-state error from 2.77 to 0.042 mm. A response-matched impedance baseline reaches 2.59 mm but briefly saturates and requires 3.3 times the peak positive joint power; ideal measured-force cancellation reaches 1.39 mm. The proposed sensorless controller therefore isolates a $65.8\times$ offset-rejection benefit in the tested moving task without increasing peak power. Results are simulation-only and establish a compact realization and controlled ablation, not a hardware safety or universal performance claim.

Index Terms—Physical human–robot interaction, model predictive control, impedance control, disturbance estimation, torque constraints.

I. INTRODUCTION

Impedance and admittance control provide transparent interaction behavior [1], [2]. Their objectives depend on the task: in hand guiding, force-induced displacement may be the command, whereas reference-holding and recovery require a robot to return to a desired motion after yielding to contact. A finite-stiffness impedance retains the equilibrium bias $p - p_d = K_d^{-1} F_h$ under a sustained human force F_h . Integral action can remove this bias, but must be coordinated with actuator saturation [3], [4].

Predictive interaction control is already well established. Existing work optimizes interaction dynamics [5], combines impedance and constraint optimization [6], learns interaction models [7], estimates force online [8], or enforces passivity and safety conditions [9], [10]. High-rate nonlinear manipulator MPC is also possible with tailored computation [11]. Thus MPC, disturbance estimation, and predictive impedance are not individually new.

Offset-free MPC commonly augments a nominal model with a constant output or input disturbance and estimates that state online [12]. The choice of disturbance coordinates is important here. An acceleration disturbance changes with the robot’s configuration through the task inertia, whereas a

constant Cartesian load is approximately constant in force coordinates. We therefore place the disturbance in the same force channel as the optimizer. This also distinguishes load rejection from intent inference: the estimated vector includes contact, unmodelled dynamics, and cancellation error and cannot identify which part was generated deliberately by a person.

This paper addresses a narrower implementation question: how can these ideas be connected through a small, auditable interface? Operational-space cancellation exposes a normalized translational error model. The optimizer selects a corrective task force, the disturbance estimator uses the same force coordinates, and the robot-specific realization enters an affine joint-torque constraint. The contributions are:

- 1) a constant-transition interaction-error predictor whose input matrix is scheduled only through the current task inertia;
- 2) force-domain disturbance augmentation with a centered input cost that admits the steady balancing input $F_{\text{mpc}} = -\hat{d}$; and
- 3) a first-move applied-torque constraint and a controlled FR3 simulation comparison against nominal, response-matched, integral, variable-impedance, and ideal measured-force baselines.

The conference version focuses on the implemented controller and its causal ablation. Longer proofs, parameter sweeps, and optional barrier/passivity extensions are not used to support the principal experimental claim.

A. Problem statement and evaluation questions

Given $p_d(t)$, joint feedback $(q, \dot{q})$, and a model (M, C, G, J) , the reference-holding objective is to minimize $e = p_d - p$ while respecting the physical joint-torque box. No contact-force measurement is supplied to the proposed controller. We ask three concrete questions. First, can a 3-D disturbance state remove the sustained-load bias without changing the nominal MPC tuning? Second, does the comparison remain meaningful after matching a classical impedance controller to the MPC’s closed-loop response and enforcing the same actuator limits? Third, how does the flat disturbance prediction degrade under time-varying loads? These questions determine the ablations and metrics in Section V.

II. INTERACTION-ERROR MODEL

Consider an n -DOF torque-controlled manipulator; the experiments use the Franka FR3 ($n = 7$) [13]. Its dynamics are

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = \tau + J^\top(q)\mathcal{F}_h, \quad (1)$$

where $\mathcal{F}_h$ is positive when the human pushes onto the robot. Let $J_v \in \mathbb{R}^{3 \times n}$ be the translational Jacobian and

$$\Lambda(q) = (J_v M^{-1} J_v^\top)^{-1} \quad (2)$$

the translational operational-space inertia [14]. The implementation regularizes Λ^{-1} by $10^{-6}I$ and operates away from singularities.

The commanded torque separates feedforward, translation, orientation, and null-space channels:

$$\tau = \tau_{\text{ff}} + J_v^\top F_{\text{mpc}} + J_\omega^\top F_{\text{ori}} + \bar{N}^\top \tau_{\text{null}}, \quad (3)$$

where $\bar{N}$ is the dynamically consistent projector of the full pose task [15]. Feedforward cancellation uses

$$\tau_{\text{ff}} = C\dot{q} + G + J_v^\top \Lambda \ddot{p}_d. \quad (4)$$

With $e = p_d - p$, the residual translation is

$$\ddot{e} = -\Lambda^{-1}(q)F_{\text{mpc}} + d_{\text{acc}}, \quad (5)$$

where d_{acc} collects the projected interaction wrench, $-\dot{J}_v \dot{q}$, orientation-to-translation coupling, friction, and model error. Hence this is a cancellation-plus-disturbance model, not an assumption of perfect nonlinear inversion. We use the force-equivalent disturbance $d = -\Lambda d_{\text{acc}}$, which is constant for a constant translational human force even when $\Lambda(q)$ changes.

For error state $x = [e^\top, \dot{e}^\top]^\top$ and sample period Δt , exact zero-order-hold discretization gives

$$x_{k+1} = A_d x_k + B_d(q_k)(F_{\text{mpc},k} + d_k), \quad (6)$$

$$A_d = \begin{bmatrix} I & \Delta t I \\ 0 & I \end{bmatrix}, \quad B_d(q) = \begin{bmatrix} -\frac{\Delta t^2}{2} \Lambda^{-1}(q) \\ -\Delta t \Lambda^{-1}(q) \end{bmatrix}. \quad (7)$$

Because the continuous double-integrator matrix is nilpotent, A_d is exact and configuration independent; only B_d is scheduled. This constant- A_d property applies to the reduced translational predictor, not to the complete robot dynamics or torque map.

III. OFFSET-FREE RECEDING-HORIZON CONTROLLER

A. Recursive disturbance estimator

Augment the force-equivalent disturbance as a random walk:

$$\begin{bmatrix} x_{k+1} \\ d_{k+1} \end{bmatrix} = \begin{bmatrix} A_d & B_d(q_k) \\ 0 & I \end{bmatrix} \begin{bmatrix} x_k \\ d_k \end{bmatrix} + \begin{bmatrix} B_d(q_k) \\ 0 \end{bmatrix} F_{\text{mpc},k} + \begin{bmatrix} 0 \\ w_k \end{bmatrix}. \quad (8)$$

A discrete recursive Kalman filter observes $[e^\top, \dot{e}^\top]^\top$ from robot position and velocity feedback and propagates the 9×9 covariance at each QP update. Its gain is recomputed rather than frozen. The random walk tracks constant and slowly varying aggregate loads; it does not infer human intent or separate human force from model error.

Let $z = [x^\top, d^\top]^\top$, $C_z = [I_6 \ 0]$, and denote the two matrices in (8) by $A_z(q_k)$ and $B_z(q_k)$. The implemented recursion is

$$\hat{z}_{k+1}^- = A_z(q_k)\hat{z}_k^+ + B_z(q_k)F_{\text{mpc},k}, \quad (9a)$$

$$P_{k+1}^- = A_z(q_k)P_k^+ A_z^\top(q_k) + Q_z, \quad (9b)$$

$$S_{k+1} = C_z P_{k+1}^- C_z^\top + R_z, \quad (9c)$$

$$L_{k+1} = P_{k+1}^- C_z^\top S_{k+1}^{-1}, \quad (9d)$$

$$\hat{z}_{k+1}^+ = \hat{z}_{k+1}^- + L_{k+1}(y_{k+1} - C_z \hat{z}_{k+1}^-), \quad (9e)$$

$$P_{k+1}^+ = (I - L_{k+1} C_z) P_{k+1}^-. \quad (9f)$$

Here $y = [e^\top, \dot{e}^\top]^\top$, with p from forward kinematics and $\dot{p} = J_v \dot{q}$. The covariance Q_z contains a disturbance random-walk block Q_w ; R_z represents the kinematic measurement channel. This filter uses no extra numerical differentiation of end-effector velocity.

For a frozen nonsingular B_d , the disturbance is observable from the measured error state because it affects x_{k+1} through B_d ; equivalently, the first two block rows of the augmented observability matrix contain $[I_6 \ 0]$ and $[A_d \ B_d]$. Since B_d has column rank three away from task singularities, no nonzero disturbance direction is hidden. This establishes the structural requirement behind the estimator, but does not guarantee a particular convergence rate under noise or model mismatch.

B. QP and applied-torque constraint

For horizon $N = 10$, stack $U = [F_{\text{mpc},0}^\top, \dots, F_{\text{mpc},N-1}^\top]^\top \in \mathbb{R}^{30}$ and the predicted errors X . With $d_N = \mathbf{1}_N \otimes \hat{d}$, solve

$$\min_U \frac{1}{2} X^\top \bar{Q} X + \frac{1}{2} (U + d_N)^\top \bar{R} (U + d_N), \quad (10a)$$

$$\text{s.t.} \quad -F_{\text{max}} \leq F_{\text{mpc},i} \leq F_{\text{max}}, \quad i = 0:N-1, \quad (10b)$$

$$-\tau_{\text{max}} \leq \tau_{\text{base}} + J_v^\top F_{\text{mpc},0} \leq \tau_{\text{max}}, \quad (10c)$$

where $\tau_{\text{base}} = \tau_{\text{ff}} + J_\omega^\top F_{\text{ori}} + \bar{N}^\top \tau_{\text{null}}$. The centered effort term in (10a), rather than $\|U\|_{\bar{R}}^2$, makes the steady balancing input $U = -d_N$ cost-free. Condensing yields $H = \Gamma^\top \bar{Q} \Gamma + \bar{R}$ and $h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N$. The current implementation tests this identity directly to prevent an absolute-input penalty from reintroducing an R -dependent offset.

For completeness, the condensed prediction used in code is

$$X = \Phi x_k + \Gamma U + D_{\text{bar}} \hat{d}_k, \quad qquad D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3), \quad (11)$$

where the j th block row of Φ is A_d^j and the (j,i) block of Γ is $A_d^{j-1-i} B_d$ for $i < j$. Thus $x_{\text{free}} = \Phi x_k + D_{\text{bar}} \hat{d}_k$ and

$$H = \Gamma^\top \bar{Q} \Gamma + \bar{R}, \quad h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N. \quad (12)$$

Because $\bar{R} \succ 0$, $H \succ 0$ and the optimization is a strictly convex QP. The identity $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$ is also a useful implementation check: the estimator's force must enter every prediction step through exactly the same scheduled input map as the commanded force.

C. Relation to a realized impedance

For fixed q , inactive constraints, and $\hat{d} = 0$, the strictly convex QP has the unique solution

$$U^* = -H^{-1} \Gamma^\top \bar{Q} \Phi x_k. \quad (13)$$

If $S_0 = [I_3 \ 0 \ \cdots \ 0]$ selects the first input block, then $F_{\text{mpc},0} = S_0 U^* = K_e e + K_{\dot{e}} \dot{e}$. The unconstrained predictive controller is therefore a configuration-dependent linear impedance whenever the symmetric parts of K_e and $K_{\dot{e}}$ have the stiffness and damping sign structure. Importantly, Q_p and Q_v are cost weights; they are not themselves the realized stiffness and damping. The realized gains are the finite-horizon Riccati image in (13).

This relation explains why a nominal 300 N/m impedance is not automatically a fair comparator for the tuned MPC. It also identifies what the disturbance augmentation changes. For a constant load and exact estimate, define $v = F_{\text{mpc}} + d$. The centered cost penalizes v , so the same feedback acts on the error while the physical command contains the equilibrium feedforward $F_{\text{mpc}} = -d$. In contrast, an unaugmented finite stiffness law must retain a nonzero error to produce its balancing force.

Equation (10c) constrains the complete torque that will actually be applied at the current receding-horizon step, including feedforward, orientation, and null-space terms. It does not assert horizon-wide torque feasibility. Because only the first move is applied, the nominal command satisfies the magnitude limits whenever the QP is feasible. Runtime magnitude clipping and torque-rate limiting remain final guards. If τ_{base} alone exhausts the budget, the released benchmark returns zero correction on QP failure rather than claiming recursive feasibility.

Proposition 1 (Frozen-configuration offset rejection). *Fix q , assume the augmented pair in (8) is detectable, the closed loop is stable, the QP is feasible with inactive constraints at steady state, and the estimator is asymptotically unbiased for a constant d . Then the equilibrium satisfies $e_{\infty} = 0$ and $F_{\text{mpc},\infty} = -d$.*

Proof. At equilibrium, (6) requires $B_d(F_{\text{mpc},\infty} + d) = 0$. Away from singularities B_d has full column rank, so $F_{\text{mpc},\infty} = -d$. With the centered input $V = U + d_N$, the unconstrained steady solution is $V = 0$; positive-definite position weighting and stable feedback then give $e_{\infty} = 0$. $\square$

This is a frozen-configuration result. Moving-reference performance and active constraint behavior are evaluated numerically; they are not consequences of the proposition. For time-varying d , flat horizon prediction incurs the standard bound

$$\|d_{k+i} - \hat{d}_{k|k}\| \leq e_K + L_d i \Delta t, \quad (14)$$

when $\|d_k - \hat{d}_{k|k}\| \leq e_K$ and $\|\dot{d}\| \leq L_d$. Only the first move is applied and the estimate is refreshed at the next solve.

D. Auxiliary channels and implementation scope

Orientation uses a separate operational-space PD channel. With axis-angle error e_R extracted from $R_d^\top R$, it applies

$$F_{\text{ori}} = -K_{\text{rot}} e_R - D_{\text{rot}} \omega, \quad K_{\text{rot}} = 20I_3, \quad D_{\text{rot}} = 6I_3. \quad (15)$$

This channel is not dynamically decoupled from translation; the resulting cross-coupling is part of d_{acc} in (5).

For the redundant FR3 degree of freedom, define joint clearance $\phi_i = \min(q_i - q_{\min,i}, q_{\max,i} - q_i)$. Within the activation distance $\delta_i = 0.1(q_{\max,i} - q_{\min,i})$, the signed inverse-barrier gradient has magnitude

$$|g_i(q)| = k_b \left(\frac{1}{\phi_i} - \frac{1}{\delta_i} \right), \quad k_b = 50, \quad (16)$$

and points away from the nearer limit. The null-space torque is $\tau_{\text{null}} = -k_{\text{null}}(q - q_0) + g(q) - d_{\text{null}}\dot{q}$. Near a task boundary, the reference is additionally shifted by

$$\delta p = k_{\text{ws}}(J_v J_v^\top + \epsilon_r I)^{-1} J_v g(q), \quad qquad \|\delta p\| \leq 0.06 \text{ m}. \quad (17)$$

The circular and waypoint comparisons disable this shift; the boundary test uses $k_{\text{ws}} = 5 \times 10^{-4}$.

The code also contains a one-step control-barrier projection and a translational energy-tank filter. The direct comparison scripts do not engage or log those certificates. Moreover, the tank scales only the translational predictive-force channel and excludes feedforward, orientation, and null-space power. We therefore make no certified joint-limit or full-port passivity claim for the experiments below.

The QP runs at 100 or 500 Hz and the feedforward/realization loop at 1 kHz. OSQP [16] is warm-started and its preallocated matrices are updated with the current B_d , Jacobian, and torque offset. The optimization dimension is independent of joint count, but deployment still requires the robot model, full Jacobian, joint limits, and actuator limits.

IV. REAL-TIME REALIZATION

The controller is implemented at two rates. At every 1 kHz physics step, the robot model, reference acceleration, orientation term, and null-space term are updated. At a QP tick, the same measured state is used to update the recursive filter, rebuild the scheduled prediction and affine torque row, and solve for the first task-force move. That move is held until the next QP tick. This ordering matters: using an unclipped optimizer output rather than the force associated with the applied command in (9e) would give the estimator a false input whenever a runtime guard activates.

The per-tick sequence is:

- 1) compute $M, C, G, J_v, J_\omega, \Lambda$ and the measured error y_k ;
- 2) predict and correct $(\hat{z}_k, P_k)$ using the previously applied task-force correction;
- 3) form $\Phi, \Gamma, D_{\text{bar}}$ from the current $B_d(q_k)$ and construct (H, h) from (12);
- 4) add the force box and complete first-move torque row (10c), warm-start OSQP, and solve;
- 5) assemble (3), apply the configured runtime guards, and store the applied correction for the next filter prediction.

Table I records the parameters needed to reproduce the direct comparison. The optional workspace correction is disabled in the circular and waypoint controller comparisons and enabled only in the boundary experiment. The CBF and tank constants are intentionally omitted because those final filters do not support the headline results.

Three software checks protect the interface most likely to be implemented incorrectly. First, the condensed gradient

TABLE I
PRINCIPAL CONTROLLER AND ESTIMATOR PARAMETERS

Quantity	Symbol	Value
Prediction horizon	N	10
QP period	Δt	10 ms (2 ms in C6–C7)
Inner realization period	—	1 ms
Position / velocity weights	Q_p, Q_v	$2 \times 10^4 I_3, 50 I_3$
Terminal scale / effort weight	γ, R	$5, 10^{-6} I_3$
Corrective-force bound	$F_{\max}$	150 N per axis
FR3 joint-torque limits	$\tau_{\max}$	[87, 87, 87, 87, 12, 12, 12] Nm
Disturbance process variance	Q_w	$10 I_3$
Position / velocity obs. variance	$R_e, R_{\dot{e}}$	$10^{-3} I_3, 10^{-2} I_3$
OSQP tolerances / iteration cap	—	$10^{-6} / 4000$

TABLE II
CONTROLLED MPC ABLATION, 15 N REPEATED STEP

Controller	Rate (Hz)	Contact RMS (mm)	Peak (mm)	SS error (mm)
C4: DI-MPC, no estimator	100	2.20	2.92	2.77
C5: DI-MPC + estimator	100	0.53	2.58	0.042
C6: DI-MPC, no estimator	500	0.80	1.10	1.10
C7: DI-MPC + estimator	500	0.20	0.80	< 0.05

includes $\bar{R}d_N$; omitting it changes the intended input-centered cost. Second, the torque bound is applied to $\tau_{\text{base}} + J_v^T F_{\text{mpc},0}$, not only to the corrective force. Third, the benchmark logs raw and applied torque separately, using a 10^{-3} Nm excess threshold so numerical QP tolerances are not mislabeled as physical saturation.

V. SIMULATION EVALUATION

All experiments use the MuJoCo Menagerie FR3 [17], [18] at 1 kHz with joint-torque limits [87, 87, 87, 87, 12, 12, 12] Nm. A 12 cm XZ circle is traversed in 8 s while a 15 N downward step is applied for 3 s of each cycle. The MPC horizon is $N = 10$, the nominal impedance stiffness is 300 N/m, and all reported fair comparators use the same plant and physical torque budget.

A. Estimator and update-rate ablation

Table II separates estimator and update-rate effects. C4 and C5 have identical horizon, weights, rate, and torque interface; only the augmented disturbance estimator differs. At 100 Hz it reduces steady-state error from 2.77 to 0.042 mm. Raising the rate mainly reduces the contact transient in this protocol, while the estimator primarily removes the constant-load offset; the effects are not claimed to be orthogonal in general.

B. Broad baseline screen

Before response matching, we screen the controller against four common interaction behaviors using the nominal 300 N/m impedance setting. The admittance controller has a 100 N/m virtual spring; PI impedance adds an integral state to the nominal impedance; and predictive variable impedance uses the disturbance estimate to schedule finite stiffness without cancelling the load. Table III reports three cycles and all controllers. It is included to show behavior across design classes, but comparisons between rows with different effective stiffness are descriptive rather than causal.

TABLE III
BROAD SCREEN ON THE 12 CM CIRCLE AND 15 N STEP

Controller	Total RMS (mm)	Contact RMS (mm)	Peak (mm)	SS error (mm)
Impedance, 300 N/m	35.6	41.1	51.8	44.8
Admittance, 100 N/m	113.9	174.7	210.5	186.7
PI impedance	36.2	27.4	43.7	21.4
Predictive variable imp.	12.9	4.5	7.5	4.8
C4: DI-MPC 100 Hz	11.4	2.2	2.9	2.8
C5: DI-MPC + est. 100 Hz	11.4	0.5	2.6	< 0.05
C6: DI-MPC 500 Hz	12.8	0.8	1.1	1.1
C7: DI-MPC + est. 500 Hz	12.6	0.2	0.8	< 0.05

FR3 pHRI Benchmark: Circular Trajectory + Step Human Force

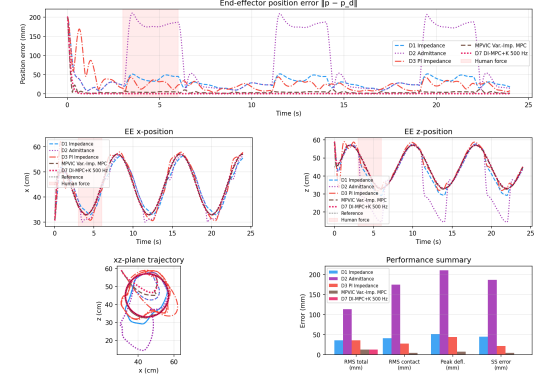


Fig. 1. Representative trajectories from the broad screen. The compliant admittance response is intentional; its large displacement is not a failure for a guidance task, but it is unsuitable for the reference-holding objective studied here. The response-matched study below removes the largest stiffness confound between impedance and MPC.

The broad screen makes two mechanism-level points. The predictive variable-impedance row improves on reactive finite-stiffness controllers but retains a 4.8 mm bias because scheduling stiffness does not provide an internal model of a constant load. At fixed MPC rate and tuning, C4 versus C5 and C6 versus C7 show the repeatable estimator effect. The exceptionally large admittance displacement is close to the $15/100 = 150$ mm equilibrium expected from its virtual spring; it reflects its chosen yielding behavior. We do not use these unmatched rows to claim general superiority.

C. Response-matched fair comparison

The nominal 300 N/m impedance is intentionally compliant, so its comparison with C4 is gain-confounded. A separate calibration estimates C4's equilibrium stiffness as 5441 N/m, then searches stiffness scales (0.8, 1.0, 1.2) and damping ratios (0.7, 1.0, 1.3) on one cycle. It selects 5441 N/m and $\zeta = 1.3$. A torque-aware PI baseline is tuned independently over nine integral-gain/limit pairs. We also provide the matched impedance with ideal simulated-force cancellation filtered at 50 ms; this is a favorable sensor-based comparator, not a reproduction of a particular published controller. Metrics in Table IV use three held-out cycles.

The response-matched impedance and C4 have similar steady-state errors (2.59 and 2.77 mm), so the nominal impedance/C4 ratio is not an architectural result. Their resource use differs: the matched impedance reaches 378.2 W

TABLE IV
FAIR COMPARISON UNDER A COMMON ACTUATOR BUDGET

Controller	Contact RMS (mm)	SS (mm)	Saturated samples (%)	Peak P^+ (W)
Nominal impedance	41.07	44.82	0	22.5
Response-matched impedance	2.38	2.59	0.45	378.2
Tuned anti-windup PI	27.10	20.38	0	58.3
Matched imp. + force FF	1.40	1.39	0.45	378.2
C4: DI-MPC 100 Hz	2.20	2.77	0	113.2
C5: DI-MPC + est. 100 Hz	0.53	0.042	0	113.1

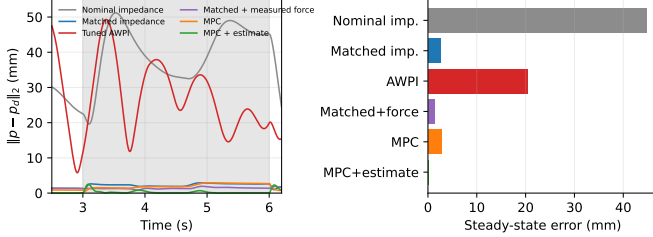


Fig. 2. Held-out fair comparison. Response matching closes the nominal impedance/C4 steady-state gap. The controlled C4–C5 pair isolates the disturbance augmentation; ideal measured-force feedforward also reduces the load-axis bias but retains the matched impedance’s saturation and power cost.

peak positive joint power and exceeds a physical torque limit in 0.45% of samples, compared with 113.2 W and no thresholded saturation for C4. C4 and C5 each complete 2400 QP solves without failure; their maximum raw limit excesses are below 2×10^{-5} Nm, beneath the 10^{-3} Nm saturation threshold. Adding the estimator reduces steady-state error by $65.8\times$ without increasing peak power. Ideal measured-force cancellation confirms that constant-load rejection is not unique to MPC; C5’s distinction in this test is achieving 0.042 mm without a force measurement.

D. Waypoint generalization

A second task checks whether the conclusion is specific to a periodic circle. The end effector visits three waypoints forming a triangle. At each waypoint, a 15 N push in a different direction begins 0.8 s after arrival and lasts 2 s; the robot must then dwell within 35 mm of the target for 1 s. All controllers reach all three waypoints. Table V repeats the controlled 100 Hz estimator ablation: contact RMS falls from 2.2 to 0.6 mm when the disturbance state is enabled. At 500 Hz, estimation and faster updates combine to reach 0.2 mm contact RMS and 0.8 mm peak error.

The predictive variable-impedance comparator rolls out the same horizon and uses $\hat{d}$ only to choose a stiffness from $\{200, 400, 800, 1500, 3000\}$ N/m; it does not subtract the estimated load. It is an in-house scheduler in the family of predictive variable-impedance methods [19], [20], not a reproduction of a published implementation. Its 5.0 mm result therefore supports only the mechanism-level observation that adapting a finite stiffness leaves a load-dependent offset. The large free-motion errors across methods include waypoint travel and are not a measure of contact regulation.

The moving-reference behavior is also checked on four circle planes without plane-specific retuning (Table VI). C5

TABLE V
THREE-WAYPOINT HOLD UNDER DIRECTIONALLY VARIED PUSHES

Controller	Waypoints reached	Free RMS (mm)	Contact RMS (mm)	Peak (mm)
Stiff impedance	3/3	63.6	41.4	47.1
Predictive variable imp.	3/3	51.2	5.0	6.0
C4: DI-MPC 100 Hz	3/3	47.9	2.2	2.6
C5: DI-MPC + est. 100 Hz	3/3	47.9	0.6	2.4
C6: DI-MPC 500 Hz	3/3	51.9	0.8	1.0
C7: DI-MPC + est. 500 Hz	3/3	51.4	0.2	0.8

TABLE VI
FREE-SPACE CIRCLE GENERALIZATION, $R = 12$ CM, $T = 8$ S

Circle plane	Nominal impedance RMS (mm)	C5 RMS (mm)
XZ sagittal	23.54	0.24
XY horizontal	25.06	0.33
YZ frontal	16.25	0.20
Tilted XZ-to-XY	25.07	0.31

remains below 0.35 mm free-space RMS on every plane. The much larger nominal-impedance errors again mix architecture with its deliberately compliant 300 N/m gain, so the table is evidence of directional consistency of the scheduled operational-space model, not a fair performance ratio.

E. Time-varying interaction and horizon validity

The random-walk model predicts d as constant over the short horizon. We test that approximation at a static target under $F_z = -12 \sin(2\pi ft)$ N for $f \in \{0, 0.1, 0.2, 0.4, 0.8\}$ Hz. From the simulator dynamics and the applied torque-limited correction, the aggregate ground truth is reconstructed as

$$d_{\text{acc},k} = \ddot{e}_k + \Lambda^{-1}(q_k)F_{\text{mpc},k}, \quad d_k = -\Lambda(q_k)d_{\text{acc},k}. \quad (18)$$

For prediction origins fully inside the settled force window, define $e_K = \text{RMS}_k \|d_k - \hat{d}_{k|k}\|$ and $\varepsilon_i = \text{RMS}_k \|d_{k+i} - \hat{d}_{k|k}\|$. The empirical rate $L_{d,\text{emp}}$ is the maximum first difference of the reconstructed aggregate disturbance, not merely the derivative of the injected sinusoid.

For all five rows, the measured N -step error is below $e_K + L_{d,\text{emp}}N\Delta t$ (2.25, 1.64, 3.97, 7.55, and 11.22 N, respectively), consistent with (14). Prediction and tracking errors increase with disturbance rate: tracking stays below 0.6 mm through 0.4 Hz and reaches 1.04 mm at 0.8 Hz. The nonzero constant-row e_K is mainly estimator fluctuation: its mean error-vector norm is 0.74 N, whereas its zero-mean fluctuation RMS is 2.07 N. This experiment checks the finite-horizon arithmetic for the simulator protocol; it is not a robustness bound for unmodelled contact, delay, or hardware sensing.

F. Force magnitude and shape

The circular experiment is repeated with sustained loads from 5 to 25 N to check the operating range of the offset claim (Table VIII). For C7, steady-state deflection remains approximately 0.021 mm throughout the tested unsaturated range, whereas first-contact peak error increases from 0.29 to 1.27 mm. The estimator cancels a constant force after convergence, but it cannot cancel an unseen step at its first

TABLE VII
GROUND-TRUTH DISTURBANCE PREDICTION, C5 AT 100 Hz

f (Hz)	$L_{d,emp}$ (N/s)	e_K (N)	ε_1 (N)	ε_N (N)	Track RMS (mm)
0.0	0.51	2.20	2.20	2.20	0.08
0.1	7.57	0.88	0.90	1.13	0.12
0.2	15.13	2.45	2.50	3.08	0.26
0.4	30.44	4.51	4.62	5.94	0.54
0.8	61.45	5.07	5.36	8.38	1.04

TABLE VIII
SUSTAINED-FORCE SWEEP: STEADY-STATE / PEAK ERROR (MM)

Applied load (N)	5	10	15	20	25
Nominal impedance, SS	26.9	33.7	45.0	58.5	73.1
Nominal impedance, peak	28.4	37.0	51.2	70.1	88.9
C7, SS	0.021	0.021	0.021	0.021	0.021
C7, peak	0.29	0.50	0.76	1.02	1.27

sample; this separates steady-state offset rejection from transient compliance.

At 15 N, changing the force profile from a step to a linear ramp lowers C7 contact RMS from 0.151 to 0.096 mm and peak error from 0.759 to 0.286 mm. A 1 Hz sinusoid raises contact RMS to 0.402 mm while peak error remains 0.601 mm. These results agree with the direct prediction study: smoother onset reduces the unobserved transient, while a persistent time-varying load exposes the bandwidth limit of the random-walk estimator. They do not imply amplitude-independent performance after the 150 N force box or joint-torque limits become active.

G. Boundary and robustness checks

The 20 cm boundary circle deliberately exercises the soft null-space barrier and workspace projection, not the final CBF. Nominal impedance reaches a fractional joint margin of 0.049 and crosses the chosen 5% threshold; C5 maintains 0.083 at both 100 and 30 Hz, with 13.33 and 11.76 mm tracking RMSE. This is empirical avoidance under the stated trajectory, not forward-invariant safety certification.

Position-noise results average five seeds and model only end-effector position noise; velocity noise, delay, and force-sensor noise are absent. The inertia test perturbs only the controller's feedforward model while the plant remains unchanged. These tests show numerical tolerance over the selected ranges, not robust-stability guarantees.

H. Loss of corrective authority

In the standard realization, the QP output is the entire translational feedback term. If its force box is tightened toward zero, the commanded translation channel approaches feedforward-only cancellation and retains no restoring stiffness. This is a meaningful deployment failure mode even though it is outside the nominal $F_{\max} = 150$ N benchmark. We therefore test an optional architecture, C8, that places a fixed damped backbone outside the optimizer,

$$F_{bb} = K_{bb}e + D_{bb}\dot{e}, \quad K_{bb} = 300I_3 \text{ N/m}, \quad (19)$$

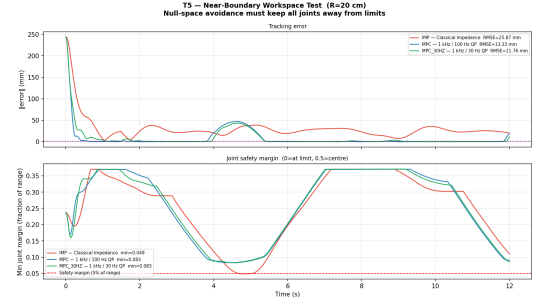


Fig. 3. Boundary-circle trajectories. The workspace correction trades tracking accuracy for clearance: the nominal impedance crosses the selected 5% fractional margin (minimum 0.049), whereas C5 maintains 0.083 in this test. The plotted result exercises the soft mechanisms in (16)–(17), not the optional CBF.

TABLE IX
C5 ROBUSTNESS CHECKS (100 Hz QP)

Position noise 1σ (mm)	0	1	2	5
10 N-step SS error (mm)	0.08	$0.19 \pm .03$	$0.37 \pm .04$	$0.89 \pm .07$
Controller inertia error	0%	+10%	+20%	+30%
Circle RMSE, estimator on (mm)	0.24	0.24	0.23	0.23
Circle RMSE, estimator off (mm)	0.94	0.86	0.79	0.73

and lets the QP choose only an additive bounded correction. The full command $F_{bb} + F_{mpc}$ is included in the torque-feasibility rows. Unlike the default controller, C8 repeats a frozen-current-configuration torque row at every horizon step. This is a local realizability approximation, not an exact future joint-space rollout.

At 150 and 20 N, C8 matches C7 to the reported precision; the backbone does not cost nominal performance because it replaces force that the unconstrained QP would otherwise generate. At 5 N and below, both controllers degrade severely, but C8's retained stiffness reduces contact RMS by 5.5–7.7 times over this 24 s protocol. At $F_{\max} = 0$, C8 still has 78.6 mm contact RMS: the backbone improves graceful degradation but cannot reproduce offset-free control without additive correction. This finite-duration stress test is not a boundedness, recursive-feasibility, or actuator-fault guarantee. It does, however, expose a practical distinction between limiting an optional predictive correction and limiting the controller's entire restoring action.

VI. DISCUSSION AND CONCLUSION

The proposed interface separates a behavior-coordinate request from its robot-specific torque realization. Operational-space cancellation gives a constant- A_d error predictor; force-domain augmentation aligns the estimate, horizon model, and balancing input; and the affine first-move constraint acts on the complete applied torque. The C4–C5 ablation attributes a $65.8\times$ steady-state improvement to disturbance augmentation under identical MPC tuning. Response matching also shows that much of the nominal impedance-versus-MPC gap is simply stiffness, while ideal force cancellation confirms that offset rejection is not unique to predictive control.

The evidence remains limited to torque-controlled FR3 simulation. The predictor lumps human force and model

TABLE X
CORRECTIVE-AUTHORITY STRESS TEST: CONTACT RMS / PEAK (MM)

$F_{\max}$ (N)	150	20	5	1	0
C7 RMS	0.15	0.15	317.7	416.0	430.0
C7 peak	0.77	0.76	412.2	554.2	565.9
C8 RMS	0.15	0.15	41.3	69.8	78.6
C8 peak	0.77	0.76	53.7	95.9	109.4

error, assumes accurate position and velocity feedback, and provides a frozen-configuration offset result. The boundary test is not a CBF certificate, and the optional energy tank does not establish full-port passivity. Hardware evaluation should compare against a canonical predictive interaction controller under shared tuning while logging force estimates, applied torque, solver status, safety-filter slack, and energy state.

REFERENCES

- [1] N. Hogan, "Impedance control: An approach to manipulation—Parts I–III," *ASME J. Dyn. Syst. Meas. Control*, vol. 107, no. 1, pp. 1–24, 1985.
- [2] S. Chiaverini, B. Siciliano, and L. Villani, "A survey of robot interaction control schemes with experimental comparison," *IEEE/ASME Trans. Mechatronics*, vol. 4, no. 3, pp. 273–285, 1999.
- [3] Y.-Y. Cao, Z. Lin, and D. G. Ward, "Anti-windup design of output tracking systems subject to actuator saturation and constant disturbances," *Automatica*, vol. 40, no. 7, pp. 1221–1228, Jul. 2004.
- [4] —, "An antiwindup approach to enlarging domain of attraction for linear systems subject to actuator saturation," *IEEE Trans. Autom. Control*, vol. 47, no. 1, pp. 140–145, Jan. 2002.
- [5] T. Gold, A. Völz, and K. Graichen, "Model predictive interaction control for robotic manipulation tasks," *IEEE Trans. Robot.*, vol. 39, no. 1, pp. 76–89, 2023.
- [6] Y. Chen, C. Li, T. Teng, X. Wu, D. Xu, Y.-H. Liu, and F. Chen, "Unified model predictive interaction control integrating impedance matching and constraint optimization," in *Proc. IEEE Int. Conf. Control Autom. (ICCA)*, 2025, pp. 372–378.
- [7] K. Haninger, C. Hegeler, and L. Peternel, "Model predictive impedance control with Gaussian processes for human and environment interaction," *Robotics and Autonomous Systems*, vol. 165, p. 104431, 2023.
- [8] A. Jordana, S. Kleff, J. Carpentier, N. Mansard, and L. Righetti, "Force feedback model-predictive control via online estimation," in *Proc. IEEE ICRA*, 2024, pp. 11 503–11 509.
- [9] R. Cao, L. Cheng, and H. Li, "Passive model-predictive impedance control for safe physical human–robot interaction," *IEEE Trans. Cogn. Dev. Syst.*, vol. 16, no. 2, pp. 426–435, 2024.
- [10] J. Matschek, J. Bethge, and R. Findeisen, "Safe machine-learning-supported model predictive force and motion control in robotics," *IEEE Trans. Control Syst. Technol.*, vol. 31, no. 6, pp. 2380–2392, 2023.
- [11] S. Kleff, A. Meduri, R. Budhiraja, N. Mansard, and L. Righetti, "High-frequency nonlinear model predictive control of a manipulator," in *Proc. IEEE ICRA*, 2021.
- [12] G. Pannocchia and J. B. Rawlings, "Disturbance models for offset-free model-predictive control," *AIChE Journal*, vol. 49, no. 2, pp. 426–437, 2003.
- [13] Franka Robotics GmbH, "Franka research 3 (FR3) technical documentation," 2023, <https://frankaemika.github.io/docs>.
- [14] O. Khatib, "A unified approach for motion and force control of robot manipulators: The operational space formulation," *IEEE J. Robot. Autom.*, vol. 3, no. 1, pp. 43–53, 1987.
- [15] L. Sentis and O. Khatib, "Synthesis of whole-body behaviors through hierarchical control of behavioral primitives," *Int. J. Humanoid Robotics*, vol. 2, no. 4, pp. 505–518, 2005.
- [16] B. Stellato, G. Banjac, P. Goulart, A. Bemporad, and S. Boyd, "OSQP: An operator splitting solver for quadratic programs," *Math. Program. Comput.*, vol. 12, no. 4, pp. 637–672, 2020.
- [17] Google DeepMind, "MuJoCo menagerie: A collection of physics-based simulation models," GitHub, 2022, https://github.com/google-deeppmind/mujoco_menagerie.
- [18] E. Todorov, T. Erez, and Y. Tassa, "MuJoCo: A physics engine for model-based control," in *Proc. IEEE/RSJ IROS*, 2012, pp. 5026–5033.
- [19] J. Xue, W. Liang, Y. Wu, and T. H. Lee, "Model predictive variable impedance control towards safe robotic interaction in unknown disturbance-rich environments," *Robotics and Autonomous Systems*, vol. 189, p. 104961, 2025.
- [20] L. Roveda, N. Iannacci, F. Vicentini, N. Pedrocchi, F. Braghin, and L. M. Tosatti, "Optimal impedance via model predictive control for robot-aided rehabilitation," *Control Eng. Practice*, vol. 83, pp. 11–23, 2019.