User Guide for Zebra Gen2X iOS app

Version: 1.0.4

April 2026

Table of Contents

Introduction 3
Connect 3
Inventory 4
..... 6
Tag Protection (Protect/Unprotect) 9
Tag Visibility (Enable/Disable) 10
Tag Focus 11
Tag Quieting (Quiet/Un-Quiet) 12
Fast ID 13

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

Introduction

This application demonstrates the features of Impinj RFID tags. The app currently includes four major features:

- Tag Protection
- Tag Visibility
- Tag Focus
- Tag Quieting
- Fast ID
- Inventory Protocol

Connect

Connect displays all the available readers that are ready to connect. Click on the reader name to connect to the reader.
Click Refresh to refresh the list of available readers that are ready to connect.

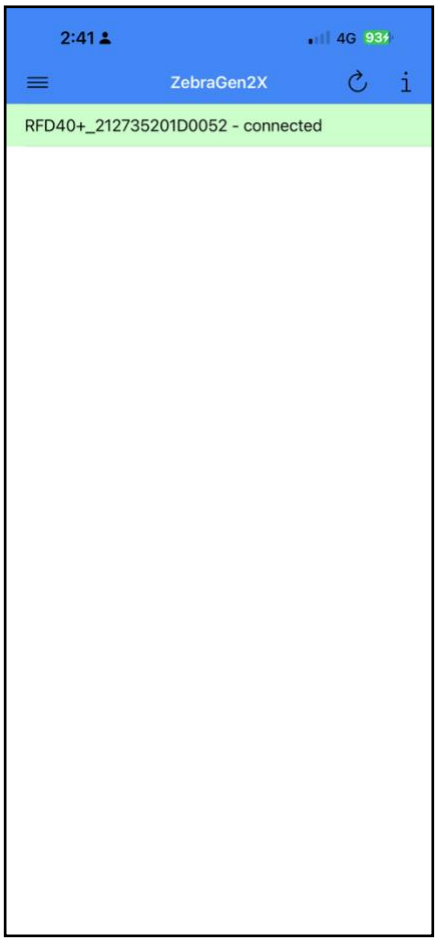

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

Inventory

The Inventory screen can be used to read tags and compare behaviors/performance using different configurations and features. This screen can be used both for standard Gen2v2 tag inventory as well as demonstrating and testing Gen2X features.

This section describes general features of the screen – please refer to specific feature sections for detailed instructions for each feature.

This screen has 4 areas:

1. Gen2X Feature Options – enable/disable options, Quiet timer
2. Inventory Tag Display – display read tags including count, RSSI and read/sec
3. Inventory Summary Bar - inventory stop timer and counts by category
4. Unique Tags Bar (including Start/Stop and Clear) – timer, unique tag count and tags/10s

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

1. Gen2X Feature Options – enable/disable options, Quiet timer

   Focus – enables TagFocus feature
   Quiet timer – timer for which the quiet filter is applied (default 2s)
   Quiet button – quiets selected tags
   Un-quiet – select to un-quiet inventoried tags

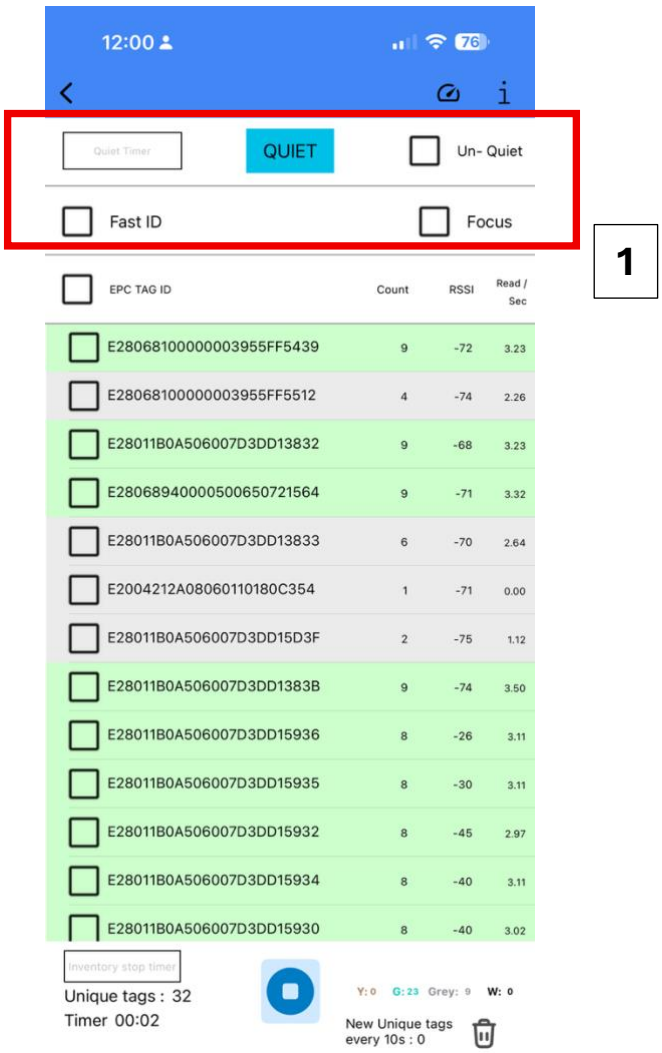

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

2. Inventory Tag Display – display read tags including count, RSSI and read/sec

2

EPC TAG ID – EPC value read from tag
Count – Number of times read in this inventory cycle
RSSI - Received Signal Strength Indicator
Read/sec – reads per second in this inventory cycle
Colors

- Green: Tags which have the read / sec greater than the average
- Grey: Tags which have read/sec less than the average
- Yellow: Tags which were quieted
- White: Non quieted tags which are not participating in the current round

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

3. Inventory Summary Bar - inventory stop timer and counts by category

Inventory Stop Timer – Set a time limit to automatically stop inventory after the specified duration

Tag Counts by Category
Y: Yellow
G: Green
GREY: Grey
W: White

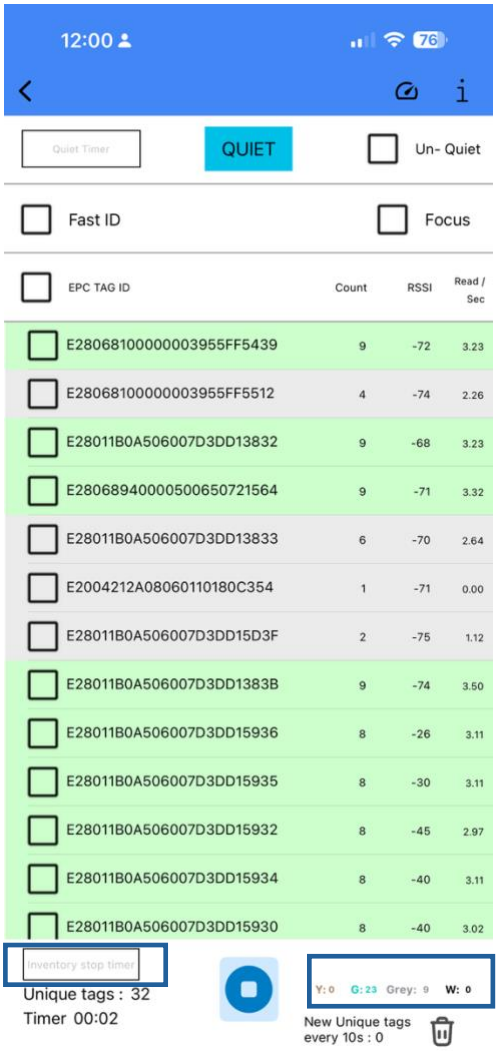

3

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

4. Unique Tags Bar (including Start/Stop and Clear) – timer, unique tag count and tags/10s

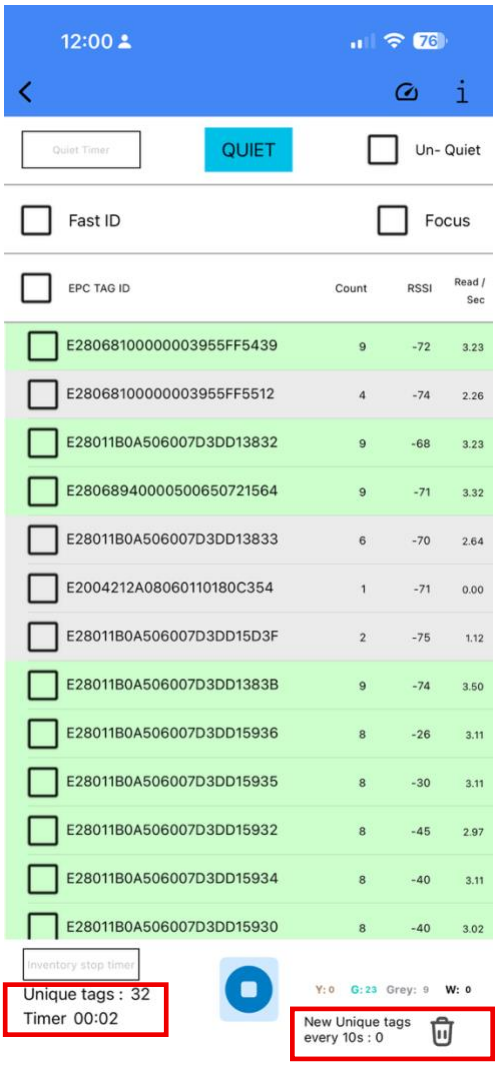

4

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

Tag Protection (Protect/Unprotect)

The Tag Protection feature allows you to assign a password to a specific Impinj tag, making it invisible during inventory scans.

To protect a tag:

1. Run a The Tag Protection feature allows you to assign a password to a specific Impinj tag, making it invisible during inventory scans.

To protect a tag:

1. Run an inventory scan.
2. Select an Impinj tag from the inventory list.
3. Navigate to the **Tag Protect** page.
4. Select **'Tag Protect'** from the picker menu.
5. Enter a password.

o **Note:** The default password for a new Impinj tag is 00000000. To change this, you must set a new password in the **Get Password & Set Password** options of the iOS app.

6. Tap the **'Perform Operation'** button.

To unprotect a tag:

1. Enter the tag's EPC in the textfield.
2. Select**' Unprotect'** from the picker menu.
3. Enter the password you used to protect the tag.
4. Tap the **'PerformOperation'** button.

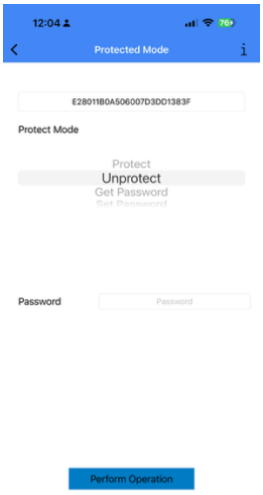

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

Tag Visibility (Enable/Disable)

This feature controls whether a protected tag is visible during an inventory scan.

To Enable Visibility:
The 'Enable Visibility' option makes a protected tag visible again during inventory.

1. Enter the EPC of the tag you want to make visible.
2. Choose **'Enable Inventory of Protected Tags** from the picker.
3. Enter the tag's password.
4. Tap the **'Perform Operation'** button.

To Disable Visibility:
'Disable Visibility' hides the tag from inventory scans.

1. Enter the EPC of the tag you want to hide.
2. Choose **Clear Protected Mode Config** from the picker.
3. Enter the tag's password.
4. Tap the**' Perform Operation'** button.

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

Tag Focus

The 'Tag Focus' feature ensures that Impinj tags are read only once during an inventory session.

To use this feature:

1. Launch the Impinj App and connect the reader.
2. Return to the app's Inventory page.
3. Tap on **Focus**.
4. Navigate to the inventory page and run the inventory. Tags will now only be read one time.
5. To deactivate this feature, untick **Focus** on the home menu.

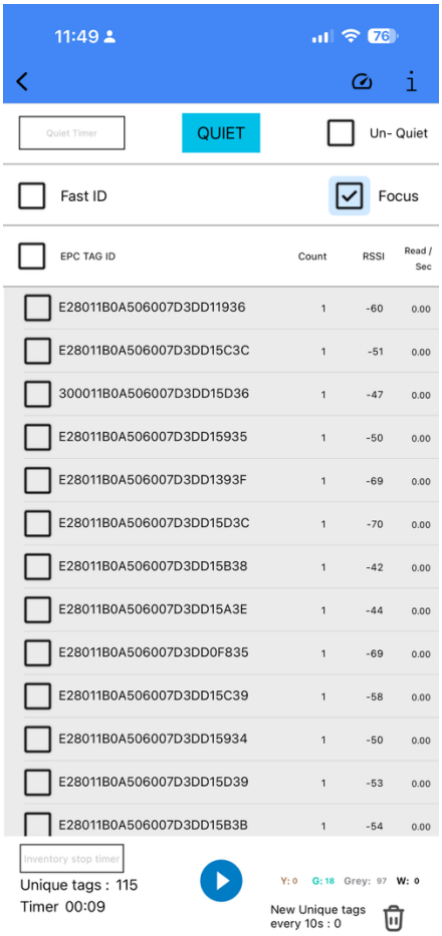

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

Tag Quieting (Quiet/Un-Quiet)

The 'Tag Quiet' feature makes selected tags temporarily inactive so they do not appear in the inventory.

To quiet tags:

1. Navigate to the **Inventory** page and run an inventory.
2. Select some tags from the list.
3. Press the **'Quiet'** button.
4. Run the inventory again. The selected tags will appear in yellow in the list.
5. You can continue to quiet additional tags by selecting them and pressing the 'Quiet' button again.

To make tags visible again (un-quiet):

1. Press the **'Un-Quiet'** button.
2. Run the inventory. All previously quieted tags will now be visible again.

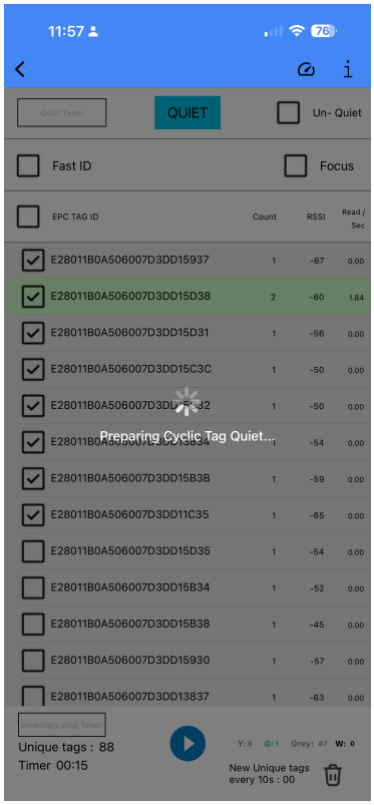

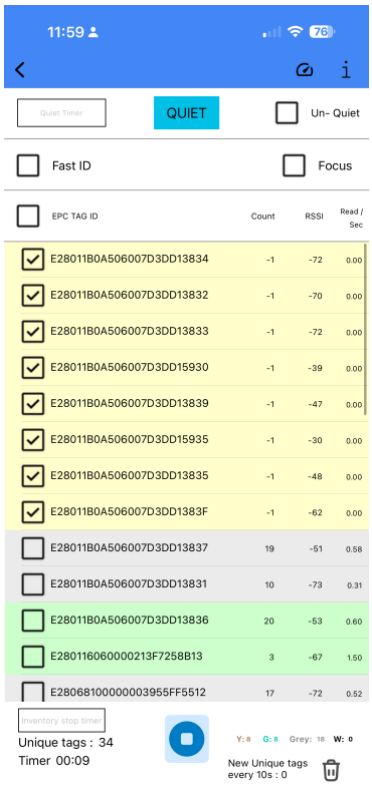

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

Fast ID

Fast ID enables the RFID tags to backscatter their EPC and TID in a single response for inventory Scan.

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.

Copyright © 2026 Zebra Technologies Corporation. All rights reserved.