www.joyoaudio.com

BSK-40

MULTIFUNCTIONAL LIVE STREAMING AMP

Owner's Manual



JOYO

Detailed safety instructions:

- Use the attached power adapter only. It has passed strict tests and has safety certificates. If use other power adapters, it will increase noise, damage the internal circuits or the built--in battery.
- Do not expose it to any damp areas such as bathtub, toilet, washing--tub, sink, swimming pool. Avoid spill liquid substance into the product, otherwise it will lead to malfunction or electric shock.
- Don't use this product in places where is full of flammable and explosive gas, such as gas station or dusty areas.
- Use BSK--40's attached AC power adapter only! If you choose other adapters, they might not compatible for BSK--40's input voltage damage the unit or worse.
- BSK--40's attached adapter has passed the related electromagnetic compatibility tests and has safety certificates. If you use other power adapters, we're not sure whether they meet your country or region's compulsory safety certification standards.
- If the attached power adapter is broken, and you need to buy a new one, please make sure its polarity of power source and maximum power are the same as the attached power adapter.
- In order to save energy, please turn off the power switch after use.
- Do not use alcohol or other cleaning fluids to clean this product, otherwise it will damage the surface, use a clean dry cloth when necessary.
- Do not open the case for any reason, please contact professional maintenance men if it malfunctions, or contact your local retailer for maintenance.
- Do not pull the power cord or other parts of this product, so as not to damage the power cord and plugs.
- Please turn off this product and unplug it during a thunderstorm, lightning or not in use for a long time.
- Do not collide, throw or vibrate this equipment.
- To protect the built--in battery, please have a full charge if it is not in use for a long time and ensure charge it for every 2 months.
- If it indicates low battery, please charge it in time, as over discharge and low battery will cause irreversible loss to the battery capacity, and damage the battery.
- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip--over.

Features

- 40W 2-Channel multi-functional outdoor live streaming amp(1 Guitar Channel/1 Mic Channel)
- Built-in drum machine(20 drum patterns in all)
- Built-in digital effects(REVERB/CHORUS/DELAY)
- 2x3.5mm Jack for smart phone recording(live streaming)
- Lithium battery facilitates outdoor use(can be used for 3hrs continuously once fully charged, a full charge takes 4.5hrs.)
- Can connect to 2 amps in series.
- With precise power indication, the LCD screen displays how much power is left.
- With support bracket and support hole, suitable for different venues.
- DI Output Jack(easy to connect to the mixer or PA system)and MUTE button
- USB OTG Jack for live streaming, with a Type-C Jack

Package contents

BSK-40×1
Power adapter×1
Power cable×1
Type-C to Lightning Adapter×1
Type-C to Type-C USB cable×1
Owner's manual×1
Nylon guitar amp carry bag×1

Note: There is anti-collision EPE foam in the bag,pls don't discard it.

Panel

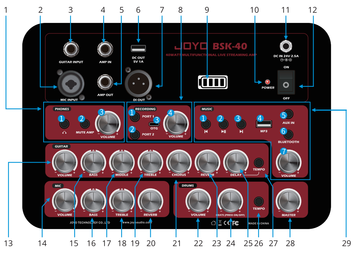

1.PHONES Function module
①" 🎧 ":Headphone Jack
②Mute amp: amplifier's Mute button
③VOLUME: for adjusting headphones' VOLUME
2. MIC Input Jack
3. Guitar Input Jack
4. 6.35mm amp connection in series Input Jack
5. 6.35mm amp connection in series Output Jack
6. USB DC5V Output Jack
7. XLR DI Output Jack
8. RECORDING function module
①PORT 1: 3.5mm smart phone live streaming/recording Jack
②PORT 2: 3.5mm smart phone live streaming/recording Jack
③OTG live streaming/recording Jack(Type-C)
④VOLUME: for adjusting the VOLUME for live streaming/recording Channel
9. Battery indicator
10. Working status indicator
11. Power adapter charging port
12. Power switch
13. Guitar Channel Volume Control knob
14. Mic Channel Volume Control knob
15. Guitar Channel Bass Control knob
16. Mic Channel Bass Control knob
17. Guitar Channel MIDDLE Control knob

18. Mic Channel Treble Control knob
19. Guitar Channel Treble Control knob
20. Mic Channel REVERB Mix Ratio Control Knob
21. Guitar Channel CHORUS Mix Ratio Control Knob
22. Drum machine Channel Volume Control Knob
23. Guitar Channel REVERB Mix Ratio Control Knob
24. Drum machine Channel drum pattern selection Knob
25. Guitar Channel DELAY Mix Ratio Control Knob
26. Drum machine Channel TAP TEMPO button
27. Guitar Channel DELAY TAP TEMPO button(1000ms max)
28. Master Volume Control Knob
29.MUSIC function module
①" ⏮ ": Previous
②" ⏯ ": Pause/Play
③" ⏭ ": Next
④"**MP3**": for connecting to the USB drive
⑤AUX IN: AUX IN Jack
⑥Bluetooth switch
⑦VOLUME knob: for adjusting the VOLUME of music playing

Connection diagrams

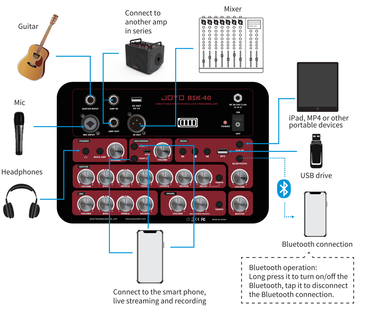

Specifications

AC adapter input voltage: AC100-240V 50-60Hz
AC adapter output voltage: DC 24V/2.5A
Battery's specification: 18.5V/5.2Ah(lithium battery)
USB Charging Output: DC 5V/1A
Guitar Channel Input Sensitivity: -11.5dBV 1MΩ
Mic Channel Input Sensitivity: -41dBV 5.6KΩ
AUX IN Sensitivity: 0dBV 3.9KΩ
PORT 1, POR 2 Input Impedance: 10KΩ
Headphone Out Impedance: 32Ω
AMP IN Impedance: 11KΩ
AMP OUT Impedance: 1KΩ
DI OUT Impedance: 1KΩ
RMS: 40W
Bass unit: 6.5 inches ,4Ω,50W
Treble unit: 2.75 inches , 8Ω.,15W
Dimensions: 30x24x24.4cm
Weight: 5.7kg

JOYO TECHNOLOGY CO., LTD
Address: 2/F, Lushi Industry Building, 28th District, Bao'an, Shenzhen, 518101 China.
www.joyoaudio.com Email:info@joyoaudio.com Tel: 0086-755-29765381