


FOSDEM AV Manual  
FOSDEM Video

October 26, 2023



FOSDEM AV Manual

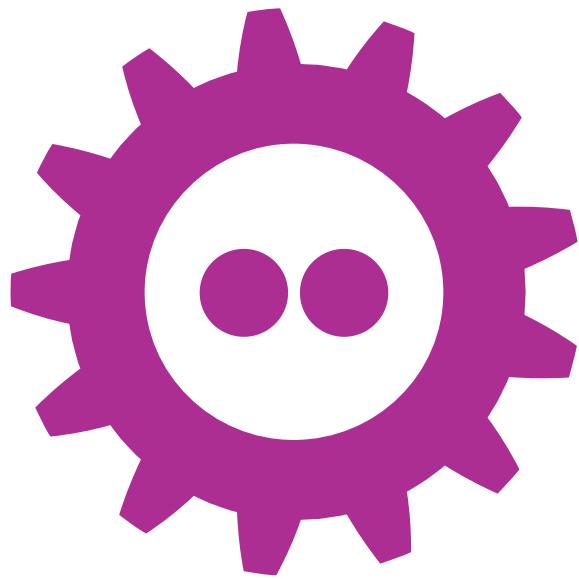

## Contents

<b>1 People</b>	<b>3</b>
1.1 AW, H, K, U and J teams . . . . .	3
1.2 Video operations control or VOC . . . . .	3
1.3 In the devroom . . . . .	4
<b>2 Monitoring and control of video streams</b>	<b>4</b>
<b>3 Rooms</b>	<b>4</b>
3.1 Small rooms . . . . .	5
3.1.1 Cabling diagram . . . . .	6
3.2 Large rooms . . . . .	7
3.2.1 Cabling diagram . . . . .	8
3.3 Extra large rooms . . . . .	9
3.3.1 Cabling diagram . . . . .	10
<b>4 FOSDEM video boxes</b>	<b>11</b>
<b>5 Tripod</b>	<b>12</b>
<b>6 Camera</b>	<b>12</b>
6.1 Standard camera settings and quick check list . . . . .	12
6.2 Setup for large and extra large rooms . . . . .	12
6.2.1 Screw camera on mount . . . . .	12
6.2.2 Power and HDMI connectors . . . . .	13
6.2.3 Microphone . . . . .	13
6.2.4 Power on . . . . .	14
6.2.5 Factory default settings . . . . .	14
6.2.6 Audio settings . . . . .	15
6.2.7 Audio levels . . . . .	15
6.2.8 Video output configuration . . . . .	16
6.2.9 Remove the lens cover . . . . .	17
6.2.10 Checklist . . . . .	17
6.2.11 Contact control . . . . .	17
<b>7 During the event</b>	<b>17</b>
<b>8 System infrastructure overview</b>	<b>18</b>
8.1 sproxy . . . . .	19
8.2 video-box . . . . .	19
8.3 video-voctop . . . . .	20
8.4 video-control-server . . . . .	20
8.5 video-streambackend . . . . .	20
8.6 video-streamfrontend . . . . .	20
8.7 video-streamdump . . . . .	20



## 1 People

Video is a big task, so there are many people working together to make it all happen. Here's all the teams:

### 1.1 AW, H, K, U and J teams

You should be a team of at least two per building: AW, H, K, UA and UD respectively. J (probably) has a dedicated knowledgeable volunteer.

Coordination with video operations control (VOC) happens through walkies and chat: <irc://irc.freenode.net#fosdem-video> or [#fosdem-video:matrix.org](#). The chat is web accessible through <https://riot.im/app/#/room/#fosdem-video:matrix.org>.

Your tasks before the conference starts:

- (Friday) take the equipment to the rooms in your building
- (Friday) work from the biggest to the smallest room
- (Friday) do basic setup: cam, sound, plug in cables, basic audio checks with microphones, ...  
See below for details.
- (days of the conference) ensure the rooms are ready before the first talk starts

During the day, you'll have a fixed spot in the building. The below spots should also appear in <https://nav.fosdem.org>.

- AW: corner between AW1.117 and AW1.121
- K: in front of K3.601
- H: behind the info desk
- UA: in the corridor near Henriot (UA2.118)
- UB4&5: between doors UB5132A and UB 5230B
- UD: in the corridor near Chavanne (UD2.120)

Your job during the conference, with the backup from the VOC team, is to do the following in your building:

- monitor video and update scene if necessary. See the “Monitoring and control of video streams” section for more details;
- assist speakers and respond to problem reports in the building;
- proactively fix problems with video. In some rooms, this includes preventatively replacing batteries!

### 1.2 Video operations control or VOC

You are in the NOC in the K building, with ssh access to all video machines: video boxes in the rooms, vocco machines near VOC, streaming backends and frontends, and the web pages showing the videos to our visitors.

Your job is to constantly monitor all the equipment and streams for problems, and to arrange fixes for any that occur. They have visual monitoring of all audio streams.

Do not run out to fix problems yourselves. Delegate to the per building teams. Maintaining contact between everyone is your main priority.

For more details on the monitoring, see “Monitoring and control of video streams”.



### 1.3 In the devroom

If you are volunteering for video inside a devroom, please:

- stay near the video equipment, keeping it safe (from people tripping over cables for example!)
- make sure the camera is aimed at the speaker
- monitor the devroom video/audio feeds (headphone!) for problems
- signal problems to VOC by irc/matrix

Please do *NOT* disconnect or turn off any equipment yourself. That is the task of the per building team only.

## 2 Monitoring and control of video streams

There should be the following monitoring available:

- Page with video previews of camera, slides and mix streams. It can show all rooms, or a single building;
- Grafana with audio levels of the camera's input, for all rooms and selectable for a set of rooms;
- Ability to stream every box's stream to check for issues in video or audio;
- Control interface for the video mix, to select the scene to be shown;
- (TBD) Host-level monitoring for all involved infrastructure, to see network outages and such.

Access to those systems is provided on Friday. Every per-building team should have a way to see the monitoring, either via the in-room beamer, or some spare large screen.

## 3 Rooms

We have 30 rooms: 14 small, 14 large and 2 extra large rooms. Each type of room has a different audio/video setup.

- AW: AW1120 (S), AW1121 (S), AW1125 (S), AW1126 (S)
- K: K1105 (XXL), K3201 (S), K3401 (S), K4201 (S), K4401 (S), K4601 (S)
- H: H1301 (L), H1302 (L), H1308 (L), H1309 (L), H2213 (S), H2214 (S), H2215 (L)
- UA: UA2214 (L), UA2118(L), UA2220 (L), UB2147 (S), UB2252A (L)
- UD: UD2119 (S), UD2120 (L), UD2208 (L), UD2218A (L)
- UB4: UB4136 (S), UB5132 (L, Sunday only), UB5230 (L, Sunday only)
- J: Janson (XXL)

Your team's flight case comes with a printed map of where the video gear goes in your rooms. Audio and power cabling should be arranged loose on the floor, or taped down after coordination with the network team! When taping down XLR cables, please provide sufficient slack for getting up to the camera. It is about 2m above ground level!



### 3.1 Small rooms


These have a projector and a tie pin microphone for the speaker. Audience questions are picked up by the camera's internal microphone.

The connections there are as follows:

- Network cable (video VLAN) to the presenter box (any port)
- Network cable from the presenter to camera box (any port, on each side)
- Camera, presenter box, video box to the AC power
- XLR cable from the microphone receiver to channel 1 (LEFT) of the camera
- USB powerbank to the microphone receiver
- HDMI from the camera to the HDMI port of the video box
- VGA cable from the presenter box left VGA port to the beamer in the room (if the beamer is VGA)
- HDMI cable from the pesenter box to the beamer in the room (if the beamer is HDMI)
- HDMI cable from the speaker's laptop to the right HDMI port of the presenter box



### 3.1.1 Cabling diagram

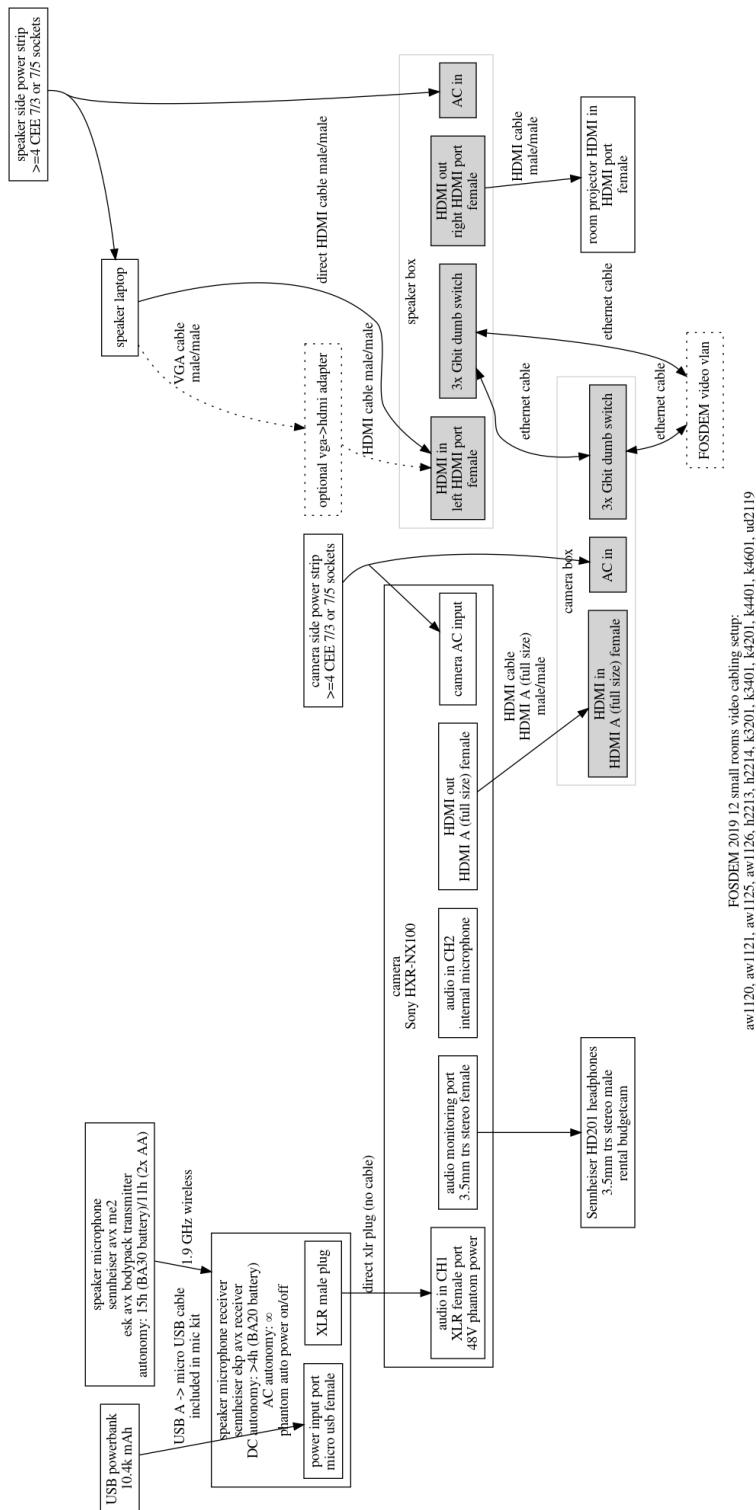

FOSDEM 2019 12 small rooms video cabling setup:



### 3.2 Large rooms


These have a projector, a tie pin mic for the speaker and an audience microphone. They use the Sony HXR-NX100 camera.

The connections there are as follows:

- Network cable (video VLAN) to the presenter box (any port)
- Network cable from the presenter to camera box (any port, on each side)
- Camera, presenter box, video box, audio mixer to the AC power
- Microphone receiver for the speaker's microphone to channel 1 of the mixer
- Microphone receiver for the audience microphone to channel 2 of the mixer
- XLR cable from the left channel of the audio mixer to channel 1 (LEFT) of the camera
- XLR cable from the right channel of the audio mixer to the audio of the room
- USB powerbank to the microphone receivers
- HDMI from the camera to the HDMI port of the video box
- VGA cable from the presenter box left VGA port to the beamer in the room (if the beamer is VGA)
- HDMI cable from the pesenter box to the beamer in the room (if the beamer is HDMI)
- HDMI cable from the speaker's laptop to the right HDMI port of the presenter box



### 3.2.1 Cabling diagram

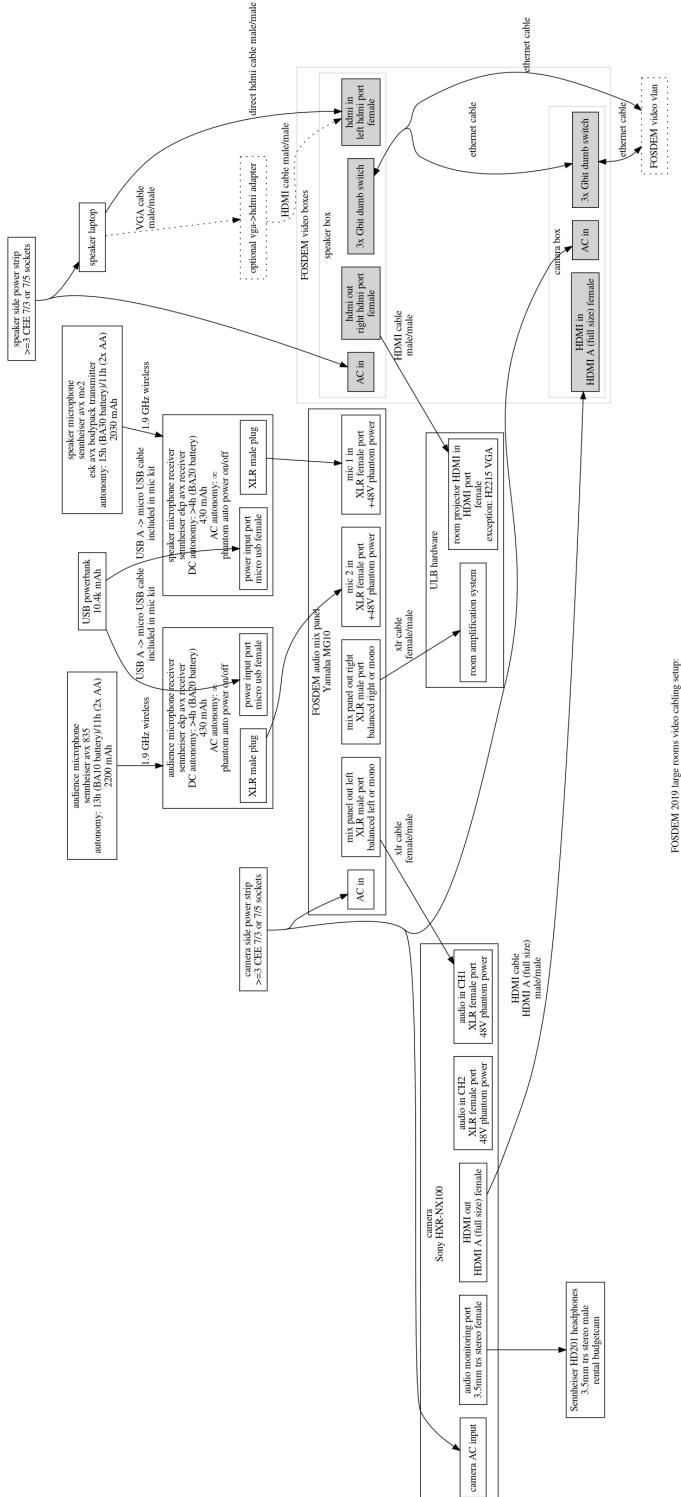



### 3.3 Extra large rooms


These have a projector, a tie pin mic for the speaker and one or two audience microphones. They use the Sony HXR-NX100 camera.

The connections there are as follows:

- Network cable (video VLAN) to the presenter box (any port)
- Network cable from the presenter to camera box (any port, on each side)
- Camera, presenter box, video box to the AC power
- XLR cable from the left channel of the audio mixer (ULB provided) to channel 1 (LEFT) of the camera
- HDMI from the camera to the HDMI port of the video box
- VGA cable from the presenter box left VGA port to the beamer in the room (if the beamer is VGA)
- HDMI cable from the presenter box to the beamer in the room (if the beamer is HDMI)
- HDMI cable from the speaker's laptop to the right HDMI port of the presenter box



### 3.3.1 Cabling diagram

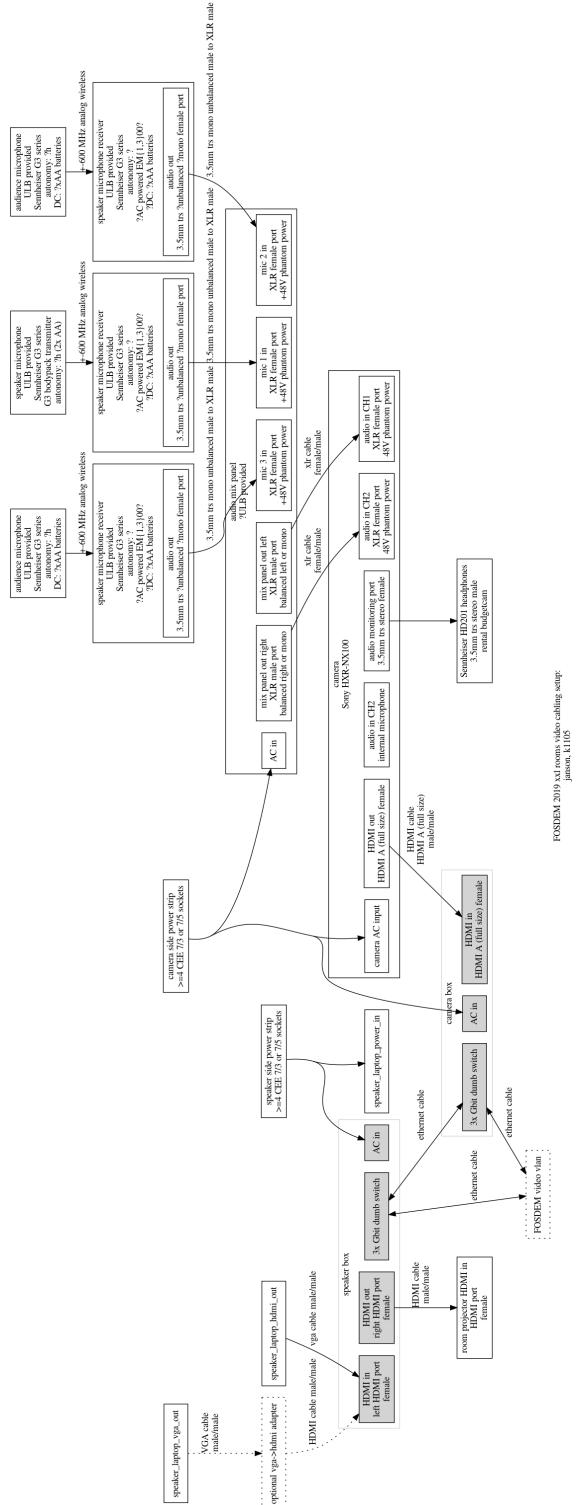

FOSDEM 2019 Xtra room video cabling setup:  
page 1105



## 4 FOSDEM video boxes

The FOSDEM video box and its control laptop will take care of the streaming and recording. There is no need to operate the controls on the camera (once on and in the correct video mode, which the setup team will have done). The setup team should also have connected the following:

- at least one network cable
- a power cable, connected to mains, with the box already turned on
- slides boxes (the one for the speaker) only:
  - The right HDMI connection should be connected to the projector
  - The left HDMI connection should have a loose HDMI cable, for connecting to the presenter laptop
- Cam boxes only:
  - An HDMI cable to the (powered on) camera (the SDI connection is for backup and normally not in use)

The power switch is at the back, on a standard power supply:



Order of connections and powering on does not matter, each order will work. There is no need to reboot the box after connections have changed. Fully booting the laptop takes about a minute, and it should show a graphical interface with data on the left and video on the right.

*Do not attempt to power off the box unassisted, as this may damage the integrity of the system.* In the event of power loss or accidental unplugging, the system should fully auto-recover by itself. If you suspect it may be malfunctioning and there is not enough diagnostic information, contact the control and monitoring team (see chapter “During the event” for full details). They may already be aware of the problem, but quick reporting helps cut down on reaction times.



While the box contains a network switch (all four ports are connected), *do not connect your own equipment* to the box. The boxes are on a special subnet with reserved bandwidth for the video streaming, and any other equipment may compromise the quality of the broadcast.

*The boxes have only HDMI input and HDMI output.* For speakers with only VGA outputs, the per-building video team is required to ask them for their time machine license registration. Mini-DP and some other connectors might be available with the per-building team. The HDMI signal is automatically scaled to 1080p (1920x1080) at 50Hz. Matching this on the presenter laptop is a good idea, but not a requirement.

*The control laptop display will inform you of all vital information about the current status of the box.* It shows the stream video on the right, signal and its network status (connected/disconnected), the recording status (yes/no), the streaming status (yes/no) and audio volume level (average over the last few seconds).

The boxes report all this information to control while their network status is good, where the control and monitoring team keeps an eye on all rooms. If something is wrong, they may send somebody your way to correct it. Please follow the instructions (if any) of video team members. Keeping an eye on the box vitals and correcting any problems you notice is encouraged.

## 5 Tripod

We use the Manfrotto MVH 502. This should hopefully be self-explanatory. Please offer feedback to VOC if that is not the case.

## 6 Camera

FOSDEM 2023 will use one camera models: the Sony HXR-NX100.

### 6.1 Standard camera settings and quick check list

Resolution	1280x720
Refresh rate	50p
MIC-CHANNEL1(left)	Speaker and audience microphone
MIC-CHANNEL2(right)	Internal microphone
Power source	Cable AND Battery
Lens cover	Remove!
Camera/Tripod	Cam must be attached to tripod plate

### 6.2 Setup for large and extra large rooms

#### 6.2.1 Screw camera on mount

Screw the camera onto the tripod. Every camera has a screw hole at the bottom that can be used for this. The plate has a distinct “point camera in this direction”-arrow, pay attention to this. The screw can be tightened by a coin or similar object.




### 6.2.2 Power and HDMI connectors

First plug in the battery at the back, then plug in both the HDMI and the power cable.

Both connectors can be found next to each other to the right of the battery slot at the back. Look at the picture if you're unsure.

Do not forget to hook up the other end of the HDMI cable to the FOSDEM Video Box, and the power cable into the mains.

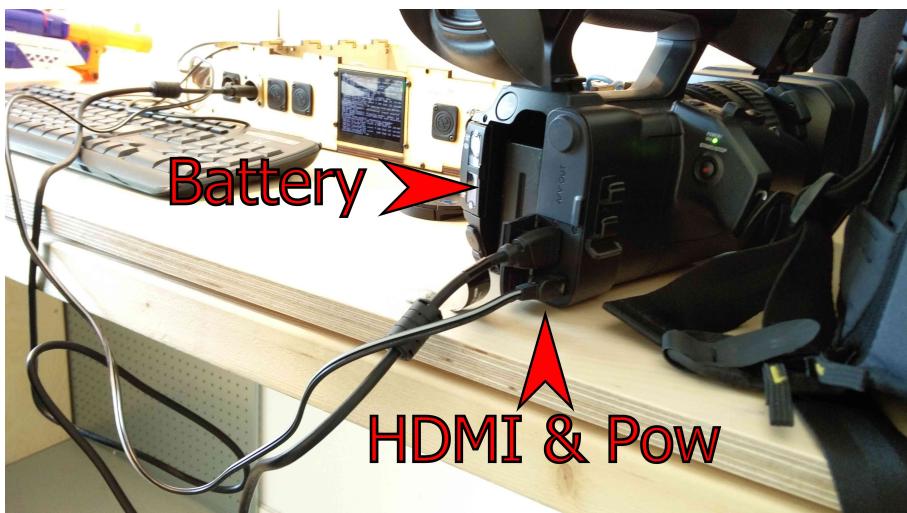

### 6.2.3 Microphone

Plug the XLR cable of the audio system into Input1.



#### 6.2.4 Power on

You can find the power button on the left side of the camera (looking from behind). Look in the bottom right corner.



#### 6.2.5 Factory default settings

Does the camera ask for a time and date? Then you can skip this section, as it already is on factory default settings. Does the camera NOT ask for a time and date? Then we have to reset things.

First we reset all but the picture profile settings to factory default: Menu → "Others" (three drawers icon) → Initialize → OK.

Now we set time and date. Not important. Just clicking the SET button a few times to get through this.



Now, we reset picture profile 4 (the default picture profile) to factory default: Menu → Camera set (camera icon) → Picture profile → PP4 → Setting → Reset → Yes

### 6.2.6 Audio settings

The audio settings can only be done through the hardware switches on the camera. Make sure to set the switches to the correct positions, as these directly affect the availability of audio on the recordings and live streams. Wrong settings means no audio! If unsure, verify with the image below.

Input	Left switch	Middle switch	Right switch	dial
Input1	BOTTOM (Mic 48V)	MIDDLE (EXT MIC)	BOTTOM (MANUAL)	5
Input2	BOTTOM (Mic 48V)	TOP (INT MIC)	BOTTOM (MANUAL)	5



### 6.2.7 Audio levels

To configure the audio levels, use the following procedure for small rooms:

- Set the levels to 5 for both channels;
- For the internal camera microphone (channel 2, small rooms) talk loud near the camera and make sure the levels don't go over the end (using the dial);
- For channel 1 (speaker microphone) yell while wearing the microphone and make sure the levels don't go over the end (using the dial);

For the other rooms:

- Set the levels to 5 for both channels;
- For the speaker microphone yell while wearing the microphone and make sure the levels don't go over the end, adjusting from the mixing console;




- For all the other microphones, talk moderately loudly while adjusting the microphones, making sure that they don't go over the top;
- Adjust the overall volume for the room to be audible as much as possible without creating feedback;
- Additionally test for feedback while moving with the microphone around the PA system in the room and adjust accordingly.

#### 6.2.8 Video output configuration


The video configuration will be done through the on-screen display.

Set up like this:

Menu → 2nd icon (two arrows) → Video out → HDMI → 720p.

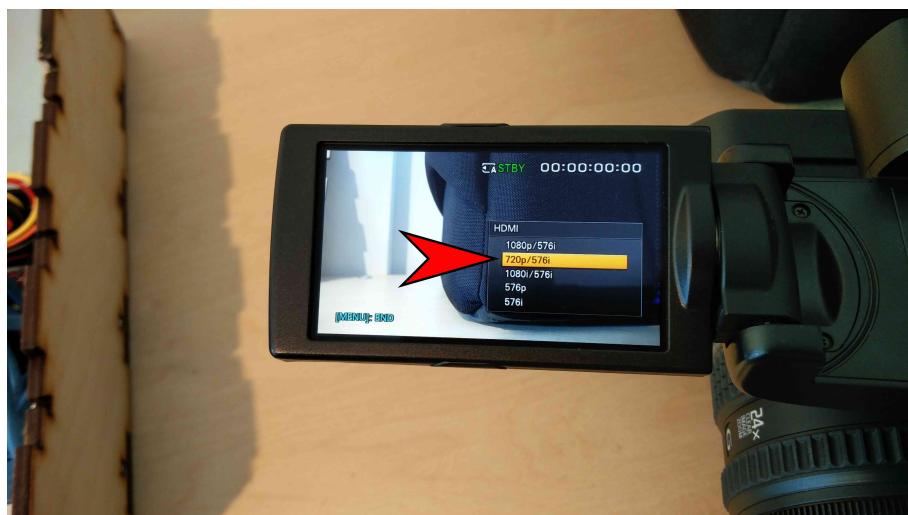

The resolution information displayed on the OSD relates to recording to the SD card, which we do not use. *Ignore this text*, as the video output config is completely separate from the recording setting on this model.

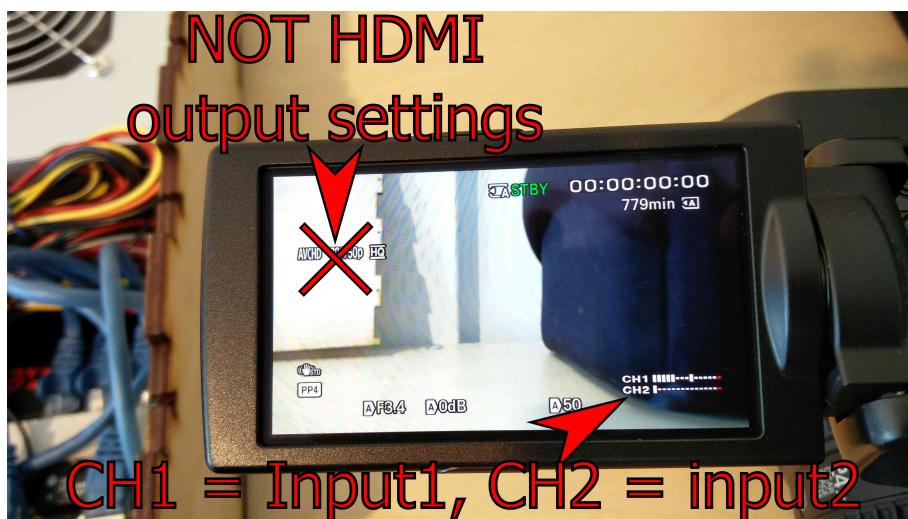



For rooms with low light conditions only, press button 3 (LOWLUX) to have the camera auto adapt to low light levels. A candle icon appears in the bottom right corner of the OSD screen.

### 6.2.9 Remove the lens cover

Do not forget to remove the lens cover. Store it in the camera bag for safe keeping.



### 6.2.10 Checklist

Please check the following before leaving:

- Does CH1 on the camera display spike when you tap the (powered on) wireless speaker microphone?
- Does CH2 on the camera display spike when you tap the camera itself with your fingers?
- Turn off the wireless speaker microphone before leaving to conserve battery power for during the day.
- Do both video boxes say mode 720p50 on the LCD display?
- Does the camera video box display the camera image on the LCD display?

If any of these do not work, re-check your connections and settings. Still no luck? Contract VOC!

### 6.2.11 Contact control

When you have finished setup of the room, please report to VOC for a full test. They will let you know what rooms still need attention.

## 7 During the event

It is expected of the devroom video volunteers that they keep an eye on the following, in order of importance:

- The wireless speaker mic is on during talks



- The wireless speaker mic is worn correctly (see below)
- The audio volume is not too low or too high (clipping is bad!)
- The camera is aimed at the speaker, *not* the projection screen (the projection screen is captured separately!)
- None of the video equipment is stolen or tampered with
- The video and control laptop box are turned on and have OK network status.

The main task is ensuring audio quality. Video quality, while important, is only a secondary concern. A recording without video is still usable, but a recording without audio is completely useless.

The correct way to wear a lapel mic is as follows:

- The microphone is attached at speaker's clothes near the neck, under the chin (centrally);
- There are no necklaces or lanyards that would touch it during the talk;
- There are no scarves or similar that cover the microphone or will touch it;
- The microphone is attached to the topmost layer of clothes (so there's nothing above it that would touch it);
- If there is no place where the microphone can be attached, a lanyard can be used for this purpose, on top of all the clothing of the speaker;
- The microphone receiver is attached to the belt of the speaker. If not possible, it's attached on top of a pocket;
- If the speaker has neither a belt nor pockets, he/she can hold the receiver in hand, or worst case scenario, it can be attached with duct tape to the waist (with a full loop around the waist).
- The speaker is notified that if he's not facing in the direction of the microphone (e.g. not looking straight) the audio will be less audible.

Video team members will be both monitoring remotely as well as visiting rooms with problems. If you have questions, concerns or problems and there is no video team member nearby, contact them through the `#fosdem-video` channel on the Freenode IRC service or <https://riot.im/app/#/room/#fosdem-video:matrix.org>. If your video box shows issues on the LCD, most likely somebody is already on their way to you. When communicating with video team members, please mention the *room number* as opposed to the devroom name. Devrooms move around, room numbers stay constant.

## 8 System infrastructure overview

This section explains how the video streaming and recording works in general for FOSDEM, to use as a helper to understanding the system and dealing with issues.

The system's code and recipes for deployment are available in FOSDEM's GitHub repo "infrastructure", in the "ansible" subdirectory. Below is a list of components (some software, some whole-system) that are the pieces of the whole thing.



## 8.1 sproxy

“sproxy” is a small piece of software available in <https://github.com/FOSDEM/sproxy> and FOSDEM’s Debian packages repository. It’s written in C and it’s role is to receive a stream of bytes on “stdin” in a ring-buffer and provide the following TCP endpoints (up to 32) to clients:

- Port 8899 - this provides the stream from the current point onward. This is used for normal video clients that want to access the stream as it’s being pushed at the moment;
- Port 8898 - this provides the stream with half of what’s currently in the buffer, to allow clients to quickly start displaying the stream. This is used mostly for debug purposes, as it just makes it faster to find a keyframe;
- Port 8899 - this provides the stream from the current point onward, after it receives some HTTP headers. This was implemented for compatibility with some streaming devices for the 2020 edition.

The main use of “sproxy” is to allow multiple clients to access a MPEG-TS encapsulated video (H.264, AAC) in real time without the need of any previous setup. MPEG-TS allows this, as it’s not relevant when in the stream the client starts reading, as the encapsulation is self-synchronizing.

“sproxy” is the successor of multicast UDP running over the network, as that proved to create hard to debug problems with even moderate packet loss (which TCP doesn’t have).

## 8.2 video-box

Implemented in role “video-box”.

The “video-box” is in general a capture device that provides “sproxy” interface from its video and audio capture, plus some monitoring functions.

Its hardware consists of a laptop and a box that connects to the laptop via a short USB 3 USB-C cable. In the box you can find:

- HDMI capture device, based on the MacroSilicon MS2131 chip. The two HDMI ports on the box are connected to it;
- A 4-port USB network controller that also acts as switch;
- An USB hub (dock), that is used to connect both the above devices to the laptop.

The laptop is used to:

- Capture video and audio from the HDMI capture device, synchronize them (with a fixed offset) and encode them using the hardware acceleration available in the CPU/GPU;
- Present the captured video via “sproxy” to the network;
- Provide a preview of the video on the screen with a bar to show the sound levels (upper right);
- Provide status for the box and stream (upper left);
- Provide a terminal for debugging if needed (bottom left);
- Make a backup recording on its disk of the full stream for emergencies;
- Show the nice purple FOSDEM color as a background.



### 8.3 video-voctop

Implemented in role “video-voctop“.

The “voctop“ is the video mixer that fetches the streams for the camera and presenter from a room, and provides the ”finished“ video stream to the streaming and recording infrastructure. The finished stream is again presented via “sproxy“.

The mixing is done using “voctomix“ (version 1). There are three sources for “voctomix“:

- “cam“, fetched from the box marked to be camera in the room;
- “grabber“, fetched from the box marked to be slides/presenter in the room;
- “background“.

All streams are chewed and converted exactly to what voctomix requires (raw video, 1080p, 25fps, SAR/DAR 1:1) and via a single “ffmpeg“ instance and two “sproxy“ instances, a 720p and 1080p streams are provided for the streaming back-end to use.

The reason for two outputs of the same “ffmpeg“ is because the laptop runs out of memory bandwidth if another copy of the raw stream is taken out of “voctomix“.

“voctomix“ provides control via text protocol on port “9999“ and that is used by the control server to switch the possible views/mixes of the stream:

- Full-screen camera;
- Full-screen presentation;
- Mix, large top-left presentation, small camera bottom right (the default);
- Mix, large top-left camera, small presentation bottom right;

Another piece of software, “audiofetcher“ reads the audio stream, pushes its sound levels to an InfluxDB database on the control server, and also provides a Prometheus endpoint for the same.

### 8.4 video-control-server

Monitoring of sound levels monitoring of what is visible in the streams Database of what is in what room DHCP

### 8.5 video-streambackend

Fetches video from voctops Writes HLS and large video fragments for sreview; Provides NFS for sreview;

### 8.6 video-streamfrontend

Serves HLS fragments coming from the backend

### 8.7 video-streamdump

The “streamdump“s role is to connect to all video-boxes and all voctops, and to stream the video they provide to record it to be used for restore for emergencies.