How to install the MATLAB USRP B210 toolbox

It is recommended to use MATLAB 2023b and later versions.

1. After installing MATLAB, double-click the toolbox to open it

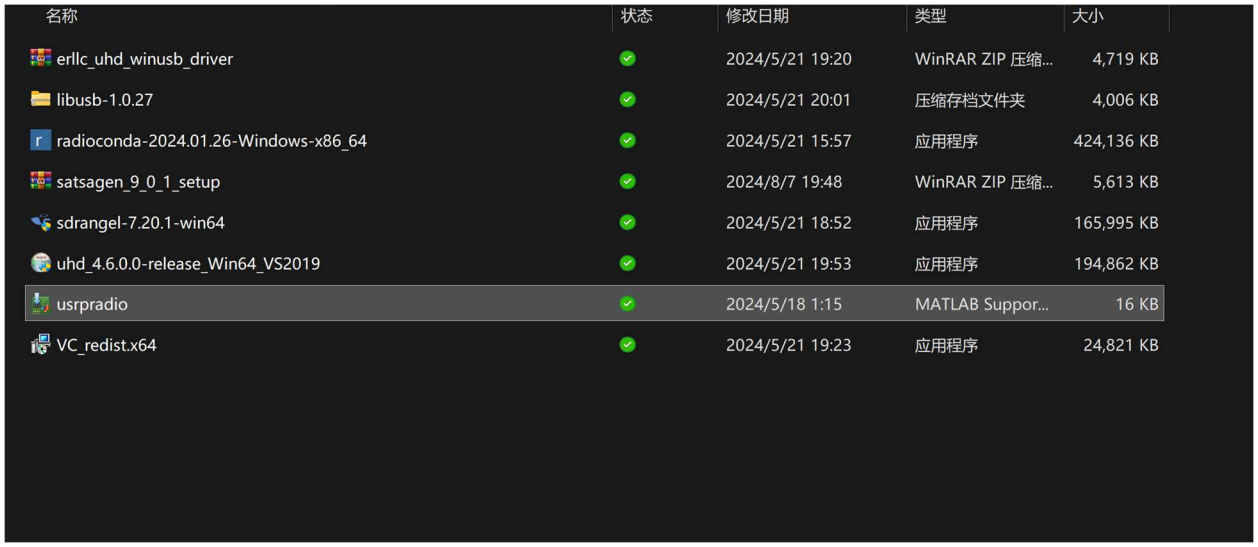

名称	状态	修改日期	类型	大小
erllc_uhd_winusb_driver		2024/5/21 19:20	WinRAR ZIP 压缩...	4,719 KB
libusb-1.0.27		2024/5/21 20:01	压缩存档文件夹	4,006 KB
radioconda-2024.01.26-Windows-x86_64		2024/5/21 15:57	应用程序	424,136 KB
satsagen_9_0_1_setup		2024/8/7 19:48	WinRAR ZIP 压缩...	5,613 KB
sdrangel-7.20.1-win64		2024/5/21 18:52	应用程序	165,995 KB
uhd_4.6.0.0-release_Win64_VS2019		2024/5/21 19:53	应用程序	194,862 KB
usrpradio		2024/5/18 1:15	MATLAB Suppor...	16 KB
VC_redist.x64		2024/5/21 19:23	应用程序	24,821 KB

2. The toolbox will automatically open MATLAB and enter the installation Click I accept

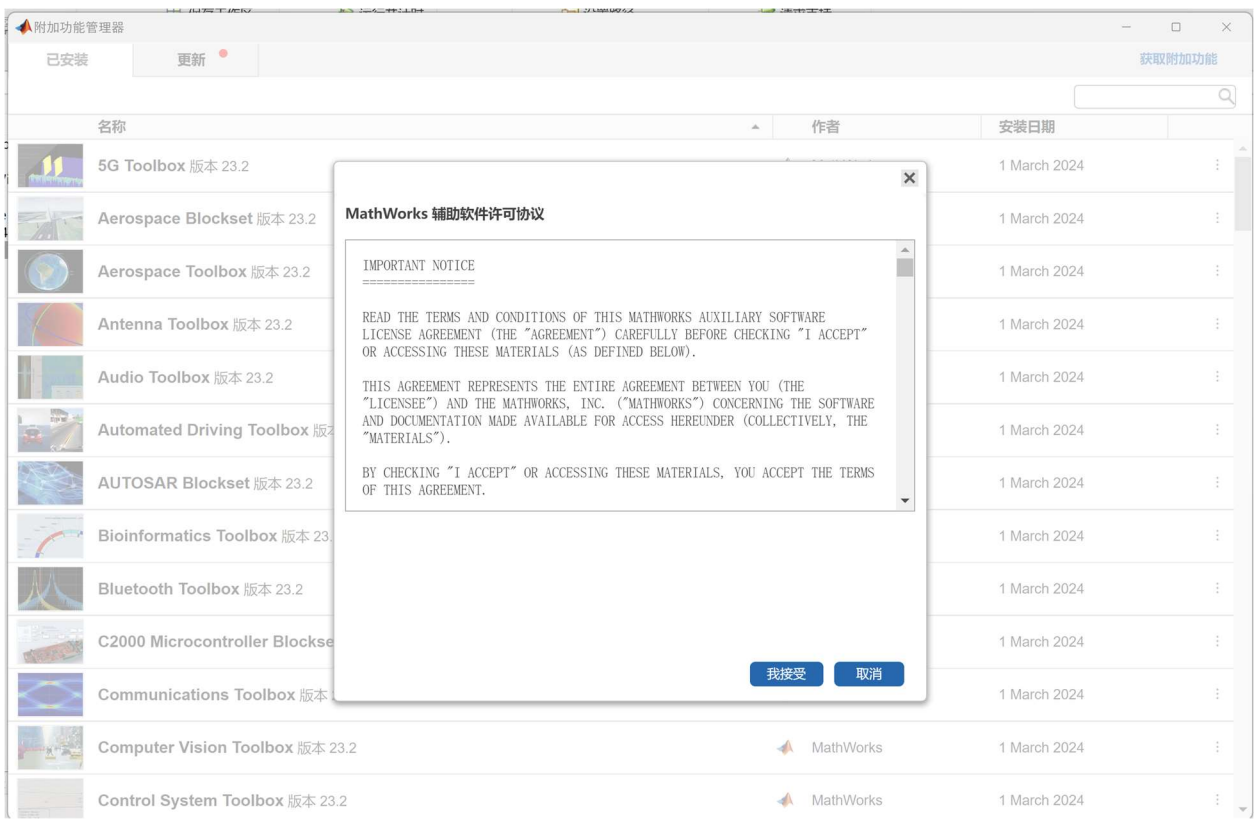

3. Click Next

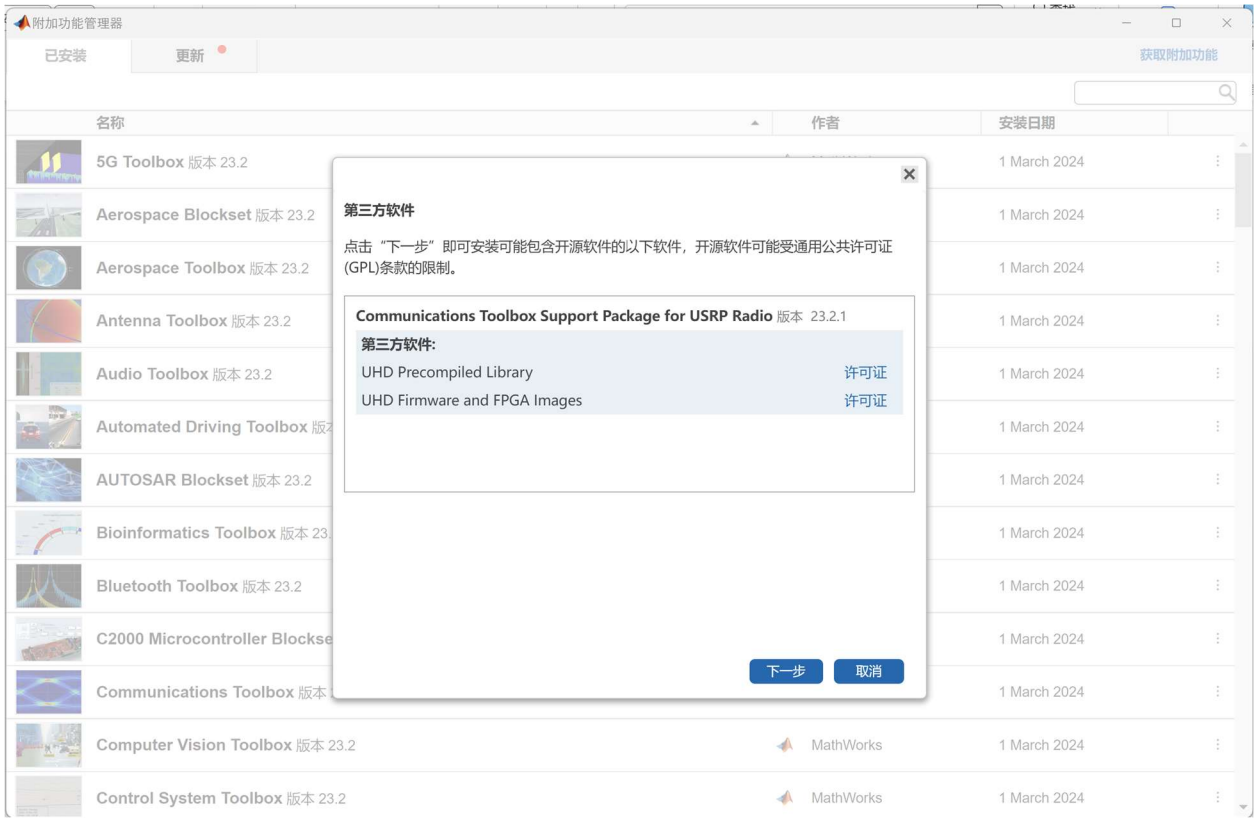

4. Wait for the automatic installation

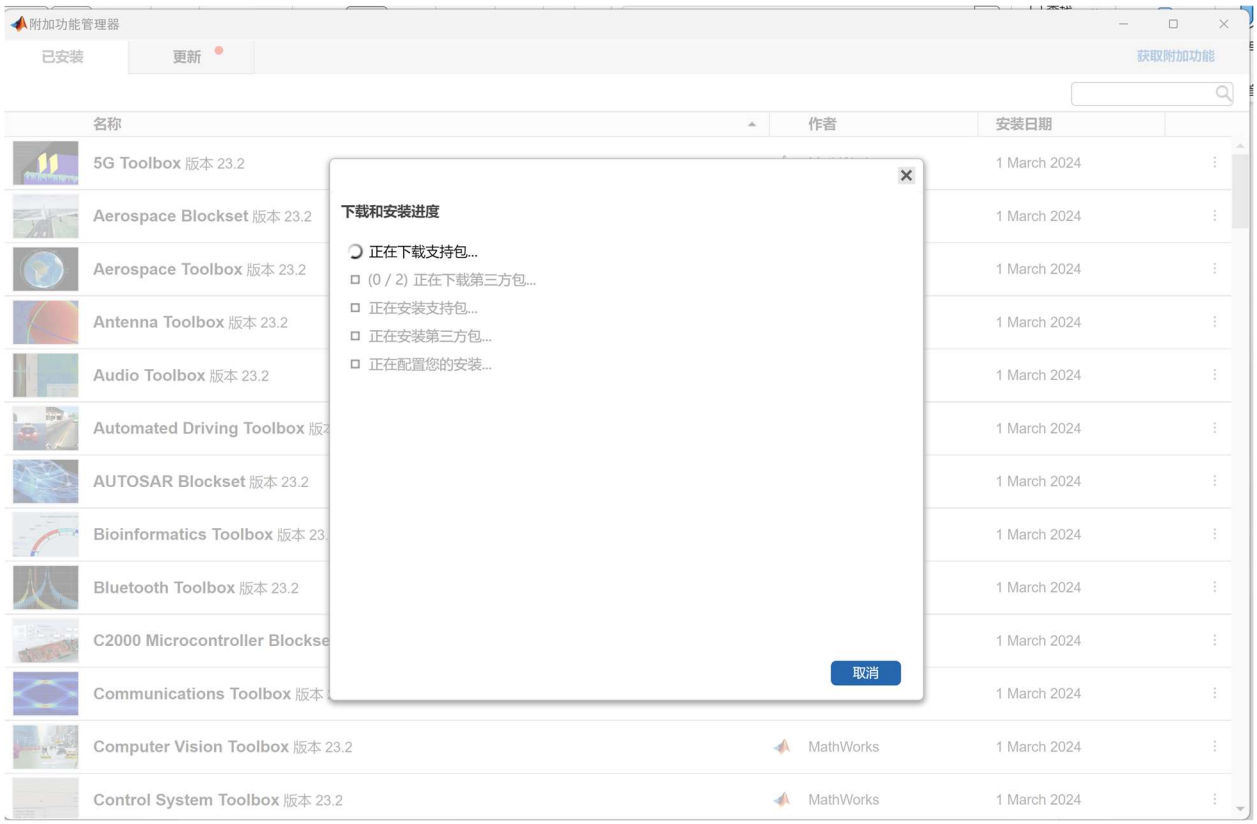

5. Click Set up now

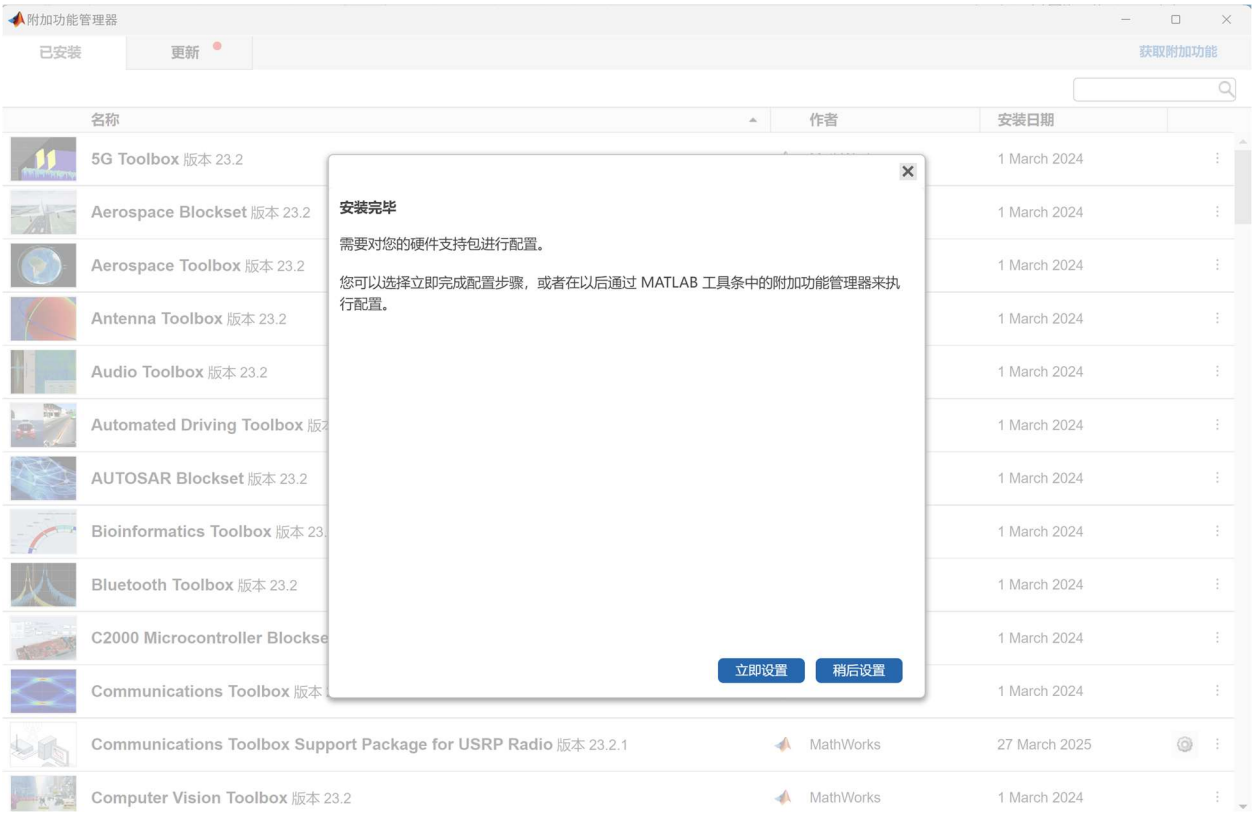

6. Select the B210 option, do not plug in the hardware at this point and click Next

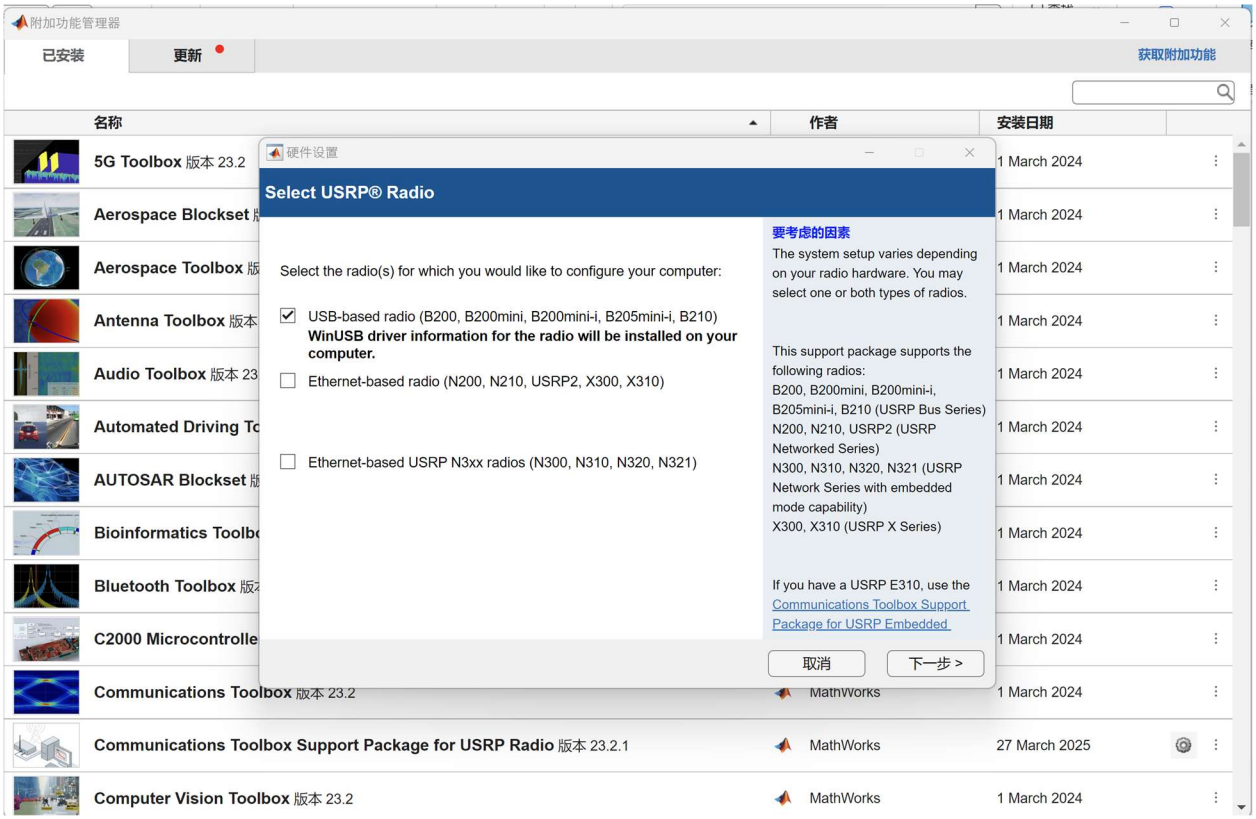

7. Click Next

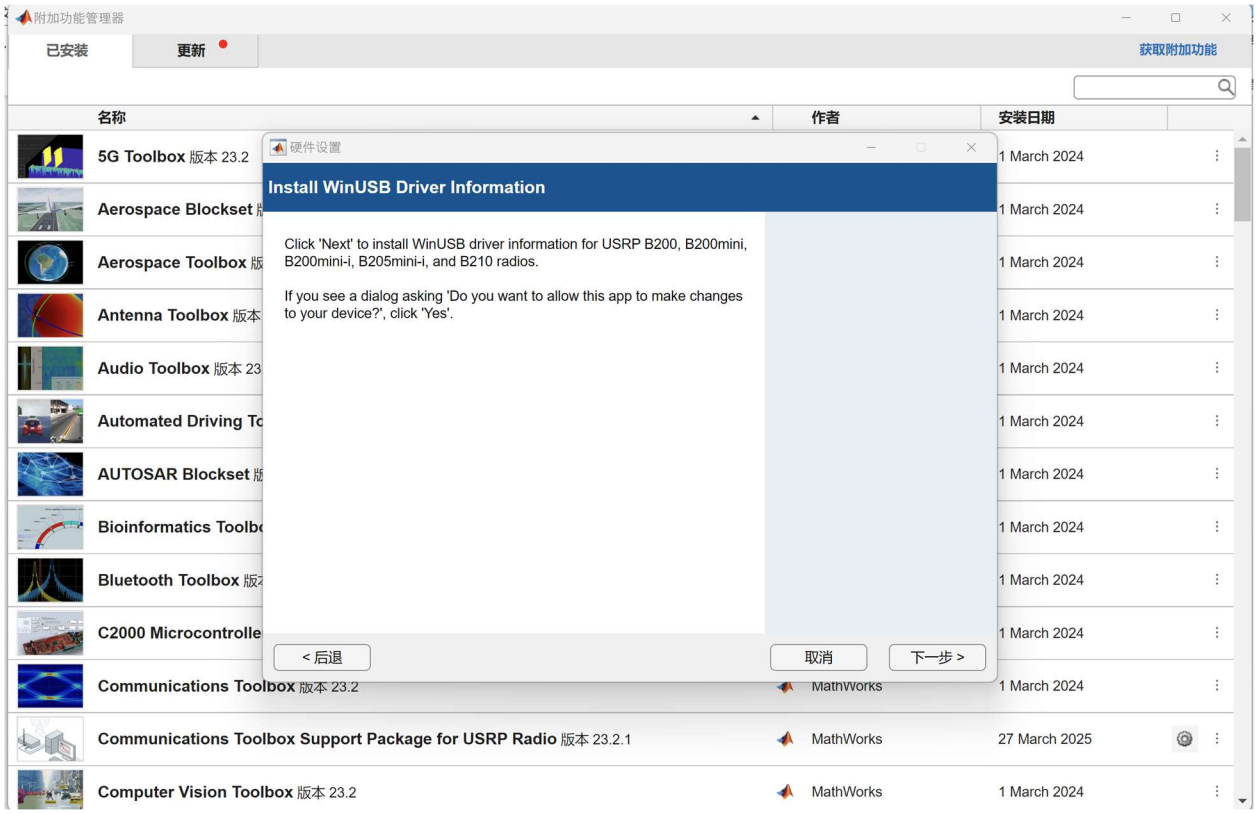

8. Because you need to install the driver, administrator permission is required, click Yes
9. This is where the hardest and most important step is taken

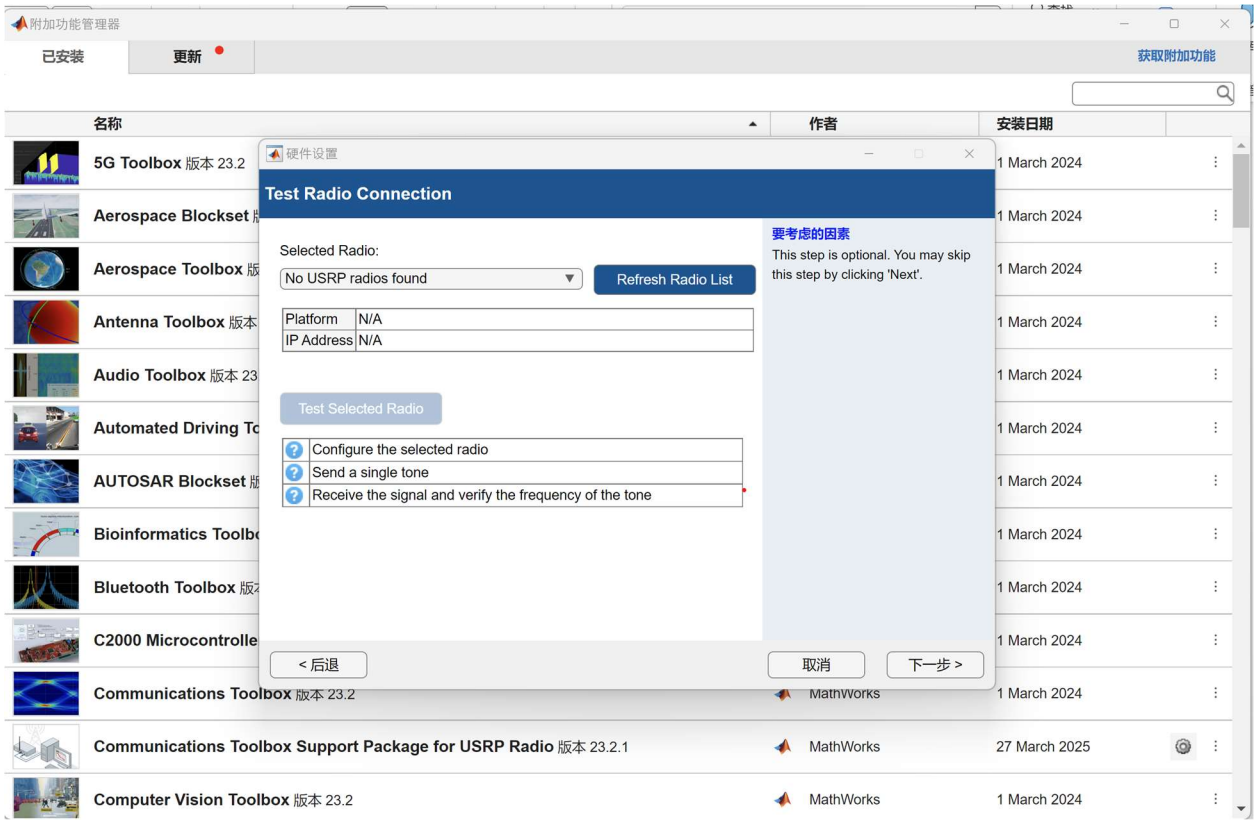

10. You need to use the FPGA file system provided by us to default the FPGA file file This step needs to be done manually, open the firmware directory of the USRP toolbox in the figure below

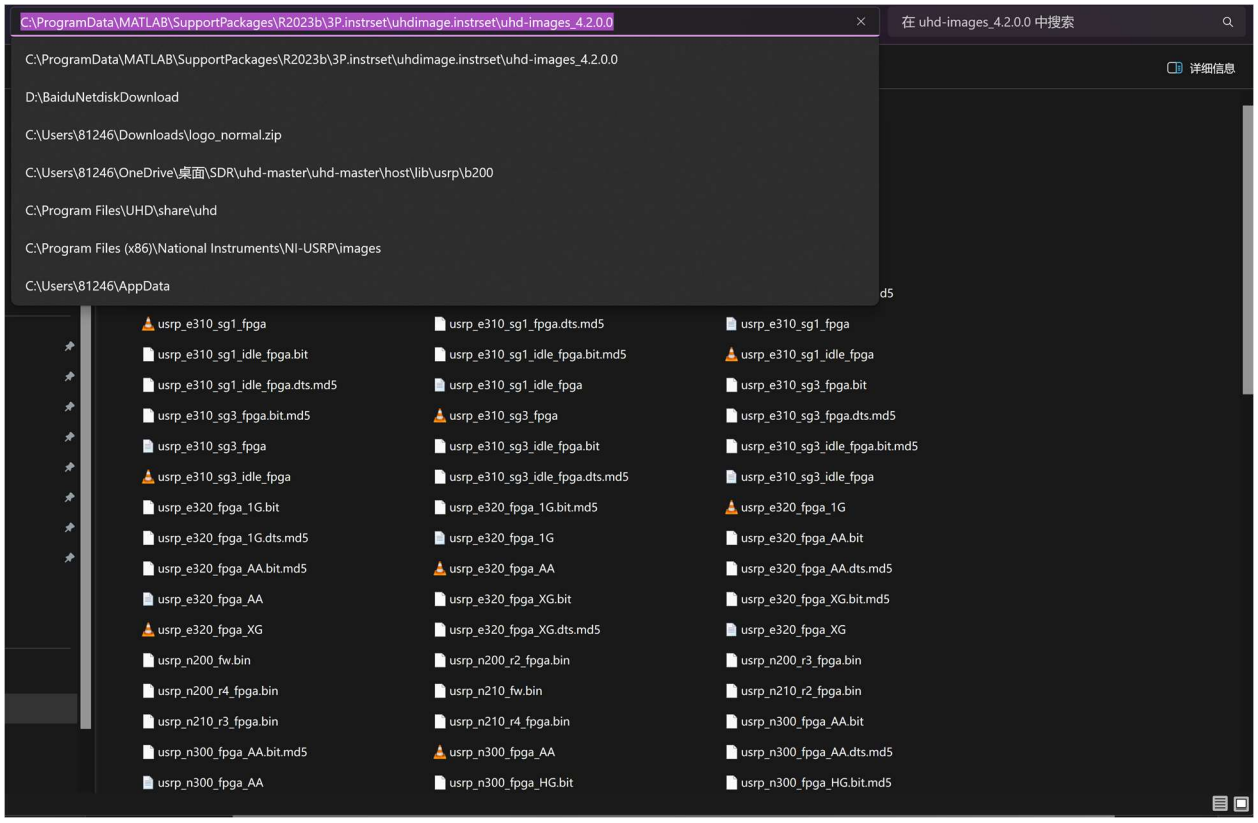

11. Open the Windows folder in the tutorial file provided, there are two folders inside: B210mini and B220mini, corresponding to two versions of the device, and the model number will be marked on the outer box

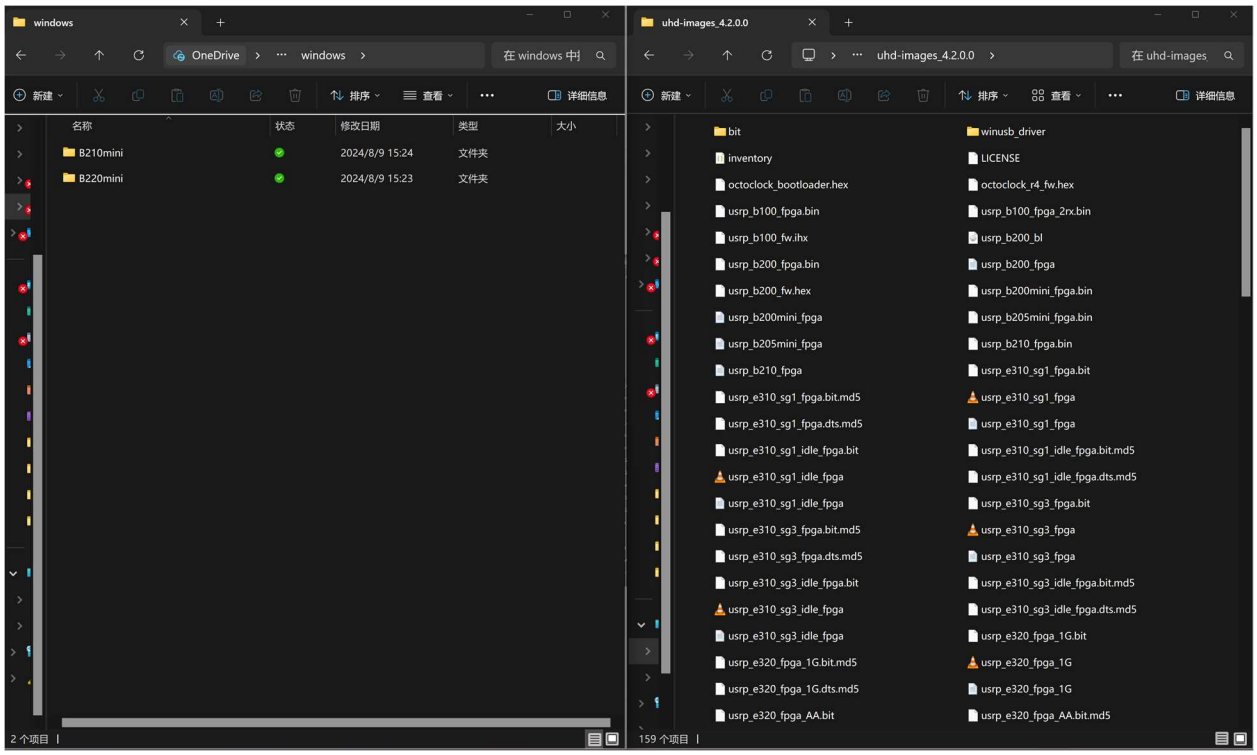

12. Overwrite the provided file with the same name in the Toolbox folder Be sure to distinguish between the two versions of the FPGA file

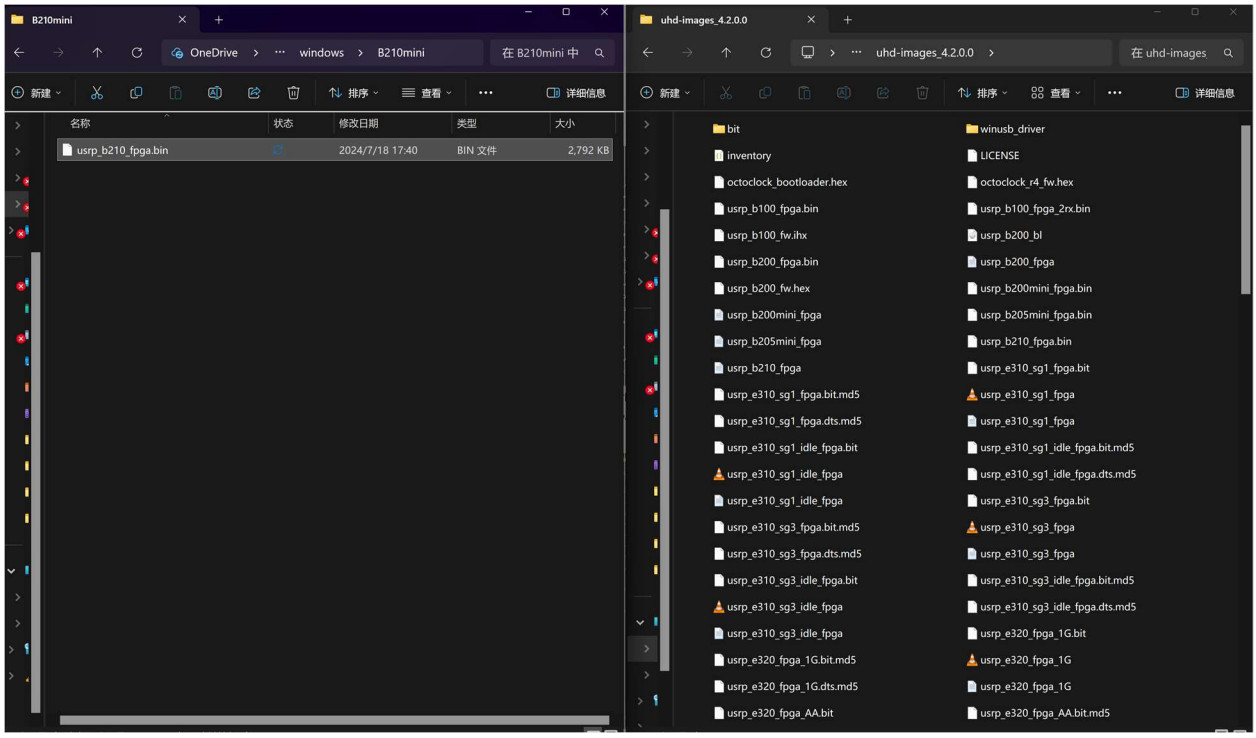

13. Plug in your device and tap Refresh and Than Click Test selected Radio

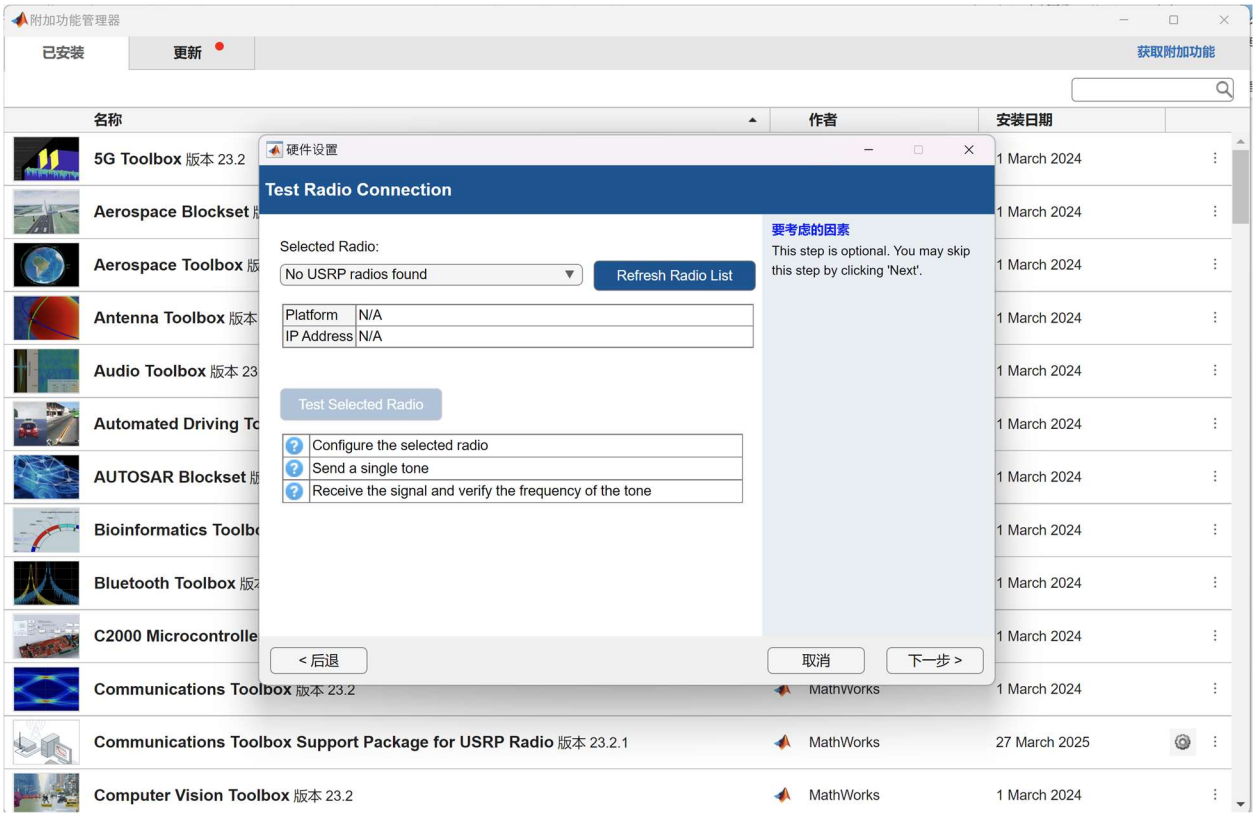

14. If the test is successful, then it is complete. If not, there is a problem: the B210mini and B220mini have been confused.