


REVISION RECORD			
LTR	ECONO	APPROVED	DATE


RaspberryPi Interface

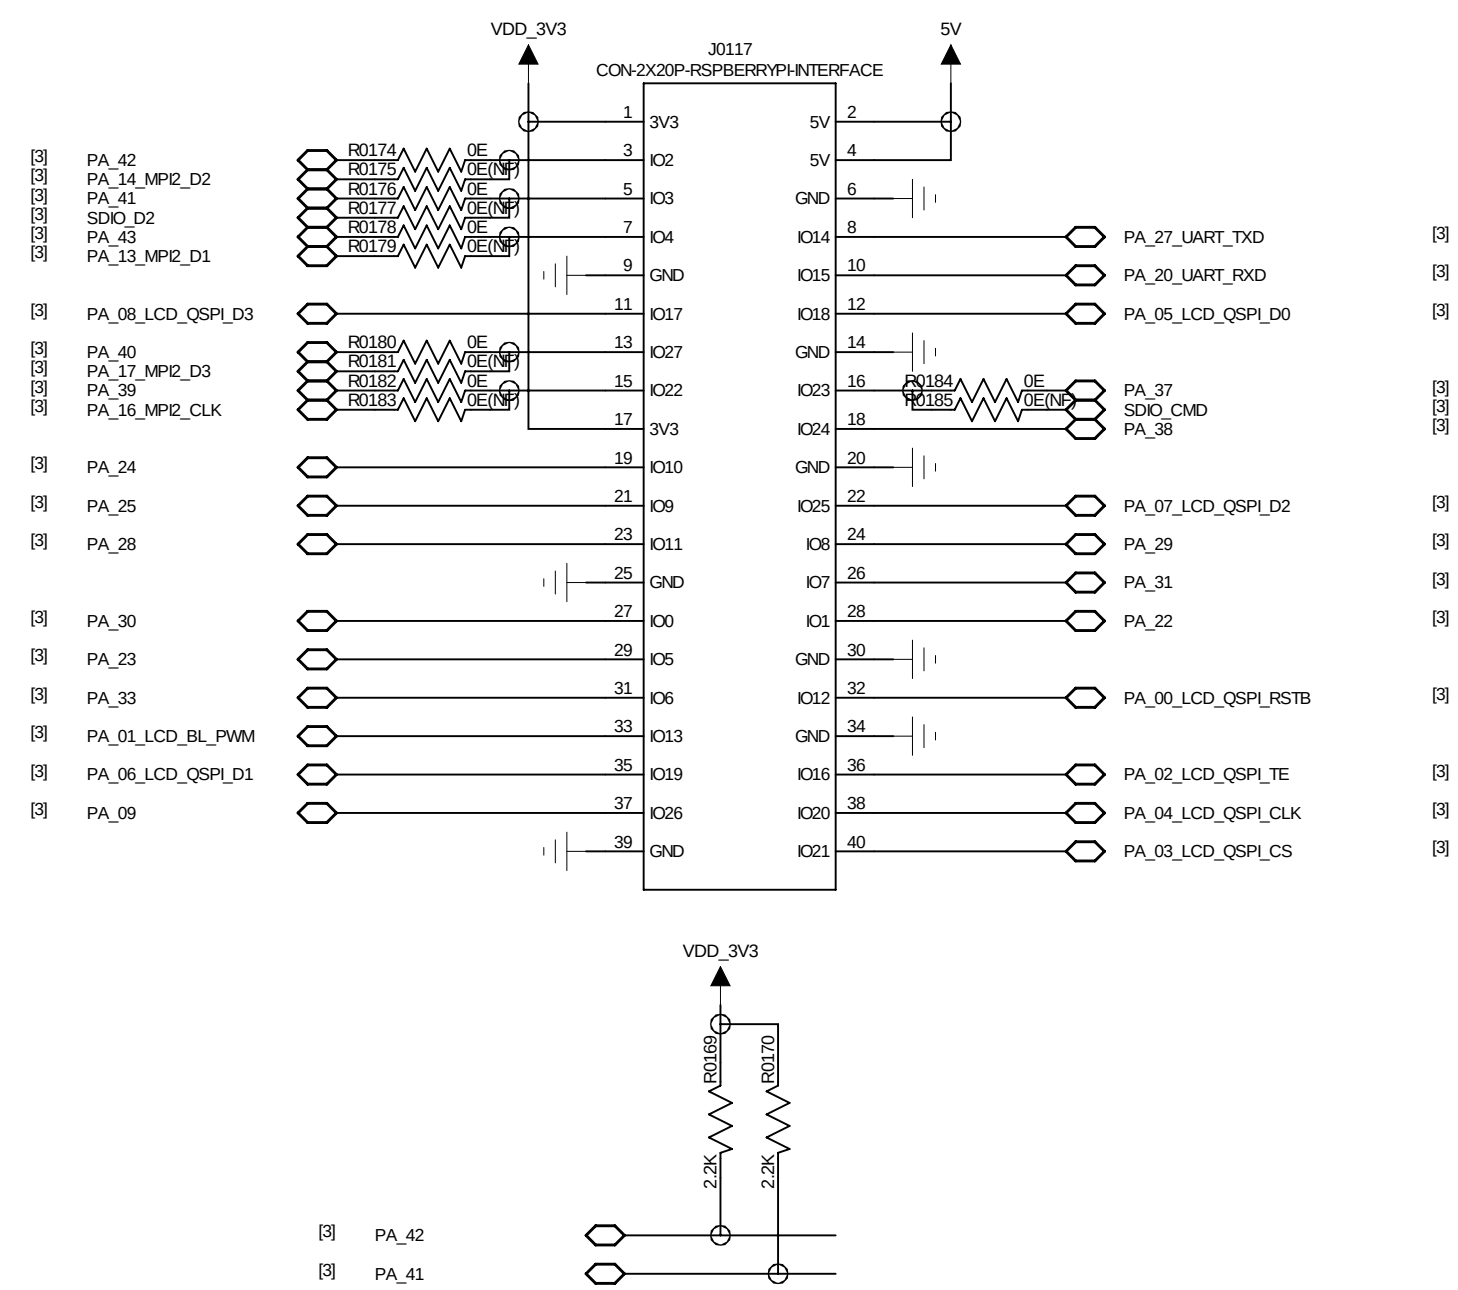

MODULE

MOD	LCD_8080	LCD_QSPI	E-Paper	RaspberryPi	SD	SPI	I2S	I2C	UART	GPTIM	CTP	KEY	GPADC	USB	WKUP
PA00	RSTB	RSTB	RES	IO12					I2C_UART_TIM						
PA01	BL_PWM	BL_PWM		IO13					I2C_UART_TIM						
PA02	TE	TE	BUSY	IO16			I2S1_MCLK		I2C_UART_TIM						
PA03	CS	CS		IO21			I2S1_SDO		I2C_UART_TIM						
PA04	WR	CLK	SCLK	IO20			I2S1_SDI		I2C_UART_TIM						
PA05	RD	D0	SDI	IO18			I2S1_BCK		I2C_UART_TIM						
PA06	DC	D1	DC	IO19			I2S1_LRCK		I2C_UART_TIM						
PA07	DB0	D2		IO25			PDM1_CLK		I2C_UART_TIM						
PA08	DB1	D3		IO17			PDM1_DATA		I2C_UART_TIM						
PA09				IO26					I2C_UART_TIM			CTP_RST			
PA10									I2C_UART_TIM			#AU_PA_EN			
PA11									I2C_UART_TIM			KEY			
PA18									I2C_UART_TIM			DB_UART_RXD			
PA19									I2C_UART_TIM			DB_UART_TXD			
PA20									I2C_UART_TIM			UART_RXD			
PA22				IO15			PDM1_CLK		I2C_UART_TIM						
PA23				IO5			PDM1_DATA		I2C_UART_TIM						
PA24				IO10		SPI1_DIO	I2S1_MCLK		I2C_UART_TIM						#WKUP_PIN0
PA25				IO9		SPI1_DI	I2S1_SDO		I2C_UART_TIM						#WKUP_PIN1
PA26							I2S1_SDI		I2C_UART_TIM			LED/TF_DET			#WKUP_PIN2
PA27				IO14			I2S1_BCK		I2C_UART_TIM						#WKUP_PIN3
PA28				IO11		SPI1_CLK	I2S1_LRCK		I2C_UART_TIM						
PA29				IO8		SPI1_CS			I2C_UART_TIM				#GPADC_CH1		
PA30				IO0					I2C_UART_TIM				#GPADC_CH2		
PA31				IO7					I2C_UART_TIM				#GPADC_CH3		
PA32									I2C_UART_TIM			CTP_SCL			
PA33				IO6					I2C_UART_TIM			CTP_INT			
PA34	KEY								I2C_UART_TIM			RGB_LED			
PA35									I2C_UART_TIM			CTP_SDA			
PA36									I2C_UART_TIM			#PWR_KEY			
PA37	DB2			IO23		SPI2_DIO			I2C_UART_TIM					#GPADC_CH7	
PA38				IO24		SPI2_DI			I2C_UART_TIM					#USB11_DP	#WKUP_PIN10
PA39	DB3			IO22		SPI2_CLK			I2C_UART_TIM					#USB11_DM	#WKUP_PIN11
PA40	DB4			IO27					I2C_UART_TIM						#WKUP_PIN12
PA41	DB5			IO3					I2C_UART_TIM						#WKUP_PIN13
PA42	DB6			IO2					I2C_UART_TIM						#WKUP_PIN14
PA43	DB7			IO4					I2C_UART_TIM						#WKUP_PIN15
PA44									I2C_UART_TIM						#WKUP_PIN16
									I2C_UART_TIM						#WKUP_PIN17
									I2C_UART_TIM						#WKUP_PIN18
									I2C_UART_TIM						#WKUP_PIN19
									I2C_UART_TIM						#WKUP_PIN20


IO0和IO24在40p屏幕扩展板时，做成SCL的可选项。1当MCU8屏时，选IO24；当QSPI屏时，使用SPI2功能选IO0，使用I2S选IO24

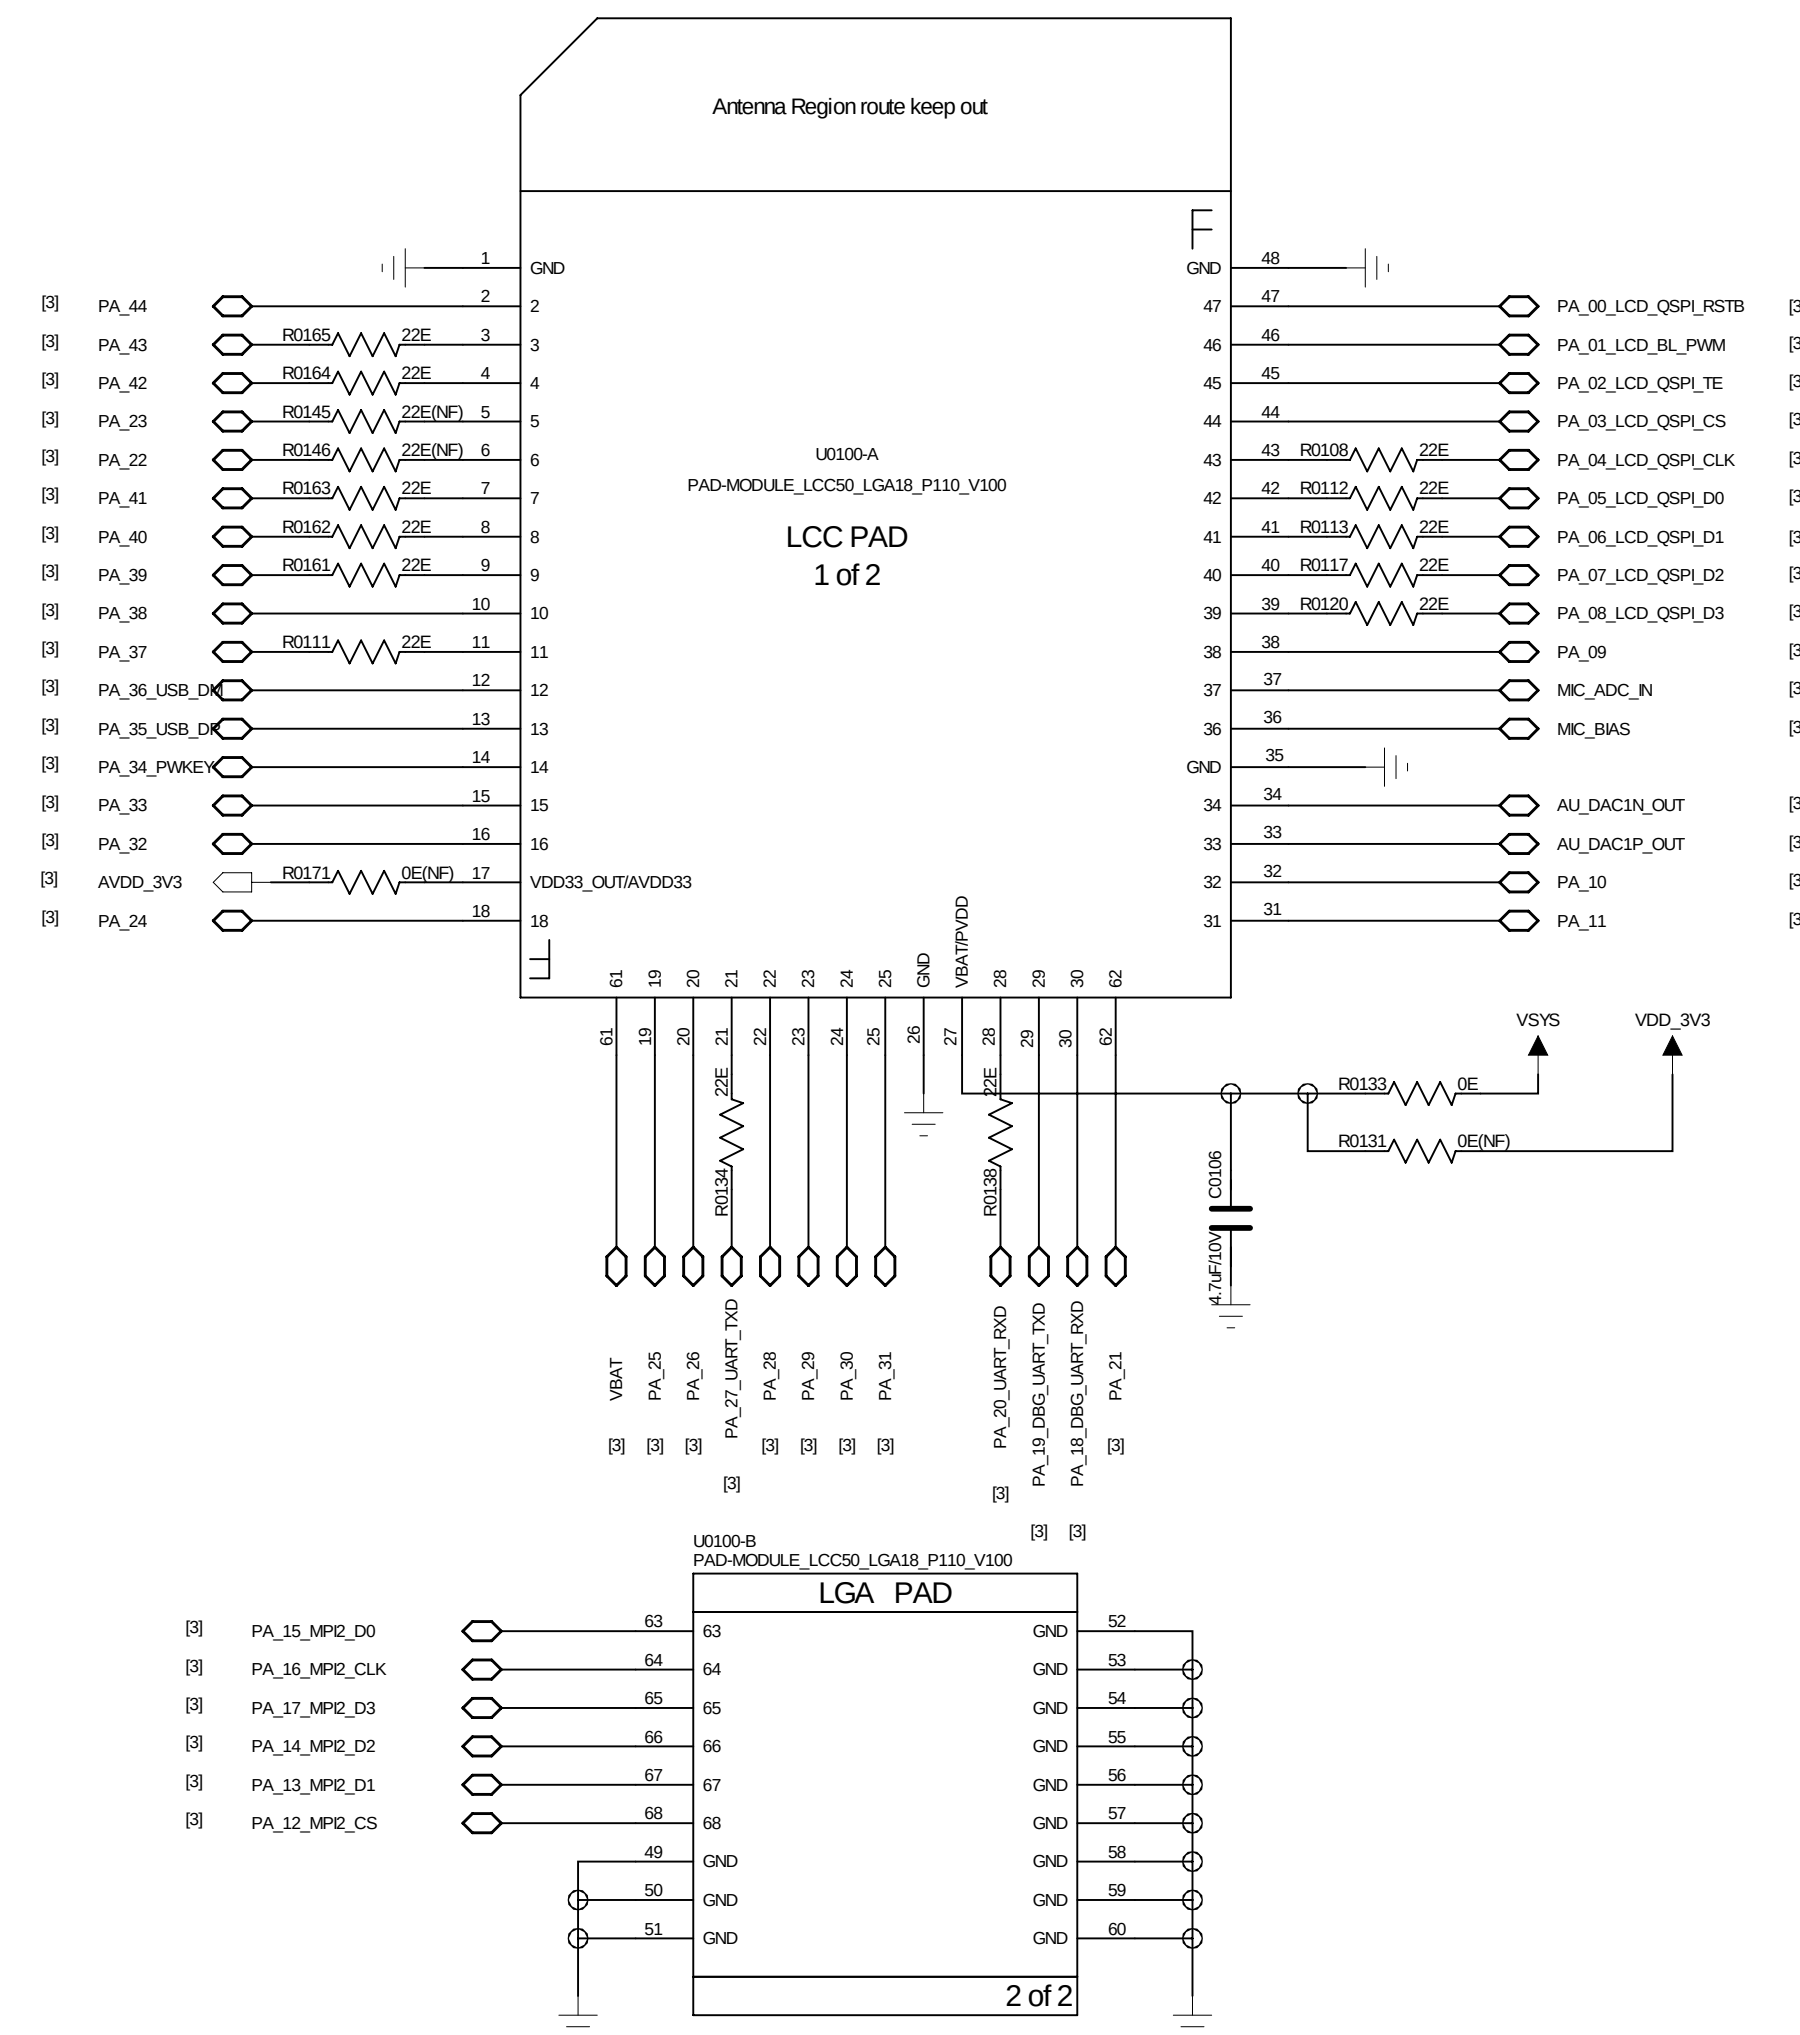


MOD Compatibility settings

	Package	Power	Install	Not install
SF32LB52-MOD-1	LCC50+LGA18	VBAT=3.6~4.2V,INPUT VDD33_OUT=3.3V,OUTPUT	R0133 R0174 R0176 R0178 R0180 R0182 R0184	R0131 R0171 R0175 R0177 R0179 R0181 R0183 R0185 R0190 R0191 R0186 R0187 R0188
SF32LB52-MOD-A	LCC50+LGA18	PVDD=1.71~3.6V,INPUT AVDD33=3.3V,INPUT	R0171 R0131 R0175 R0177 R0179 R0181 R0183 R0185 R0190 R0191	R0133 R0174 R0176 R0178 R0180 R0182 R0184 R0186 R0187 R0188
SF32LB52-MOD-D	LCC50+LGA18	PVDD=1.71~3.6V,INPUT AVDD33=3.3V,INPUT	R0171 R0131 R0174 R0176 R0178 R0180 R0182 R0184	R0133 R0175 R0177 R0179 R0181 R0183 R0185 R0190 R0191 R0186 R0187 R0188

Audio

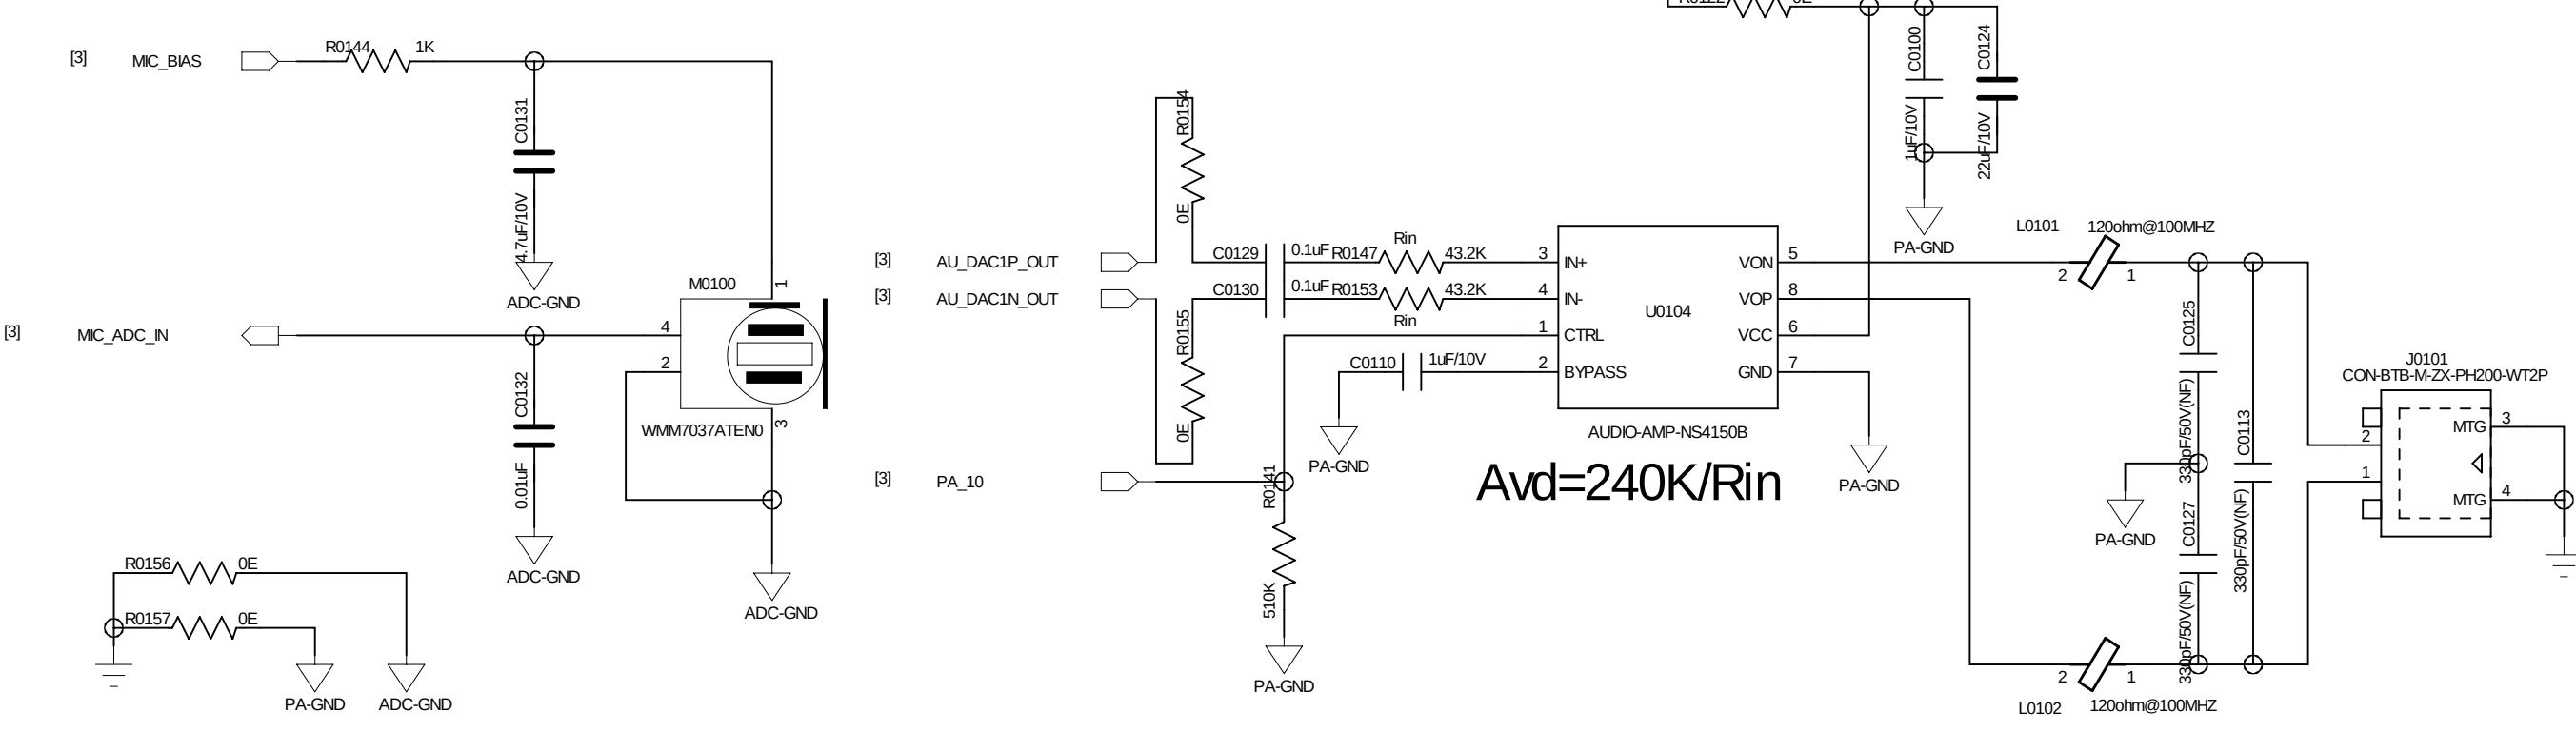


LCD

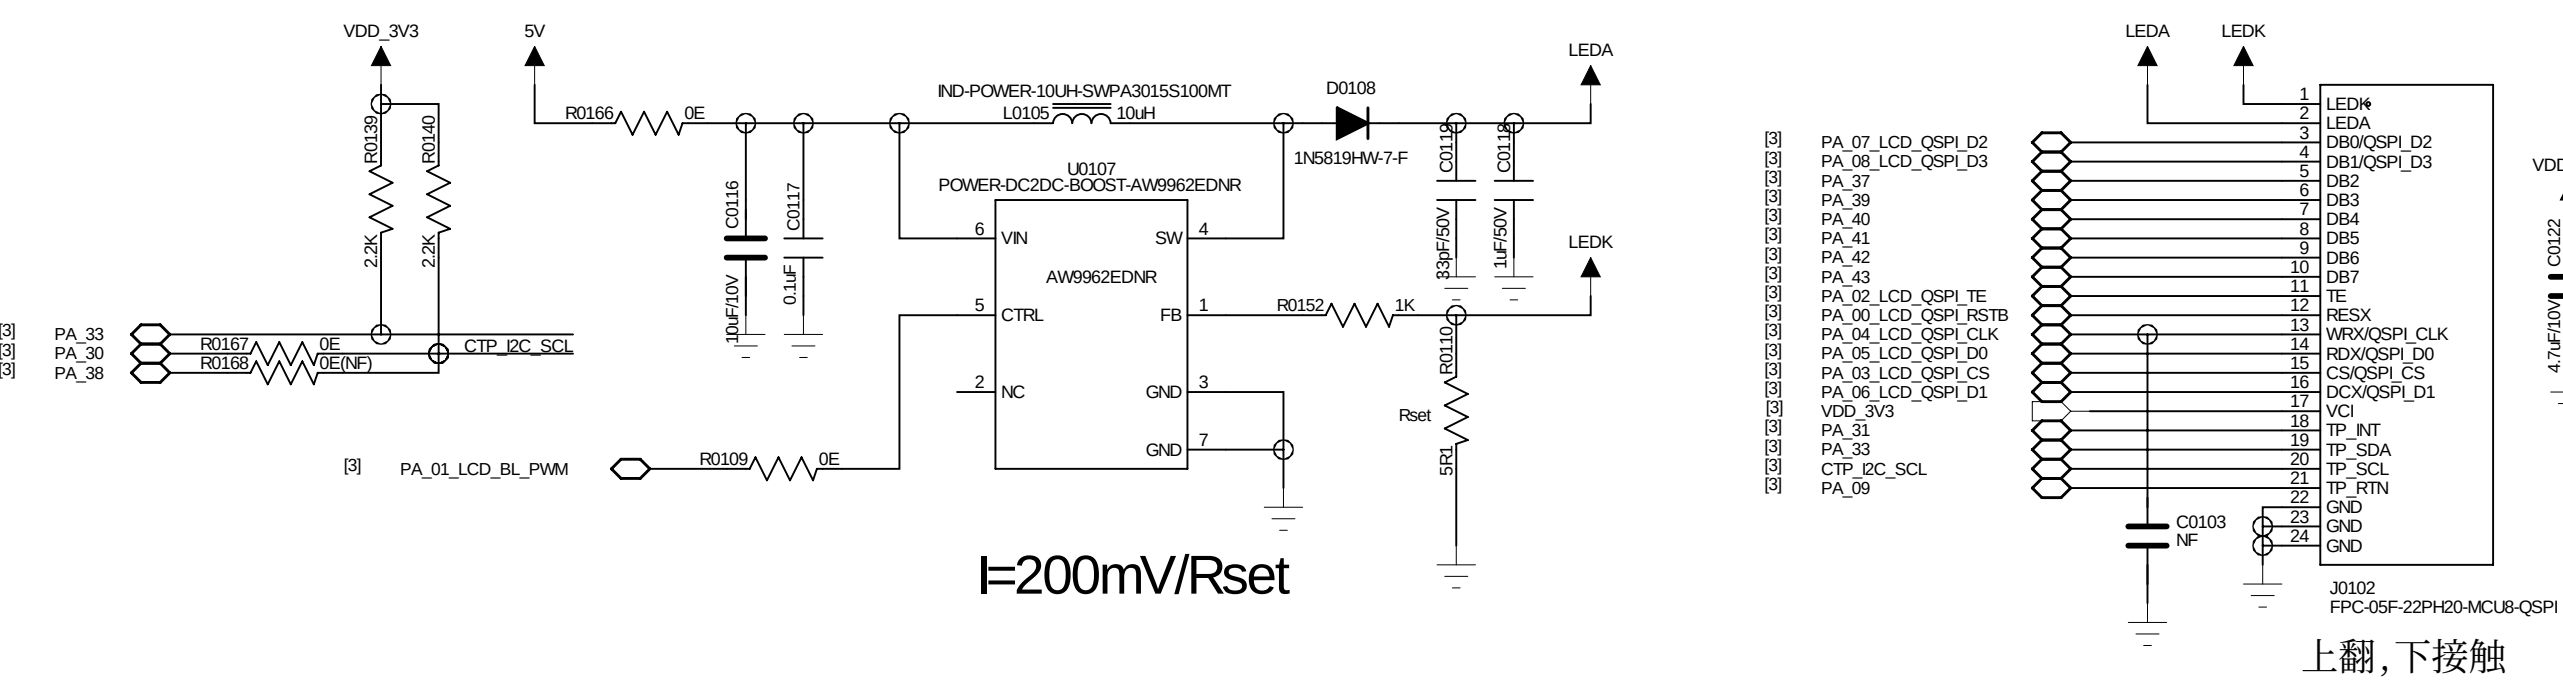


USB


Battery power supply, USB host mode instal R0189

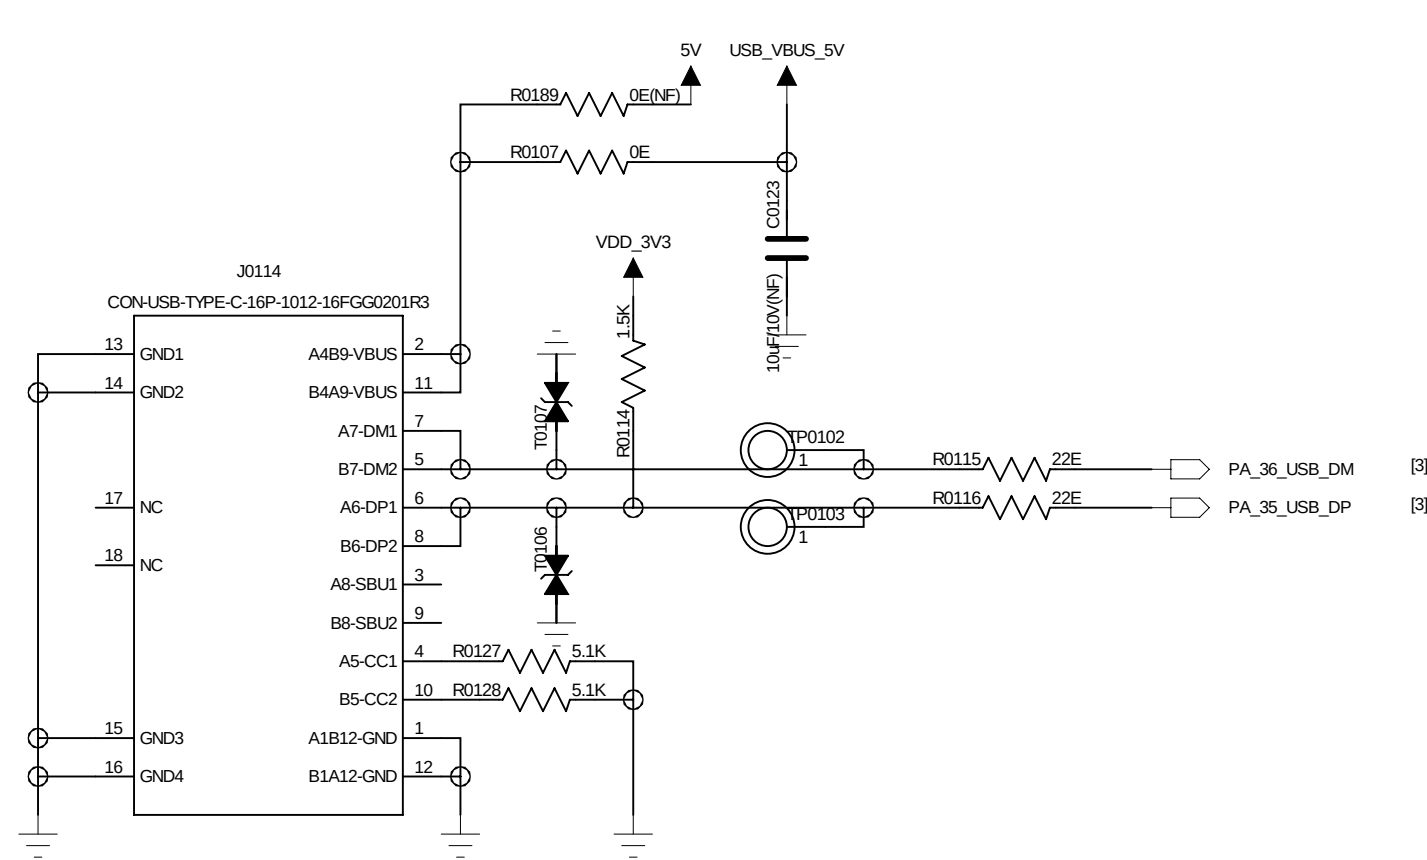


Power

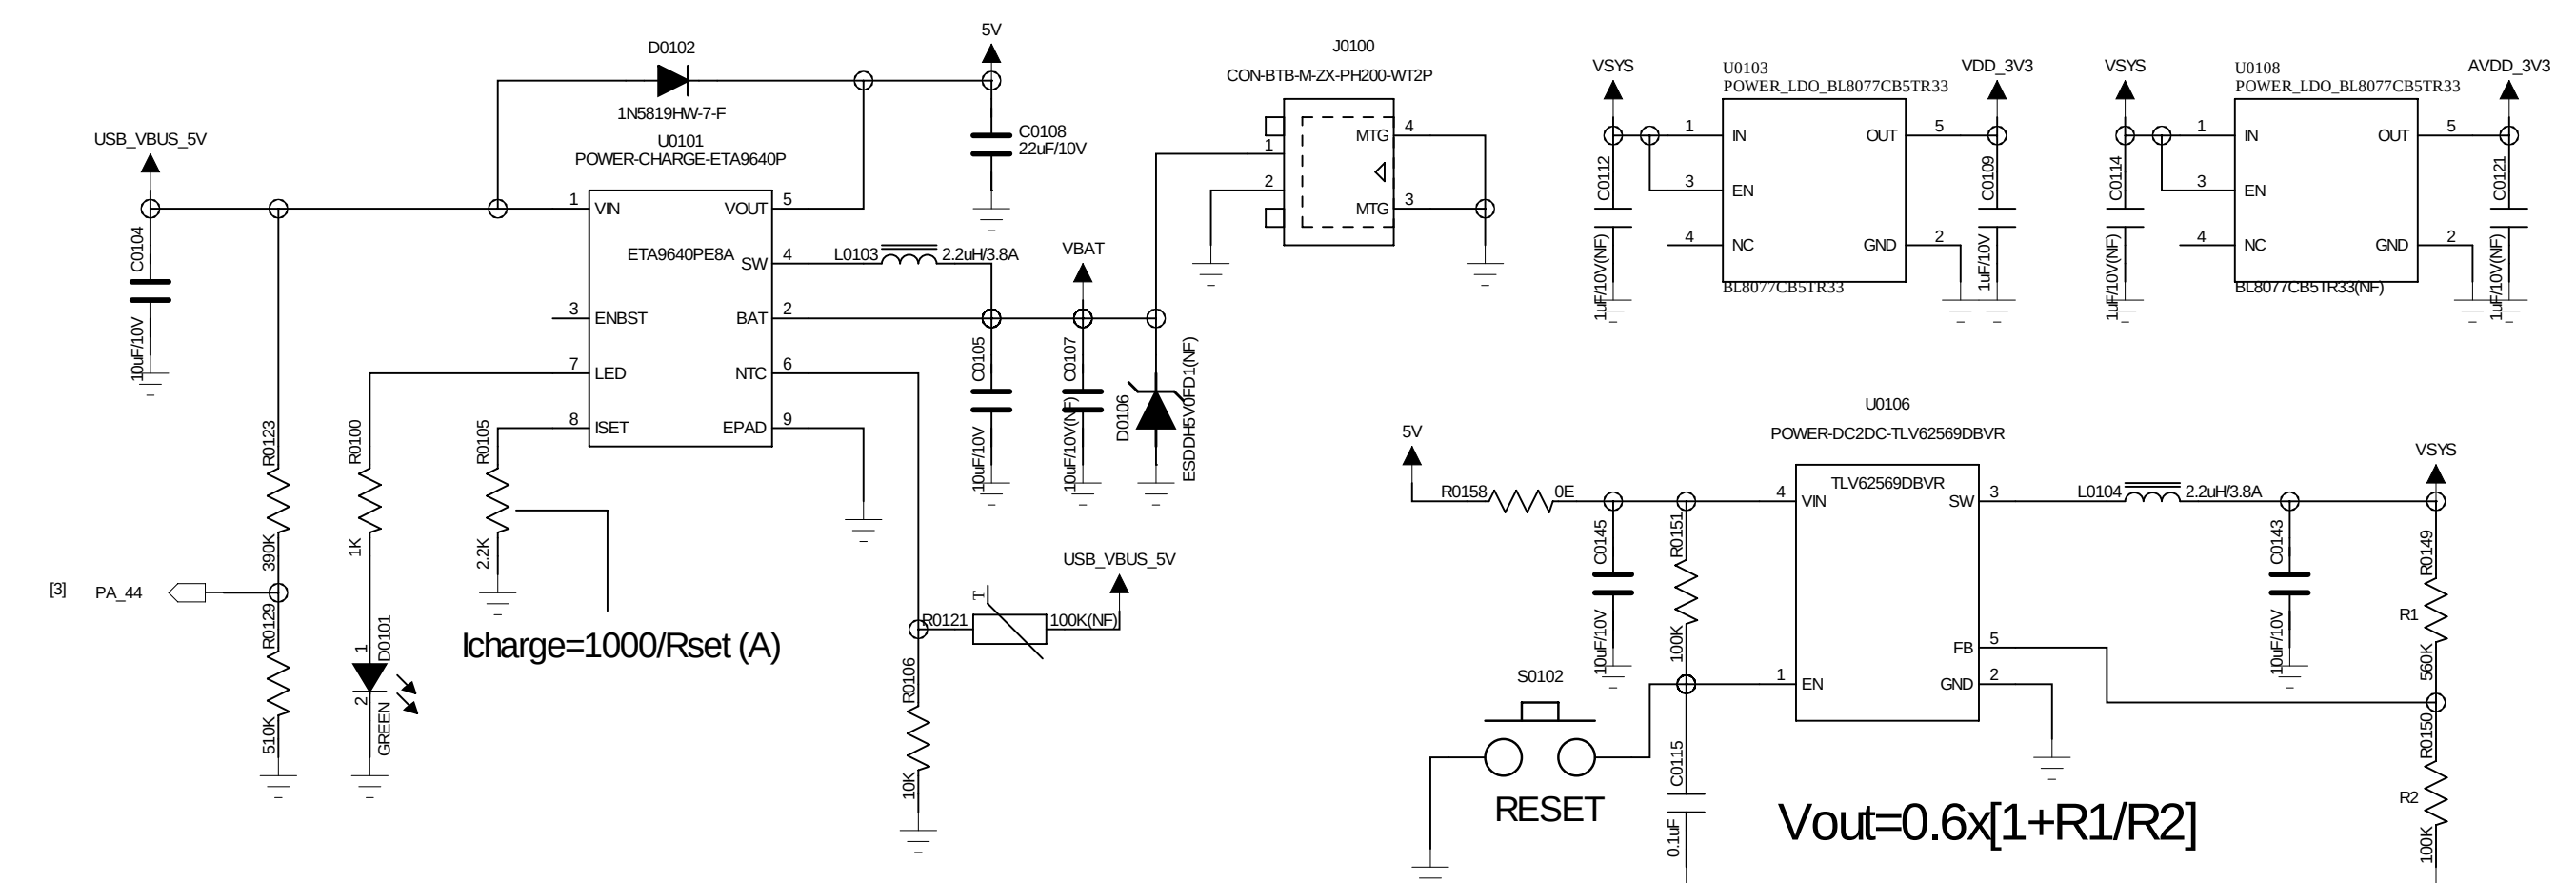


TF Card & Flash

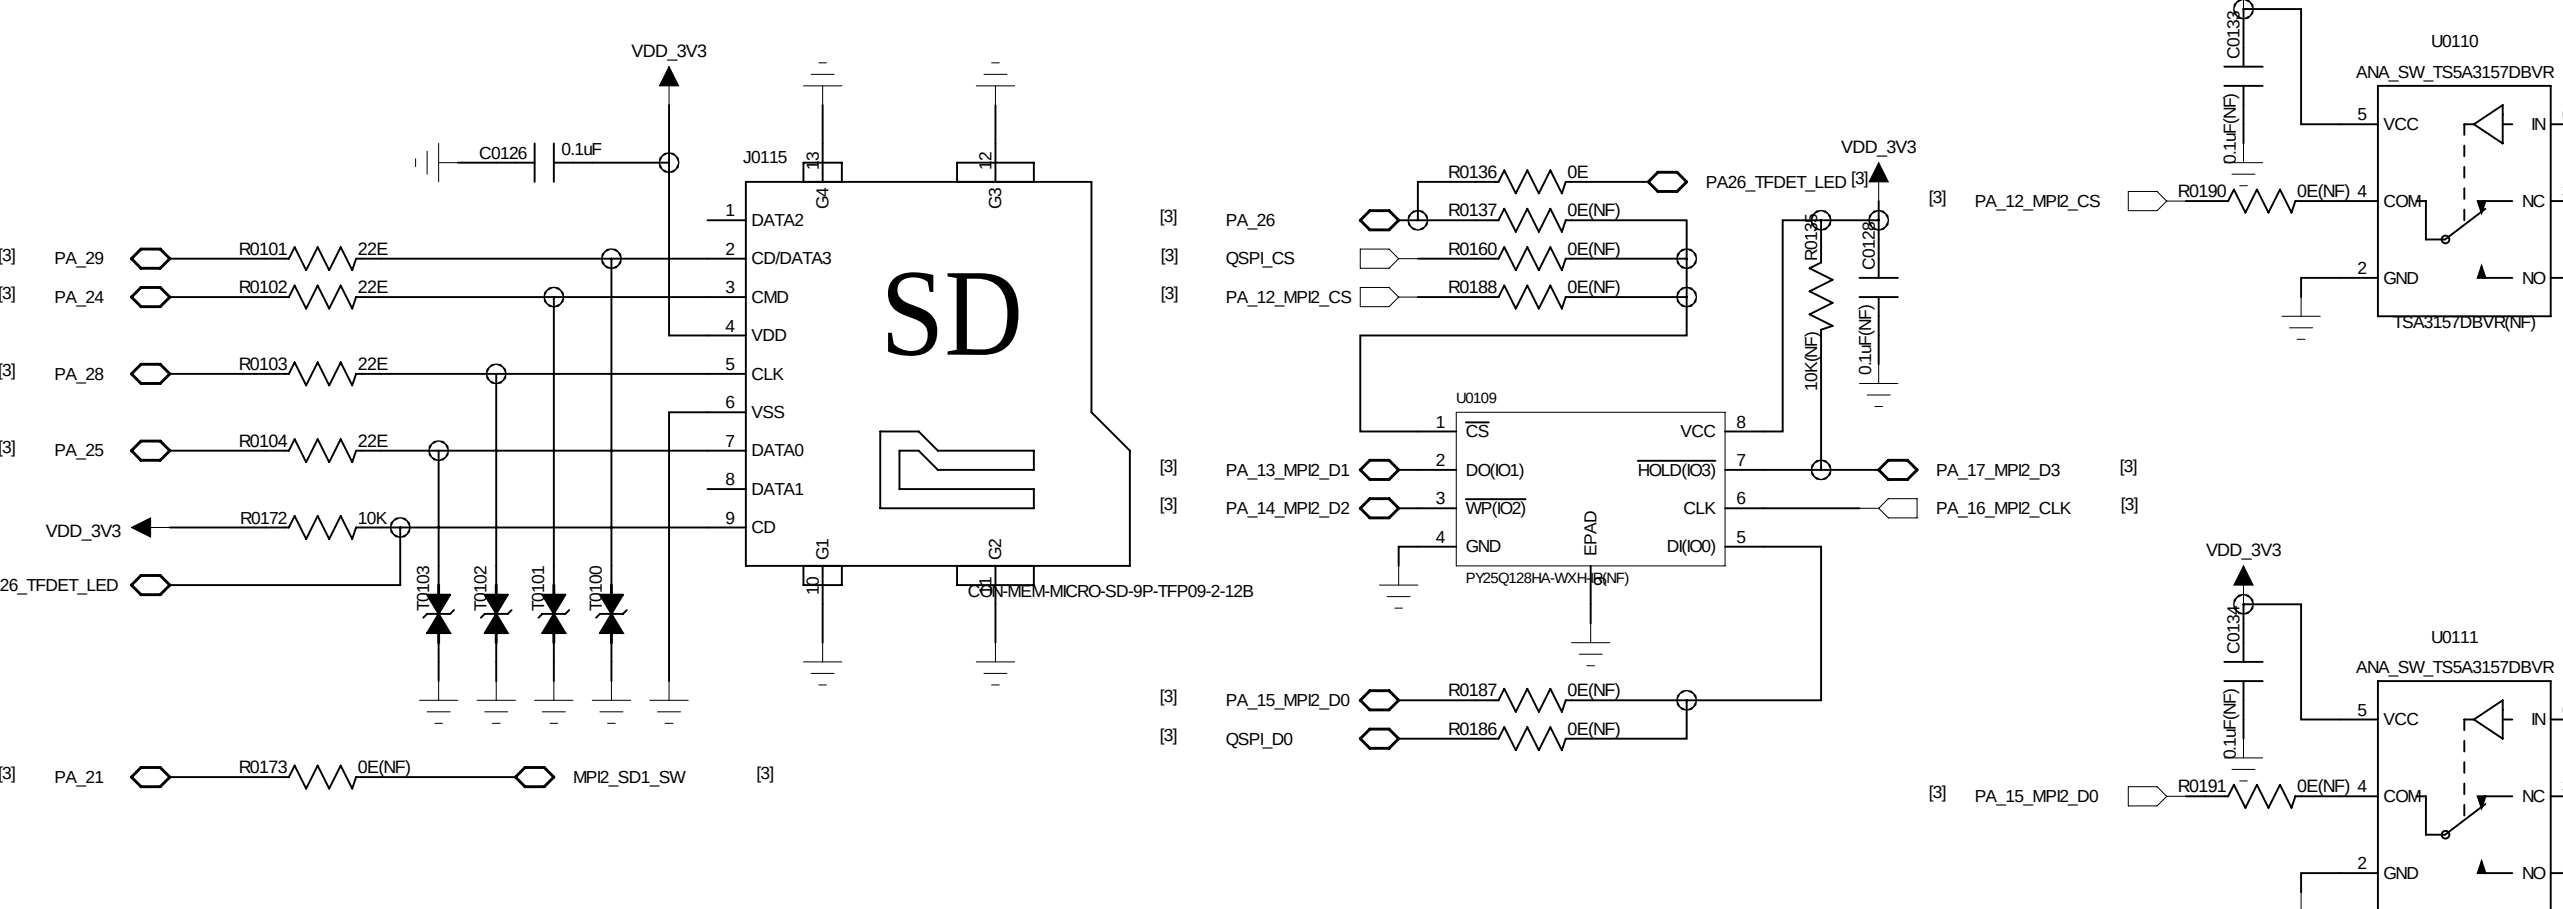


UART 2 USB

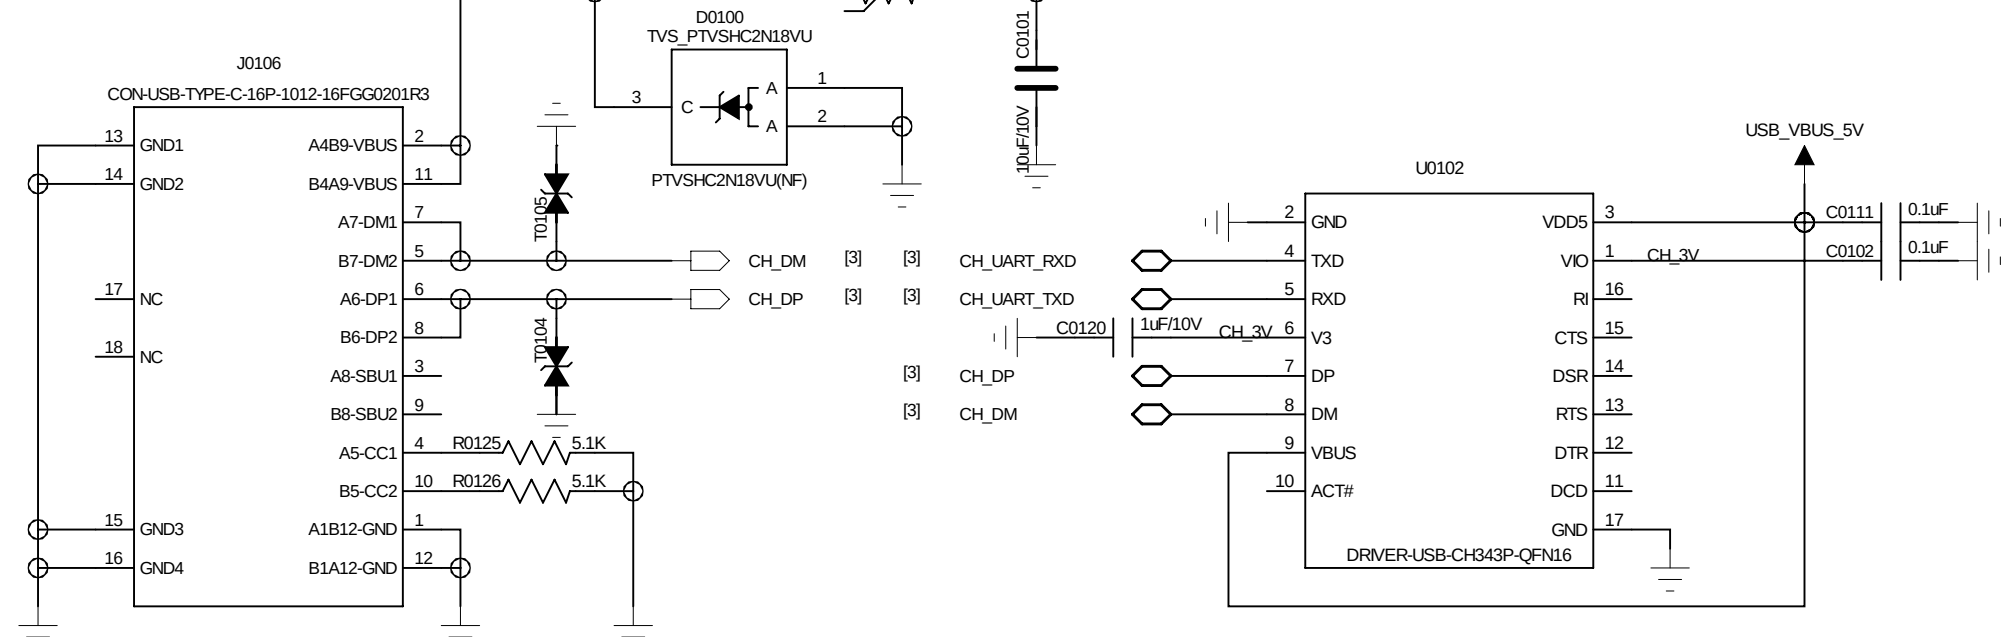



Debug

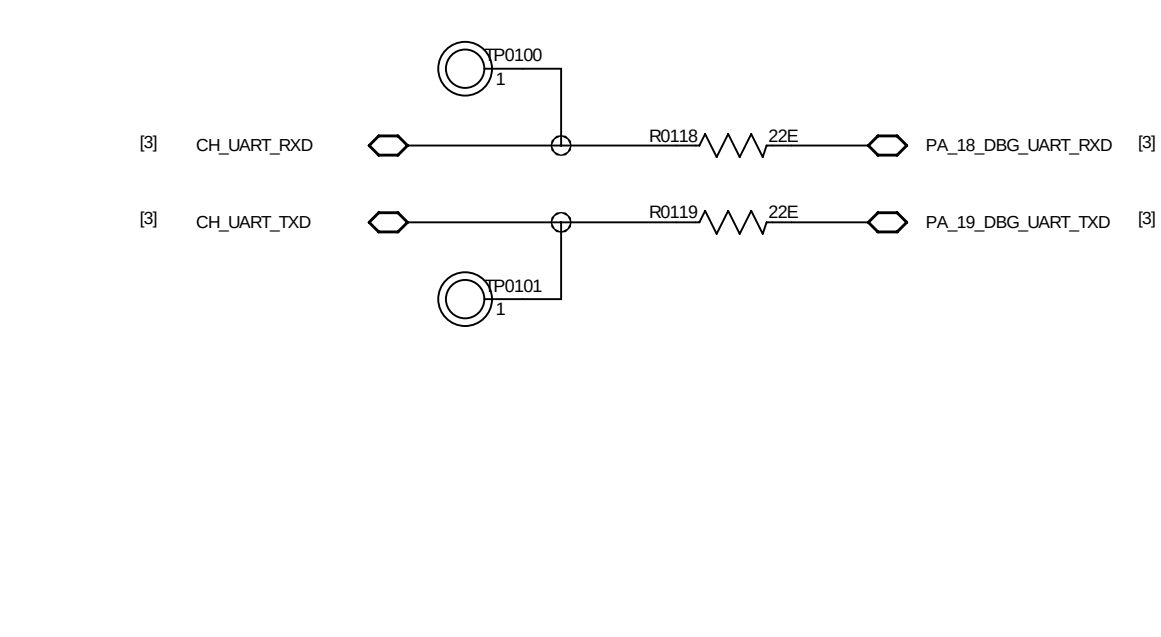

LED

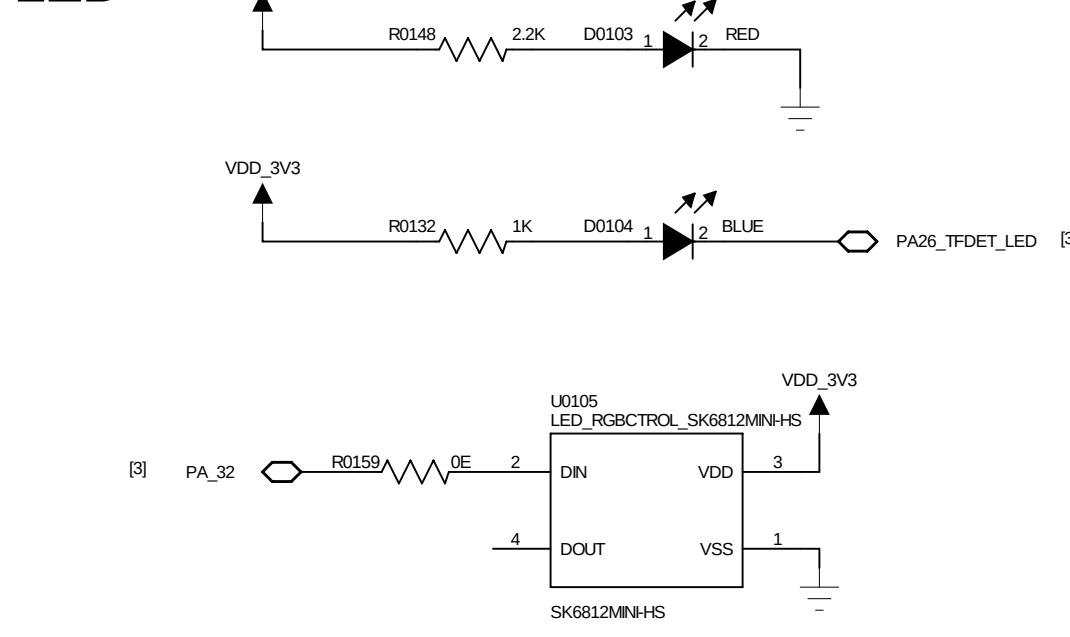

KEY

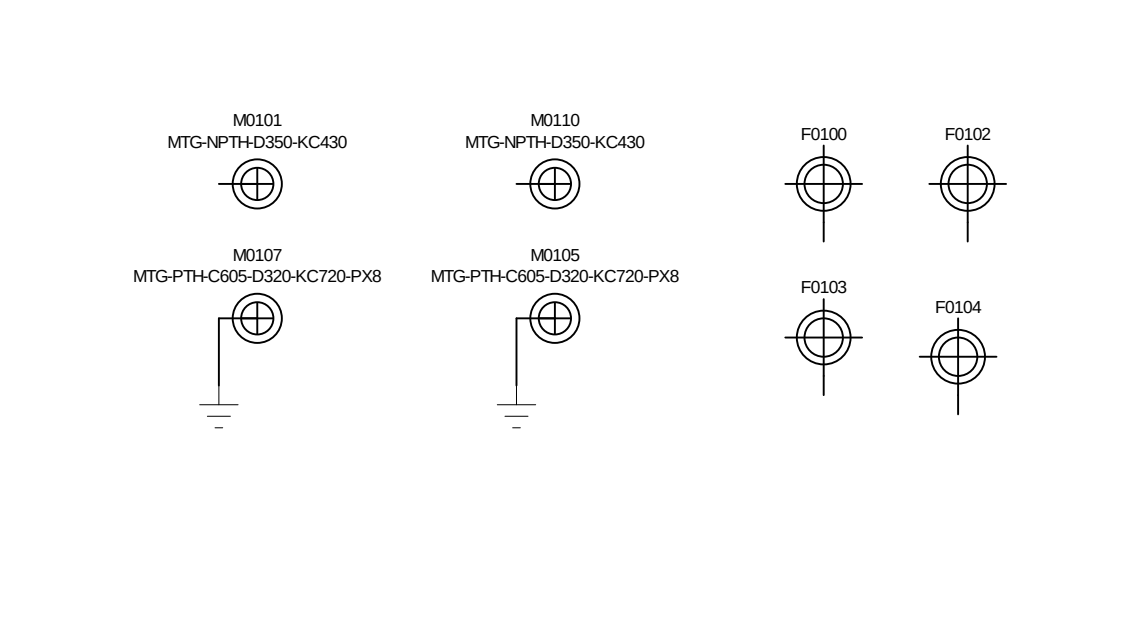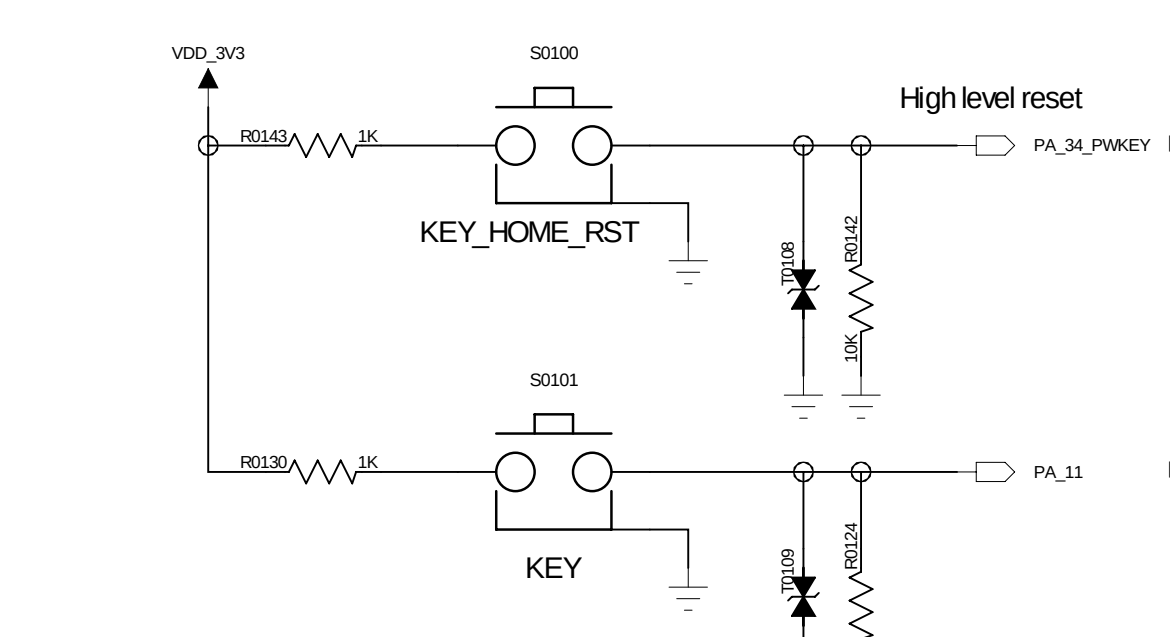

COMPANY			
TITLE			
DRAWN	Yuri	DATE	2024-12-03
CHECKED	Xunda	DATE	2024-12-05
QUALITY CONTROL	H.C	DATE	2024-12-05
RELEASED	Yuri	DATE	2024-12-08
CODE	<Code>	SIZE	A0
DRAWING NO	EM-LB52-Devkit-001	REV	1.2
SCALE	<Scale>	SHEET	3 OF 3