



Ultima Series

The Re-imagined Workforce Data Collection Terminal



Admin User Guide

A brief Introduction


This guide is designed to help administrators effectively manage and configure Ultima Series time clocks using the Timetrack application. Whether you're enrolling users, setting up biometric credentials, configuring communication settings, or managing attendance rules, this document walks you through every step with clear visuals and instructions.

The Timetrack interface is consistent across all Ultima Series models, so the steps in this guide apply universally.

Each section of this guide begins with a brief description to provide context for the feature or process being demonstrated. You'll then find step-by-step screenshots to guide you through the actual operations on the device. From biometric enrollment (fingerprint, palm, face) and badge setup to advanced configuration like bell schedules and access control, this guide ensures that you're equipped with the knowledge needed to maintain and customize your time clocks.



Admin UI	4	Device Info - About Device, System, Communication	36
User Manager - Search a User	5	Device Info - Storage	37
User Manager - Fingerprint Enrollment	6	Preferences	38
User Manager - Deleting Fingerprint	9	Communication	40
User Manager - Palm ID Enrollment	11	Attendance Setup - Function Menu, Attendance Rule	43
User Manager - Deleting Palm ID	13	Attendance Setup - Attendance Rule, Verification Rules.....	44
User Manager - Badge Enrollment	15	Data Manager - Attendance Data, Export Data, Clean Data	45
User Manager - Deleting Badge	17	Data Manager - User Enrollment	46
User Manager - Change / Update password	19	Maintenance	47
User Manager - Changing user privilege	21	Support Desk	49
User Manager - Changing user verify mode	23	Provision - Confirmation Prompt	50
User Manager - Enroll Face ID	25	Diagnostic - Barcode, Control Relay, Display & Touch	51
User Manager - Delete Face ID	27	Diagnostic - Biometric, Keypad, Clock Health, MagStripe	52
Tracking Code - Position	29	Diagnostic - Voice, Wiegand, LED, Proximity	53
Device Setup - Badge, Fingerprint, Facial, Palm	30	Diagnostic - Camera, Ethernet, Wifi, Face	54
Device Setup - Bell Schedule	32	FCC Compliance Statements	55
Device Setup - Access Control, Camera, Voice Commands	34	Resources	56
General Settings	35		

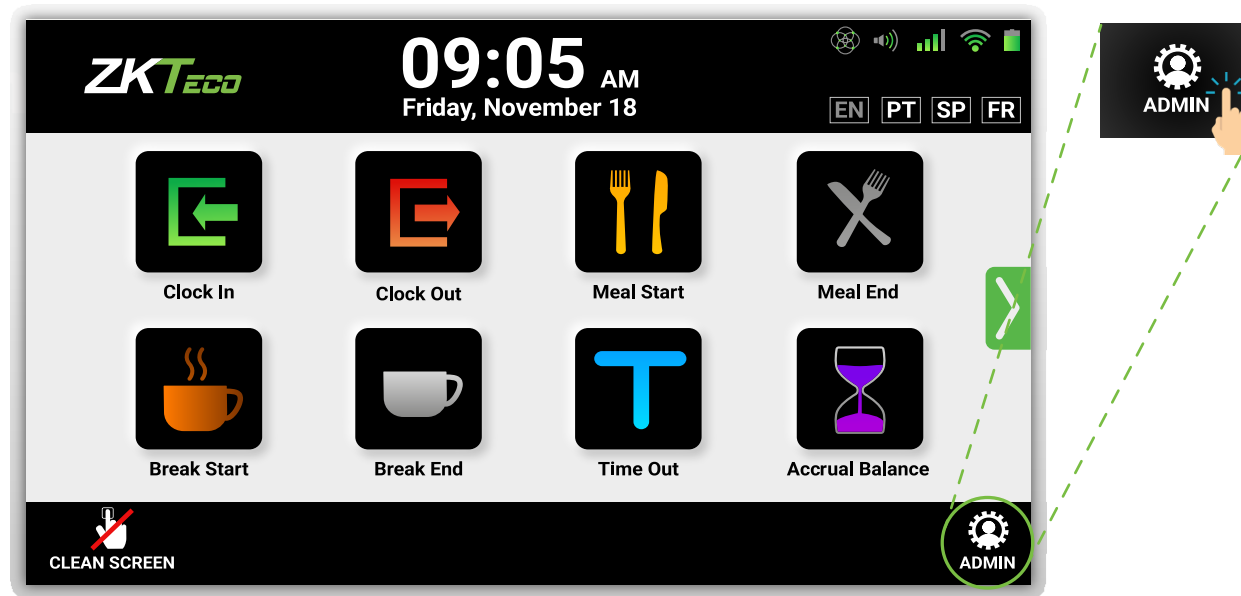

System Access Note


By default, newly shipped Ultima clocks have unrestricted Admin UI access enabled. Administrators must perform initial device configurations during this open access phase and are strongly advised to secure the Admin interface by setting a password immediately after setup to prevent unauthorized configuration changes.

User Manager – Search a User




This section explains how to search for an existing user in the Timetrack system. The search bar dynamically updates as you type a user's name or ID, making it quick and easy to find the right profile.

1

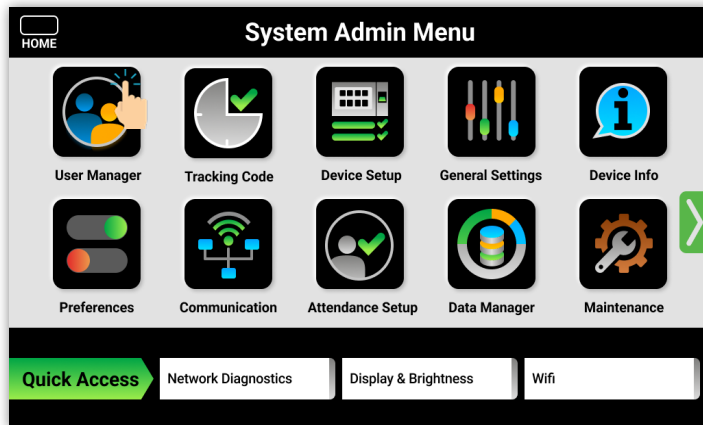


Select the **User Manager** icon

2

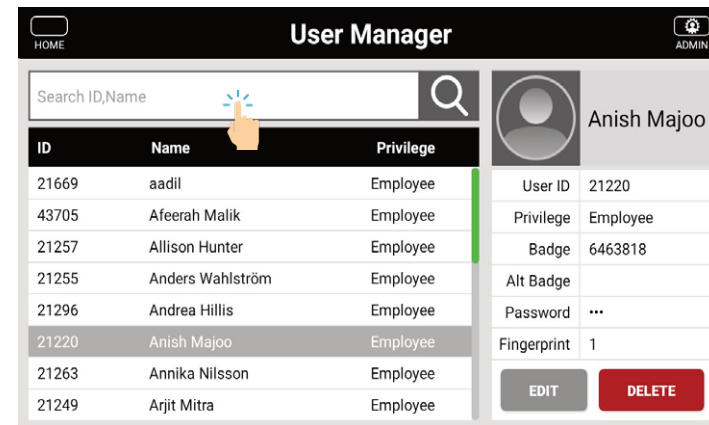

Select the **Search** field

3

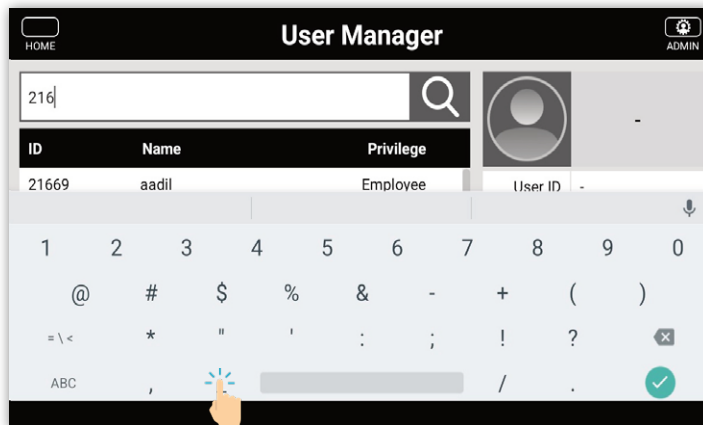


Start to enter user's **Name** or **user ID**

It is a dynamic string search field, which will show you results as you type


User Manager – Fingerprint Enrollment




Here you'll learn how to enroll a fingerprint for a user. The process involves three successful scans of the same finger to ensure accuracy. It's important to place the finger firmly and follow on-screen instructions for best results.

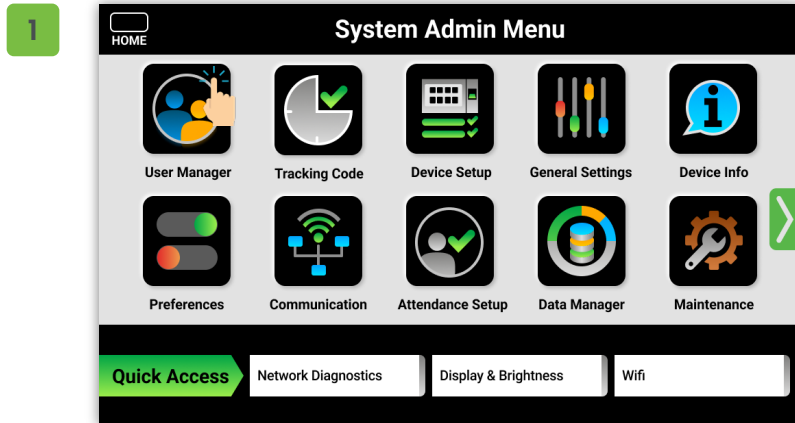


Select the **User Manager** icon

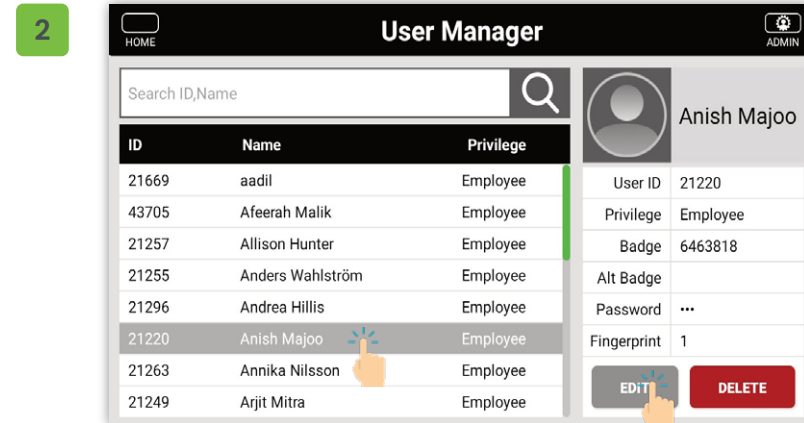


Select a **Name**
Select the **Edit** button

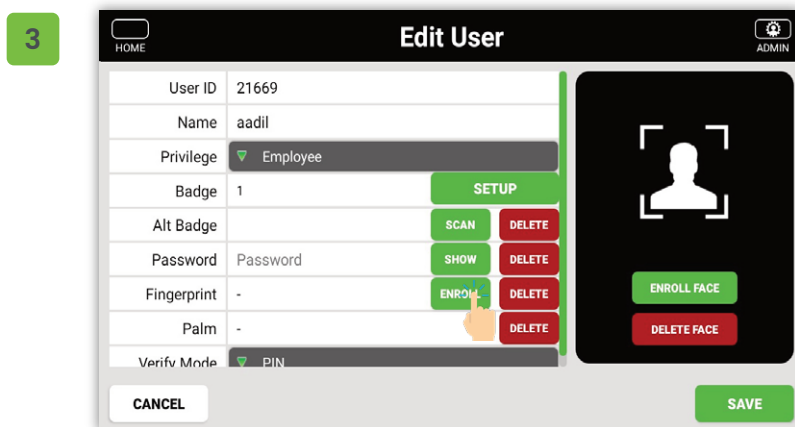


Select **Enroll**

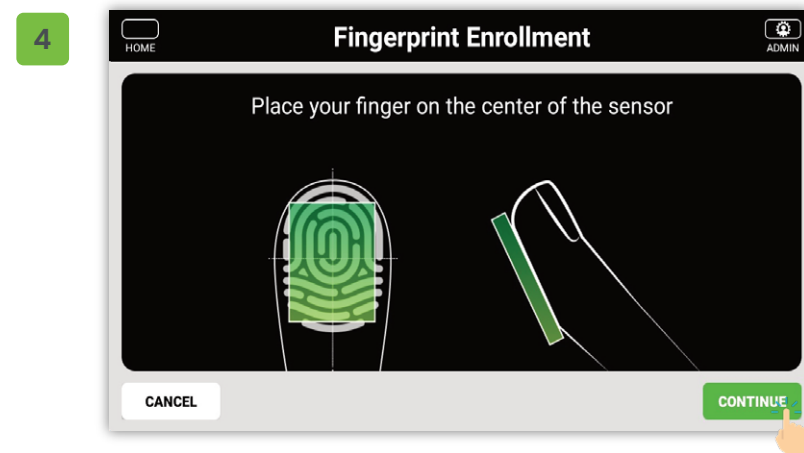

After reading the instruction
Select **Continue**

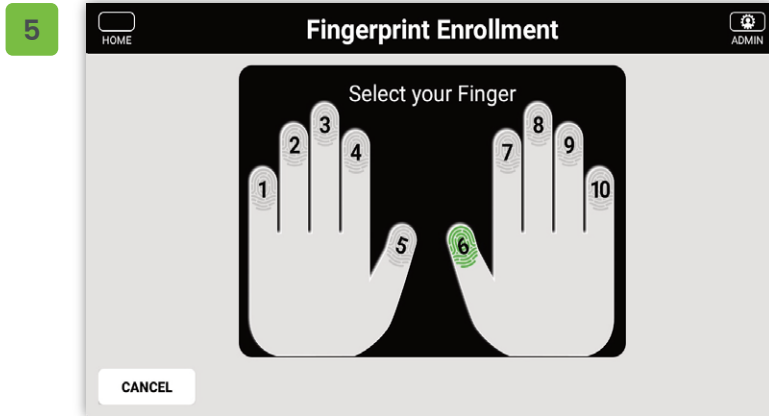


Select any **available** fingerprint to be scanned

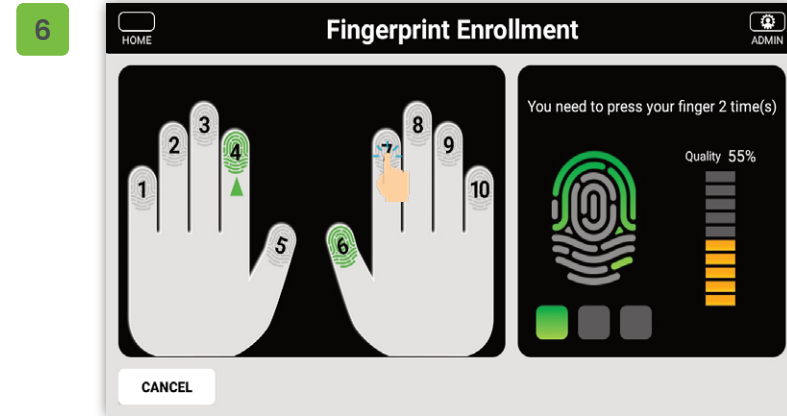


Scanning process takes 3 steps

Step 1 For instance:
Select number 7 (index finger)
Place your index finger on to scanner bed firmly

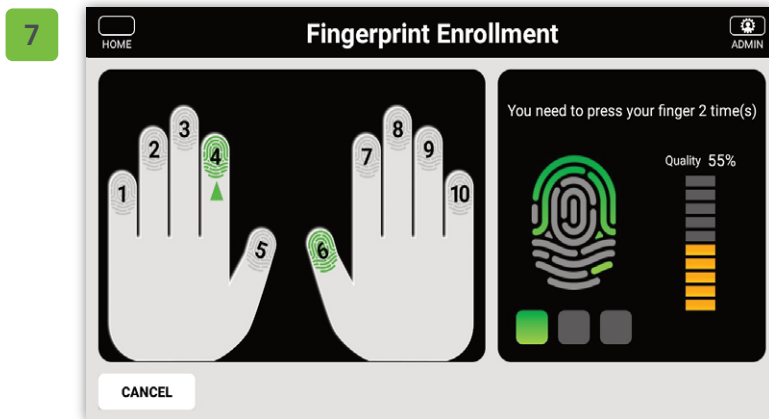

Step 2
Repeat the process

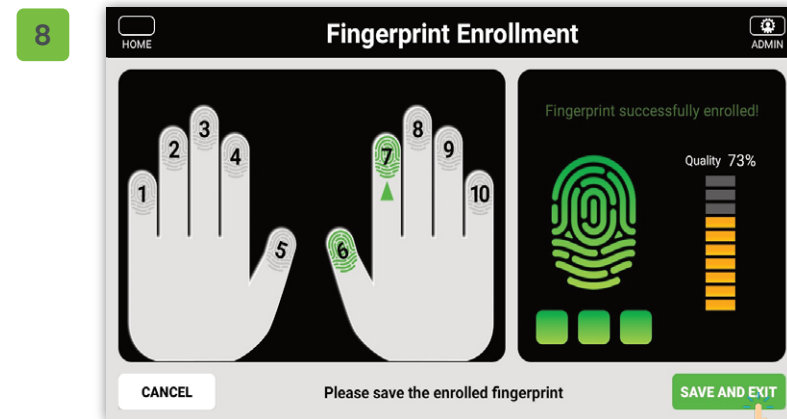

Step 3 Repeat the process. If successful
Select **Save and Exit**

If scanning quality is inadequate it will fail. So you need to start to scanning process again.



9

HOME ADMIN

Edit User

User ID 21296

Name Andrea Hillis

Privilege Employee Employee

Badge 1 SETUP

Alt Badge SCAN DELETE

Password Password SHOW DELETE

Fingerprint 1 ENROLL DELETE

Palm - DELETE

Verify Mode PIN

CANCEL SAVE

On the fingerprint field shows number of fingerprint has been recorded
Select **Save** button

10

HOME ADMIN

User Manager

Search ID,Name NEW

ID	Name	Privilege
21659	Bittu Kumar	Employee
21670	QuickTest Ab	Employee
21657	ujwal m	Employee

Employee information saved successfully!

User ID -

Privilege -

Badge -

Alt Badge

Password •

Fingerprint -

EDIT DELETE


After adding the fingerprint, the pop up will display as
"Employee information saved successfully"

User Manager – Deleting Fingerprint




Need to remove a user's fingerprint data? This section shows how to delete enrolled fingerprints and confirms the deletion with on-screen prompts for added security.

1

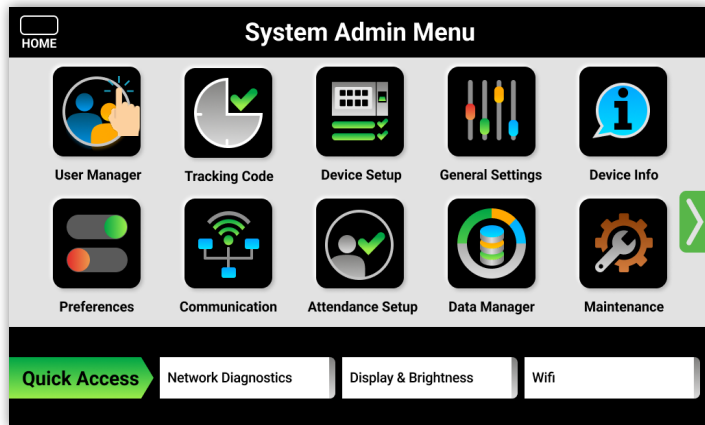


Select the **User Manager** icon

2

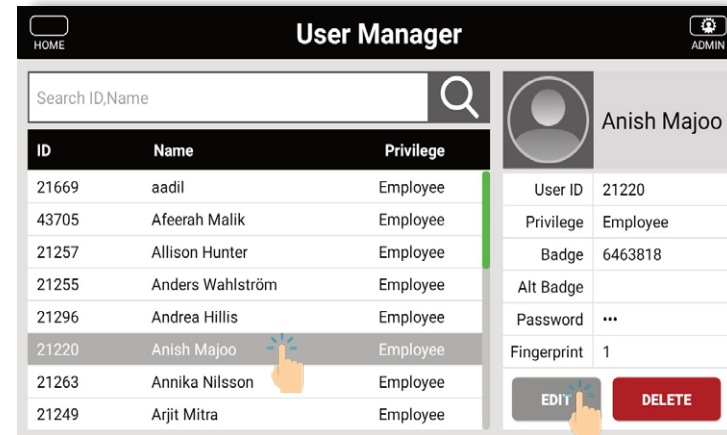


Select a **Name**
Select the **Edit** button

3

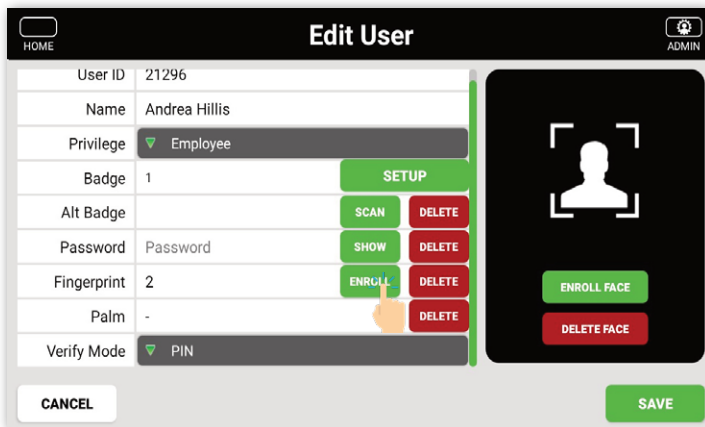

Select **Delete** button

4

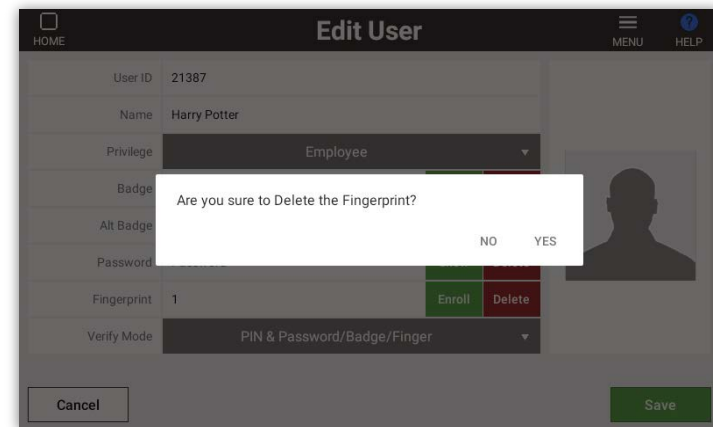

Select **YES** to confirm or **NO** to cancel

User Manager – Deleting Fingerprint



5

Edit User

HOME ADMIN

User ID	21659
Name	Bittu Kumar
Privilege	Employee
Badge	0
Alt Badge	
Password	Password
Fingerprint	-
Palm	-
Verify Mode	PIN

CANCEL SAVE

After delete the fingerprint, the pop up will display as "Deleted"

6

Edit User

HOME ADMIN

User ID	21296
Name	Andrea Hillis
Privilege	Employee
Badge	1
Alt Badge	
Password	Password
Fingerprint	1
Palm	-
Verify Mode	PIN

CANCEL SAVE

Select **Save** button

7

User Manager

HOME ADMIN

Search ID,Name

NEW

ID	Name	Privilege
21659	Bittu Kumar	Employee
21670	QuickTest Ab	Employee
21657	ujwal m	Employee

Employee information saved successfully!

EDIT DELETE


After deleting the fingerprint, the pop up will display as "Employee information saved successfully"

User Manager – Palm ID Enrollment




This section covers the enrollment of a user's palm using the built-in camera. Palm recognition offers a touchless alternative to fingerprint scanning and is especially useful in environments where hygiene is a concern.

1

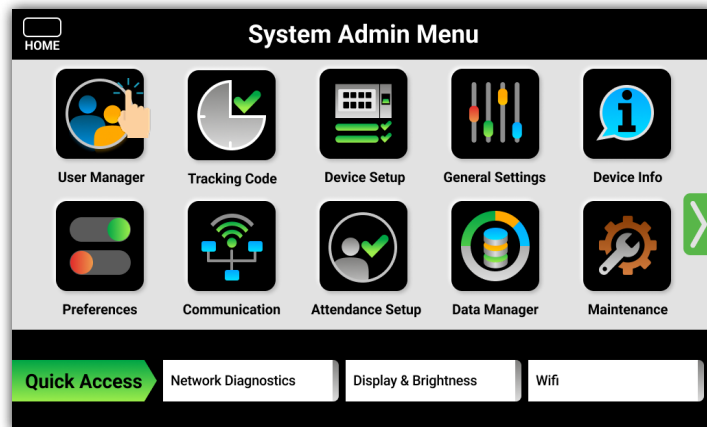


Select the **User Manager** icon

2

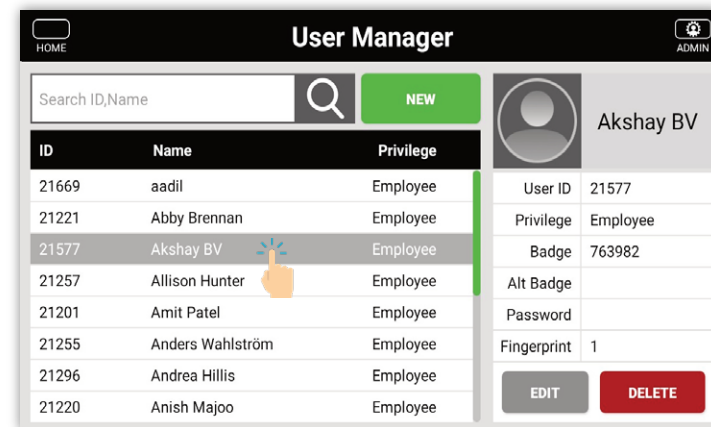


Select a **Name**
Select the **Edit** button

3

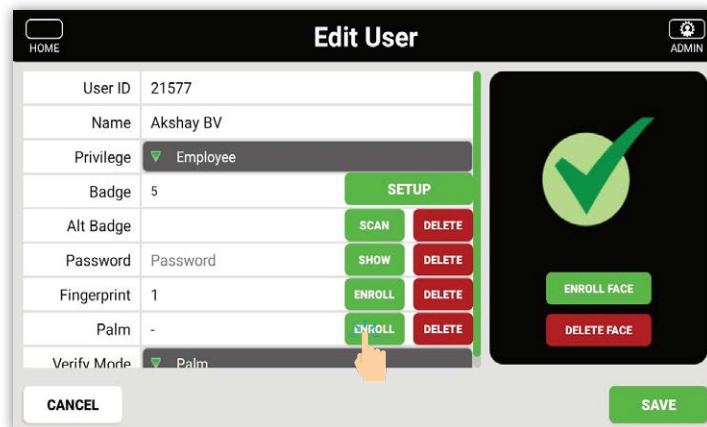

Select the **Enroll Palm** button

4

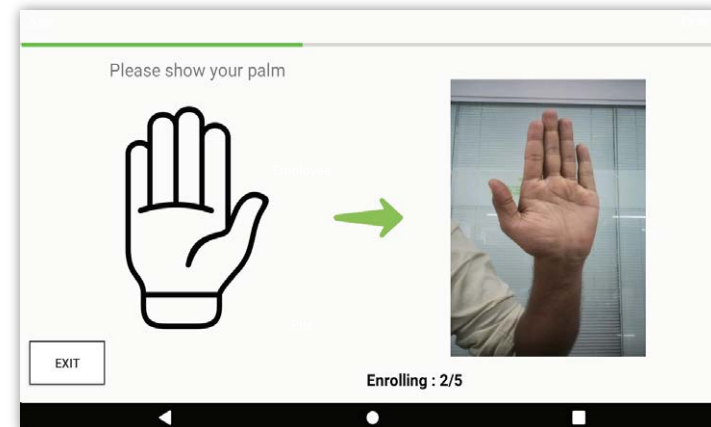

Show your plam to the camera like shown in screen



5

Edit User

HOME ADMIN

User ID: 21577
Name: Akshay BV
Privilege: Employee
Badge: 5
Alt Badge:
Password: Password
Fingerprint: 1
Palm: 1
Verify Mode: Palm

SETUP
SCAN
DELETE
SHOW
DELETE
ENROLL
DELETE
ENROLL
DELETE

ENROLL FACE
DELETE FACE

CANCEL SAVE

Select **Save** button

6

User Manager

HOME ADMIN

Search ID,Name

NEW

ID	Name	Privilege
21669	aadil	Employee
21221	Abby Brennan	Employee
21577	Akshay BV	Employee
21257	Allison Hunter	Employee
21201	Amit Patel	Employee
21255	Anders Wahls	Employee
21296	Andrea Hillis	Employee
21220	Anish Majoo	Employee

User ID -
Privilege -
Badge -
Alt Badge -
Password -
Fingerprint -

EDIT DELETE

Employee information saved successfully!


After adding the palm, the pop up will display as "Employee information saved successfully"

User Manager – Deleting Palm ID




Follow these steps to remove an enrolled Palm ID from the system. Deleting a Palm ID is a straightforward process and ensures out-dated or incorrect entries are cleaned up efficiently.

1

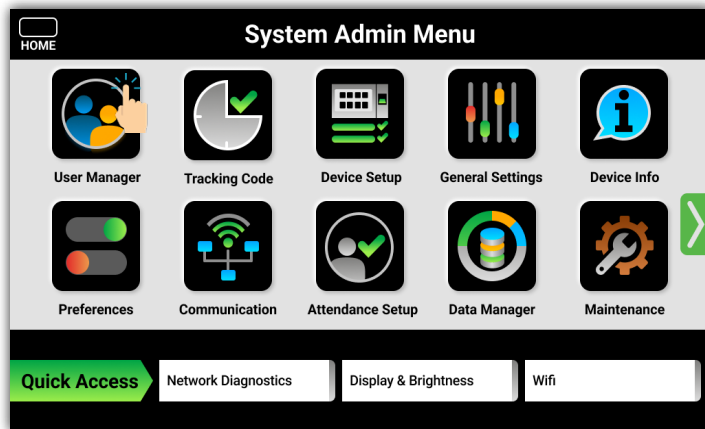


Select the **User Manager** icon

2

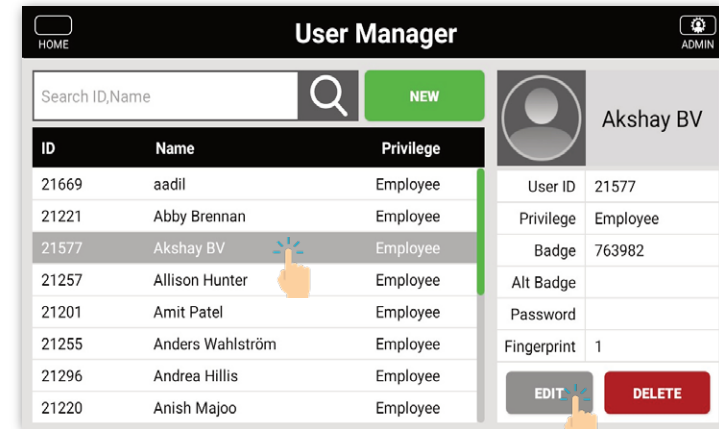


Select a **Name**
Select the **Edit** button

3

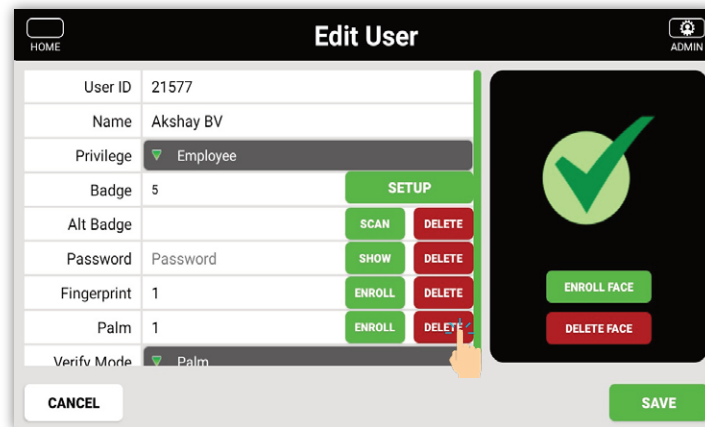

Select the **Delete Palm** button

4

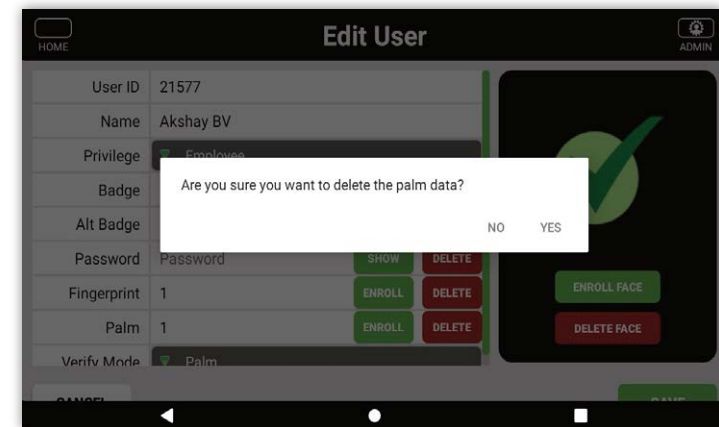

Select **YES** to confirm or **NO** to cancel

User Manager – Deleting Palm ID



5

The 'Edit User' screen displays the following fields: User ID (21577), Name (Akshay BV), Privilege (Employee), Badge (5), Alt Badge, Password (Password), Fingerprint (1), and Palm (1). The 'Palm' field is highlighted with a green checkmark icon. The 'Verifv Mode' is set to 'Palm'. The 'SETUP' button is visible. The 'SAVE' button is highlighted with a green checkmark icon.

After delete the Palm ID, the pop up will display as "Deleted"

6

The 'Edit User' screen displays the following fields: User ID (21577), Name (Akshay BV), Privilege (Employee), Badge (5), Alt Badge, Password (Password), Fingerprint (1), and Palm (-). The 'Palm' field is highlighted with a green checkmark icon. The 'Verifv Mode' is set to 'Palm'. The 'SETUP' button is visible. The 'SAVE' button is highlighted with a green checkmark icon.

Select **Save** button

7


The 'User Manager' screen displays a list of users with columns ID, Name, and Privilege. The list includes: 21669 aadil Employee, 21221 Abby Brennan Employee, 21577 Akshay BV Employee, 21257 Allison Hunter Employee, 21201 Amit Patel Employee, 21255 Anders Wahlsom Employee, 21296 Andrea Hillis Employee, and 21220 Anish Majoo Employee. A confirmation message 'Employee information saved successfully!' is displayed. The 'EDIT' and 'DELETE' buttons are visible.

After deleting the Palm ID, the pop up will display as "Employee information saved successfully"

User Manager – Badge Enrollment




Learn how to assign a badge to a user. While badge numbers are typically managed through your host application and synced automatically, this section offers a manual method for temporary or alternative updates.

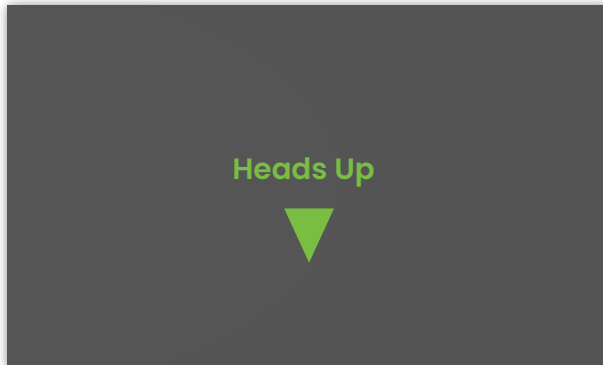


Ideally, all the badge number updates are done in host application, then the DCS will load it and update the latest badge number on time clock accordingly.


The option to update it in DCS or Time clock is provided as an alternative way to help the badge user, however, please keep in mind that host application data always have the highest priority. As an example, if you have a host application ID updated with Badge number 1111, while you already have a badge number registered in DCS or time clock as 2222, once the Badge number A is loaded automatically from your host application, your badge number will be overridden as 1111.

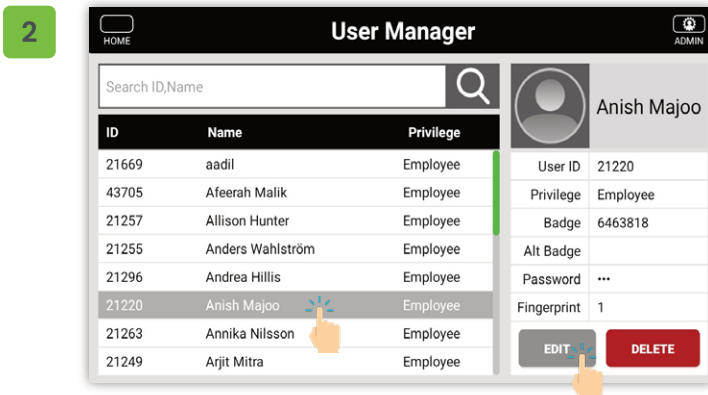

Select a **Name**
Select the **Edit** button

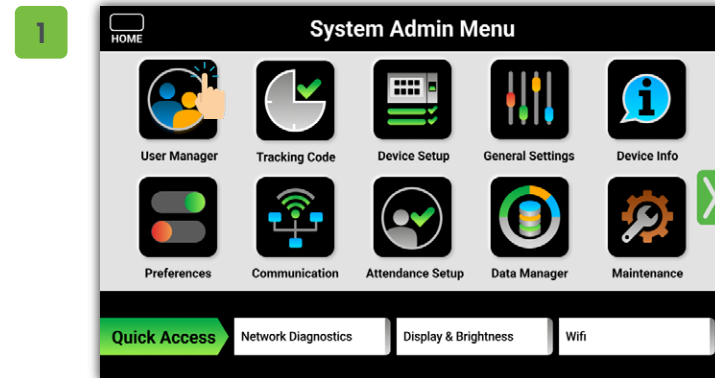

Select the **User Manager** icon

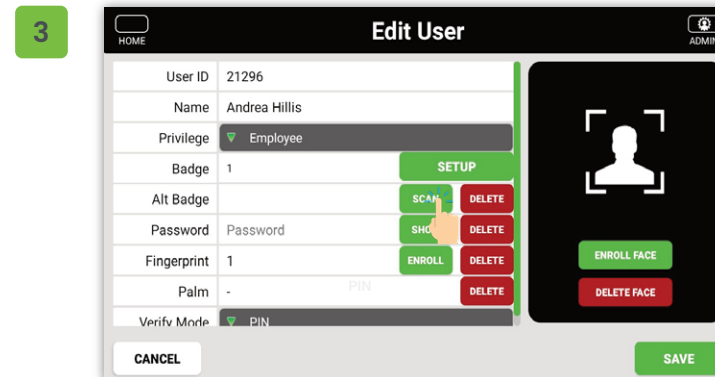

Select **Scan**



4

Badge enrollment screen will display
It is ready to scan your badge. Swipe to scan your badge

5

Your badge is scanned and card number is assigned
Select **Save** button

6

The badge has been saved


7

As an alternative, you may enter the badge number manually
Select the badge number filed and enter the badge number
Select **Save** button


User Manager – Deleting Badge




This section walks you through the process of removing a badge number assigned to a user. It's helpful when reissuing badges or resolving duplicates.

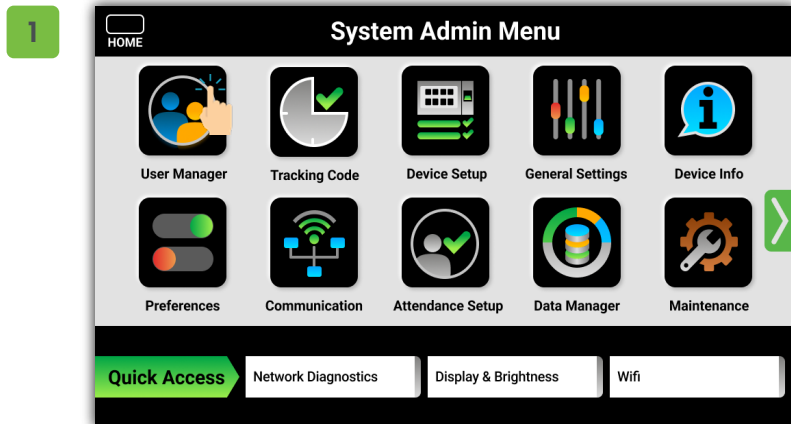


Select the **User Manager** icon

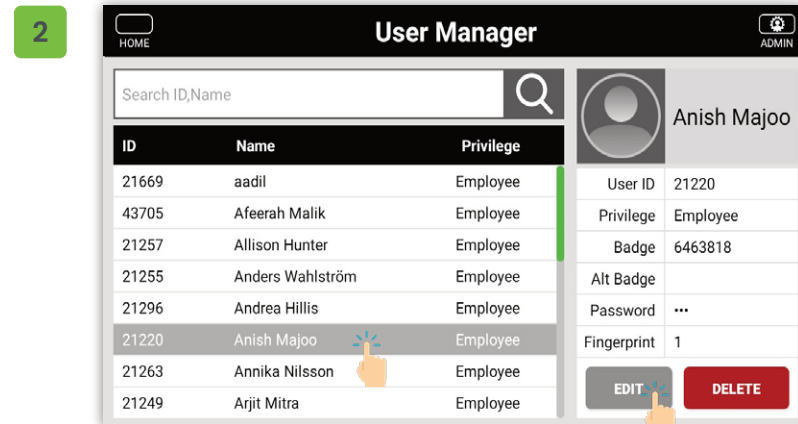

Select a **Name**
Select the **Edit** button

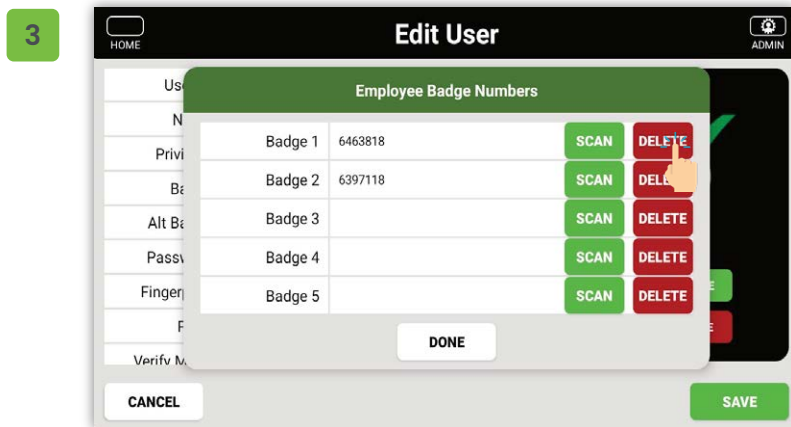

Select **Delete** Button

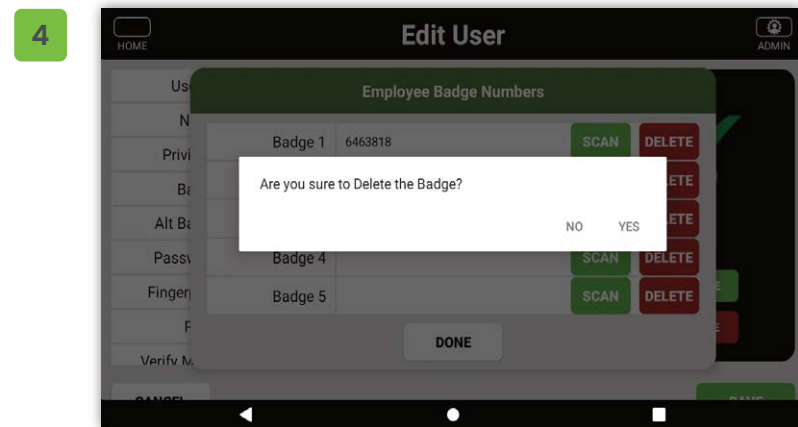

Select **YES** to confirm or **NO** to cancel

User Manager – Deleting Badge



5

Edit User

HOME ADMIN

Employee Badge Numbers

Badge	SCAN	DELETE
Badge 1	SCAN	DELETE
Badge 2	SCAN	DELETE
Badge 3	SCAN	DELETE
Badge 4	SCAN	DELETE
Badge 5	SCAN	DELETE

DONE Deleted

CANCEL SAVE

After deleting the badge, the pop up will display as "Deleted"

6

Edit User

HOME ADMIN

Employee Badge Numbers

Badge	SCAN	DELETE
Badge 1	SCAN	DELETE
Badge 2 6397118	SCAN	DELETE
Badge 3	SCAN	DELETE
Badge 4	SCAN	DELETE
Badge 5	SCAN	DELETE

DONE

CANCEL SAVE

Select **Save** button

7

User Manager

HOME ADMIN

Search ID,Name

NEW

ID	Name	Privilege
124	Williams	Enroller

Employee information saved successfully!


EDIT DELETE

After deleting the badge successfully, the pop up will display as "Employee information saved successfully"


User Manager – Change / Update password




Need to update a user's login credentials? This section shows how to change or reset a password within the Admin UI.

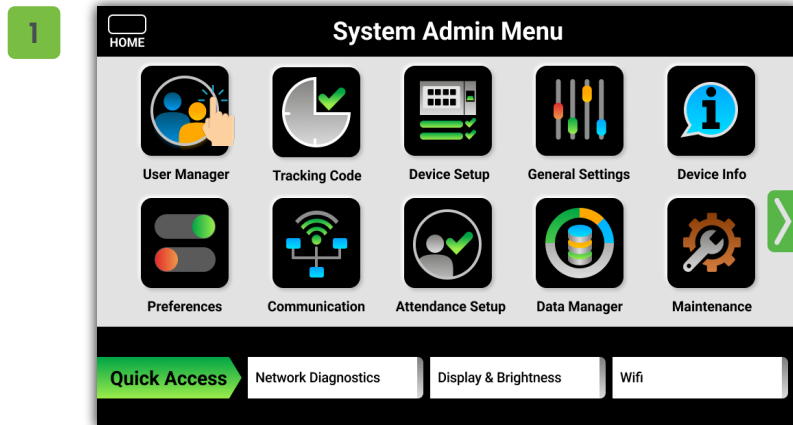


Select the **User Manager** icon

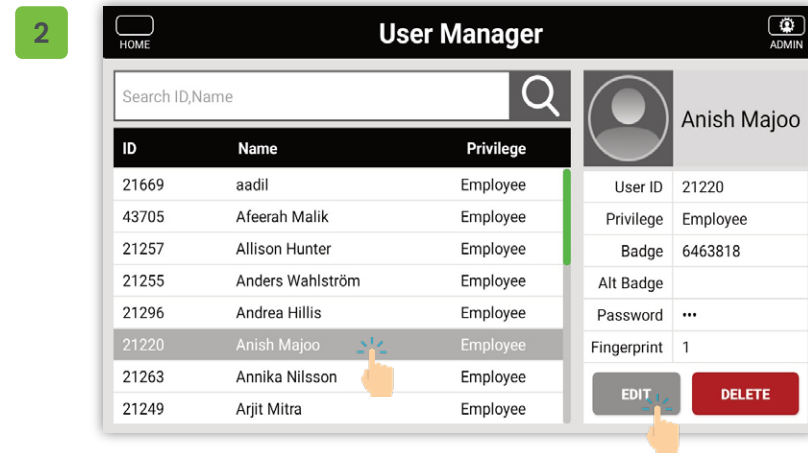

Select a **Name**
Select the **Edit** button

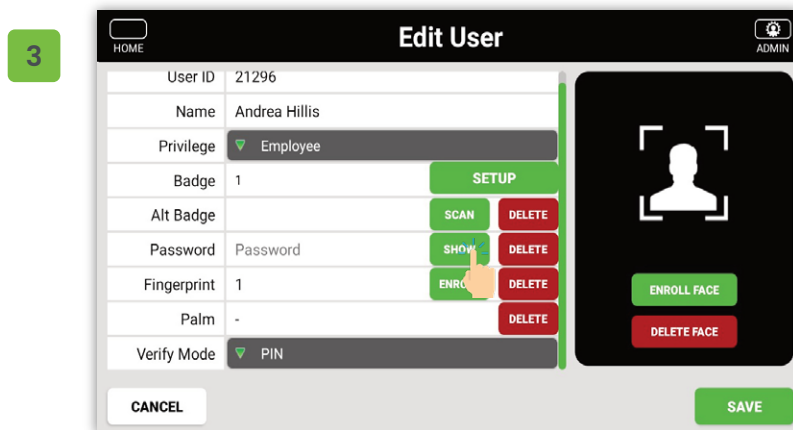

Select **Show**

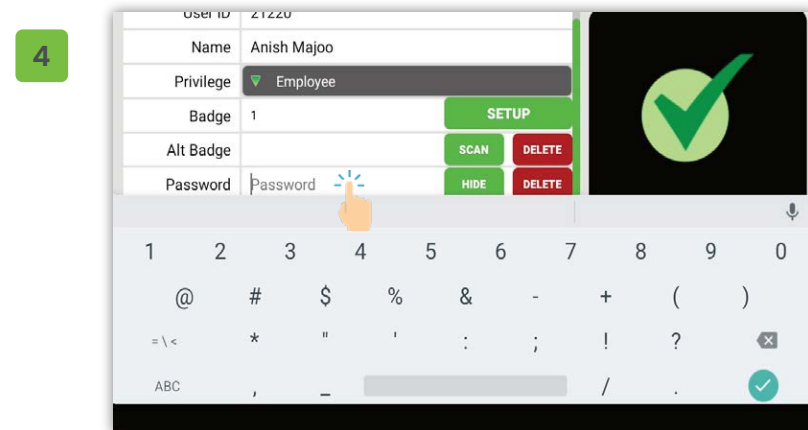

Select verify type field, for instance **PIN & Fingerprint**

User Manager – Change / Update password



5

User ID: 21220
Name: Anish Majoo
Privilege: Employee
Badge: 1
Alt Badge:
Password:
Buttons: SETUP, SCAN, DELETE, HIDE, DELETE
Keyboard: 1 2 3 4 5 6 7 8 9 0 @ # \$ % & - + () = \ < * " ' : ; ! ? , - / .

Enter new password and select **Enter** button

5

HOME Edit User ADMIN
User ID: 21220
Name: Anish Majoo
Privilege: Employee
Badge: 1
Alt Badge:
Password: 12#*\$
Fingerprint: 1
Palm: -
Verify Mode: PIN
Buttons: SETUP, SCAN, DELETE, HIDE, DELETE, ENROLL, DELETE, ENROLL FACE, DELETE FACE
CANCEL SAVE

Select the **Edit** button

7

HOME User Manager ADMIN
Search ID,Name
ID Name Privilege
21669 aadil Employee
21759 Abdul Ahmed Employee
45013 Abigail Pate Enroller
43705 Afeerah Malik Employee
21257 Allison Hunter Employee
21255 Anders Wahlström Employee
21296 Andrea Hillis Employee
21220 Anish Majoo Employee
Buttons: EDIT, DELETE
User ID: 21220
Privilege: Employee
Badge: 6463818
Alt Badge:
Password: 12#*\$
Fingerprint: 1


The password has been updated

User Manager – Changing user privilege




This section outlines how to assign different access levels such as Admin, Enrollee, or Employee. Each level controls what parts of the system the user can access.

1

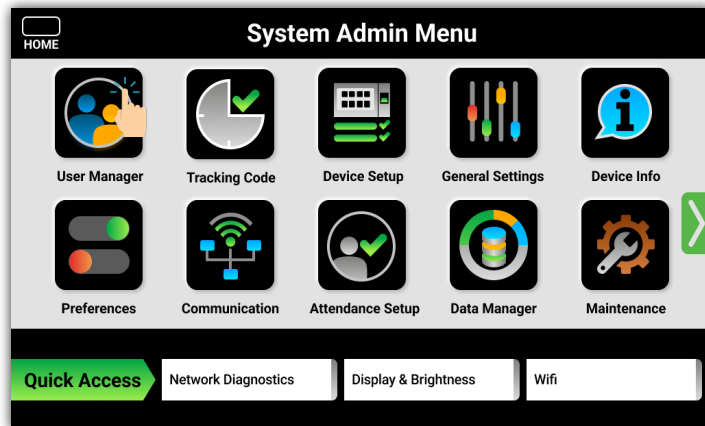


Select the **User Manager** icon

2

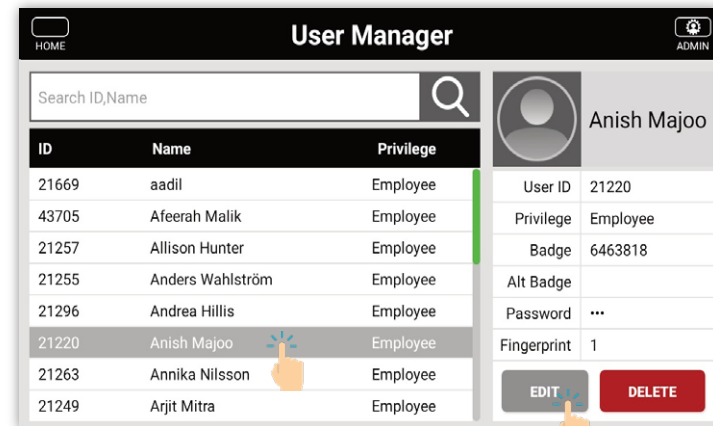


Select a **Name**
Select the **Edit** button

3

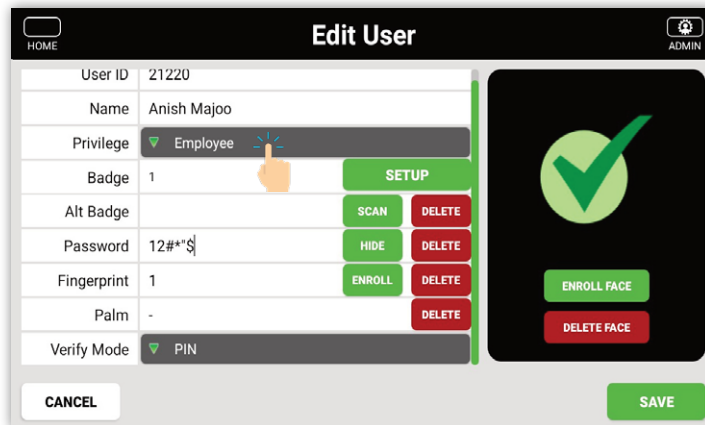

Select the **Verify mode** dropdown menu

4

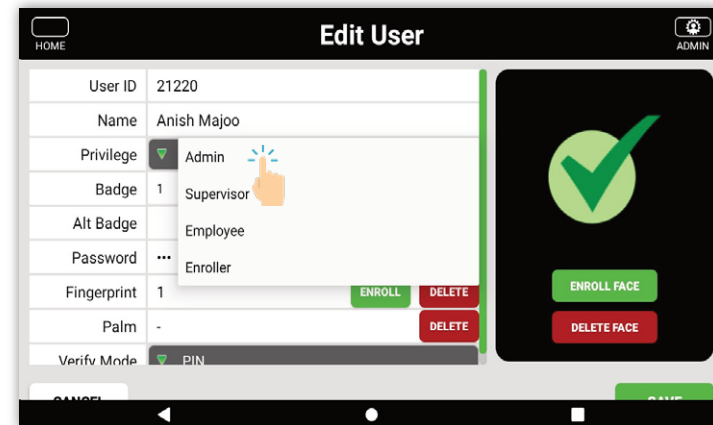

Select privilege type field, for instance **Admin**

Admin: All the "Menu" Access

Enrollee: Accessible to Enrolled-User Manager, Device Info and Communication Menu's

Employee: Access to "Attendance Function Key" only

User Manager – Changing user privilege



5

Edit User

HOME ADMIN

User ID: 21220
Name: Anish Majoo
Privilege: Admin
Badge: 1
Alt Badge:
Password: ***
Fingerprint: 1
Palm: -
Verify Mode: PIN

SETUP
SCAN
SHOW
ENROLL
DELETE
DELETE
DELETE
DELETE

ENROLL FACE
DELETE FACE

CANCEL SAVE

Verify mode has been changed
Select **Save** button

6

User Manager

HOME ADMIN

Search ID,Name

ID Name Privilege

21669	aadil	Employee
43705	Afeerah Malik	Employee
21257	Allison Hunter	Employee
21255	Anders Wahlström	Employee
21296	Andrea Hillis	Employee
21220	Anish Majoo	Admin
21263	Annika Nilsson	Employee
21249	Arjit Mitra	Employee

Anish Majoo

User ID: 21220
Privilege: Admin
Badge: 6463818
Alt Badge:
Password: ***
Fingerprint: 1

EDIT DELETE


Changing user privilege is complete

User Manager – Changing user verify mode




Customize how users authenticate themselves on the clock. You'll learn about various combinations such as PIN & Fingerprint, Face & Badge, or Palm ID to meet your organization's security requirements.

1

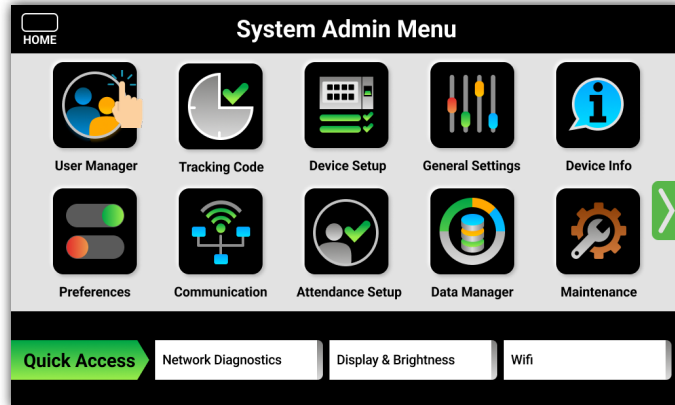


Select the **User Manager** icon

2

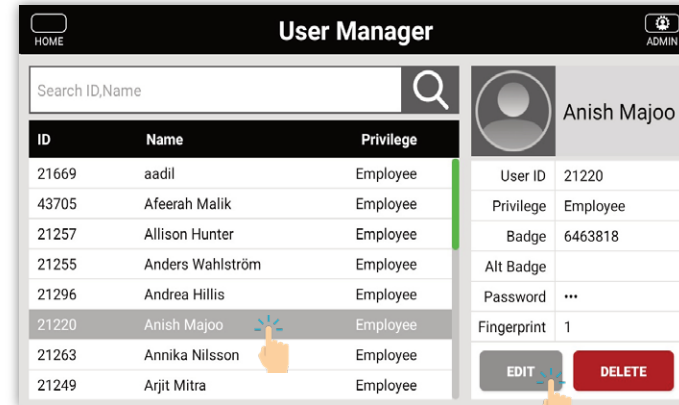


Select a **Name**
Select the **Edit** button

3

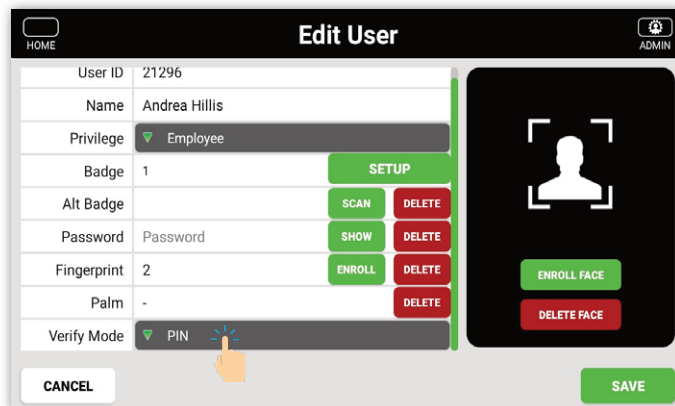

Select the **Verify mode** dropdown menu

4

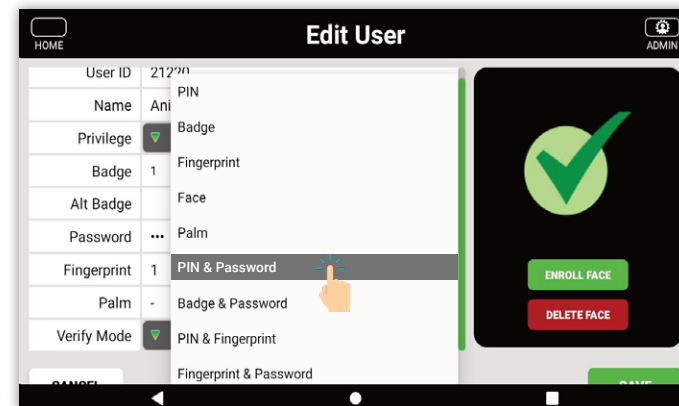

Select verify type field, for instance **PIN & Fingerprint**

VERIFY TYPE COMBINATIONS

- | | | | | |
|-------------------|---------------------------|--------------------------------------|-----------------------------|----------------------|
| 1. PIN | 7. Badge & Password | 13. Face/PIN & Password/Badge/Finger | 19. Face / Badge | 25. PIN/Finger/Badge |
| 2. Badge | 8. PIN & Fingerprint | 14. PIN & Password/Badge/Finger | 20. Face & Badge | 26. Face /PIN |
| 3. Fingerprint | 9. Fingerprint & Password | 15. PIN & Finger/Badge & Finger | 21. Face & PIN | 27. Face & PIN |
| 4. Face | 10. Badge & Fingerprint | 16. Badge & Password & Finger | 22. Face & Badge/Face & PIN | |
| 5. Palm | 11. PIN/Badge | 17. Finger/PIN & Password | 23. Face/Badge | |
| 6. PIN & Password | 12. PIN & Password/Badge | 18. Finger/Badge | 24. Face /Finger | |

User Manager – Changing user verify mode



5

The 'Edit User' screen for user 21220, Anish Majoo, with Admin privilege. The 'Verify Mode' dropdown is highlighted with a green box and set to 'Pin & Password & Finger'. A green checkmark icon is visible on the right side of the screen.

Verify mode has been changed
Select **Save** button

6

The 'User Manager' screen displays a table of users and a success message: "Employee information saved successfully!".

ID	Name	Privilege
21659	Bittu Kumar	Employee
21670	QuickTest Ab	Employee
21657	ujwal m	Employee

After verify mode is added, the pop up will display as
"Employee information saved successfully"

7

The 'User Manager' screen shows the updated list of users. Anish Majoo (ID 21220, Admin privilege) is highlighted in the list.

ID	Name	Privilege
21669	aadil	Employee
43705	Afeerah Malik	Employee
21257	Allison Hunter	Employee
21255	Anders Wahlström	Employee
21296	Andrea Hillis	Employee
21220	Anish Majoo	Admin
21263	Annika Nilsson	Employee
21249	Arit Mitra	Employee


Changing user verify mode is complete

User Manager – Enroll Face ID




This section explains how to register a user's face using the clock's camera for touchless authentication.

1

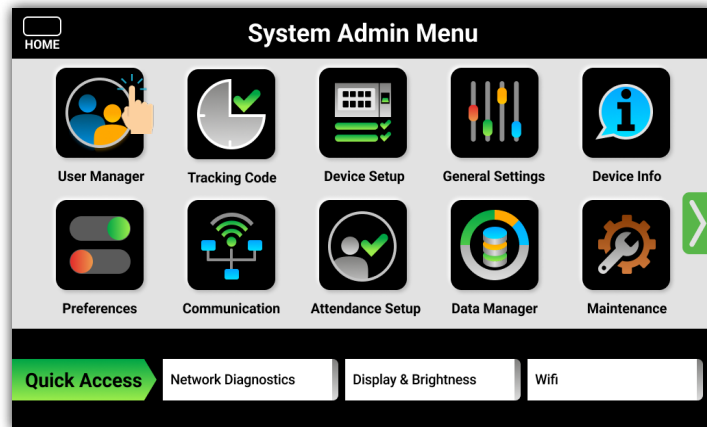


Select the **User Manager** icon

2

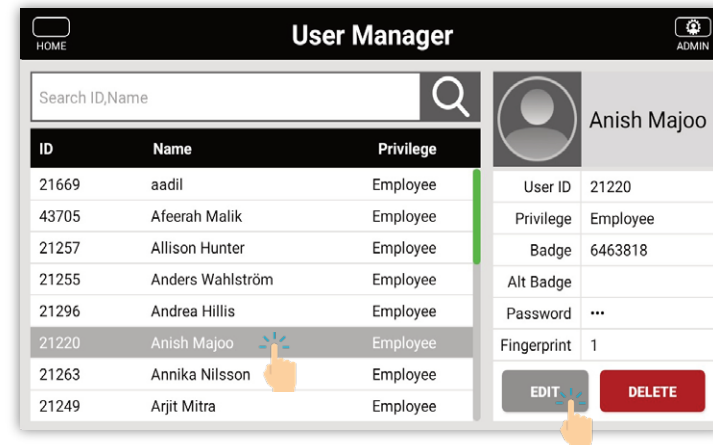


Select a **Name**
Select the **Edit** button

3

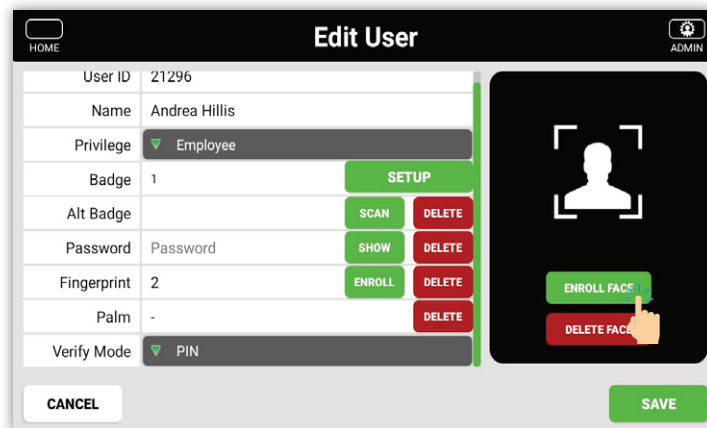

Select **Enroll Face**

4

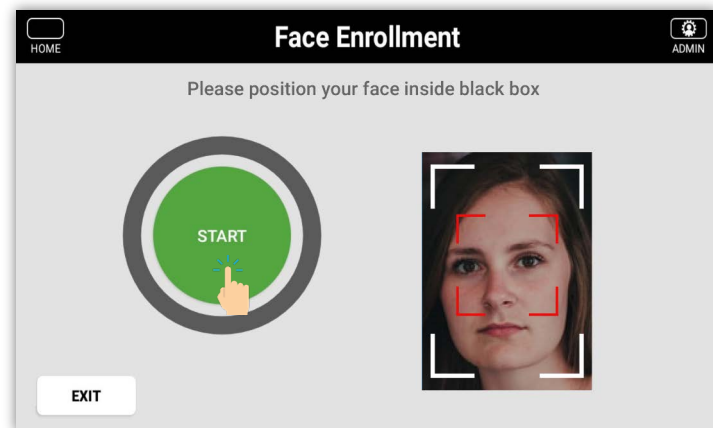

Select **Start** and put face inside the black box



5

Edit User

HOME ADMIN

User ID	21220
Name	Anish Majoo
Privilege	Employee
Badge	2
Alt Badge	
Password	***
Fingerprint	1
Palm	-
Verify Mode	Pin & Password & Fingerprint

SETUP

SCAN DELETE

SHOW DELETE

ENROLL DELETE

ENROLL DELETE

ENROLL FACE

DELETE FACE

SAVE


Select **Save** button

User Manager – Delete Face ID




Follow these steps to remove facial data from a user profile. A confirmation message ensures successful deletion.

1

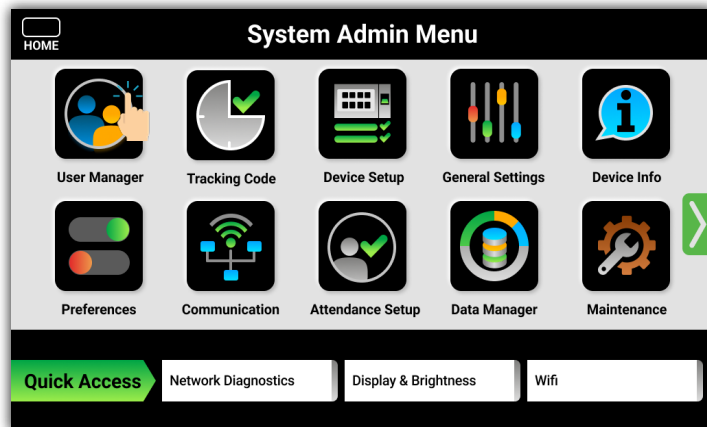


Select the **User Manager** icon

2

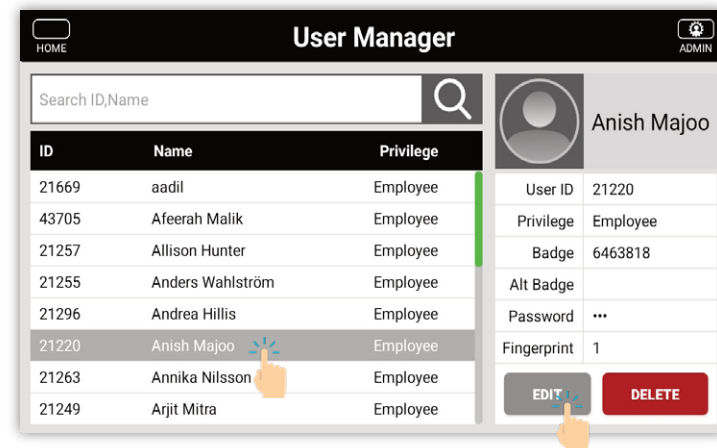


Select a **Name**
Select the **Edit** button

3

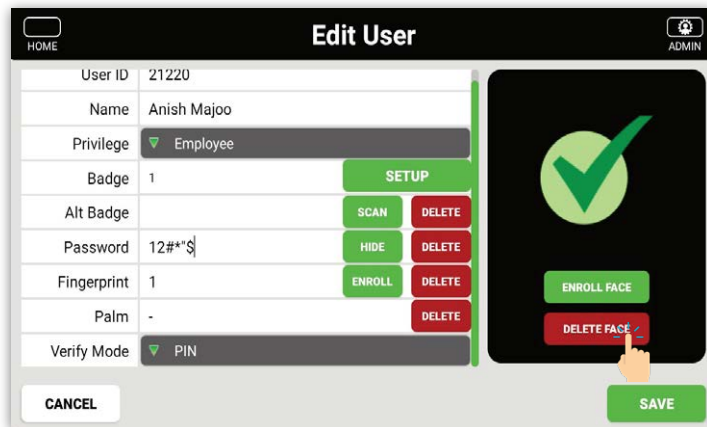


Select **Delete** button

4

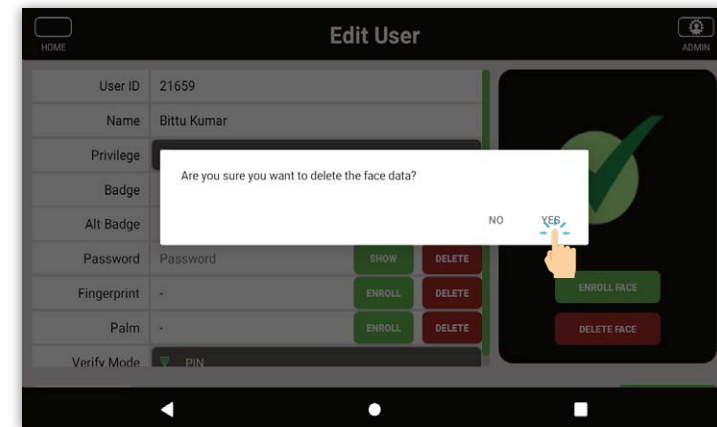


Select **YES** to confirm or **NO** to cancel


User Manager - Delete Face ID

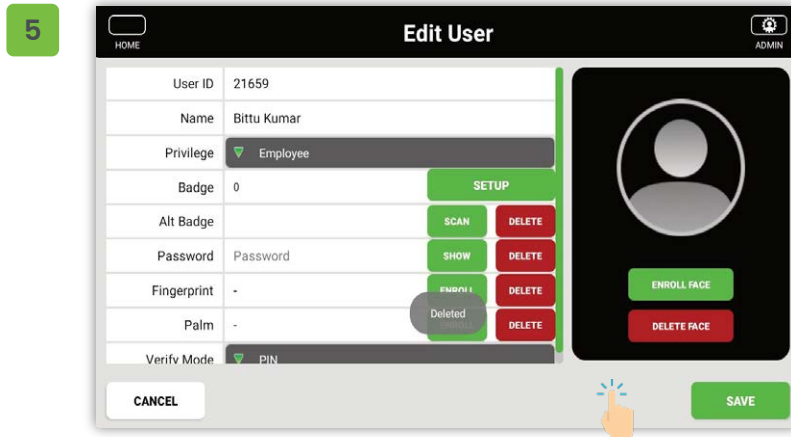

After Face is deleted successfully, the pop up will display as "Deleted"

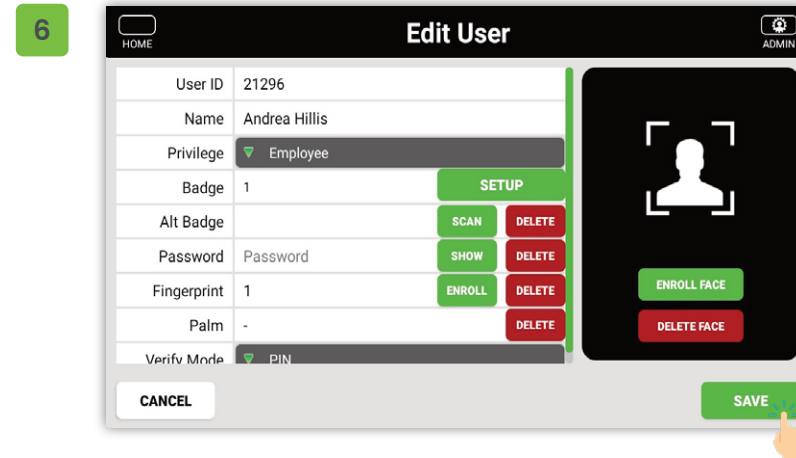


Select **Save** button

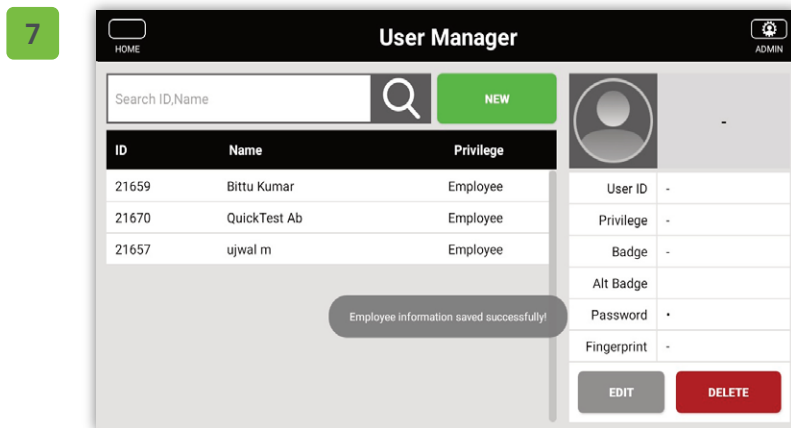


After face is deleted, the pop up will display as "Employee information saved successfully"



This section provides a reference for assigning job or labor codes to employees. These codes help track employee roles or tasks and may vary depending on your organization's configuration.

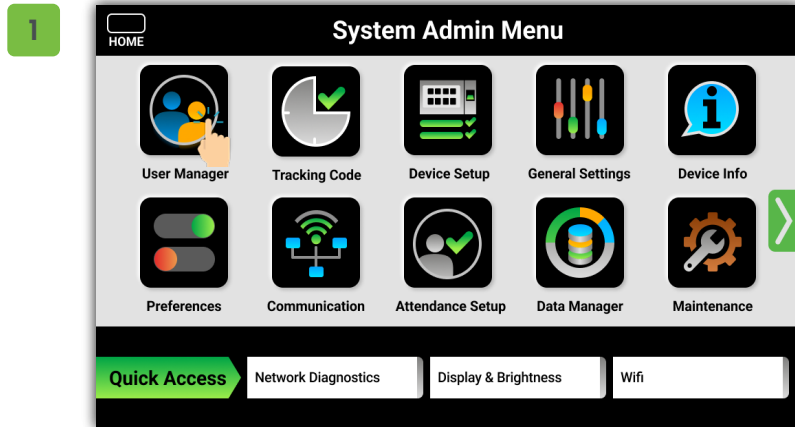

Select the **Tracking Code** icon

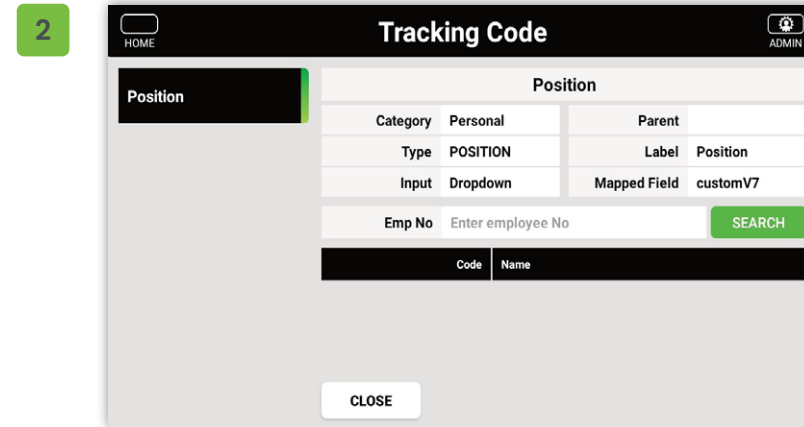


Job and labor codes assigned to employees
(This is just a reference page)

Note: If applicable to customer


Device Setup – Badge Setup, Fingerprint Setup, Facial Detection Setup, Palm Detection Setup




These screens allow you to configure the hardware modules for biometric and badge recognition. Use this section to adjust thresholds and settings for optimal scanning and security.

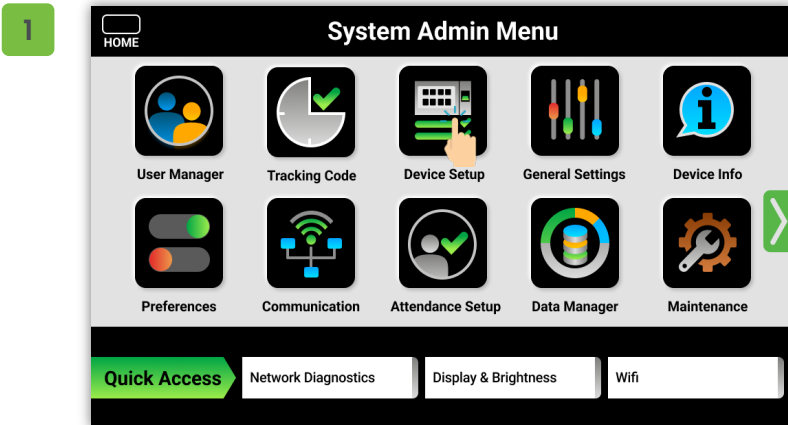


Select the **Device Setup** icon

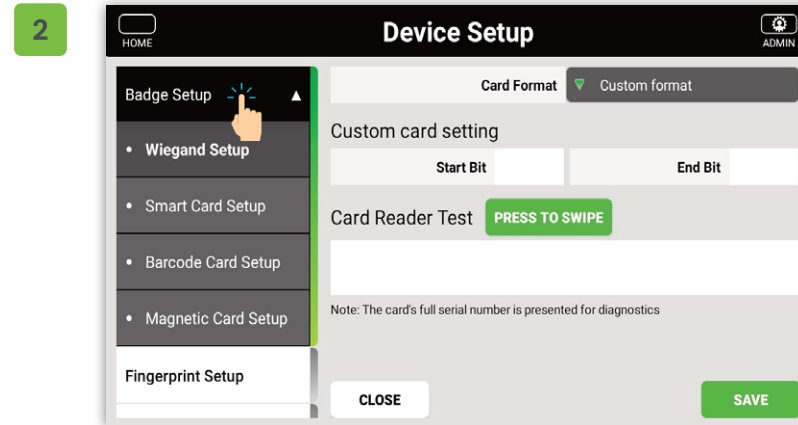

Select the **Wiegand Setup** tab

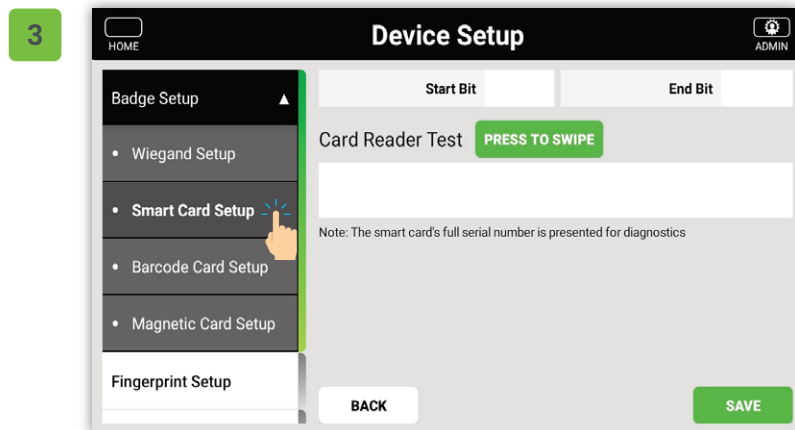

Select the **Smart Card Setup** tab

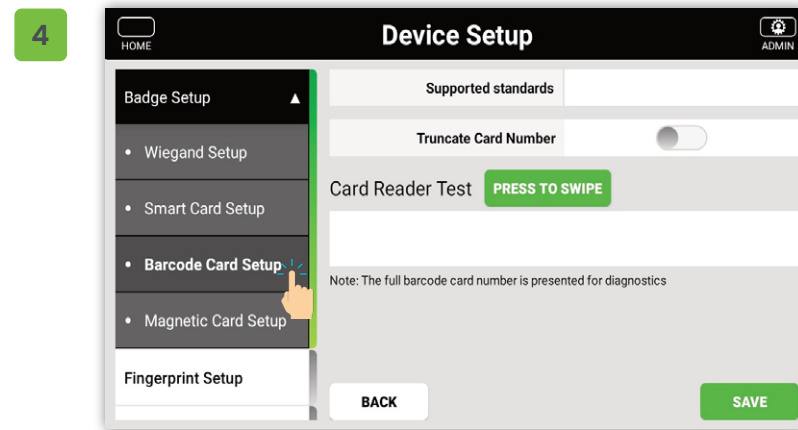

Select the **Barcode Card Setup** tab

Device Setup – Badge Setup, Fingerprint Setup, Facial Detection Setup, Palm Detection Setup



5

Device Setup

HOME ADMIN

Badge Setup

- Wiegand Setup
- Smart Card Setup
- Barcode Card Setup
- Magnetic Card Setup**
- Fingerprint Setup

Truncate Card Number ☐

Card Reader Test **PRESS TO SWIPE**

Note: The full magnetic card number is presented for diagnostics

BACK SAVE

Select the **Magnetic Card Setup** tab

6

Device Setup

HOME ADMIN

Badge Setup

Fingerprint Setup

Facial Detection Setup

Palm Detection Setup

Thermal Module Setup

Bell Schedule

Enable Fingerprint Detection ☒

Fingerprint Image Display Mode ☐

Enrollment Threshold 55 %

Match Threshold(1:N) 55 %

Trial Times for Matching - 0 +

CLOSE TEST SAVE

Select the **Fingerprint Setup** tab

Note: Threshold should not be lowered unless a ZKTeco WFM representative authorizes to do so.

7

Device Setup

HOME ADMIN

Badge Setup

Fingerprint Setup

Facial Detection Setup

Palm Detection Setup

Thermal Module Setup

Bell Schedule

Enable Facial Detection ☒

Enrollment Threshold 80 %

Face Recognition Threshold (1:N) 81 %

Face Recognition Threshold (1:1) 85 %

Display Face Score ☒

CLOSE SAVE

Select the **Facial Detection Setup** tab

8

Device Setup

HOME ADMIN

Badge Setup

Fingerprint Setup

Facial Detection Setup

Palm Detection Setup

Thermal Module Setup

Bell Schedule

Enable Palm Detection ☒

Enrollment Threshold 45

Palm Recognition Threshold (1:N) 45

Palm Recognition Threshold (1:1) 45

CLOSE SAVE


Select the **Palm Detection Setup** tab

Device Setup – Bell Schedule



Learn how to create or edit bell schedules to trigger audible alerts for shift changes, breaks, or other timed events. You'll define sound type, timing, duration, and repetition using either internal or external speakers.

1

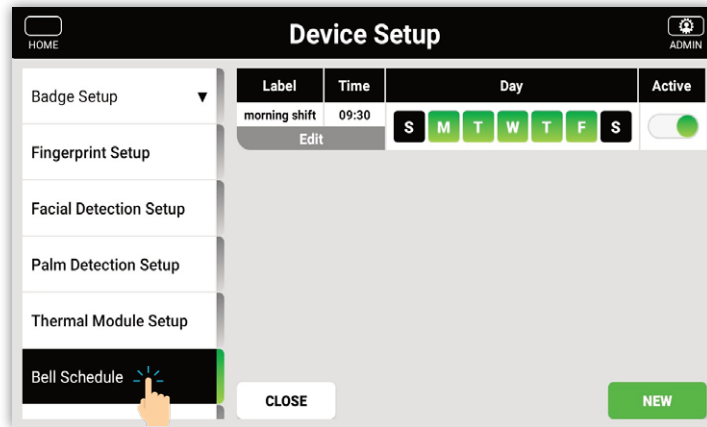


Select the **Bell Schedule** tab
Select the existing bell schedule and **Edit** or select **New**

2



Select the Event Label field and Input a name for the schedule name. **For instance:** Morning Shift, Lunch, Break etc.

3

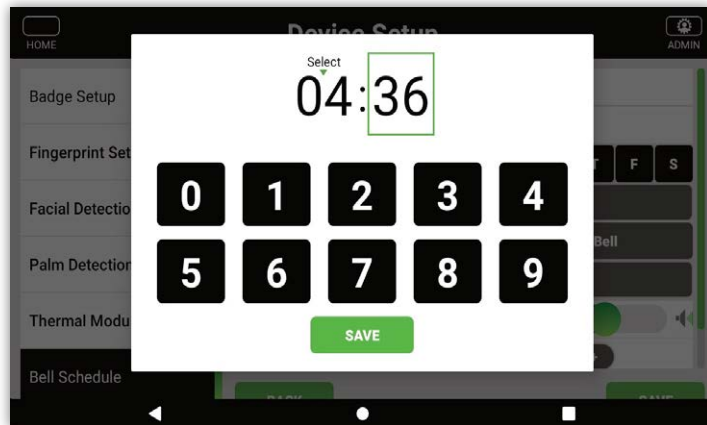

Input the time by selecting the hours and then using the keypad repeat for the minutes and finally select AM/PM



4

Select the days (this schedule should reoccur)

5

Select from the **drop down** if Internal/External bell. Internal will set off the clock speaker, External will require a Relay Board and connection to a 12V Bell or Siren

6

Select from the drop down what internal sound (Ring-Horn-Siren)

7


Select the Volume level - Duration(seconds) and Repeat Times for the settings of the Internal bell

If External settings are the same except Volume cannot be control for an external speaker

Device Setup – Access Control Setup, Camera Setup, Voice Commands Setup




This section helps configure physical access control, schedule-based camera settings, and voice command responses. Use these tools to enhance security and streamline user interactions with the clock.

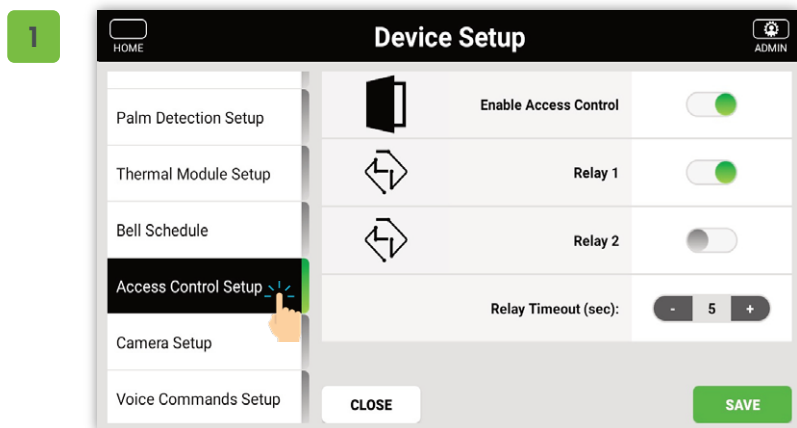


Select the **Access Control Setup** tab

Select the Event Label field and Input a name for the schedule name. **For instance:** Morning Shift, Lunch, Break etc.

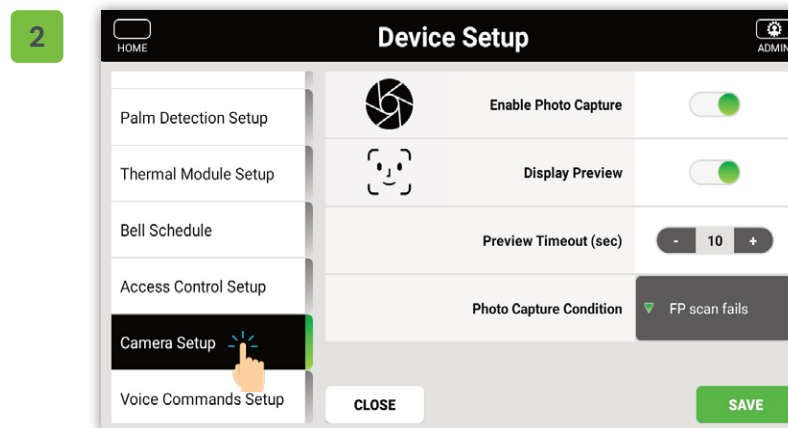

Select the **Camera Setup** tab

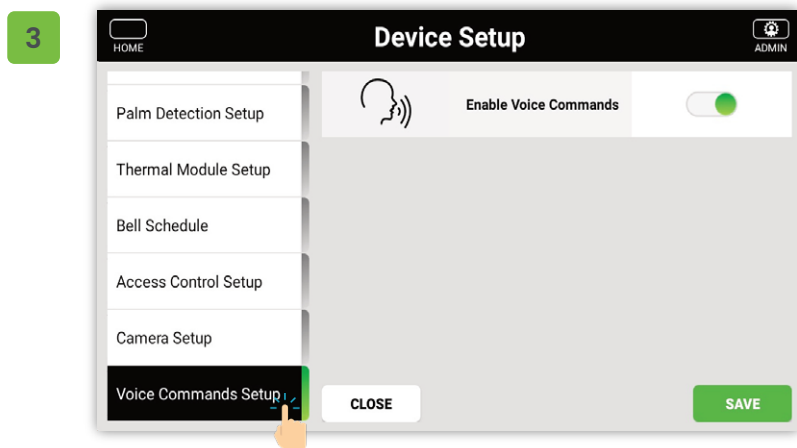


Select the **Voice Commands Setup** tab


General Settings – Display & Brightness, Sound, Date & Time




Adjust visual and audio elements such as screen brightness, timeout settings, and system volume. You can also set the correct time zone and display format for your organization.

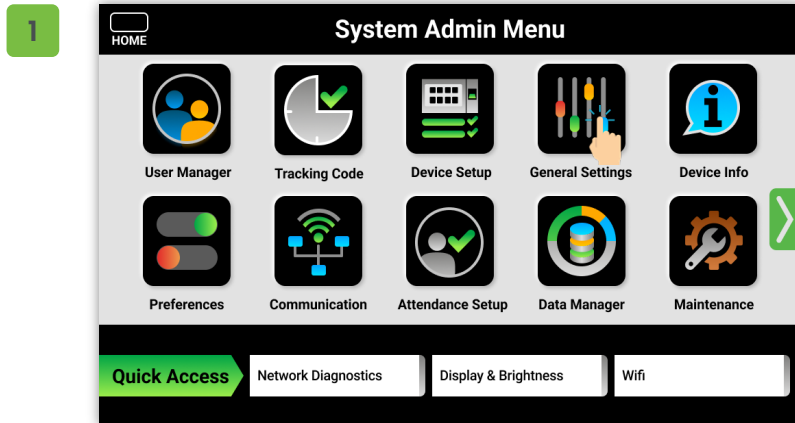


Select the **General Settings** icon

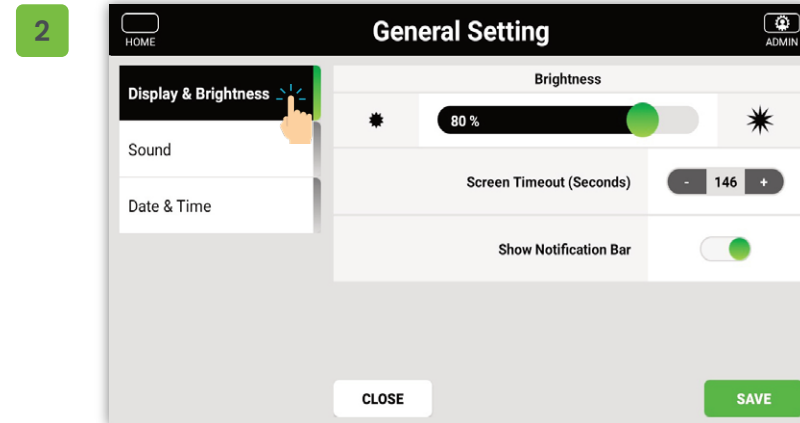

Adjust the **brightness of the screen**. Adjust the amount of time before the screen goes back to the home screen. Show Notification Bar if you want messages to appear on screen

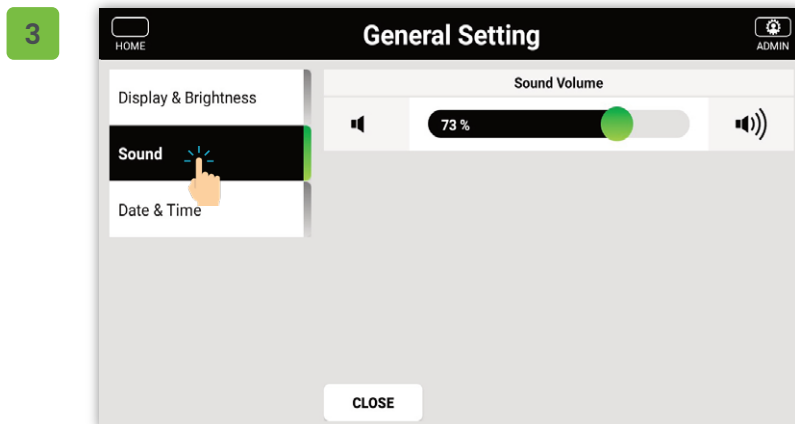

Adjust the volume that the buttons/and responses will ring

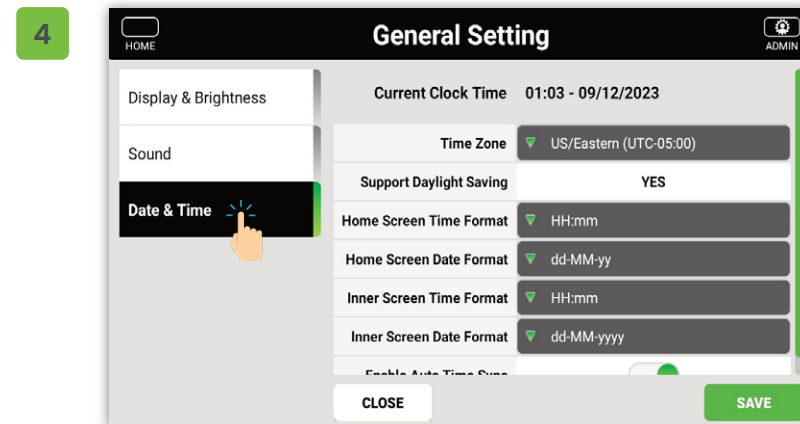


Date and Time settings. Adjust the clock, Time zone and format in which it is displayed


Device Info – About Device, System, Communication




View system information including device name, serial number, memory usage, and communication settings (IP addresses, WiFi status). This is especially useful for IT or technical troubleshooting.

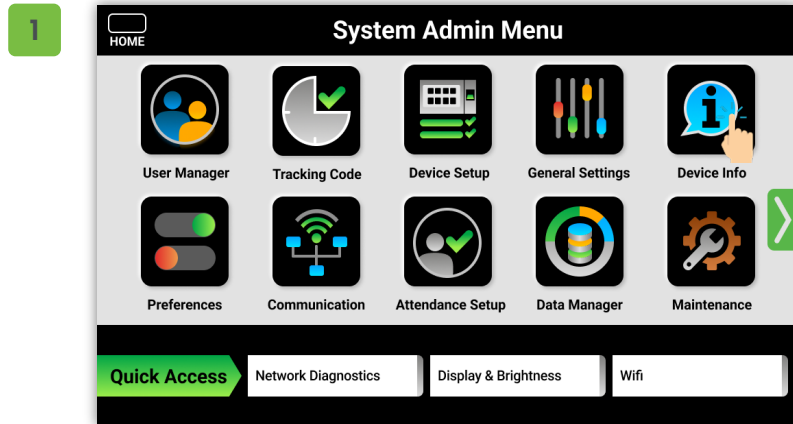


Select the **Device Info** icon

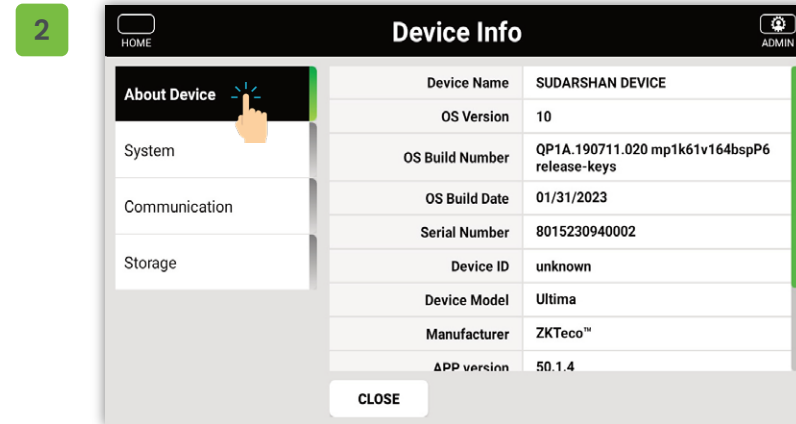

Select **About Device** to view Device Name, Device Serial Number and APP version installed on Time-clocks

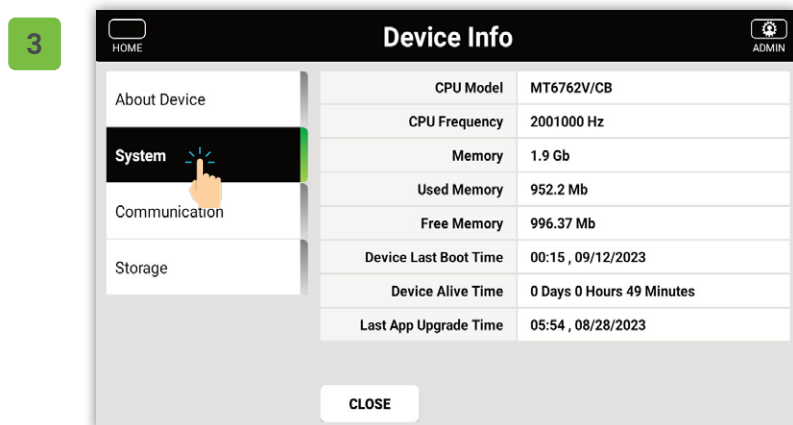


Select **System** to view CPU Model, CPU Frequency, Memory, Used Memory, Free Memory

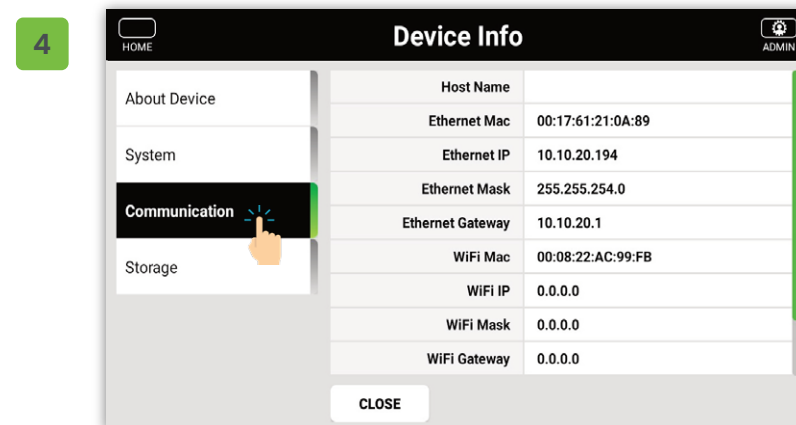

Select **Communication** to view Ethernet Mac, IP and WiFi Settings




Check available and used internal storage on the device. This can help determine when maintenance like data clean-up is needed.

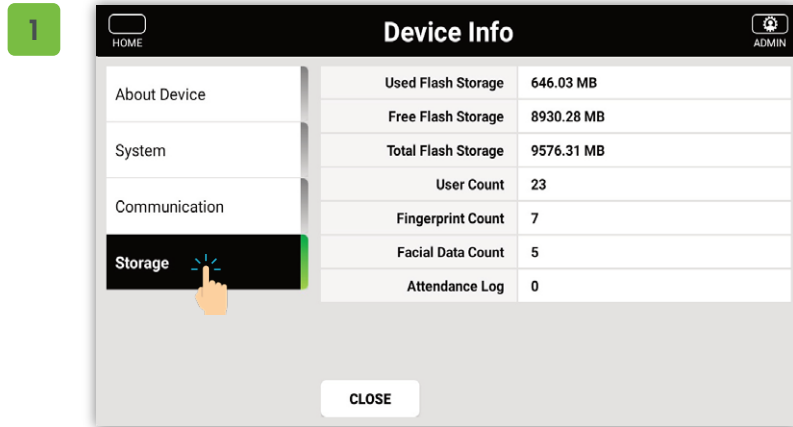


Select **Storage** to view information about internal storage



Customize the user experience with language preferences, screen layout, and voice settings. You can also modify what shortcuts appear on the admin home screen for quicker access.

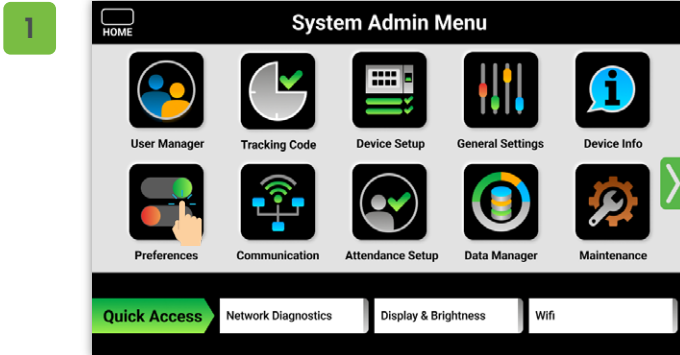


Select the **Preferences** icon

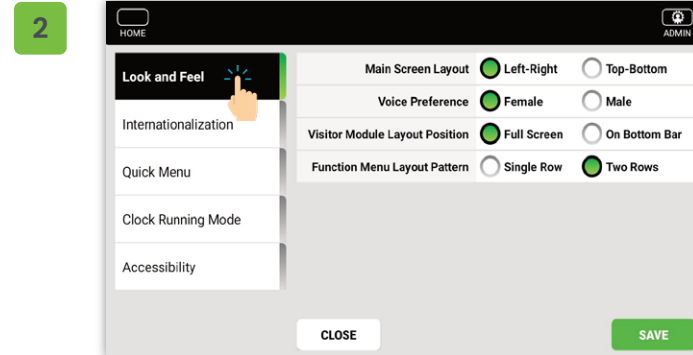


Select **Look and Feel** to modify;

- 1- Home screen scroll direction Horizontal or Vertical
- 2- Prompt voice female/male

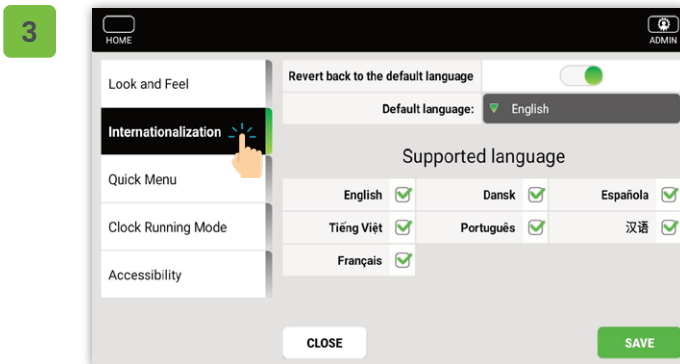


Select **Internationalization** to include language(s) on home screen by checking Languages on home represented by language abbreviations;

[EN] English [DA] Dansk [ES] Española [VI] Tiếng Việt
[PT] Português [ZH] 汉语 [FR] Français

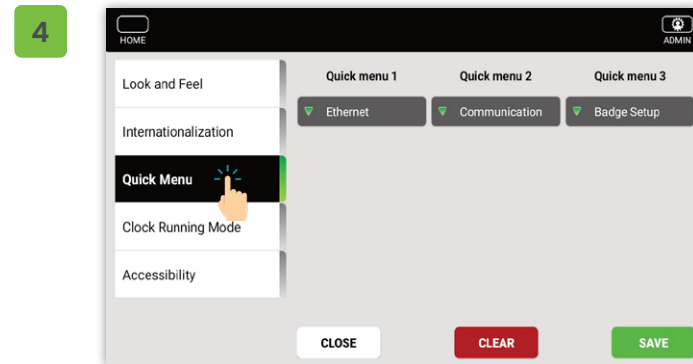


Select **Quick Menu** and **Select** a function from the drop downs
Selected function will be placed on admin home screen

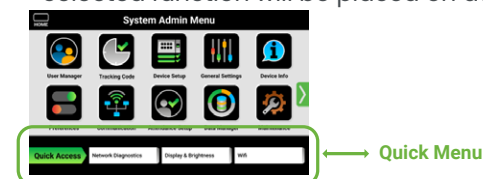




Set the operational mode of the clock (e.g., Production, Demo, Debug) and enable features for improved accessibility if needed.

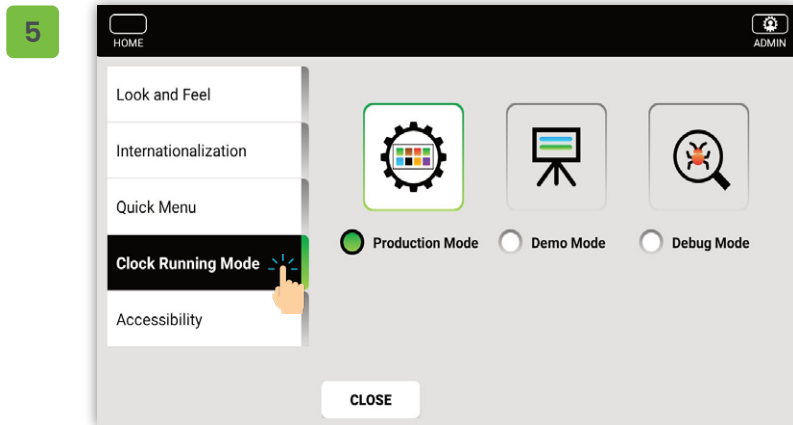

Select the **Clock Running Mode** to choose

1. Production (is used while clock is in Normal Service)
2. Demo (will not send punches to DCS) therefore onto your host application
3. Debug Mode (is for F/D)

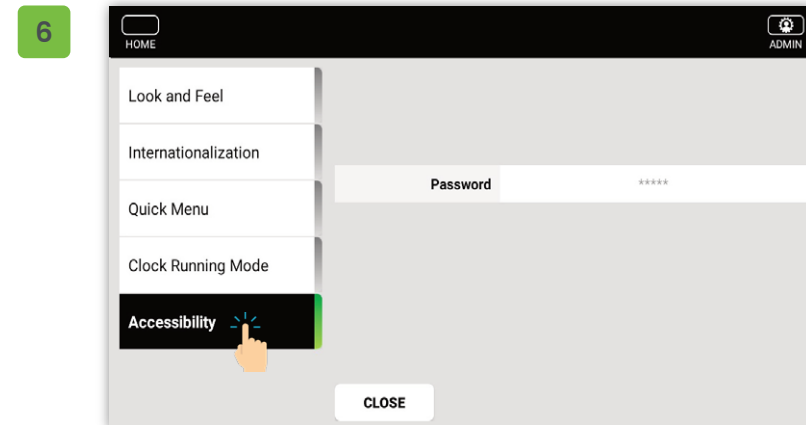


Select the **Accessibility** to choose


Communication – Ethernet, WiFi, Web Server, Network Diagnostics




This section guides you through configuring network settings. You can set up static or dynamic IPs, connect to WiFi, input server URLs, and perform diagnostics to resolve connectivity issues.

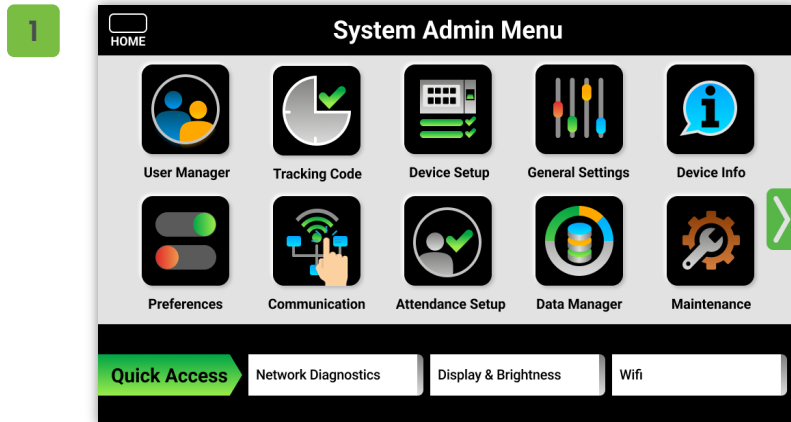


Select the **Communication** icon

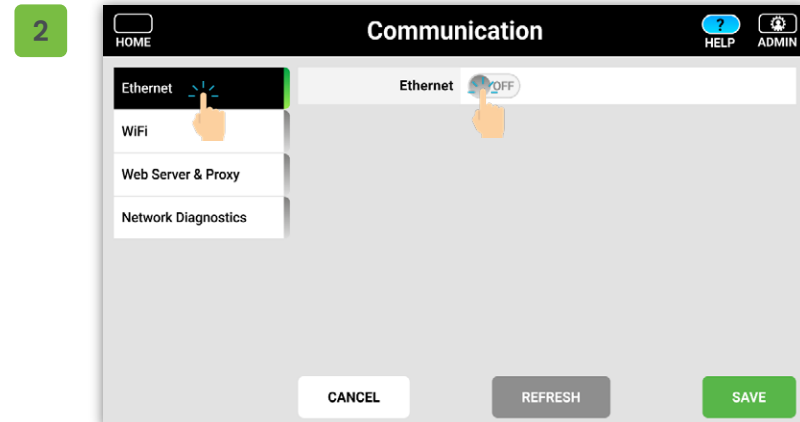


Select **Ethernet** to switch it ON

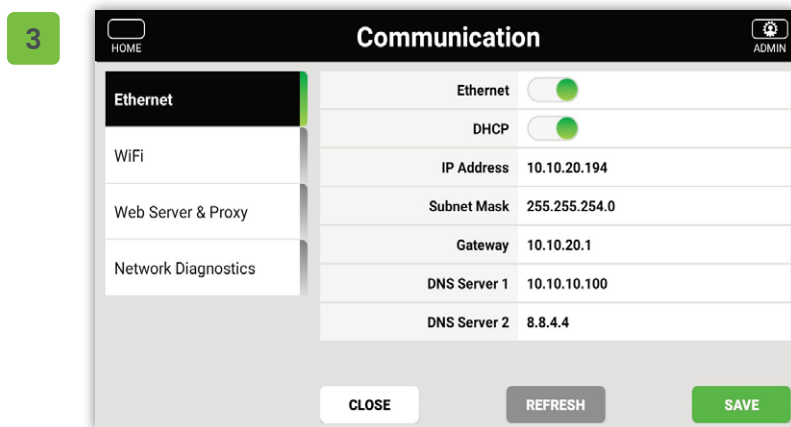


If you set DHCP = ON, then it will automatically grab IP Address from the network

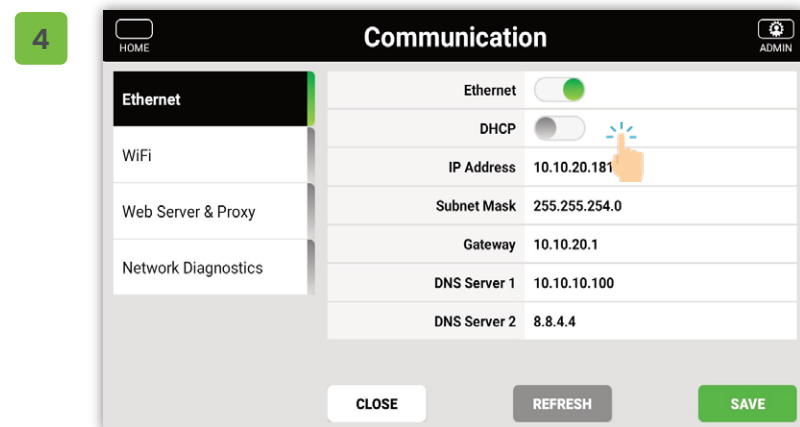


If you set DHCP = OFF, then you need to enter IP Address, Subnet Mask, Gateway, DNS Server 1 and DNS Server 2

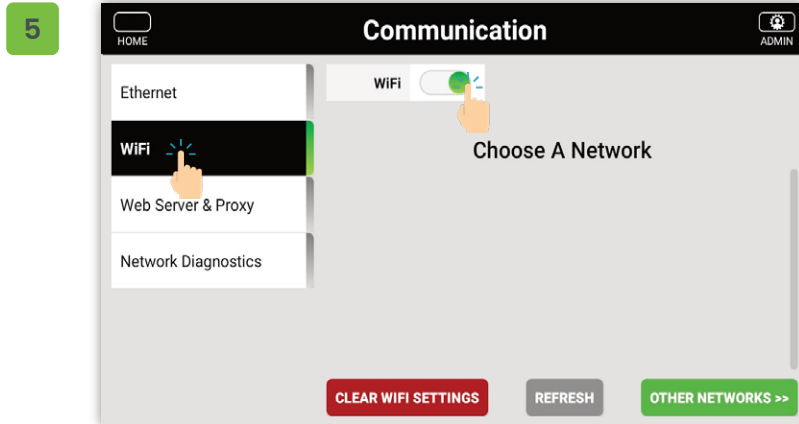


Select the **WiFi** tab and turn WiFi switch ON

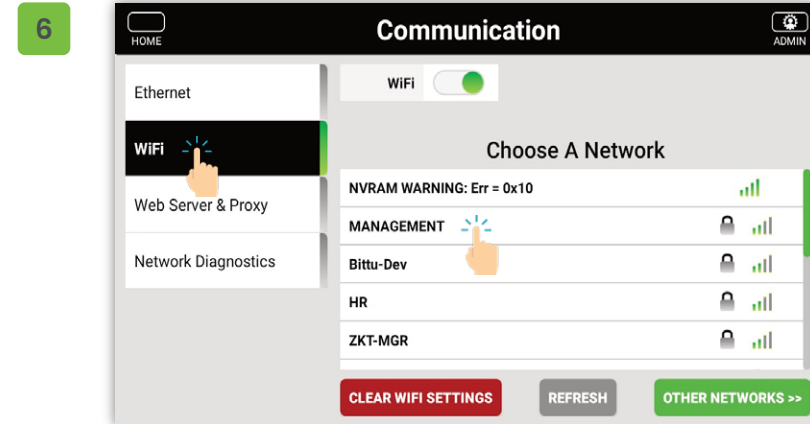

Select a network under “Choose A Network”

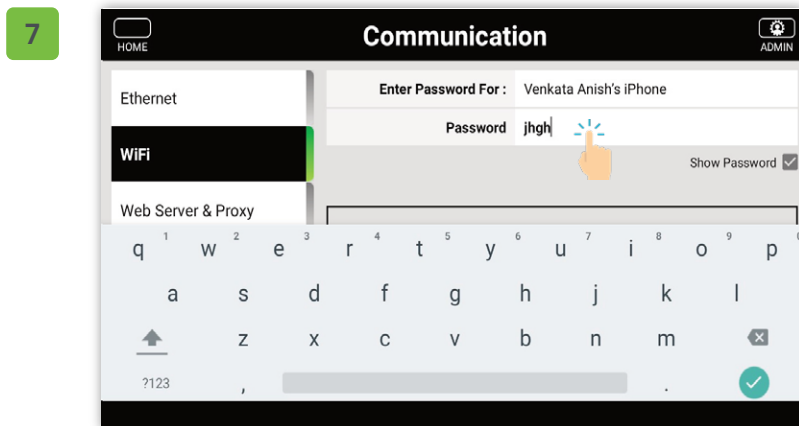


Enter Password for the selected network and Select “Enter” button

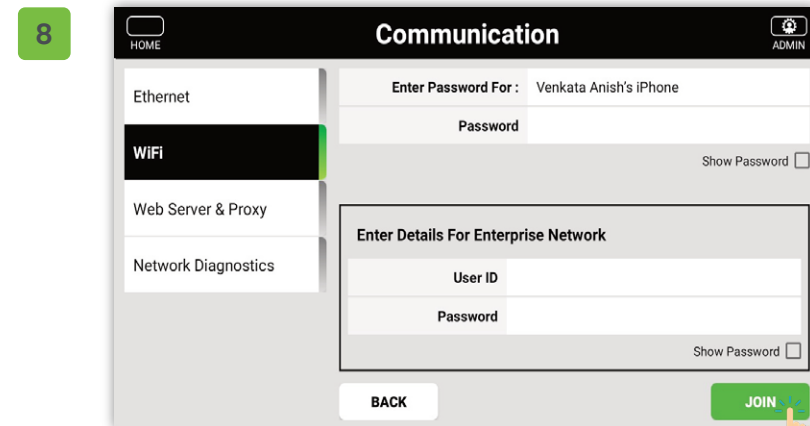

Select **Join** button




9

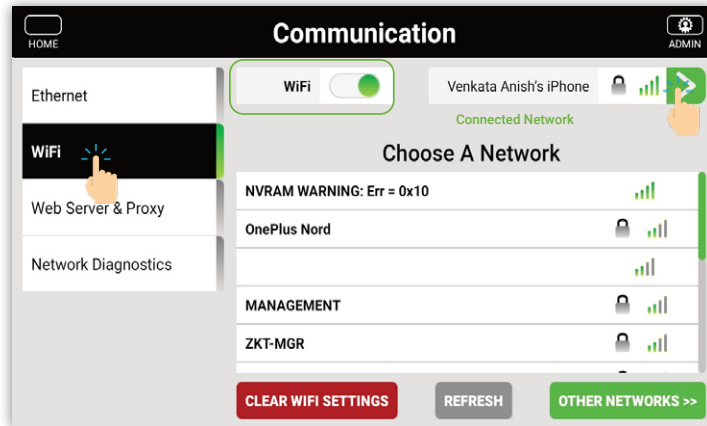


Connected Network will be displayed under **WiFi Switch**
To view details select double arrow button

10

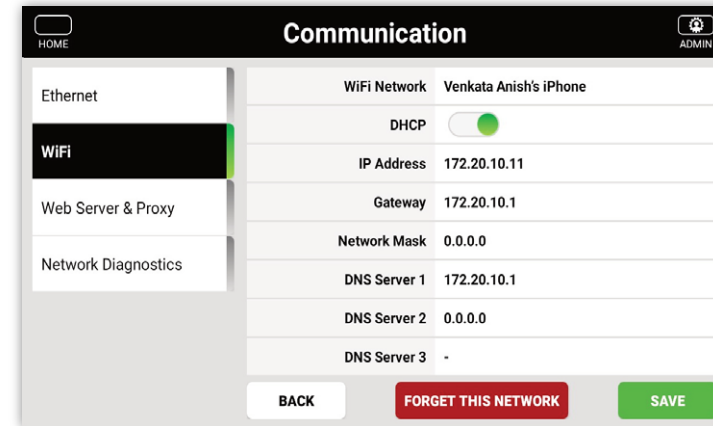

Network details will be shown


11

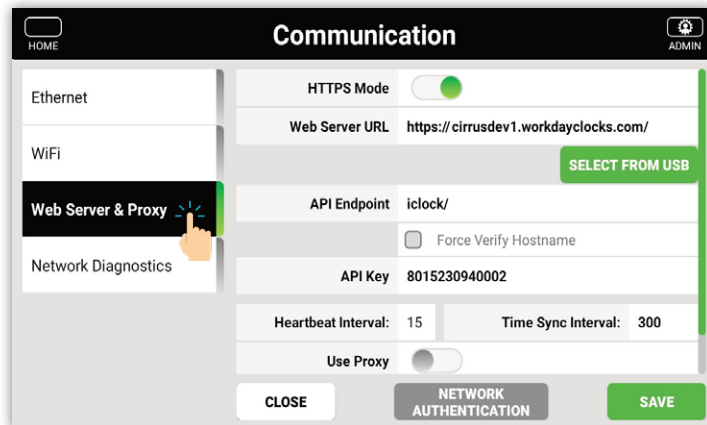

Select the **Web Server & Proxy**
Enter correct URL for Server, also Heartbeat Interval =15
and Time Sync Interval =300

Note: Customer's Organization will have custom URL
pointing to their individual tenet

12

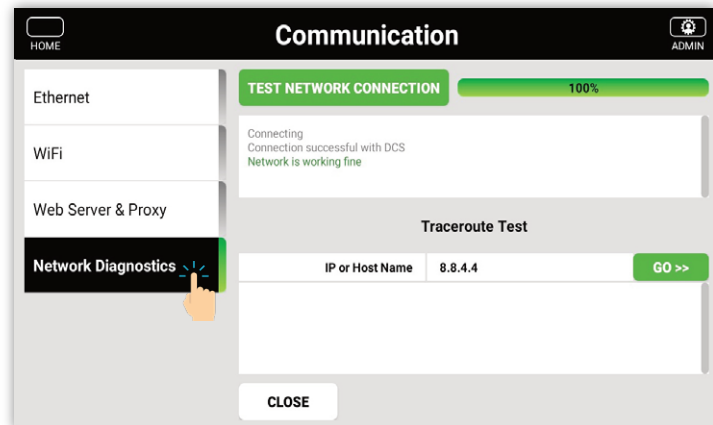


Select the **Network Diagnostic**


Attendance Setup – Function Menu, Attendance Rule



Understand and configure how punches are handled by the system. You'll find options for shift grace periods, lockout rules, and fast punch settings. Most of these will be preset by ZKTeco WFM but are shown here for reference.

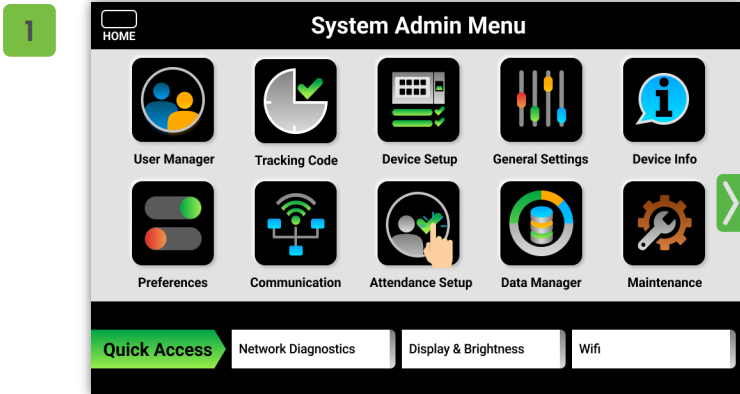


Select the **Attendance** icon

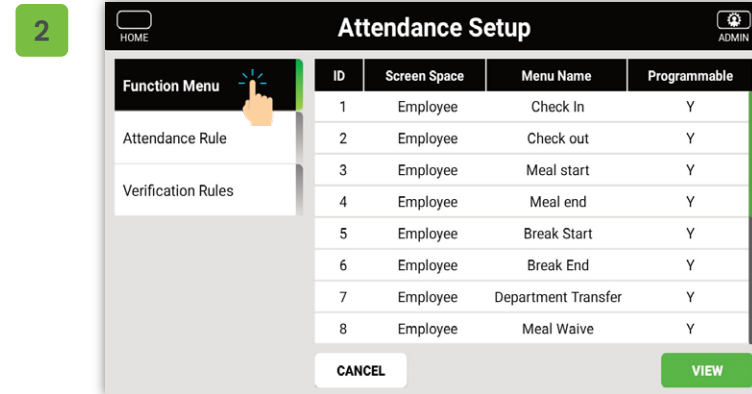

Select the **Function Menu** tab


Note: This should be configured from DCS Tenant

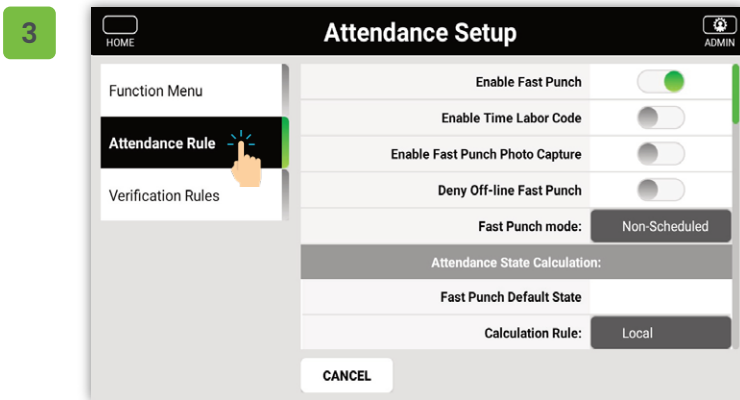

Select the **Attendance Rule** tab

Note: This will be configured prior by a ZKTeco WFM representative and should only be for reference if a clock needs to be reconfigured.

Enable Fast Punch, Accept Consecutive Locked Punches, Enable Shift Lockout, Accept Scheduled Locked Punch, Shift Start Grace Period (Minutes) Shift End Grace Period (Minutes)

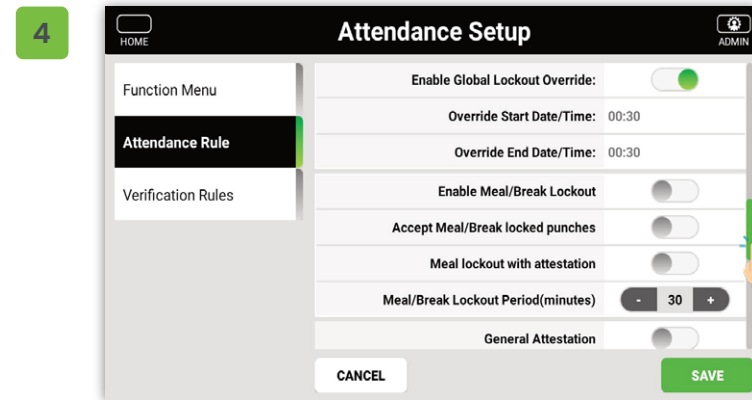


Enable Global Lockout Override, Override Start Date/Time Override End Date/Time, Enable Meal/Break Lockout, Accept Meal/Break locked punches, Meal lockout with attestation, Meal/Break Lockout Periodic (Minutes)


Attendance Setup – Attendance Rule, Verification Rules



Modify how the device handles punch verification and attestation. This includes visitor verification and 1:1 matching requirements for added security.

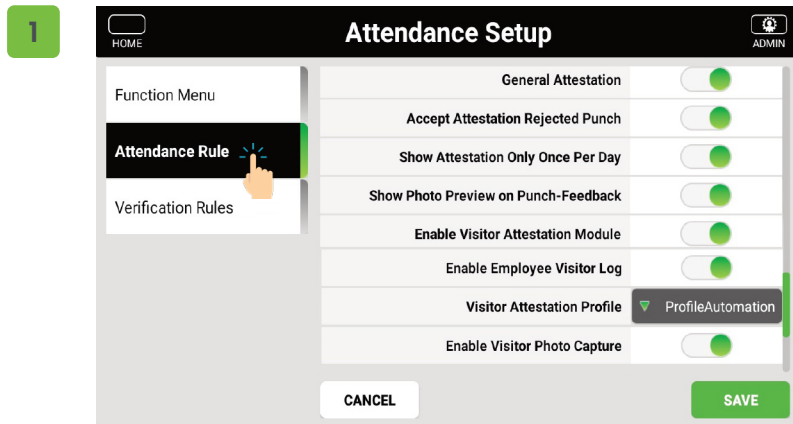

General Attestation, Accept Attestation Rejected Punch, Show Attestation Only Once Per Day, Enable Visitor Attestation Module, Visitor Attestation Profile, Enable Visitor Photo Capture

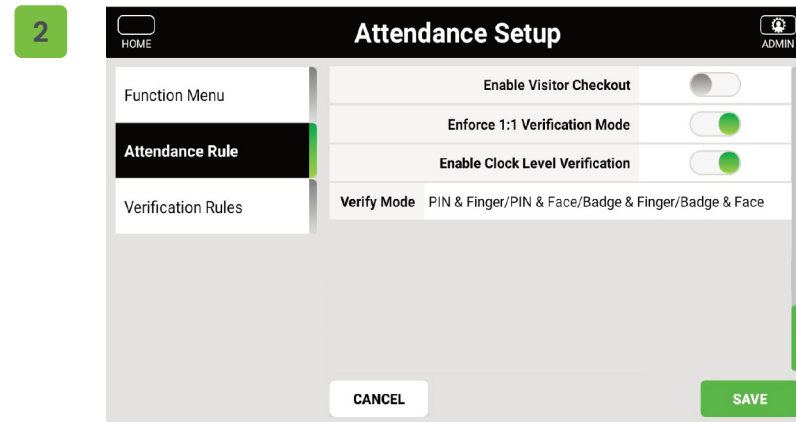


Select the **Verification Rules** tab
Enable 1:1 verification mode and enable clock level verification

Data Manager – Attendance Data, Export Data, Clean Data




Access attendance logs, export data to a USB drive, or remove old records from the system. Use this section to manage and maintain punch data directly from the device.

1

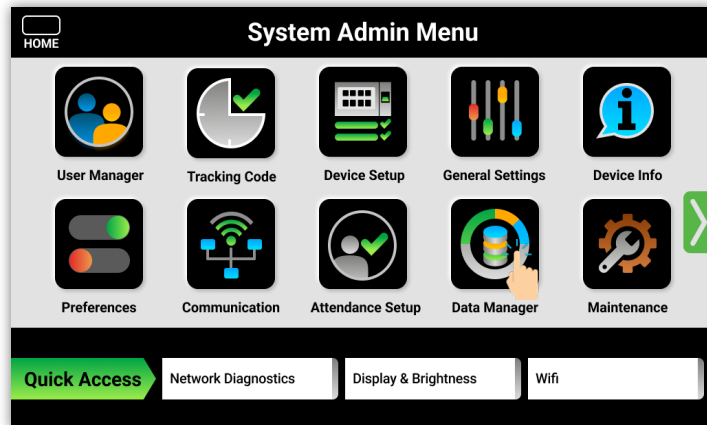


Select the **Data Manager** icon

2

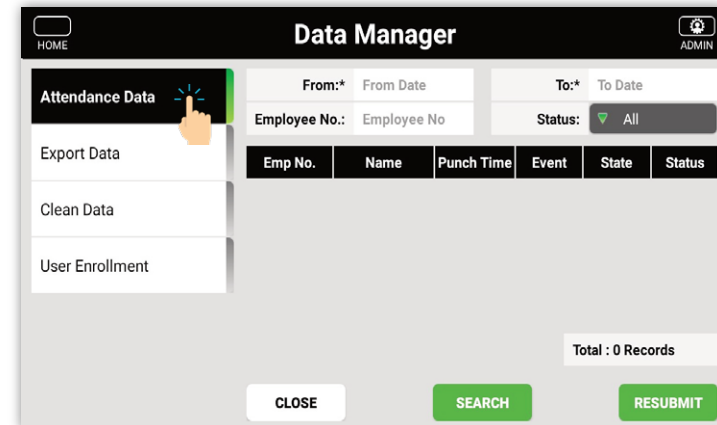


Select the **Attendance Data** tab
Look up Attendance logs directly on the clock

3

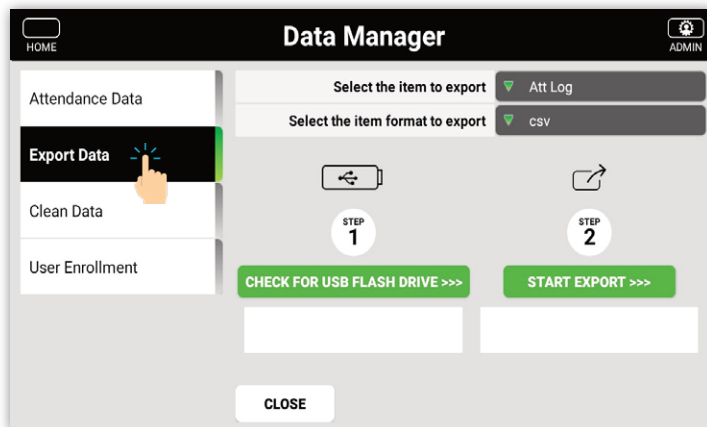

Select the **Export Data** tab
Attendance logs to a USB drive


4

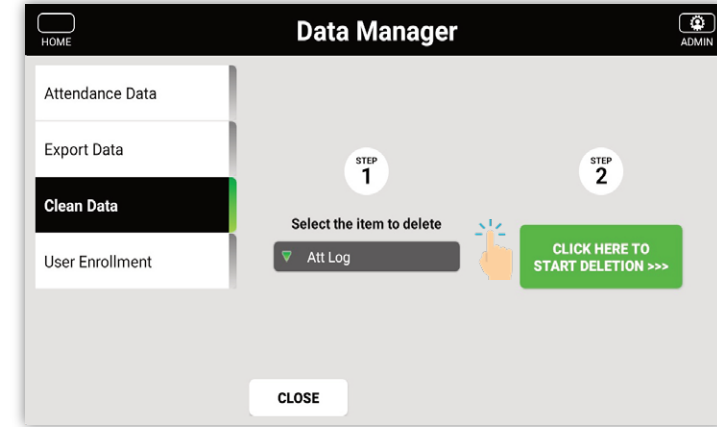

Select the **Clean Data** tab
Select the item to be deleted
Select "start to delete" button



Enables offline user enrollment for environments without network connectivity. This feature should only be used when authorized by ZKTeco WFM.

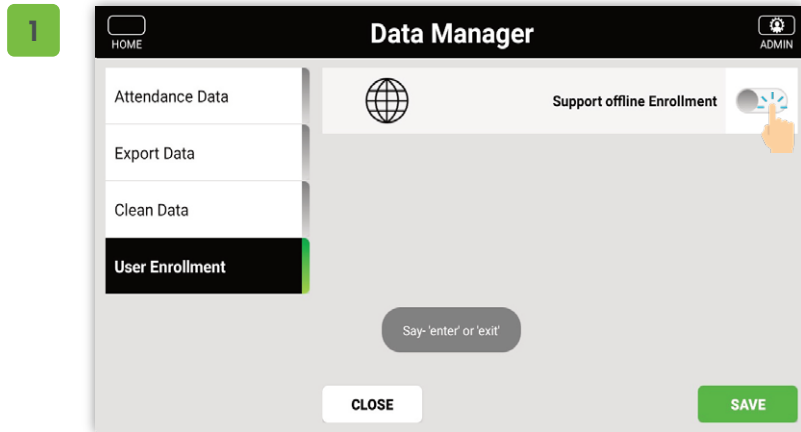

Select the **User Enrollment** tab

Turns offline enrollment **ON**


Note: Not recommended unless ZKTeco WFM representative advises

Maintenance – Upgrade from USB, Upgrade from Server, Clock Back Up




Perform firmware updates via USB or server, back up settings, or restore/reset the clock.

1

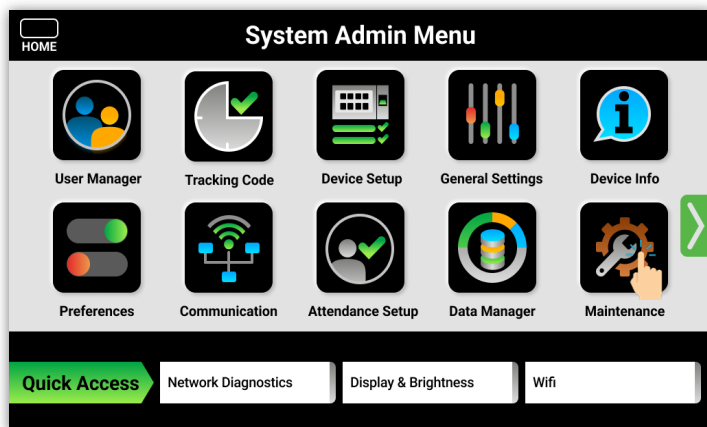


Select the **Maintenance** icon

2

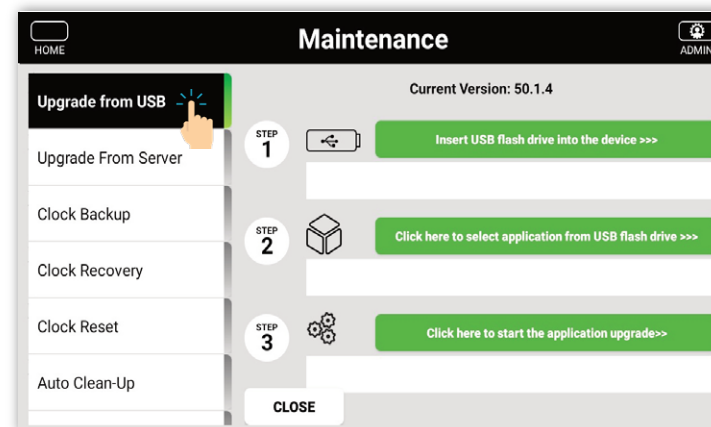


Select the **Upgrade from USB** tab

3

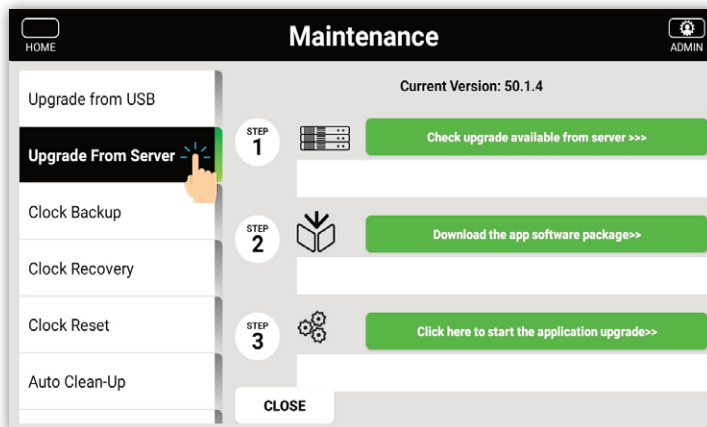


Select the **Upgrade from Server** tab

4

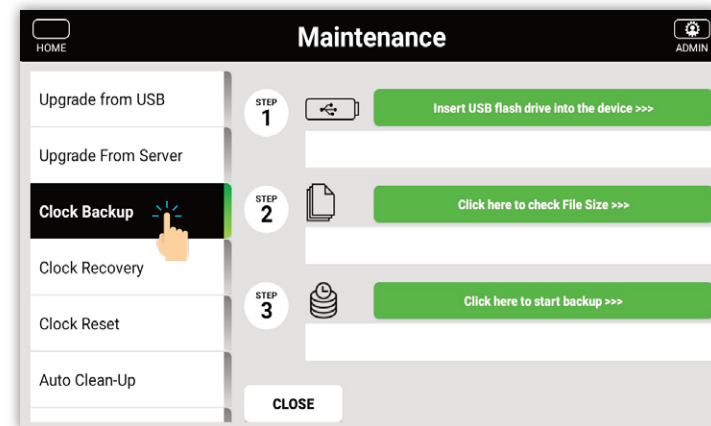


Select the **Clock Back Up** tab


Maintenance – Clock Recovery, Clock Reset, Auto Clean-up, Manual Clean-up

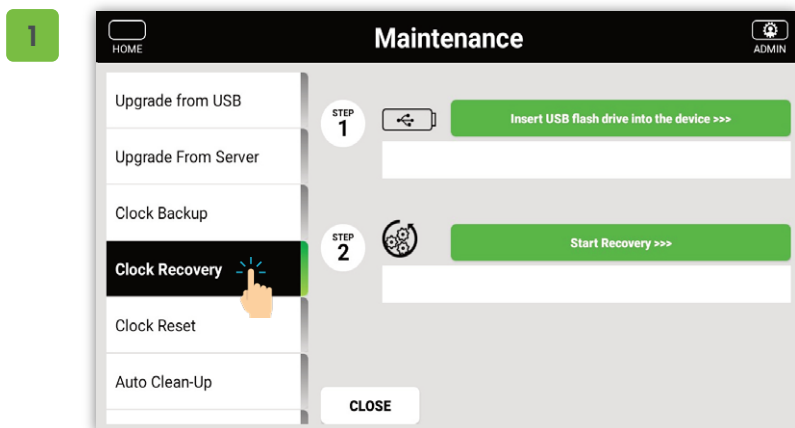

Select the **Clock Recovery** tab

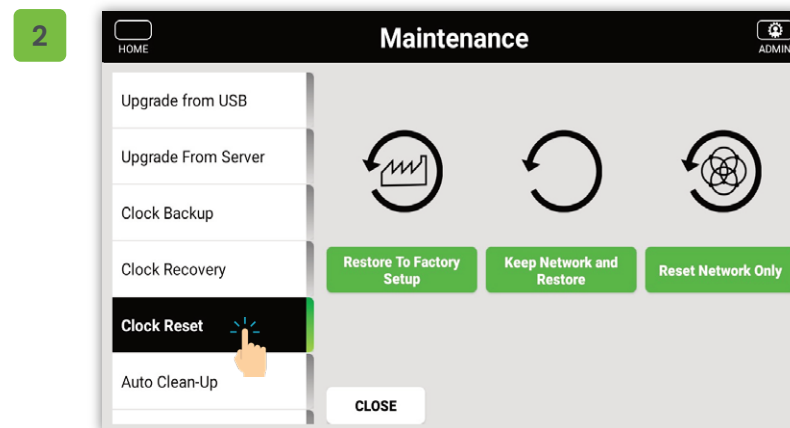


Select the **Clock Reset** tab

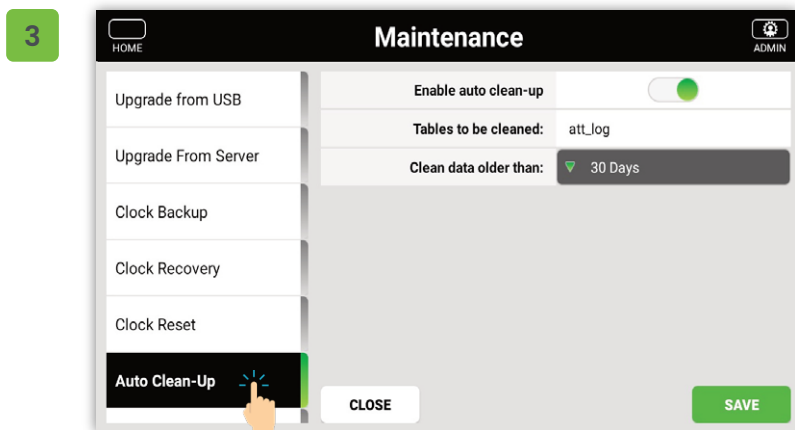

Select the **Auto Clean-up** tab

Enable auto clean up and from dropdown menu and choose preferred data block

Select **Save**

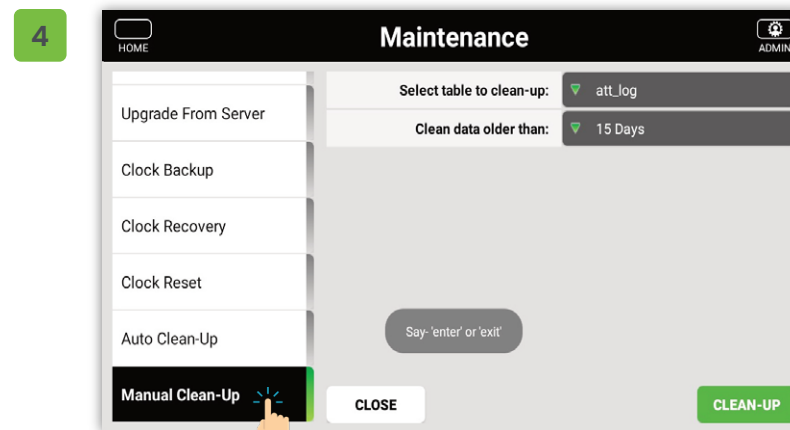

Select the **Manual Clean-up** tab

Select a table to clean from dropdown menu and choose preferred data block


Select **Clean-Up**

Note: All Upgrades will be sent by ZKTeco WFM representative and should never be done without ZKTeco WFM suggestion/supervision


Support Desk – Support Contact, Troubleshooting, Initial Configurations



Find methods for contacting ZKTeco WFM support and view guidance on initial setup. Be sure to use the ticketing system for technical help and consult this section before making major configuration changes.

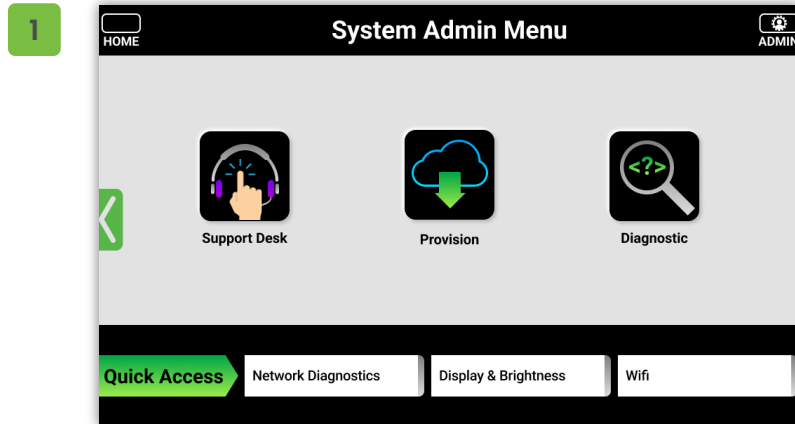


Select the **Support Desk** icon

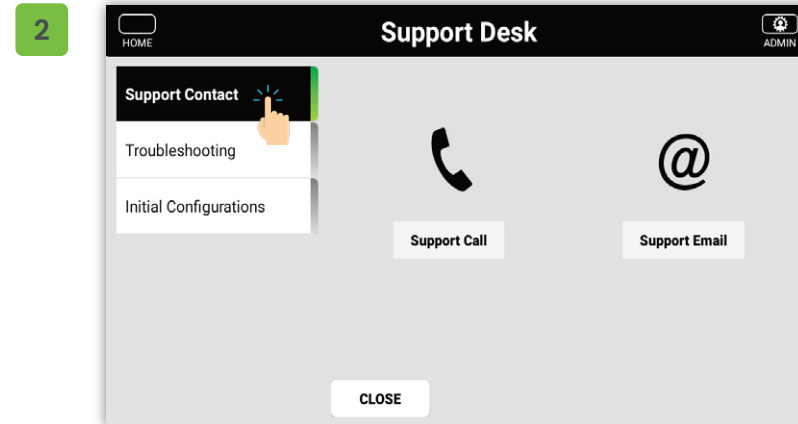


Select the **Support Contact** tab

These are methods on how to contact ZKTeco WFM. Please use the ticketing system first

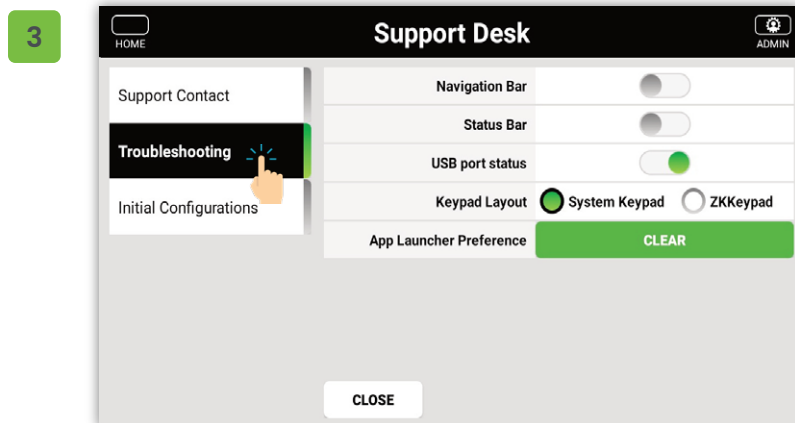

Select the **Troubleshooting** tab

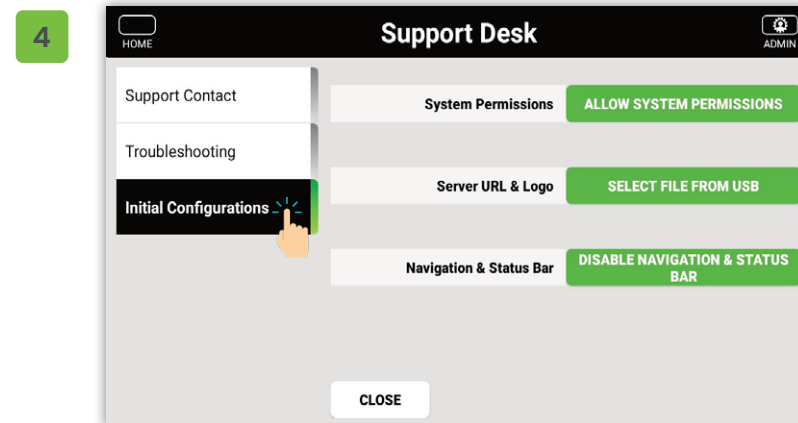


Select the **Initial Configurations** tab

Note: All changes will be sent by a ZKTeco WFM representative and should never be done without ZKTeco WFM suggestion/supervision.


Provision – Confirmation Prompt



Use this only when directed. Provisioning manually pulls settings from the DCS platform to the time clock, though this usually occurs automatically.

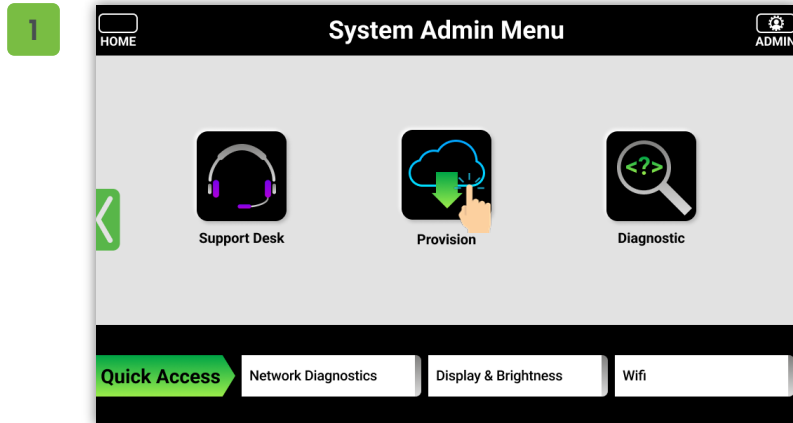

Select the **Provision** icon

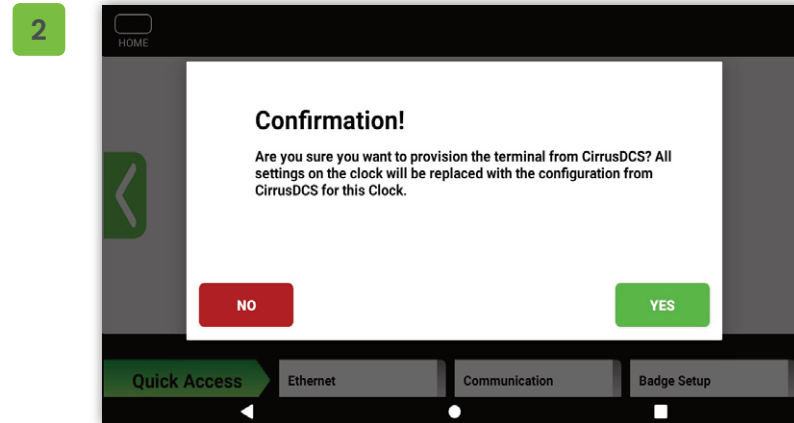


Provision Confirmation prompt

Pulls all settings from DCS manually. No need to do this as settings are pushed from DCS frequently


Diagnostic – Test Barcode, Test Control Relay, Test Display & Touch




Run diagnostic checks on barcode scanners, biometric sensors, cameras, speakers, and connectivity modules. These tools are intended for troubleshooting and support purposes in collaboration with ZKTeco WFM.

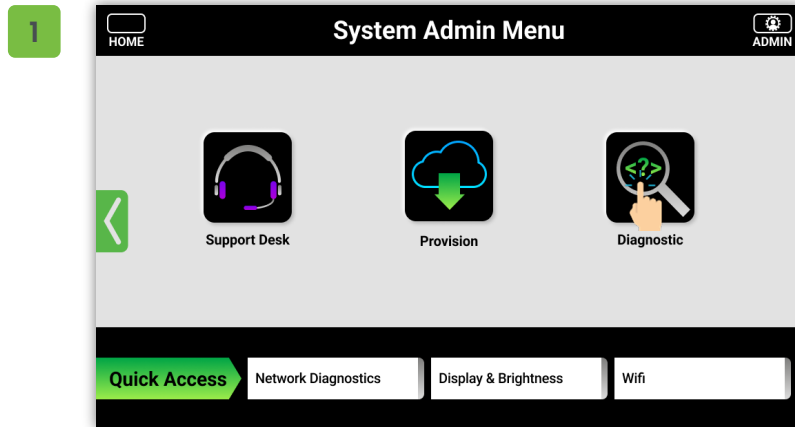


Select the **Diagnostic** icon

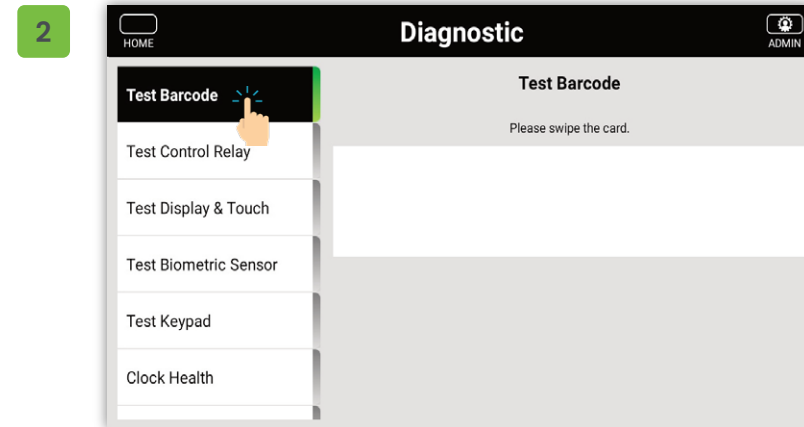

Select the **Test Barcode** tab

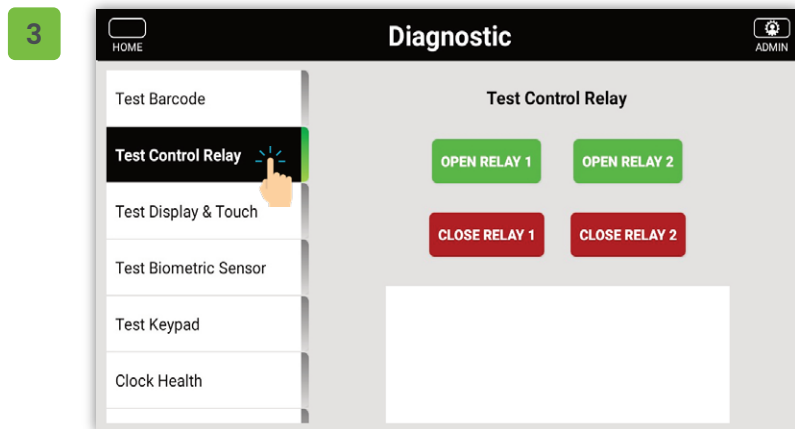


Select the **Test Control Relay** tab

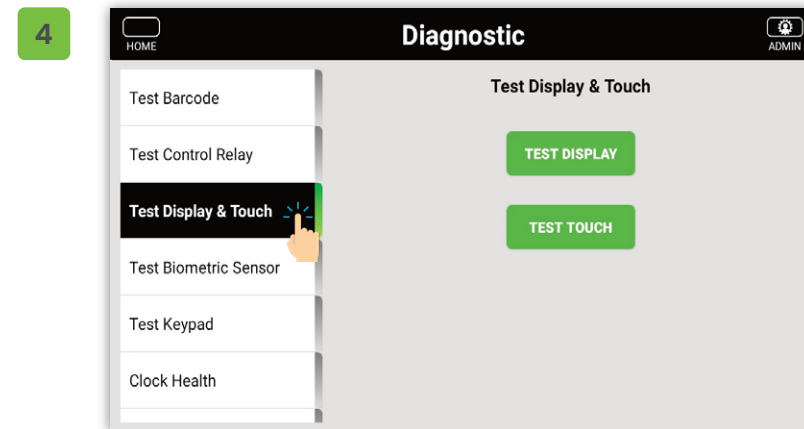


Select the **Test Display & Touch** tab


Diagnostic – Test Biometric Sensor, Test Keypad, Test Clock Health, Test MagStripe

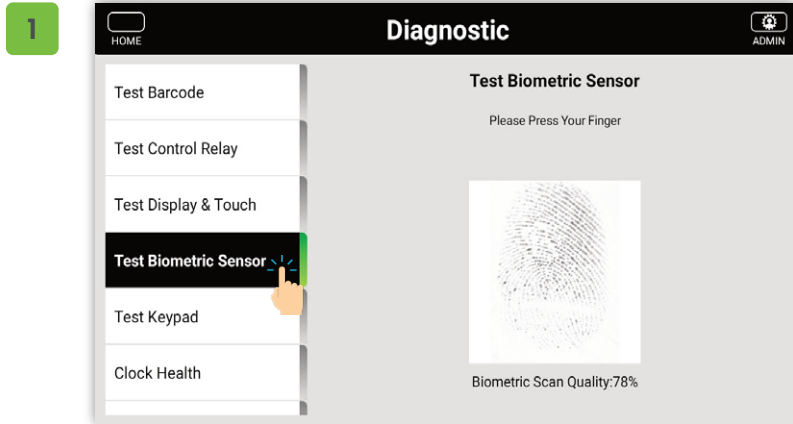


Select the **Test Biometric Sensor** icon

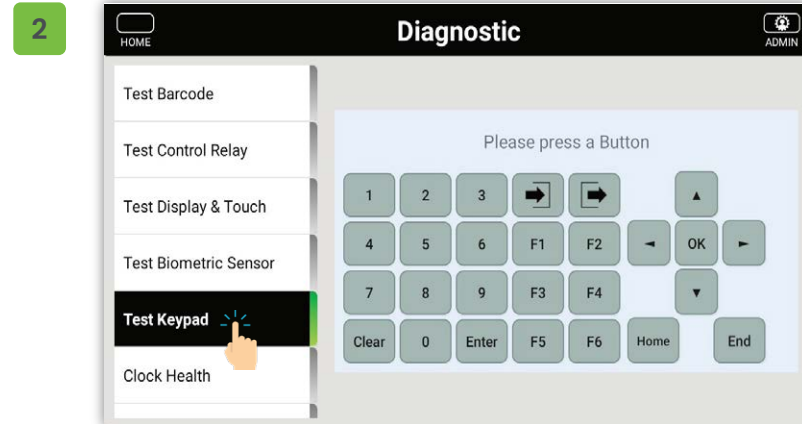

Select the **Test Keypad** tab

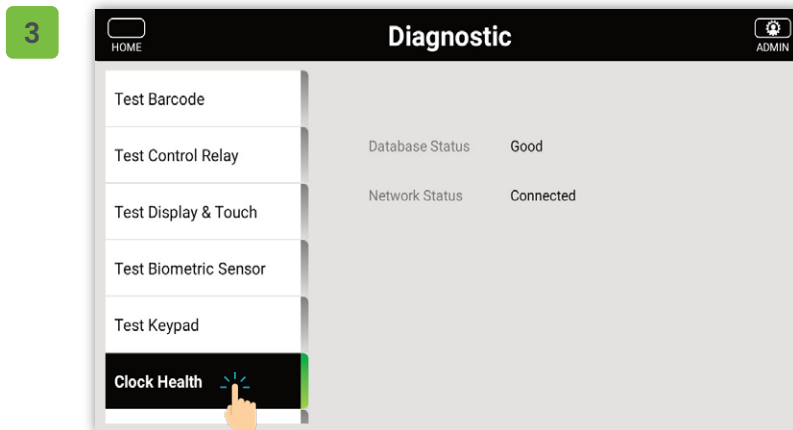


Select the **Clock Health** tab

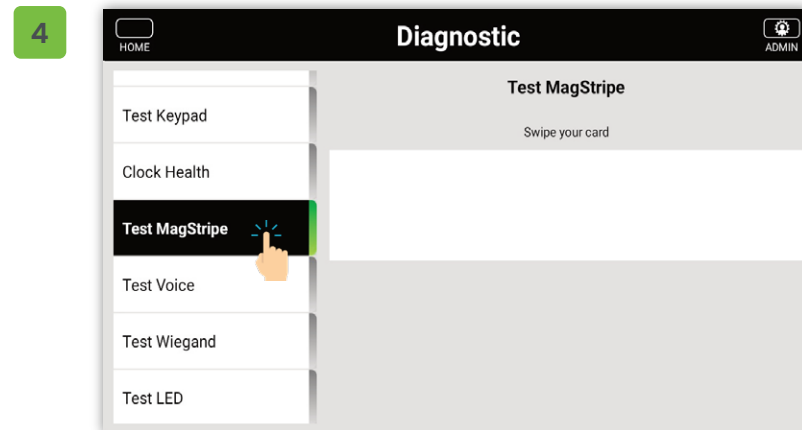


Select the **Test MagStripe** tab


Diagnostic – Test Voice, Test Wiegand, Test LED, Test Proximity

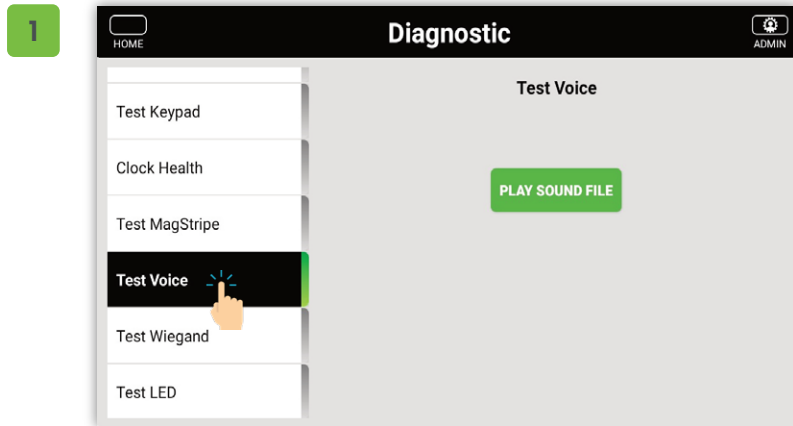


Select the **Test Voice** tab

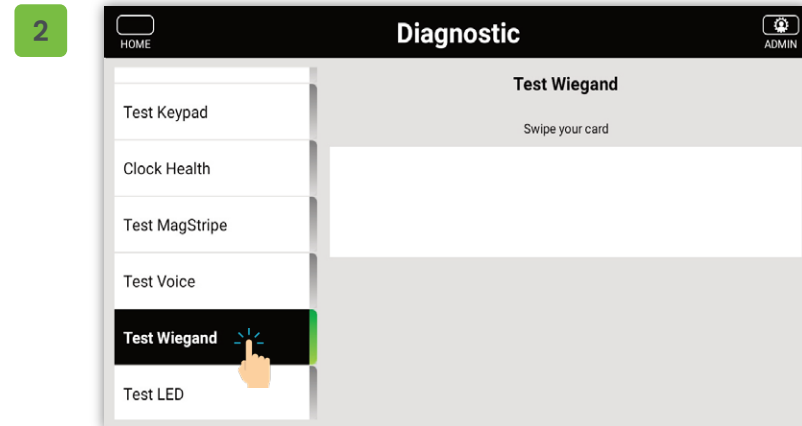

Select the **Test Wiegand** tab

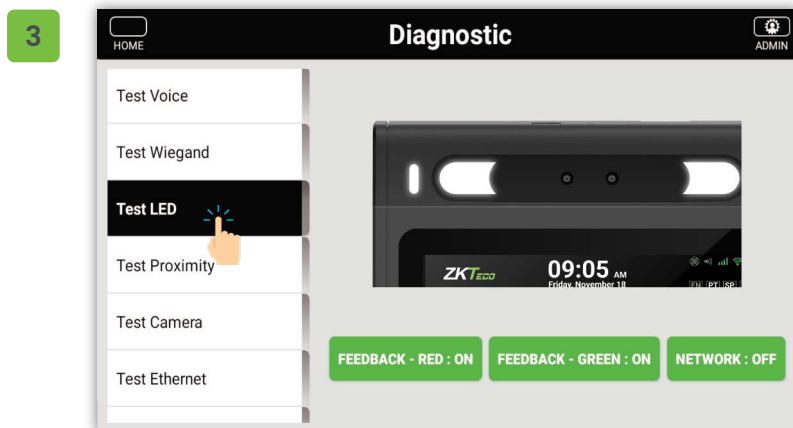


Select the **Test LED** tab

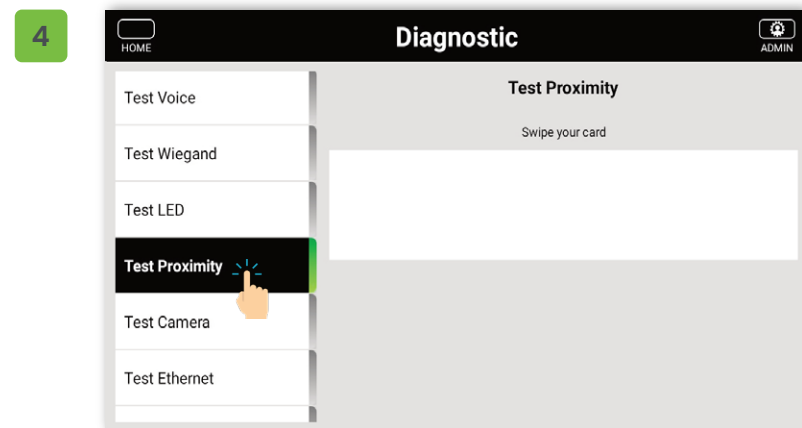


Select the **Test Proximity** tab


Diagnostic – Test Camera, Test Ethernet, Test Wifi, Test Face

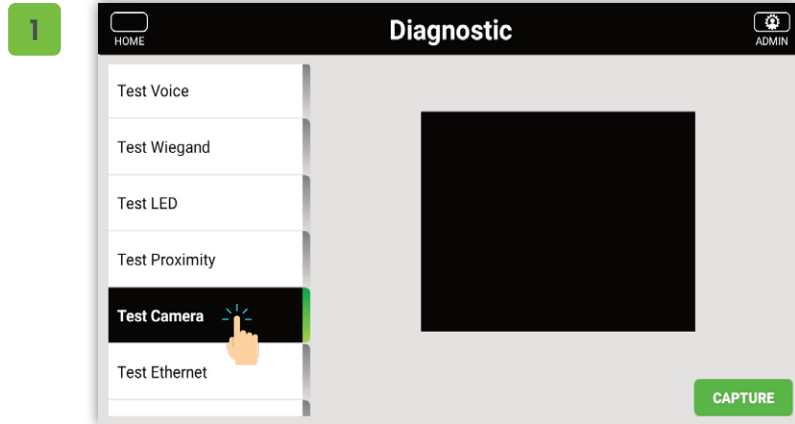

Select the **Test Camera** tab

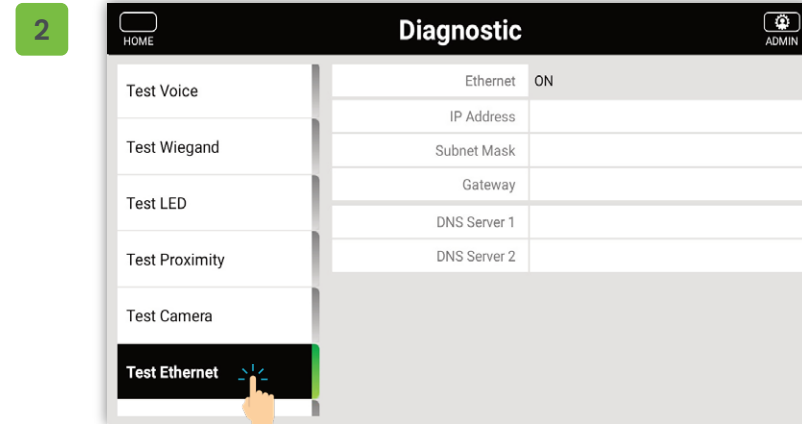


Select the **Test Ethernet** tab

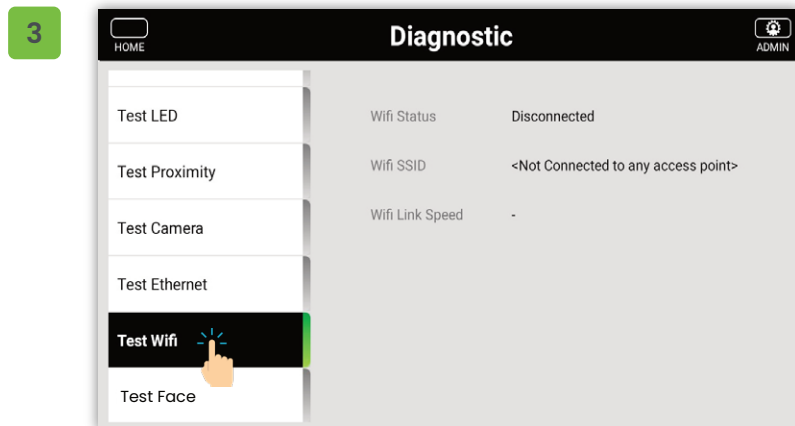

Select the **Test WiFi** tab

Note: These are all tools to be used in conjunction with ZKTeco WFM support.

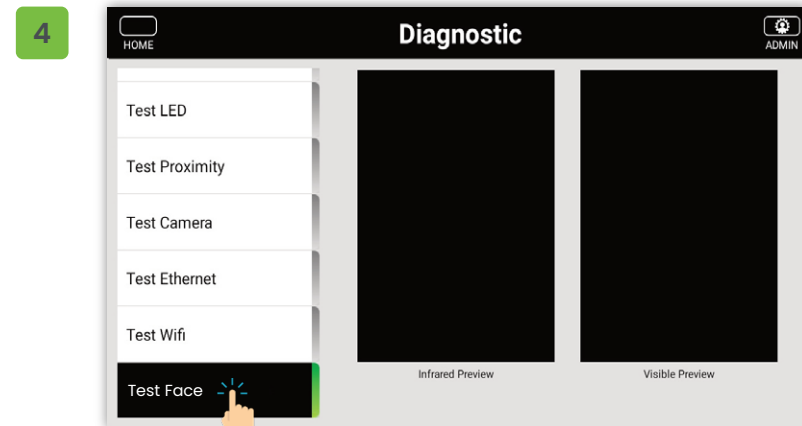

Select the **Test Face** tab



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and, used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

RF Exposure Compliance

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be colocated or operating in conjunction with any other antenna or transmitter.

Declaration for EU Compliance

5150-5350MHz is restricted in indoor used within European Union countries (AT/BE/BG/CZ/DK/EE/FR/ DE/ SE/IE/IT/EL/ESCY/LV/HR/LT/LU/HU/MT/NL/PL/PT/RO/SI/SK/UK)


Frequency Bands	Maximum Output Power
125KHz	-2.75dBuA/m@10m
13.56M Hz	-13.85dBuA/m@10m
2.4GHz BLE EIRP	-3.11dBm
2.4GHz WiFi EIRP	7.99dBm
5GHz WiFi EIRP	1.13dBm
5.8GHz WiFi EIRP	2.43dBm



Fingerprint Enrollment Matching Information



Datasheets

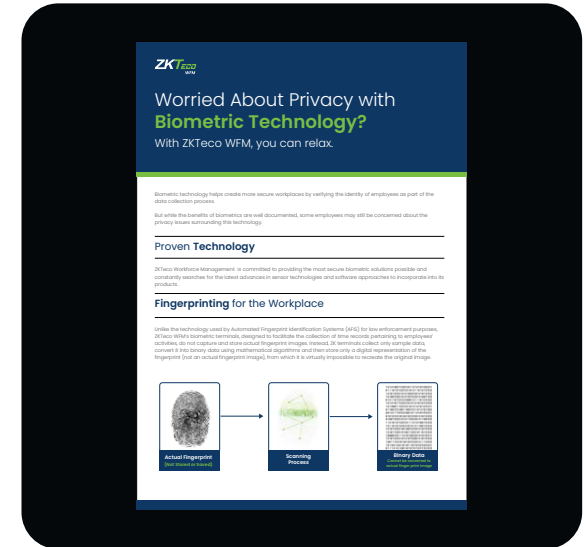

Privacy Concerns

© Copyright 2025. ZKTeco WFM is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

