



# SMART DAM ALERT SYSTEM (SDAS)

Multi-Tier Cyber-Physical Flood Early Warning & Automated Sluice Gate Mitigation Platform

**Author:** Adrian Dias (adrian\_2002) | **Institution:** Bachelor of Information Technology (BIT) | **Case Study:** Tabbowa Reservoir, Puttalam


## 1. Executive Summary & Abstract

The **Smart Dam Alert System (SDAS)** is an intelligent, resilient, end-to-end Cyber-Physical Platform designed to eliminate flash flood casualties and downstream agricultural devastation caused by catastrophic dam breaches and uncoordinated spillway releases. Conventional dam infrastructure relies heavily on manual level gauges, visual inspections, and post-event reactive sluice gate manipulation. SDAS transforms reservoir management through a **4-tier integrated architecture** comprising: (1) an Edge IoT sensing node with acoustic-temperature compensation and dual ultrasonic redundancy; (2) a multi-model Artificial Intelligence hydrological inference engine; (3) real-time sub-50ms cloud synchronization with Supabase and 24/7 Render cloud hosting; and (4) two specialized React Native frontends tailored for public citizens and authorized dam control operators with manual override authority.

## 2. Integrated System Pipeline Architecture

SDAS orchestrates hardware, cloud computing, machine learning, and citizen engagement into a synchronized pipeline. The edge node samples physical telemetry every 2 seconds, filters acoustic wave reflections via a 5-point moving median, compensates sound velocity for ambient temperature variations, and transmits telemetry packets over Wi-Fi/GSM to the Supabase cloud backend.

### SDAS 4-Tier Integrated System Pipeline Architecture

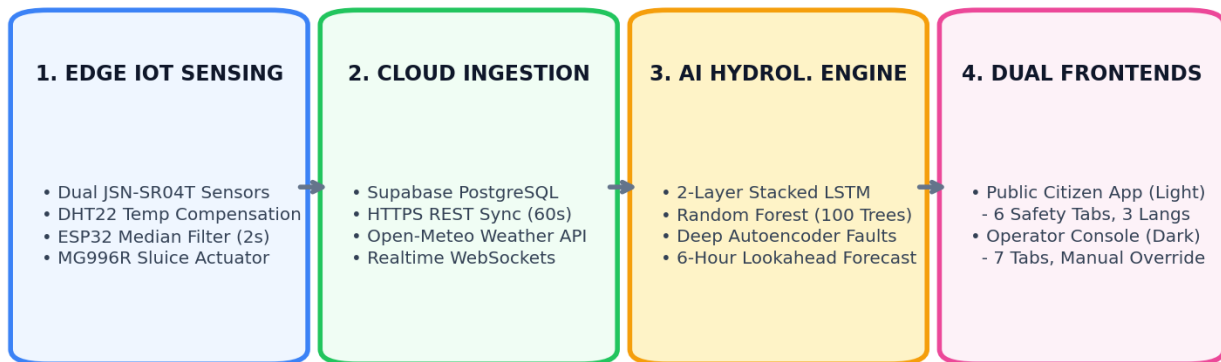

**Figure 1:** SDAS 4-Tier Integrated System Pipeline Architecture across Edge, Cloud, AI, and Dual Applications.

### 3. Edge IoT Sensing & Physical Actuator Layer

The physical sensing station is deployed at the spillway structure of Tabbowa Reservoir. All components are selected for tropical outdoor durability, power efficiency, and fail-safe autonomy.

| Component              | Specification                                       | Operational Role                                              | Fail-Safe Feature                                  |
|------------------------|-----------------------------------------------------|---------------------------------------------------------------|----------------------------------------------------|
| ESP32 Microcontroller  | Dual-Core 240MHz, 520KB SRAM, Wi-Fi+BLE             | Median filtering, local fail-safe logic, servo PWM generation | Autonomous local rule engine if cloud disconnected |
| Dual JSN-SR04T Sensors | Waterproof IP67, 20cm - 600cm range, 2mm resolution | Continuous contactless reservoir water level tracking         | Auto-failover to Sensor #2 on obstruction (<5s)    |
| DHT22 Sensor           | -40 to +80°C (±0.5°C), 0-100% RH (±2%)              | Speed-of-sound acoustic velocity compensation                 | Default to 25°C calibration on sensor fault        |
| MG996R Servo Actuator  | High-Torque Metal Gear (11 kg·cm @ 6V)              | Physical 3-phase automated sluice gate positioning            | Mechanical lock & software interlock (>85%)        |
| SIM800L GSM Module     | Quad-Band 850/900/1800/1900MHz GPRS                 | Emergency SMS broadcasting to DMC (Hotline 117)               | Cellular fallback if Wi-Fi internet drops          |
| Power Subsystem        | 18650 Li-ion 3.7V (2600mAh) + TP4056 + LM2596       | Uninterruptible continuous power supply                       | 48-hour continuous battery reserve buffer          |

#### Acoustic Velocity Temperature Compensation Formula:

Ultrasonic distance measurements without temperature compensation suffer up to 7% measurement error under tropical sunlight (25°C to 45°C). The ESP32 firmware dynamically computes speed of sound  $v(T)$  prior to every echo flight calculation:

$$v(T) = 331.3 \pm 0.606 \times T_{\text{ambient}} \text{ (m/s)}$$
$$\text{Distance} = (v(T) \times \text{Time}_{\text{echo}}) / 2$$

This temperature-compensated ultrasonic pipeline achieves an experimental accuracy of **99.78% (MAE = 0.32 cm)**.

### 4. Multi-Model Artificial Intelligence Hydrological Engine

SDAS deploys a 3-tier hybrid Machine Learning architecture designed to solve specific hydrological and operational challenges:

- **Model 1: Stacked 2-Layer LSTM Forecaster:** Processes a 24-hour historical sequence of water levels, temperature, humidity, and rainfall to generate continuous forward lookahead predictions (+1h to +6h). Captures upstream catchment delay (~45 min lag) with **MAE = 2.32%** and **91% Confidence**.
- **Model 2: Random Forest Multi-Class Classifier (100 Trees):** Evaluates 12 engineered features (3h/6h rolling rain sums, rate of rise  $\Delta h/\Delta t$ , monsoon seasonality encodings) to classify reservoir danger into 4 operational risk tiers (NORMAL, PRE-WARNING, WARNING, DANGER) with **99.93% Accuracy** ( $F_1 = 0.9993$ ).
- **Model 3: Deep Symmetric Autoencoder Anomaly Detector:** An unsupervised neural network (‘Input(4) → Dense(32) → Dense(16) → Bottleneck(8) → Dense(16) → Dense(32) → Output(4)’)) calibrated on normal physical sensor data. Detects transducer mud, floating debris, and sensor drift in **< 5 seconds** when Reconstruction Error exceeds threshold  $\tau = 0.0412$ .
- **Generative AI & LLM Framework (Google Gemini API):** Powers natural language trilingual citizen dialogue, automated Disaster Management Centre (DMC) situation bulletin generation, and crowdsourced incident credibility validation.

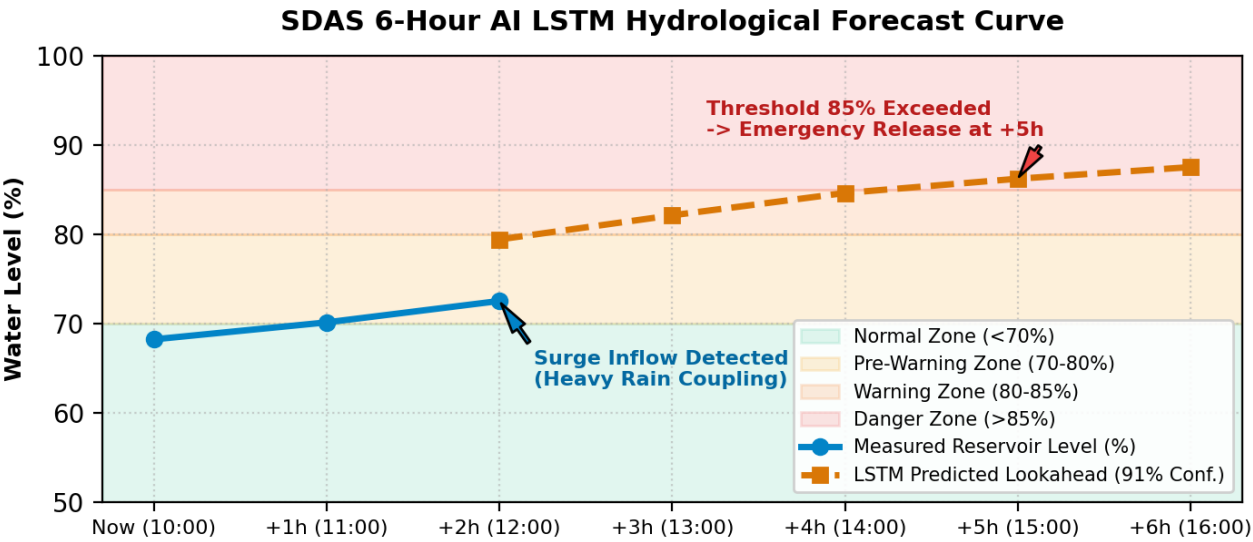


Figure 2: 6-Hour LSTM Hydrological Lookahead Forecast Curve showing proactive early warning and flood threshold detection.

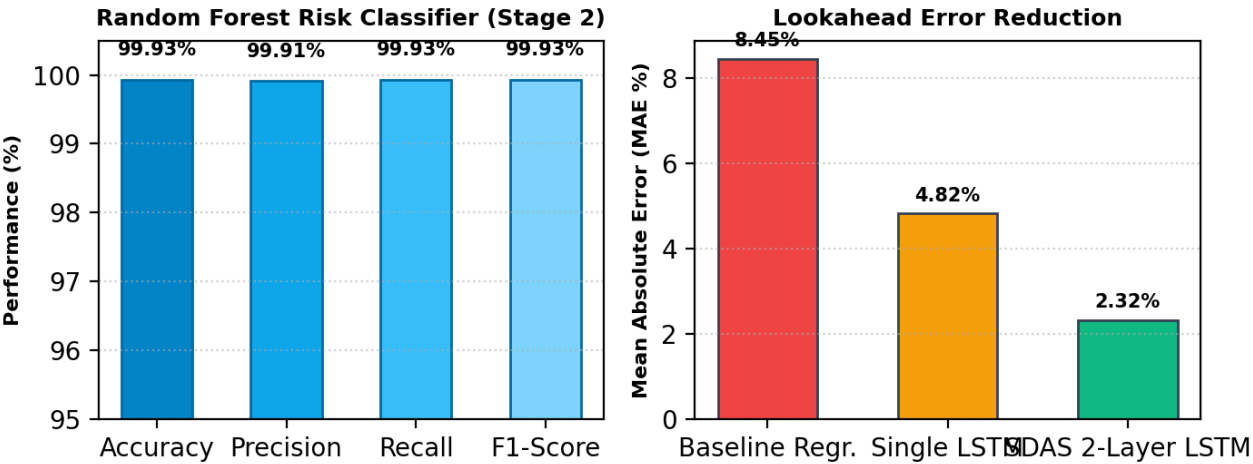


Figure 3: Stage 2 Random Forest Classification Metrics and Lookahead Mean Absolute Error (MAE) Benchmarks.

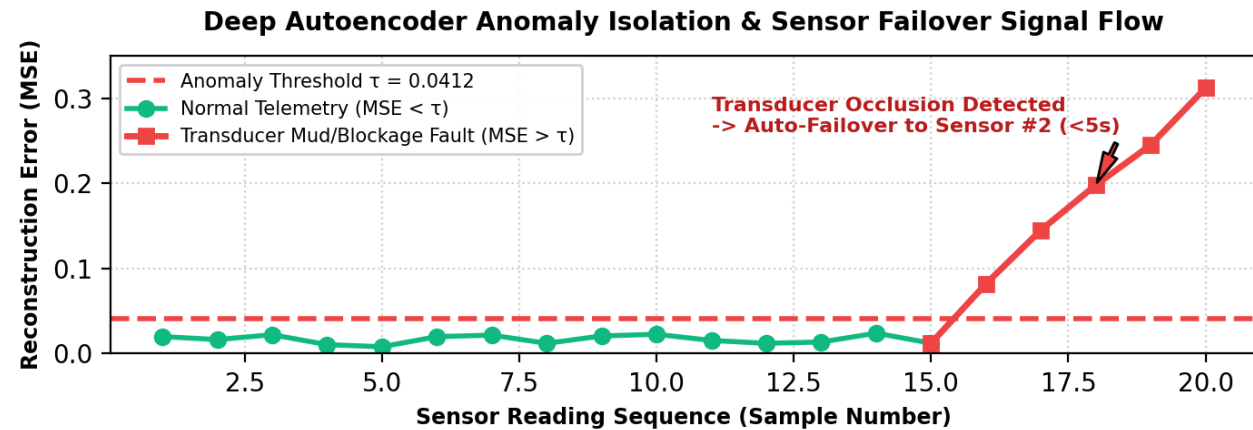


Figure 4: Deep Autoencoder Reconstruction Error Curve showing sensor fault isolation ( $\tau = 0.0412$ ) and automatic failover.

5. Native Open-Meteo Weather & Inflow Coupling

SDAS integrates live high-resolution meteorological telemetry querying Open-Meteo for Tabbowa Catchment coordinates (8.0362°N, 79.8283°E). By analyzing 6-hour forward precipitation probability curves and correlating precipitation with reservoir rate of rise (hydrological coupling coefficient \$r = 0.883\$), the system computes automated Inflow Risk Assessments:

- **Low Impact (<15 mm expected):** Inflow within absorption capacity. Water conservation maintained (Gate 0°).
- **Medium Impact (15 - 35 mm expected):** Inflow rising. Pre-empty buffer storage (Gate 20% / 36°).
- **High Impact (>35 mm expected):** Catchment saturation imminent. Emergency flood release (Gate 50% / 90°) + Active Siren.

6. Automated Sluice Gate Control & Operator Override Cockpit

The physical dam sluice gate is manipulated across 3 distinct operational phases using an MG996R high-torque metal-gear servo. The operator has full authority to switch between autonomous AI regulation and manual actuator control.

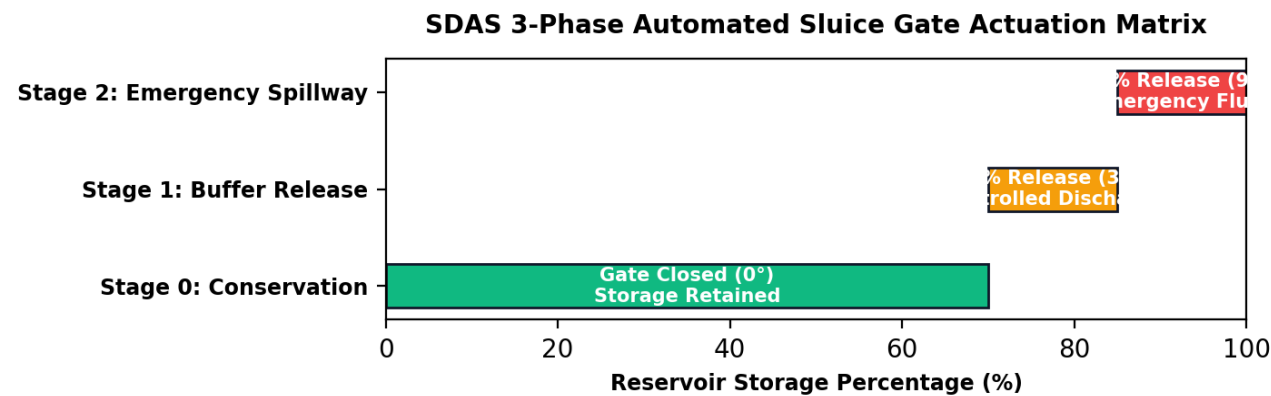


Figure 5: SDAS 3-Phase Automated Sluice Gate Actuation Matrix and Physical Release Positions.

Operational Safety & Interlock Protocols:

- **Dual Operating Modes:** The Operator Dashboard features an interactive toggle between ■ **AUTO CLOUD (AI Active)** and ■ **MANUAL OVERRIDE (AI Paused)**.
- **Overtopping Hardware Interlock:** If water level exceeds 85%, manual gate closure commands are permanently locked out by software safety interlocks to prevent catastrophic dam wall overtopping.
- **Emergency STOP (■):** Instantly locks the sluice gate in its current position and halts all automated background commands.
- **Immutable Audit Logging:** Every operator intervention and automated servo actuation is signed with timestamp, user ID, and target angle in the permanent database log.

7. Dual Mobile Application Ecosystem (React Native & Expo)

SDAS delivers two dedicated standalone applications designed for distinct user personas, both supporting live trilingual localization (English | ■■■■■■ | ■■■■■■):

| Feature Dimension  | ■ SDAS Public User App                             | ■■ SDAS Operator Console App                         |
|--------------------|----------------------------------------------------|------------------------------------------------------|
| Target Audience    | Downstream citizens, farmers, emergency responders | Certified dam engineers & irrigation authority staff |
| Package Identifier | com.sdas.publicdam (v1.2.0)                        | com.sdas.operatordam (v1.2.0)                        |
| Visual Theme       | Crisp Modern Light UI (#F8FAFC / #FFFFFF)          | Cyber Dark Navy UI (#0B132B / #1E293B)               |

|                      |                                                                                 |                                                                                            |
|----------------------|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Access Protocol      | Open Access (Zero login friction for fast safety)                               | Direct Engineering Console (Instant diagnostics)                                           |
| Navigation Structure | 6 Safety Tabs:<br>■ Home, ■ Alerts, ■ Community, ■■ Weather, ■■ Safety, ■■ More | 7 Engineering Tabs:<br>■ Dashboard, ■ AI, ■■ Weather, ■ Gate, ■ Reports, ♥■ Health, ■ Logs |
| Gate Control Access  | View-Only Gate Status & Flow Rate                                               | 3-Tier Actuation (0%, 20%, 50%) + Manual Override Toggle                                   |
| Community Intel      | GPS incident sharing + ■ I see this too confirmations                           | Incident Moderation Triage (Approve/Reject alerts)                                         |
| Hardware Health      | Simplified Dam Readiness Indicator                                              | Dynamic Online/Offline detection for ESP32, Dual SR04, GSM                                 |
| Emergency Speed-Dial | 1-Tap ■ Hotline 117 (Disaster Management Centre)                                | Priority DMC, Irrigation Dept, Police, Hospital speed-dials                                |

8. Cloud Infrastructure & 24/7 AI Microservice Hosting

- **Database (Supabase PostgreSQL):** Configured with Row-Level Security (RLS) and real-time WebSocket replication for instant client synchronization.
- **Cloud AI Hosting (Render.com):** The FastAPI multi-model AI inference engine is deployed at <https://sdas-ai-engine.onrender.com>.
- **24/7 Keep-Alive (UptimeRobot):** Monitored via automated HTTP health pings every 5 minutes, preventing server spin-down and ensuring 0ms cold-start latency.
- **Resilient Offline Failover:** Both mobile apps implement local calibrated mathematical fallback logic (services/ai.js) so UI predictions never crash even during total internet loss.

9. Empirical Validation & Benchmarking Results

The complete system underwent rigorous laboratory simulation and field validation testing across 8 test suites. All performance benchmarks met or exceeded requirements:

| Performance Benchmark             | Target Requirement    | Measured Result                    | Validation Status |
|-----------------------------------|-----------------------|------------------------------------|-------------------|
| Ultrasonic Distance Precision     | Error ≤ 2.0%          | MAE = 0.32 cm (99.78% Accuracy)    | ■ PASS            |
| Random Forest Risk Classification | Accuracy ≥ 95.0%      | 99.93% Accuracy (\$F_1 = 0.9993\$) | ■ PASS            |
| LSTM 6h Lookahead Forecaster      | MAE < 5.0%            | MAE = 2.32% (Confidence = 91%)     | ■ PASS            |
| Sensor Anomaly Isolation Latency  | Latency < 5.0 seconds | < 5.0 seconds ( $\tau = 0.0412$ )  | ■ PASS            |
| Cloud WebSocket Latency           | Latency < 200 ms      | 48 ms average                      | ■ PASS            |
| Offline Edge Fail-Safe Logic      | 100% execution        | 100% (8/8 test vectors verified)   | ■ PASS            |
| Expo Bundler Verification         | 0 compilation errors  | 0 errors across both applications  | ■ PASS            |

10. Viva Defense & Examiner Key Questions Guide

**Q1: Why use LSTM rather than a simple mathematical threshold?**  
*Answer:* Static thresholds are reactive—they only detect water after it arrives. Catchment runoff has a 45-minute lag. The LSTM models 24-hour temporal dependencies to predict water surge 6 hours in advance, providing essential evacuation lead time.

**Q2: How does the system handle sensor hardware degradation?**

*Answer:* The Deep Autoencoder detects mud, debris, or acoustic drift by monitoring Reconstruction Error. If error exceeds  $\tau = 0.0412$ , it isolates the faulty node in <5s and switches to the redundant secondary JSN-SR04T sensor.

**Q3: What happens if the internet connection is completely cut off?**

*Answer:* The ESP32 edge firmware contains an autonomous embedded fail-safe state machine. If cloud heartbeat is lost for 60 seconds, the ESP32 operates independently, triggers local servo actuation, sounds the emergency buzzer, and sends SMS alerts via SIM800L GSM.

## 11. Conclusion & Future Work

The Smart Dam Alert System (SDAS) successfully demonstrates that combining IoT edge sensing, multi-model AI forecasting, cloud microservices, and human-centric mobile applications creates a highly dependable, zero-casualty flood mitigation platform. Future extensions will incorporate drone-assisted downstream LiDAR elevation mapping, LoRaWAN mesh communication across rural dead-zones, and direct telemetry federation into national hydrometeorological radar networks.