Two-Timescale Secure Transmission for Movable Antenna-Enabled Multiuser Systems With Statistical Eavesdropper CSI

Author One, *Student Member, IEEE,* Author Two, *Member, IEEE*

***Abstract*—This paper investigates two-timescale secure transmission for a movable antenna (MA)-enabled multiuser downlink with a passive eavesdropper (Eve), where the antenna positions are optimized based on statistical channel state information (CSI), and zero-forcing precoding with null-space artificial noise (AN) adapts to the instantaneous CSI of the legitimate users (LUs). Specifically, the antenna positions and the long-term power allocation of the confidential signals and AN are jointly optimized to maximize the ergodic secrecy sum rate (ESSR), subject to the transmit power, movable-region, and minimum-distance constraints. To solve this nonconvex stochastic problem, we first transform it into a deterministic problem by approximating the ergodic wiretap rate in closed form. The resulting approximation reveals that the MAs can reduce the information leakage and increase the AN received by Eve, even for a single LU. Then, an alternating optimization algorithm is developed for the deterministic problem, where the power allocation among the LUs follows a secrecy water-filling structure, and each antenna position is selected by a grid search and refined by majorization–minimization. Simulation results show that the proposed design outperforms the benchmark schemes while allocating less power to the AN, and requires fewer antennas to achieve a given ESSR.**

***Index Terms*—Artificial noise, movable antenna, physical layer security, statistical CSI, two-timescale design.**

I. Introduction

PHYSICAL layer security (PLS) exploits the randomness and spatial characteristics of wireless channels to protect confidential messages against eavesdropping [1]–[3]. In multi-antenna systems, PLS is commonly achieved by secure precoding and artificial noise (AN) [4], [5], which steer the confidential signals toward the legitimate users (LUs) and degrade the channel of the eavesdropper (Eve), respectively. Both techniques, however, rely on the spatial separability between the LUs and Eve, which is limited for a conventional fixed-position antenna (FPA) array if Eve is located in a direction close to that of an LU and the line-of-sight (LoS) path is dominant [2], [6]. Recently, movable antennas (MAs) [7], [8] have emerged as a means to enhance this separability, where adjusting the antenna positions within a given region reshapes the channel correlation among different receivers without additional radio-frequency (RF) chains [9]–[11].

For MA-enabled PLS, the transmit beamforming and the antenna positions have been jointly optimized to maximize the secrecy rate with perfect channel state information (CSI) [6] and without the instantaneous CSI of the eavesdroppers [12]. With AN, the precoding matrix, the AN covariance matrix, and the antenna positions have been jointly optimized for a secure multiple-input multiple-output (MIMO) system [13], and null-space AN has been combined with MAs to secure the transmission without the CSI of Eve [14]. A deterministic equivalent of the ergodic secrecy rate has been derived for a MIMO MA system with the statistical CSI of a multi-antenna Eve [15]. In [16], a sensing-assisted secure design has been developed, where the antenna positions improve both the estimation of the angles of departure (AoDs) of Eve and the secrecy rate. However, the antenna positions in [6], [12]–[15] are optimized based on the instantaneous CSI of the legitimate receivers, even if only the statistical CSI of Eve is required [15]. Since this CSI varies from one channel coherence interval (CI) to another, the antennas have to be repositioned in each CI, which incurs a high operational complexity [17]. These designs also require the CSI over the entire movable region, whose acquisition entails channel measurements at many antenna positions [17], [18]. The design in [16], on the other hand, assumes LoS channels and thus ignores the small-scale fading.

To reduce the frequency of antenna movement and the CSI acquisition overhead, two-timescale designs have been developed for MA systems [17], [18], following those for intelligent reflecting surfaces [19]. In these designs, the antenna positions are optimized based on the statistical CSI, whereas the beamforming is designed based on the instantaneous CSI at the optimized positions. Specifically, the antenna positions have been optimized for a multiuser downlink with maximum-ratio transmission and zero-forcing (ZF) precoding in [17] and for a multiuser uplink with linear and successive interference cancellation receivers in [18]. However, these works aim at maximizing the ergodic sum rate without considering eavesdropping. In particular, the ergodic-rate approximations for ZF precoding adopted in [17], [18], [20] characterize only the signal power received by the intended users. These approximations therefore depend on the antenna positions only through the channel correlations among the users, so that the MAs bring no rate gain for a single user [17, Remark 2]. By contrast, for secure transmission, the ergodic rate of Eve further depends on the correlations between the channels of Eve and the LUs, which cannot be captured by these approximations. To the best of our knowledge, the two-timescale MA design for secure transmission remains unexplored.

In this paper, we consider an MA-enabled multiuser downlink with a passive Eve, where the base station (BS) adopts ZF

The authors are with ... (e-mail: ...).

precoding and null-space AN. The main contributions of this paper are summarized as follows. First, we formulate an ergodic secrecy sum rate (ESSR) maximization problem, where the antenna positions and the long-term power allocation of the confidential signals and AN are jointly optimized. Unlike [15], where the statistical CSI is exploited only for Eve, the antenna positions are optimized based on the statistical CSI of both the LUs and Eve, so that they need not be adjusted in each CI. Second, since the ZF directions and the AN subspace vary with the random channels of the LUs, we prove that the information leakage and the AN power received by Eve are conditionally independent given these channels. Based on this property, we derive a closed-form approximation of the ergodic wiretap rate, which, unlike the approximations in [17], [18], [20], captures the LoS correlations between Eve and the LUs. This approximation reveals that the MAs can reduce the information leakage and increase the AN received by Eve, even for a single LU.

Third, we develop an alternating optimization (AO) algorithm for the resulting deterministic problem. For given antenna positions and AN power, the optimal power allocation among the LUs is derived in a secrecy water-filling form, where an LU is allocated nonzero power only if its effective channel gain exceeds that of Eve for its signal. For a given power allocation, each antenna position is first selected by a grid search and then refined by majorization–minimization (MM), where a rank-one structure of the objective function reduces the cost of evaluating each grid point. Simulation results show that the proposed design outperforms the benchmark schemes, including the rate-oriented MA design and antenna selection (AS), while allocating less power to the AN, and that its gain persists for a single LU.

The rest of this paper is organized as follows: Section II presents the system model and the problem formulation, Section III analyzes the ergodic secrecy rate, Section IV develops the AO algorithm, Section V provides the simulation results, and Section VI concludes the paper.

Notations: Scalars, vectors, and matrices are denoted by italic, bold lower-case, and bold upper-case letters, respectively. $\mathbb{C}^{a\times b}$ and $\mathbb{R}^{a\times b}$ denote the sets of $a\times b$ complex and real matrices, respectively. $(\cdot)^{\mathrm{T}}$, $(\cdot)^*$, and $(\cdot)^{\mathrm{H}}$ denote the transpose, conjugate, and conjugate transpose, and $|\cdot|$, $\|\cdot\|$, and $\mathrm{tr}(\cdot)$ the modulus (or the cardinality of a set), Euclidean norm, and trace, respectively. $[\mathbf{x}]_i$ and $[\mathbf{X}]_{i,j}$ denote the i-th entry of $\mathbf{x}$ and the (i,j)-th entry of $\mathbf{X}$, $\mathrm{diag}(x_1,\ldots,x_M)$ the diagonal matrix with diagonal entries $x_1,\ldots,x_M$, and $\mathbf{X}^{1/2}$ the entrywise square root of a nonnegative diagonal matrix $\mathbf{X}$. $\mathbf{I}_N$ denotes the $N\times N$ identity matrix, $\mathbf{e}_m$ the m-th column of an identity matrix, and $\mathcal{CN}(\boldsymbol{\mu},\boldsymbol{\Sigma})$ the proper complex Gaussian distribution with mean $\boldsymbol{\mu}$ and covariance matrix $\boldsymbol{\Sigma}$. $\mathbf{X}\succeq\mathbf{0}$ ($\mathbf{X}\succ\mathbf{0}$) means that $\mathbf{X}$ is positive semidefinite (definite), and $\mathbf{X}_1\succeq\mathbf{X}_2$ means $\mathbf{X}_1-\mathbf{X}_2\succeq\mathbf{0}$. $j\triangleq\sqrt{-1}$, $\mathbb{E}\{\cdot\}$ and $\mathrm{Var}\{\cdot\}$ denote the expectation and variance, $\mathrm{Re}\{\cdot\}$ the real part, $\nabla_{\mathbf{x}}f$ the gradient of f with respect to $\mathbf{x}$, $[x]^+\triangleq\max\{x,0\}$, $\emptyset$ the empty set, $\setminus$ the set difference, and $\mathcal{O}(\cdot)$ and $o(\cdot)$ the big-O and little-o notations, respectively.

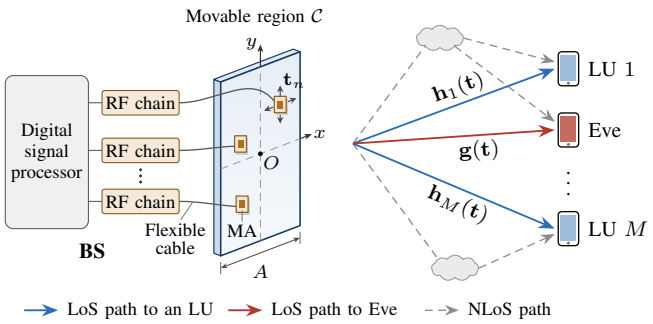


Fig. 1. An MA-enabled multiuser downlink system with a passive Eve.

II. System Model and Problem Formulation

A. MA-Enabled Secure Multiuser Downlink System

As illustrated in Fig. 1, we consider the downlink of a multiuser system, where a BS equipped with N MAs serves M single-antenna LUs in the presence of a single-antenna passive Eve. Let $\mathcal{M}\triangleq\{1,\ldots,M\}$ and $\mathcal{N}\triangleq\{1,\ldots,N\}$ denote the index sets of the LUs and the MAs, respectively. To transmit AN in the null space of the channels of the LUs, we assume $N\geq M+1$. The MAs are connected to the RF chains via flexible cables and can move within a two-dimensional square region $\mathcal{C}\triangleq[-A/2,A/2]\times[-A/2,A/2]$ of side length A [7], [8]. In the local Cartesian coordinate system of $\mathcal{C}$, the position of the n-th MA is denoted by $\mathbf{t}_n\triangleq[x_n,y_n]^{\mathrm{T}}\in\mathcal{C}$, and the positions of all the MAs are collected in $\mathbf{t}\triangleq[\mathbf{t}_1^{\mathrm{T}},\ldots,\mathbf{t}_N^{\mathrm{T}}]^{\mathrm{T}}\in\mathbb{R}^{2N\times1}$. To mitigate mutual coupling, any two MAs must be separated by at least a minimum distance $D_{\min}$, and the residual coupling is neglected.

Since the size of $\mathcal{C}$ is much smaller than the propagation distance, moving the MAs changes only the phases of the LoS paths, whereas their AoDs and amplitudes remain unchanged [8]. Let $\theta_m\in[-\pi/2,\pi/2]$ and $\phi_m\in[-\pi/2,\pi/2]$ denote the elevation and azimuth AoDs of the LoS path from the BS to the m-th LU, respectively, and define $\mathbf{a}_m\triangleq[\cos\theta_m\sin\phi_m,\ \sin\theta_m]^{\mathrm{T}}$. Then, the propagation distance of the LoS path from the n-th MA differs from that from the origin of $\mathcal{C}$ by $\mathbf{t}_n^{\mathrm{T}}\mathbf{a}_m$ [8], which results in a phase difference of $2\pi\mathbf{t}_n^{\mathrm{T}}\mathbf{a}_m/\lambda$, where λ is the carrier wavelength. Hence, the LoS component of the channel from the BS to the m-th LU is given by [17]

$$\bar{\mathbf{h}}_m(\mathbf{t})\triangleq\left[e^{j\frac{2\pi}{\lambda}\mathbf{t}_1^{\mathrm{T}}\mathbf{a}_m},\ldots,e^{j\frac{2\pi}{\lambda}\mathbf{t}_N^{\mathrm{T}}\mathbf{a}_m}\right]^{\mathrm{T}}\in\mathbb{C}^{N\times1}. \tag{1}$$

As in [17], [18], the channel from the BS to the m-th LU follows Rician fading and is given by

$$\mathbf{h}_m(\mathbf{t})=\sqrt{\frac{\kappa_m\beta_m}{\kappa_m+1}}\,\bar{\mathbf{h}}_m(\mathbf{t})+\sqrt{\frac{\beta_m}{\kappa_m+1}}\,\tilde{\mathbf{h}}_m, \tag{2}$$

where β_m is the large-scale fading coefficient, $\kappa_m\geq0$ is the Rician factor, and $\tilde{\mathbf{h}}_m\sim\mathcal{CN}(\mathbf{0},\mathbf{I}_N)$ is the non-LoS (NLoS) component. Similarly, the channel from the BS to Eve is given by

$$\mathbf{g}(\mathbf{t})=\sqrt{\frac{\kappa_{\mathrm{e}}\beta_{\mathrm{e}}}{\kappa_{\mathrm{e}}+1}}\,\bar{\mathbf{g}}(\mathbf{t})+\sqrt{\frac{\beta_{\mathrm{e}}}{\kappa_{\mathrm{e}}+1}}\,\tilde{\mathbf{g}}, \tag{3}$$

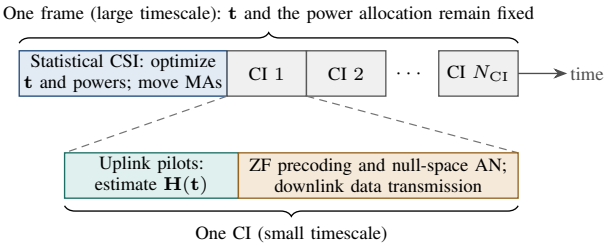


Fig. 2. Two-timescale transmission protocol (CI: coherence interval).

where β_{e}, κ_{e}, and $\tilde{\mathbf{g}} \sim \mathcal{CN}(\mathbf{0}, \mathbf{I}_N)$ are defined similarly to those in (2), and $\bar{\mathbf{g}}(\mathbf{t})$ is given by (1) with $\mathbf{a}_m$ replaced by $\mathbf{a}_{\mathrm{e}} \triangleq [\cos\theta_{\mathrm{e}} \sin\phi_{\mathrm{e}},\ \sin\theta_{\mathrm{e}}]^{\mathrm{T}}$ for the elevation and azimuth AoDs θ_{e} and ϕ_{e} of Eve. The NLoS components $\tilde{\mathbf{h}}_1, \ldots, \tilde{\mathbf{h}}_M$ and $\tilde{\mathbf{g}}$ are mutually independent. Let $\mathbf{H}(\mathbf{t}) \triangleq [\mathbf{h}_1(\mathbf{t}), \ldots, \mathbf{h}_M(\mathbf{t})] \in \mathbb{C}^{N\times M}$ denote the channel matrix from the BS to the LUs, and let $\bar{\mathbf{H}}(\mathbf{t}) \triangleq [\bar{\mathbf{h}}_1(\mathbf{t}), \ldots, \bar{\mathbf{h}}_M(\mathbf{t})]$ and $\tilde{\mathbf{H}} \triangleq [\tilde{\mathbf{h}}_1, \ldots, \tilde{\mathbf{h}}_M]$ collect its LoS and NLoS components, respectively. The Rician factors of the LUs are collected in $\mathbf{K} \triangleq \mathrm{diag}(\kappa_1, \ldots, \kappa_M)$.

B. Two-Timescale Transmission Protocol

The statistical CSI is determined by the large-scale fading and the LoS geometry, i.e., by $\{\beta_m, \kappa_m, \theta_m, \phi_m\}_{m\in\mathcal{M}}$ for the LUs and by $\{\beta_{\mathrm{e}}, \kappa_{\mathrm{e}}, \theta_{\mathrm{e}}, \phi_{\mathrm{e}}\}$ for Eve, and it varies much more slowly than the NLoS components $\tilde{\mathbf{H}}$ and $\tilde{\mathbf{g}}$, which change from one CI to another. Following [12], we assume that the statistical CSI of Eve is known at the BS.[1]

Based on these two timescales, we adopt the transmission protocol in Fig. 2, where the time is divided into frames, and each frame consists of $N_{\mathrm{CI}} \gg 1$ CIs with constant statistical CSI. At the beginning of each frame, the BS optimizes the antenna positions and the long-term power allocation based on the statistical CSI and then moves the MAs to the optimized positions. In each CI of the frame, the BS estimates the channels of the LUs at these positions from uplink pilots by exploiting the channel reciprocity of time-division duplexing and then designs the precoders and the AN. For ease of exposition, the channels of the LUs are assumed to be perfectly estimated, whereas the NLoS component $\tilde{\mathbf{g}}$ of Eve is unknown to the BS. Compared with the designs based on instantaneous CSI, this protocol moves the MAs only once per frame and requires the CSI of the LUs only at the current antenna positions.

C. Signal Model and Ergodic Secrecy Rate

In each CI, the transmit signal of the BS is given by

$$\mathbf{x} = \sum_{m=1}^{M} \mathbf{w}_m s_m + \mathbf{z}, \tag{4}$$

where $s_m \sim \mathcal{CN}(0,1)$ is the confidential symbol for the m-th LU, $\mathbf{w}_m \in \mathbb{C}^{N\times 1}$ is the corresponding precoding vector, and $\mathbf{z} \sim \mathcal{CN}(\mathbf{0}, \mathbf{\Sigma})$ is the AN with covariance matrix $\mathbf{\Sigma} \succeq \mathbf{0}$. The symbols $s_1, \ldots, s_M$ and the AN $\mathbf{z}$ are mutually independent, and the transmit power satisfies $\sum_{m=1}^{M} \|\mathbf{w}_m\|^2 + \mathrm{tr}(\mathbf{\Sigma}) \le P_{\mathrm{tot}}$, where P_{tot} is the maximum transmit power of the BS.

The signal received by the m-th LU is given by

$$y_m = \mathbf{h}_m^{\mathrm{H}}(\mathbf{t})\mathbf{x} + n_m, \tag{5}$$

where $n_m \sim \mathcal{CN}(0, \sigma_m^2)$ is the additive white Gaussian noise (AWGN) at the m-th LU. Accordingly, the signal-to-interference-plus-noise ratio (SINR) of the m-th LU is given by

$$\gamma_m = \frac{|\mathbf{h}_m^{\mathrm{H}}(\mathbf{t})\mathbf{w}_m|^2}{\sum_{i=1, i\neq m}^{M} |\mathbf{h}_m^{\mathrm{H}}(\mathbf{t})\mathbf{w}_i|^2 + \mathbf{h}_m^{\mathrm{H}}(\mathbf{t})\mathbf{\Sigma}\mathbf{h}_m(\mathbf{t}) + \sigma_m^2}. \tag{6}$$

Similarly, the signal received by Eve is given by

$$y_{\mathrm{e}} = \mathbf{g}^{\mathrm{H}}(\mathbf{t})\mathbf{x} + n_{\mathrm{e}}, \tag{7}$$

where $n_{\mathrm{e}} \sim \mathcal{CN}(0, \sigma_{\mathrm{e}}^2)$ is the AWGN at Eve. Since the BS does not know the receiver structure of the passive Eve, we consider the worst case where Eve can cancel the signals of the other LUs when intercepting s_m, e.g., via multiuser detection [21]. This worst-case model provides a secrecy guarantee that does not depend on the decoding capability of Eve, and the resulting SINR of Eve for s_m is given by

$$\gamma_{\mathrm{e},m} = \frac{|\mathbf{g}^{\mathrm{H}}(\mathbf{t})\mathbf{w}_m|^2}{\mathbf{g}^{\mathrm{H}}(\mathbf{t})\mathbf{\Sigma}\mathbf{g}(\mathbf{t}) + \sigma_{\mathrm{e}}^2}, \tag{8}$$

which upper-bounds that of an Eve treating the signals of the other LUs as interference.

Since the instantaneous CSI of Eve is unknown, the BS cannot adapt the transmission rate to each realization of $\tilde{\mathbf{g}}$. Instead, the confidential message of each LU is encoded over the N_{CI} CIs of a frame, which experience independent realizations of the NLoS components. With this coding scheme, the following ergodic secrecy rate is achievable for the m-th LU [21], [22]:

$$R_m^{\mathrm{sec}} \triangleq \left[\bar{R}_m - \bar{R}_{\mathrm{e},m}\right]^+, \tag{9}$$

where

$$\bar{R}_m \triangleq \mathbb{E}\{\log_2(1+\gamma_m)\}, \quad \bar{R}_{\mathrm{e},m} \triangleq \mathbb{E}\{\log_2(1+\gamma_{\mathrm{e},m})\} \tag{10}$$

denote the ergodic rate of the m-th LU and the ergodic wiretap rate of Eve for s_m, respectively, with the expectations taken over $\tilde{\mathbf{H}}$ and $\tilde{\mathbf{g}}$ for a given $\mathbf{t}$. The ESSR is then given by $\sum_{m=1}^{M} R_m^{\mathrm{sec}}$.

D. Problem Formulation

Since the precoders and the AN covariance matrix are adapted to the instantaneous CSI of the LUs, they are designed for each realization of $\mathbf{H}(\mathbf{t})$, whereas the antenna positions are

[1]The statistical CSI of Eve can be obtained, e.g., from prior knowledge of its location, by sensing its direction [16], or from its historical signals if it is an untrusted node.

designed based on the statistical CSI. Accordingly, the ESSR maximization problem is formulated as

$$(\mathrm{P1}):\ \max_{\mathbf{t},\{\mathbf{w}_m\},\mathbf{\Sigma}}\ \sum_{m=1}^{M} R_m^{\mathrm{sec}} \tag{11a}$$

$$\text{s.t.}\ \ \sum_{m=1}^{M}\|\mathbf{w}_m\|^2+\mathrm{tr}(\mathbf{\Sigma})\le P_{\mathrm{tot}},$$

$$\mathbf{\Sigma}\succeq\mathbf{0},\ \forall\mathbf{H}(\mathbf{t}), \tag{11b}$$

$$\mathbf{t}_n\in\mathcal{C},\ \forall n\in\mathcal{N}, \tag{11c}$$

$$\|\mathbf{t}_n-\mathbf{t}_i\|\ge D_{\min},\ \forall n,i\in\mathcal{N},\ n\ne i. \tag{11d}$$

Problem (P1) is a nonconvex stochastic optimization problem, which is challenging to solve. Specifically, the ergodic rates in (10) have no closed-form expressions, and the precoders and the AN covariance matrix need to be optimized for every realization of $\mathbf{H}(\mathbf{t})$. Moreover, the objective function is nonconcave with respect to $\mathbf{t}$ due to the phases of the LoS components in (1), and the minimum-distance constraints in (11d) are nonconvex. To tackle these challenges, we first adopt ZF precoding and null-space AN with a long-term power allocation and approximate the ergodic rates in closed form in Section III, which yields a deterministic problem in the long-term variables only. Then, an AO algorithm is developed for this deterministic problem in Section IV.

III. Two-Timescale ZF-AN Design and Ergodic Secrecy Rate Analysis

A. ZF Precoding and Null-Space AN

Since the instantaneous CSI of Eve is unavailable for reducing the information leakage in each CI, we adopt ZF precoding and null-space AN [5], [21], which require only the instantaneous CSI of the LUs. Specifically, the precoder of the m-th LU is given by $\mathbf{w}_m=\sqrt{p_m}\,\bar{\mathbf{w}}_m$, where $p_m\ge 0$ is the power allocated to the m-th LU, and

$$\bar{\mathbf{w}}_m\triangleq\frac{\mathbf{H}(\mathbf{t})\big(\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t})\big)^{-1}\mathbf{e}_m}{\big\|\mathbf{H}(\mathbf{t})\big(\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t})\big)^{-1}\mathbf{e}_m\big\|} \tag{12}$$

is the normalized ZF precoding vector, which satisfies $\mathbf{h}_i^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{w}}_m=0,\ \forall i\ne m$, so that the inter-user interference is eliminated. Moreover, the AN is isotropically distributed in the null space of $\mathbf{H}^{\mathrm{H}}(\mathbf{t})$ with the covariance matrix $\mathbf{\Sigma}=q\mathbf{P}^{\perp}$, where $q\ge 0$ is the AN power per dimension, and

$$\mathbf{P}^{\perp}\triangleq\mathbf{I}_N-\mathbf{H}(\mathbf{t})\big(\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t})\big)^{-1}\mathbf{H}^{\mathrm{H}}(\mathbf{t}) \tag{13}$$

is the orthogonal projection onto the null space of $\mathbf{H}^{\mathrm{H}}(\mathbf{t})$. Since $\mathbf{H}(\mathbf{t})$ has full column rank with probability one, we have $\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{P}^{\perp}=\mathbf{0}$ and $\mathrm{tr}(\mathbf{P}^{\perp})=N-M$, so that the AN causes no interference to the LUs, and the transmit power in each CI is $\sum_{m=1}^{M}p_m+(N-M)q$. Although the AN could be further shaped within the null space based on the statistical CSI of Eve, we adopt isotropic AN as in [5], [21], since it requires no knowledge of Eve and allows us to focus on the effect of the antenna positions.

The powers $\mathbf{p}\triangleq[p_1,\ldots,p_M]^{\mathrm{T}}$ and q constitute the long-term power allocation, which is optimized based on the statistical CSI and remains fixed within a frame, whereas $\bar{\mathbf{w}}_m$ and $\mathbf{P}^{\perp}$ are updated in each CI according to $\mathbf{H}(\mathbf{t})$. As a result, the ZF-AN design involves no optimization in each CI. With this design, the SINRs in (6) and (8) reduce to

$$\gamma_m=\frac{p_m|\mathbf{h}_m^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{w}}_m|^2}{\sigma_m^2}=\frac{p_m}{\sigma_m^2\big[(\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t}))^{-1}\big]_{m,m}}, \tag{14}$$

$$\gamma_{\mathrm{e},m}=\frac{p_m|\mathbf{g}^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{w}}_m|^2}{q\,\mathbf{g}^{\mathrm{H}}(\mathbf{t})\mathbf{P}^{\perp}\mathbf{g}(\mathbf{t})+\sigma_{\mathrm{e}}^2}, \tag{15}$$

where the second equality in (14) follows from $|\mathbf{h}_m^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{w}}_m|^2=1/[(\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t}))^{-1}]_{m,m}$ by (12).

The equal power allocation in [17] and the information–AN power splitting with equal power per LU are special cases of $(\mathbf{p},q)$. With the ZF-AN design, (P1) is restricted to

$$(\mathrm{P2}):\ \max_{\mathbf{t},\mathbf{p},q}\ \sum_{m=1}^{M}R_m^{\mathrm{sec}}(\mathbf{t},p_m,q) \tag{16a}$$

$$\text{s.t.}\ \ \sum_{m=1}^{M}p_m+(N-M)q\le P_{\mathrm{tot}}, \tag{16b}$$

$$p_m\ge 0,\ \forall m\in\mathcal{M},\quad q\ge 0, \tag{16c}$$

$$\mathbf{t}_n\in\mathcal{C},\ \forall n\in\mathcal{N}, \tag{16d}$$

$$\|\mathbf{t}_n-\mathbf{t}_i\|\ge D_{\min},\ \forall n,i\in\mathcal{N},\ n\ne i, \tag{16e}$$

where $R_m^{\mathrm{sec}}(\mathbf{t},p_m,q)$ denotes (9) with the SINRs in (14) and (15), and (16b) and (16c) guarantee (11b) in every CI. Since the ZF-AN design is a particular choice of the precoders and the AN covariance matrix in (P1), (P2) is a restriction of (P1), and its optimal value is a lower bound on that of (P1). However, (P2) is still intractable because the ergodic rates in (16a) have no closed-form expressions. To address this issue, the ergodic rates of the LUs and Eve are approximated in Sections III-B and III-C, respectively.

B. Ergodic Rate of the LUs

Let $\tilde{\beta}_m\triangleq\beta_m/(\kappa_m+1)$ denote the power of the NLoS component of the m-th LU, and define $\mathbf{B}\triangleq\mathrm{diag}(\tilde{\beta}_1,\ldots,\tilde{\beta}_M)$ and $\mathbf{L}(\mathbf{t})\triangleq\bar{\mathbf{H}}(\mathbf{t})\mathbf{K}^{1/2}$. From (2), the channel matrix of the LUs can be written as

$$\mathbf{H}(\mathbf{t})=\big(\mathbf{L}(\mathbf{t})+\tilde{\mathbf{H}}\big)\mathbf{B}^{1/2}. \tag{17}$$

By (14), the ergodic rate of the m-th LU is determined by the distribution of $[(\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t}))^{-1}]_{m,m}$. Since $\log_2(1+p_m/(\sigma_m^2 z))$ is convex in $z>0$, applying Jensen's inequality to (14) yields

$$\bar{R}_m\ge\log_2\left(1+\frac{p_m}{\sigma_m^2\mathbb{E}\big\{[(\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t}))^{-1}]_{m,m}\big\}}\right). \tag{18}$$

For Rician fading, the expectation in (18) has no closed-form expression. Following [20], we approximate the Gram matrix $\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t})$ by a central Wishart matrix with N degrees of freedom and the same mean $\mathbf{B}^{1/2}\mathbf{\Phi}(\mathbf{t})\mathbf{B}^{1/2}$, where

$$\mathbf{\Phi}(\mathbf{t})\triangleq\mathbf{L}^{\mathrm{H}}(\mathbf{t})\mathbf{L}(\mathbf{t})+N\mathbf{I}_M. \tag{19}$$

Since the inverse of this Wishart matrix has the mean $N\mathbf{B}^{-1/2}\mathbf{\Omega}(\mathbf{t})\mathbf{B}^{-1/2}/(N-M)$ with $\mathbf{\Omega}(\mathbf{t})\triangleq\mathbf{\Phi}^{-1}(\mathbf{t})$, we

substitute this mean into (18) and approximate the ergodic rate of the m-th LU by

$$\bar{R}_m \approx \tilde{R}_m(\mathbf{t}, p_m) \triangleq \log_2\big(1+\eta_m(\mathbf{t})\,p_m\big), \tag{20}$$

where $\eta_m(\mathbf{t}) \triangleq \zeta_m(N-M)/(N\omega_m(\mathbf{t}))$ is the effective channel gain of the m-th LU, $\zeta_m \triangleq \tilde{\beta}_m/\sigma_m^2$, and $\omega_m(\mathbf{t}) \triangleq [\mathbf{\Omega}(\mathbf{t})]_{m,m}$.

The approximation in (20) is equivalent to that in [17, Sec. IV-A]. For Rayleigh fading, the central Wishart model is exact, and (20) reduces to the well-known lower bound $\log_2(1+\zeta_m p_m(N-M))$ [23]. For Rician fading, (20) underestimates the ergodic rate in the LoS-dominant regime, as shown in Section V-B. In addition, the antenna positions affect $\tilde{R}_m(\mathbf{t}, p_m)$ only through $\omega_m(\mathbf{t})$. Since $\mathbf{\Phi}(\mathbf{t}) \succeq N\mathbf{I}_M$ and $[\mathbf{\Omega}(\mathbf{t})]_{m,m} \geq 1/[\mathbf{\Phi}(\mathbf{t})]_{m,m} = 1/(N(\kappa_m+1))$ [24], we have

$$\zeta_m(N-M) \leq \eta_m(\mathbf{t}) \leq \zeta_m(N-M)(\kappa_m+1), \tag{21}$$

where the upper bound is achieved if $\bar{\mathbf{h}}_m^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{h}}_i(\mathbf{t}) = 0$ for all $i \neq m$ with $\kappa_i > 0$. By decorrelating the LoS component of the m-th LU from those of the other LUs, the antenna positions can thus increase $\eta_m(\mathbf{t})$ by up to a factor of $\kappa_m + 1$.

C. Ergodic Wiretap Rate of Eve

Unlike γ_m in (14), which depends on $\mathbf{H}(\mathbf{t})$ only through $[(\mathbf{H}^{\mathrm{H}}(\mathbf{t})\mathbf{H}(\mathbf{t}))^{-1}]_{m,m}$, the SINR of Eve in (15) depends on the ZF direction $\bar{\mathbf{w}}_m$ and the AN subspace, both of which vary randomly with $\mathbf{H}(\mathbf{t})$. To handle this dependence, we first characterize the information leakage and the AN power received by Eve for a given $\mathbf{H}(\mathbf{t})$.

Lemma 1: Conditioned on $\mathbf{H}(\mathbf{t})$, the information leakage $X_m \triangleq |\mathbf{g}^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{w}}_m|^2$ and the AN power $Y \triangleq \mathbf{g}^{\mathrm{H}}(\mathbf{t})\mathbf{P}^{\perp}\mathbf{g}(\mathbf{t})$ received by Eve are independent, and their conditional means are given by

$$\mathbb{E}\{X_m|\mathbf{H}(\mathbf{t})\} = \tilde{\beta}_{\mathrm{e}}\big(\kappa_{\mathrm{e}}\bar{X}_m + 1\big), \tag{22}$$

$$\mathbb{E}\{Y|\mathbf{H}(\mathbf{t})\} = \tilde{\beta}_{\mathrm{e}}\big(\kappa_{\mathrm{e}}\bar{Y} + N - M\big), \tag{23}$$

where $\tilde{\beta}_{\mathrm{e}} \triangleq \beta_{\mathrm{e}}/(\kappa_{\mathrm{e}}+1)$ is the power of the NLoS component of Eve, and $\bar{X}_m \triangleq |\bar{\mathbf{g}}^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{w}}_m|^2$ and $\bar{Y} \triangleq \bar{\mathbf{g}}^{\mathrm{H}}(\mathbf{t})\mathbf{P}^{\perp}\bar{\mathbf{g}}(\mathbf{t})$ are the LoS counterparts of X_m and Y, respectively.

Proof: See Appendix A. ∎

Lemma 1 shows that the information leakage and the AN power received by Eve are determined by orthogonal components of the wiretap channel, namely, its component along $\bar{\mathbf{w}}_m$ and that in the null space of $\mathbf{H}^{\mathrm{H}}(\mathbf{t})$, respectively. Based on this property, we approximate $\bar{R}_{\mathrm{e},m} = \mathbb{E}\{\log_2(1 + p_m X_m/(qY+\sigma_{\mathrm{e}}^2))\}$ by replacing X_m and Y with their means, as in [20, Lemma 1]. This approximation is accurate when X_m and Y concentrate around their means, e.g., when the NLoS components of both Eve and the LUs are weak (see Appendix A). In particular, it is asymptotically exact as $\kappa_{\mathrm{e}} \to \infty$ and $\kappa_m \to \infty$, $\forall m \in \mathcal{M}$, provided that the LoS components of the LUs are linearly independent. Since the rate is concave in X_m and convex in Y, the approximation is neither an upper nor a lower bound, and its accuracy is evaluated in Section V-B. Using Lemma 1 and taking the expectation over $\tilde{\mathbf{H}}$, we obtain

$$\bar{R}_{\mathrm{e},m} \approx \log_2\left(1 + \frac{p_m\big(\kappa_{\mathrm{e}}\mathbb{E}\{\bar{X}_m\}+1\big)}{q\big(\kappa_{\mathrm{e}}\mathbb{E}\{\bar{Y}\}+N-M\big)+\bar{\sigma}_{\mathrm{e}}^2}\right), \tag{24}$$

where $\bar{\sigma}_{\mathrm{e}}^2 \triangleq \sigma_{\mathrm{e}}^2/\tilde{\beta}_{\mathrm{e}}$ is the normalized noise power of Eve.

The expectations $\mathbb{E}\{\bar{X}_m\}$ and $\mathbb{E}\{\bar{Y}\}$ in (24), i.e., the average LoS energies of Eve along the ZF direction of the m-th LU and in the AN subspace, still have no closed-form expressions. Since $\bar{\mathbf{w}}_m$ and $\mathbf{P}^{\perp}$ are invariant to the scaling of the columns of $\mathbf{H}(\mathbf{t})$, they are determined by $\mathbf{L}(\mathbf{t}) + \tilde{\mathbf{H}}$ in (17), whose Gram matrix has the mean $\mathbf{\Phi}(\mathbf{t})$. As derived in Appendix B, replacing the inverse of this Gram matrix with $\mathbf{\Omega}(\mathbf{t})$, where the NLoS contribution to the AN subspace is calibrated by the identity $\mathrm{tr}(\mathbf{P}^{\perp}) = N - M$, yields $\mathbb{E}\{\bar{X}_m\} \approx c_m(\mathbf{t})$ and $\mathbb{E}\{\bar{Y}\} \approx d(\mathbf{t})$ with

$$c_m(\mathbf{t}) \triangleq \frac{\big|[\mathbf{\Omega}(\mathbf{t})\mathbf{v}(\mathbf{t})]_m\big|^2 + N[\mathbf{\Omega}^2(\mathbf{t})]_{m,m}}{\omega_m(\mathbf{t})}, \tag{25}$$

$$d(\mathbf{t}) \triangleq \frac{(N-M)\big(N - \mathbf{v}^{\mathrm{H}}(\mathbf{t})\mathbf{\Omega}(\mathbf{t})\mathbf{v}(\mathbf{t})\big)}{N-M+N\mathrm{tr}(\mathbf{\Omega}(\mathbf{t}))}, \tag{26}$$

where $\mathbf{v}(\mathbf{t}) \triangleq \mathbf{L}^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{g}}(\mathbf{t}) = \mathbf{K}^{1/2}\bar{\mathbf{H}}^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{g}}(\mathbf{t})$ collects the LoS correlations between Eve and the LUs weighted by $\mathbf{K}^{1/2}$. Substituting (25) and (26) into (24), we approximate the ergodic wiretap rate of Eve for s_m by

$$\bar{R}_{\mathrm{e},m} \approx \tilde{R}_{\mathrm{e},m}(\mathbf{t}, p_m, q) \triangleq \log_2\left(1 + \frac{\xi_m(\mathbf{t})\,p_m}{q\,\psi(\mathbf{t})+\bar{\sigma}_{\mathrm{e}}^2}\right), \tag{27}$$

where $\xi_m(\mathbf{t}) \triangleq \kappa_{\mathrm{e}}c_m(\mathbf{t}) + 1$ and $\psi(\mathbf{t}) \triangleq \kappa_{\mathrm{e}}d(\mathbf{t}) + N - M$ represent the normalized information leakage for the m-th LU and the normalized AN power received by Eve, respectively. The approximations $c_m(\mathbf{t})$ and $d(\mathbf{t})$ have the following properties.

Proposition 1: The quantities $c_m(\mathbf{t})$, $d(\mathbf{t})$, $\mathbb{E}\{\bar{X}_m\}$, and $\mathbb{E}\{\bar{Y}\}$ lie in $[0, N]$. Moreover, $c_m(\mathbf{t}) = \mathbb{E}\{\bar{X}_m\}$ and $d(\mathbf{t}) = \mathbb{E}\{\bar{Y}\}$ if $\kappa_m = 0$, $\forall m \in \mathcal{M}$. For linearly independent LoS components of the LUs, $c_m(\mathbf{t}) - \mathbb{E}\{\bar{X}_m\}$ and $d(\mathbf{t}) - \mathbb{E}\{\bar{Y}\}$ vanish as $\mathbf{K} = \kappa\mathbf{K}_0$ with $\kappa \to \infty$ for any diagonal $\mathbf{K}_0 \succ \mathbf{0}$.

Proof: See Appendix B. ∎

Unlike the approximations for ZF precoding in [17], [20], which involve only the diagonal entries of $\mathbf{\Omega}(\mathbf{t})$, (27) captures the LoS correlation between Eve and the LUs via $\mathbf{v}(\mathbf{t})$.

D. Secrecy Mechanisms of the MAs

By (20) and (27), the antenna positions affect the approximate ergodic rates only through $\omega_m(\mathbf{t})$, $c_m(\mathbf{t})$, and $d(\mathbf{t})$. In this subsection, we examine how the antenna positions improve the secrecy performance via these quantities.

1) LoS decorrelation: By (19), (25), and (26), the quantities $\omega_m(\mathbf{t})$, $c_m(\mathbf{t})$, and $d(\mathbf{t})$ are determined by the LoS correlations among the LUs and between Eve and the LUs, which are given by

$$[\bar{\mathbf{H}}^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{H}}(\mathbf{t})]_{i,k} = \sum_{n=1}^{N} e^{j\frac{2\pi}{\lambda}\mathbf{t}_n^{\mathrm{T}}(\mathbf{a}_k-\mathbf{a}_i)}, \quad i,k \in \mathcal{M}, \tag{28}$$

$$[\bar{\mathbf{H}}^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{g}}(\mathbf{t})]_i = \sum_{n=1}^{N} e^{j\frac{2\pi}{\lambda}\mathbf{t}_n^{\mathrm{T}}(\mathbf{a}_{\mathrm{e}}-\mathbf{a}_i)}, \quad i \in \mathcal{M}, \tag{29}$$

respectively, where $\rho_m(\mathbf{t}) \triangleq |\bar{\mathbf{h}}_m^{\mathrm{H}}(\mathbf{t})\bar{\mathbf{g}}(\mathbf{t})|/N \in [0,1]$ denotes the normalized LoS correlation between Eve and the m-th LU. A weaker LoS correlation between the m-th LU and the other LUs reduces $\omega_m(\mathbf{t})$ and thus increases the effective channel gain $\eta_m(\mathbf{t})$ according to (21). This decorrelation among the LUs is the only mechanism exploited by the rate-oriented MA design [17]. For secure transmission, the MAs offer two additional mechanisms: a smaller $c_m(\mathbf{t})$ reduces the information leakage, and a larger $d(\mathbf{t})$ increases the AN received by Eve. In particular, if $\mathbf{v}(\mathbf{t}) = \mathbf{0}$, i.e., the LoS component of Eve is orthogonal to those of all the LUs, then, for a given $\mathbf{\Phi}(\mathbf{t})$, $c_m(\mathbf{t})$ attains its minimum $N[\mathbf{\Omega}^2(\mathbf{t})]_{m,m}/\omega_m(\mathbf{t})$ caused by the NLoS components, and $d(\mathbf{t})$ attains its maximum $N(N-M)/(N-M+N\mathrm{tr}(\mathbf{\Omega}(\mathbf{t})))$. By decorrelating the LoS component of Eve from those of the LUs, the MAs can reduce the information leakage and increase the AN received by Eve at the same time. In contrast, an FPA array can hardly achieve this decorrelation when Eve is located in a direction close to that of an LU. If $\kappa_{\mathrm{e}} = 0$, then $\tilde{R}_{\mathrm{e},m} = \log_2(1+p_m/(q(N-M)+\bar{\sigma}_{\mathrm{e}}^2))$ does not depend on $\mathbf{t}$, since the statistical CSI of Eve carries no spatial information, and only the decorrelation among the LUs remains.

2) Single LU: If $M = 1$, then $\mathbf{\Phi}(\mathbf{t}) = N(\kappa_1+1)$ is a scalar, and $\eta_1 = \zeta_1(N-1)(\kappa_1+1)$ does not depend on $\mathbf{t}$.[2] In contrast,

$$c_1(\mathbf{t}) = \frac{\kappa_1 N \rho_1^2(\mathbf{t}) + 1}{\kappa_1 + 1}, \tag{30}$$

$$d(\mathbf{t}) = \frac{(N-1)(\kappa_1+1)}{(N-1)(\kappa_1+1)+1}\Big(N + \frac{1}{\kappa_1+1} - c_1(\mathbf{t})\Big) \tag{31}$$

depend on $\mathbf{t}$ through the normalized LoS correlation $\rho_1(\mathbf{t})$ between Eve and the LU. Therefore, unlike in the rate-oriented MA design, where the MAs bring no gain for a single user [17, Remark 2], the MAs enhance the secrecy of a single LU by reducing this correlation. For $M = 1$, the identity $\bar{\mathbf{w}}_1\bar{\mathbf{w}}_1^{\mathrm{H}} + \mathbf{P}^{\perp} = \mathbf{I}_N$ further implies $\bar{X}_1 + \bar{Y} = N$, so that reducing the leakage is equivalent to increasing the AN received by Eve. This identity is nearly preserved by (30) and (31), since $c_1(\mathbf{t}) + d(\mathbf{t}) - N = (c_1(\mathbf{t})-1)/((N-1)(\kappa_1+1)+1) \in [-1/4, 1/4]$.

3) High-SNR behavior and AN power: To obtain insight into the AN power, we consider the information–AN power splitting with equal power among the LUs, where $p_m = \alpha P_{\mathrm{tot}}/M$ and $q = (1-\alpha)P_{\mathrm{tot}}/(N-M)$ with the power-splitting factor $\alpha \in (0,1)$. As $P_{\mathrm{tot}} \to \infty$, i.e., in the high signal-to-noise ratio (SNR) regime, the approximate secrecy rate of the m-th LU satisfies

$$\tilde{R}_m - \tilde{R}_{\mathrm{e},m} = \log_2 \frac{\alpha P_{\mathrm{tot}} \eta_m(\mathbf{t})}{M} - \log_2\Big(1 + \frac{\alpha \Xi_m(\mathbf{t})}{1-\alpha}\Big) + o(1), \tag{32}$$

where $o(1)$ vanishes as $P_{\mathrm{tot}} \to \infty$, and $\Xi_m(\mathbf{t}) \triangleq \frac{(N-M)\xi_m(\mathbf{t})}{M\psi(\mathbf{t})}$ is the ratio of the normalized information leakage to the normalized AN power received by Eve. Hence, the high-SNR slope of the approximate ESSR is M regardless of $\mathbf{t}$, and the antenna positions affect only the constant term. The value of α that maximizes the sum of the constant terms in (32) satisfies $\sum_{m=1}^{M}\big[\frac{1}{\alpha} - \frac{1}{1-\alpha} - \frac{\Xi_m - 1}{1+\alpha(\Xi_m-1)}\big] = 0$, and for $\Xi_m = \Xi$, $\forall m \in \mathcal{M}$, it is given in closed form by

$$\alpha^{\star} = \frac{1}{1+\sqrt{\Xi}}. \tag{33}$$

Since the MAs can decrease $c_m(\mathbf{t})$ and increase $d(\mathbf{t})$, they decrease Ξ and thus increase $\alpha^{\star}$, so that less power is required for the AN. This equal-power case serves only to provide insight, whereas the long-term power allocation is optimized without this restriction in Section IV-A.

E. Approximate ESSR Maximization Problem

Combining (20) and (27), we approximate the ergodic secrecy rate of the m-th LU by

$$R_m^{\mathrm{sec}} \approx \tilde{R}_m^{\mathrm{sec}}(\mathbf{t}, p_m, q) \triangleq \big[\tilde{R}_m(\mathbf{t}, p_m) - \tilde{R}_{\mathrm{e},m}(\mathbf{t}, p_m, q)\big]^+, \tag{34}$$

which depends only on the statistical CSI. Replacing the ergodic secrecy rates in (P2) with (34) yields the following deterministic problem:

$$\begin{aligned}(\mathrm{P3}):\ \max_{\mathbf{t},\mathbf{p},q}\ & F(\mathbf{t},\mathbf{p},q) \triangleq \sum_{m=1}^{M}\Bigg[\log_2\big(1+\eta_m(\mathbf{t})p_m\big) \\ & - \log_2\Big(1 + \frac{\xi_m(\mathbf{t})p_m}{q\psi(\mathbf{t}) + \bar{\sigma}_{\mathrm{e}}^2}\Big)\Bigg] \quad (35a)\\ \text{s.t.}\ & \text{(16b)–(16e)},\end{aligned}$$

where the operator $[\cdot]^+$ in (34) is dropped without loss of optimality. Specifically, for any feasible $(\mathbf{t},\mathbf{p},q)$, setting $p_m = 0$ for every LU whose term in (35a) is negative yields another feasible solution. Since the m-th term depends only on p_m and q for a given $\mathbf{t}$, the objective value of this solution equals the approximate ESSR $\sum_{m=1}^{M}\tilde{R}_m^{\mathrm{sec}}(\mathbf{t},p_m,q)$ of the original solution. Consequently, (P3) has the same optimal value as its counterpart with $[\cdot]^+$, and $F(\mathbf{t},\mathbf{p},q) \le \sum_{m=1}^{M}\tilde{R}_m^{\mathrm{sec}}(\mathbf{t},p_m,q)$ holds for any feasible solution.

IV. Proposed Two-Timescale Optimization Algorithm

Problem (P3) is nonconvex, since F is nonconcave with respect to $\mathbf{t}$ and the minimum-distance constraints in (16e) are nonconvex. Moreover, $\mathbf{t}$, $\mathbf{p}$, and q are coupled in the objective function, and $\mathbf{p}$ and q are further coupled by the power constraint in (16b). To tackle (P3), we exploit two properties of its objective function. First, for a given $\mathbf{t}$, the coefficients η_m, ξ_m, and ψ in (35a) are constants, and the optimal $\mathbf{p}$ for a given q can be derived in semi-closed form. Second, for given $\mathbf{p}$ and q, each antenna position affects F only through rank-one terms of $\mathbf{\Phi}(\mathbf{t})$ and $\mathbf{v}(\mathbf{t})$, which allows F to be evaluated at a large number of candidate positions with low complexity. Based on these properties, we alternately optimize the power allocation and the antenna positions in Sections IV-A and IV-B, respectively.

[2]For $M = 1$, even the exact ergodic rate $\mathbb{E}\{\log_2(1+p_1\|\mathbf{h}_1(\mathbf{t})\|^2/\sigma_1^2)\}$ does not depend on $\mathbf{t}$, because the distribution of $\|\mathbf{h}_1(\mathbf{t})\|^2$ depends on $\bar{\mathbf{h}}_1(\mathbf{t})$ only through $\|\bar{\mathbf{h}}_1(\mathbf{t})\|^2 = N$.

A. Power Allocation Optimization for Given $\mathbf{t}$

For given $\mathbf{t}$, (P3) reduces to

$$(\text{P3.1}): \max_{\mathbf{p},q} \sum_{m=1}^{M} f_m(p_m;q) \quad \text{s.t. (16b), (16c),} \tag{36a}$$

where

$$f_m(p;q) \triangleq \log_2(1+\eta_m p) - \log_2\left(1+\eta_{\mathrm{e},m}(q)\,p\right), \tag{37}$$

and $\eta_{\mathrm{e},m}(q) \triangleq \xi_m/(q\psi+\bar{\sigma}_{\mathrm{e}}^2)$ denotes the effective channel gain of Eve for s_m, which decreases with q. For brevity, the argument $\mathbf{t}$ is omitted in this subsection. Problem (P3.1) is nonconvex in general, because f_m is not jointly concave in p_m and q. For a given q, however, the optimal $\mathbf{p}$ can be obtained in semi-closed form. To this end, we first examine the first-order and second-order derivatives of f_m with respect to p, which are given by

$$\frac{\partial f_m}{\partial p} = \frac{\eta_m - \eta_{\mathrm{e},m}}{\ln 2\,(1+\eta_m p)(1+\eta_{\mathrm{e},m}p)}, \tag{38}$$

$$\frac{\partial^2 f_m}{\partial p^2} = \frac{1}{\ln 2}\left[\frac{\eta_{\mathrm{e},m}^2}{(1+\eta_{\mathrm{e},m}p)^2} - \frac{\eta_m^2}{(1+\eta_m p)^2}\right], \tag{39}$$

where the argument q of $\eta_{\mathrm{e},m}$ is omitted. If $\eta_m \le \eta_{\mathrm{e},m}$, then $f_m(p;q) \le 0$ for all $p \ge 0$, and thus $p_m = 0$ is optimal. If $\eta_m > \eta_{\mathrm{e},m}$, then $\eta_m(1+\eta_{\mathrm{e},m}p) - \eta_{\mathrm{e},m}(1+\eta_m p) = \eta_m - \eta_{\mathrm{e},m} > 0$ implies $\frac{\eta_m}{1+\eta_m p} > \frac{\eta_{\mathrm{e},m}}{1+\eta_{\mathrm{e},m}p}$, so that f_m is strictly increasing and strictly concave in $p \ge 0$ by (38) and (39). Let $\mathcal{M}_{\mathrm{a}}(q) \triangleq \{m \in \mathcal{M} \,|\, \eta_m > \eta_{\mathrm{e},m}(q)\}$ denote the set of LUs that can achieve positive secrecy rates, and let $P_{\mathrm{s}}(q) \triangleq P_{\mathrm{tot}} - (N-M)q$ denote the power available for the confidential signals. Then, the optimal $\mathbf{p}$ for a given q is given by the following proposition.

Proposition 2 (Secrecy Water-Filling): For a given q with $P_{\mathrm{s}}(q) > 0$ and $\mathcal{M}_{\mathrm{a}}(q) \neq \emptyset$, the optimal power allocation is $p_m^\star = 0$ for $m \notin \mathcal{M}_{\mathrm{a}}(q)$ and

$$p_m^\star(\nu) = \left[\frac{2(\mu_m - 1)}{\sqrt{(\eta_m - \eta_{\mathrm{e},m})^2 + 4\eta_m\eta_{\mathrm{e},m}\mu_m} + \eta_m + \eta_{\mathrm{e},m}}\right]^+ \tag{40}$$

for $m \in \mathcal{M}_{\mathrm{a}}(q)$, where $\mu_m = \mu_m(\nu) \triangleq (\eta_m - \eta_{\mathrm{e},m})/(\nu \ln 2)$, and the water level $\nu > 0$ is the unique solution of $\sum_{m\in\mathcal{M}_{\mathrm{a}}(q)} p_m^\star(\nu) = P_{\mathrm{s}}(q)$.

Proof: Since the objective function is strictly concave and increasing in $\{p_m\}_{m\in\mathcal{M}_{\mathrm{a}}(q)}$ and Slater's condition holds, the Karush–Kuhn–Tucker (KKT) conditions are necessary and sufficient for optimality, and the power constraint is active at the optimal solution [25]. Let $\nu > 0$ denote the Lagrange multiplier associated with the power constraint. Then, the KKT conditions for $m \in \mathcal{M}_{\mathrm{a}}(q)$ reduce to

$$\left.\frac{\partial f_m}{\partial p}\right|_{p=p_m^\star} = \nu \;\text{ if } p_m^\star > 0, \qquad \left.\frac{\partial f_m}{\partial p}\right|_{p=0} \le \nu \;\text{ if } p_m^\star = 0. \tag{41}$$

By (38), the first condition is equivalent to the quadratic equation $(1+\eta_m p)(1+\eta_{\mathrm{e},m}p) = \mu_m(\nu)$ in p, whose positive root is given by (40) in a form that avoids numerical cancellation. The second condition is equivalent to $\mu_m(\nu) \le 1$, for which (40) also yields $p_m^\star = 0$. Finally, as ν increases from 0 to $\max_{m\in\mathcal{M}_{\mathrm{a}}(q)}(\eta_m - \eta_{\mathrm{e},m})/\ln 2$, $\sum_{m\in\mathcal{M}_{\mathrm{a}}(q)} p_m^\star(\nu)$ decreases continuously and strictly from $+\infty$ to 0. Hence, the water level that satisfies the power constraint with equality is unique. ∎

The water level in Proposition 2 can be found by bisection, because $p_m^\star(\nu)$ is nonincreasing in ν. Since (40) reduces to the classic water-filling solution $[1/(\nu\ln 2) - 1/\eta_m]^+$ as $\eta_{\mathrm{e},m} \to 0$, it can be regarded as a secrecy water-filling solution, which allocates zero power to the m-th LU if $\eta_m \le \eta_{\mathrm{e},m}(q)$, i.e., if its effective channel gain does not exceed that of Eve for s_m.

Let $F^\star(q) \triangleq \sum_{m\in\mathcal{M}} f_m(p_m^\star;q)$ denote the optimal value of (P3.1) for a given q, with $F^\star(q) = 0$ if $\mathcal{M}_{\mathrm{a}}(q) = \emptyset$ or $P_{\mathrm{s}}(q) = 0$. The AN power per dimension is then optimized as

$$q^\star = \arg\max_{0\le q\le q_{\max}} F^\star(q), \tag{42}$$

where $q_{\max} \triangleq P_{\mathrm{tot}}/(N-M)$. Increasing q reduces the effective channel gains of Eve at the cost of less power for the confidential signals. Since $F^\star(q)$ is not necessarily unimodal, (42) is solved by a coarse grid search followed by a finer one around the best grid point, as summarized in Algorithm 1.

Algorithm 1 Power Allocation for Given $\mathbf{t}$

Input: $\{\eta_m, \xi_m\}_{m\in\mathcal{M}}$, ψ, $\bar{\sigma}_{\mathrm{e}}^2$, P_{tot}, and the grid size Q.
Output: $q^\star$ and $\mathbf{p}^\star$.
1: **for** each q in a uniform grid of Q points over $[0, q_{\max}]$ **do**
2: Obtain $\mathbf{p}^\star$ by Proposition 2, where ν is found by bisection.
3: Evaluate $F^\star(q)$.
4: **end for**
5: Repeat Steps 1–4 over a uniform grid of Q points between the two neighbors of the best grid point.
6: **return** the best q as $q^\star$ and its optimal power allocation as $\mathbf{p}^\star$.

B. Antenna Position Optimization for Given $\mathbf{p}$ and q

For given $\mathbf{p}$ and q, (P3) reduces to

$$(\text{P3.2}): \max_{\mathbf{t}} F(\mathbf{t}) \tag{43a}$$

$$\text{s.t. } \mathbf{t}_n \in \mathcal{C},\ \forall n \in \mathcal{N}, \tag{43b}$$

$$\|\mathbf{t}_n - \mathbf{t}_i\| \ge D_{\min},\ \forall n,i \in \mathcal{N},\ n \neq i, \tag{43c}$$

where $F(\mathbf{t}) \triangleq F(\mathbf{t},\mathbf{p},q)$. With this slight abuse of notation, the arguments of F hereafter indicate the variables being optimized, whereas the other variables are fixed at their latest values. Problem (P3.2) is challenging for two reasons. First, by (28) and (29), $F(\mathbf{t})$ depends on each $\mathbf{t}_n$ through the phases $\frac{2\pi}{\lambda}\mathbf{t}_n^{\mathrm{T}}(\mathbf{a}_k - \mathbf{a}_i)$, $i,k \in \mathcal{M}\cup\{\mathrm{e}\}$. Since each phase varies with the period $\lambda/\|\mathbf{a}_k - \mathbf{a}_i\|$ along $\mathbf{a}_k - \mathbf{a}_i$, $F(\mathbf{t})$ oscillates over distances on the order of a wavelength and has many local maxima within $\mathcal{C}$. Second, the minimum-distance constraints are nonconvex. To reduce the problem dimension, we optimize the antenna positions in an element-wise manner similar to [17], i.e., $\mathbf{t}_n$ is updated with the other positions fixed, for $n = 1,\ldots,N$ in turn. Accordingly, $F(\mathbf{t}_n)$ denotes

F as a function of $\mathbf{t}_n$, and the subproblem for the n-th MA is given by

$$(\text{P3.2.}n):\ \max_{\mathbf{t}_n}\ F(\mathbf{t}_n) \tag{44a}$$
$$\text{s.t.}\ \ \mathbf{t}_n \in \mathcal{C}, \tag{44b}$$
$$\|\mathbf{t}_n - \mathbf{t}_i\| \geq D_{\min},\ \forall i \in \mathcal{N}\setminus\{n\}. \tag{44c}$$

Although (P3.2.n) has only two real variables, $F(\mathbf{t}_n)$ is multimodal, so that a local method, such as the MM method in [17], tends to converge to a local maximum close to the current position, which may trap the AO iterations at an inferior solution (see Section V-C). To avoid this, we solve (P3.2.n) in two stages: Stage 1 selects the best candidate position by a grid search over $\mathcal{C}$, and Stage 2 refines this position by the MM method. The cost of the grid search is reduced by the following rank-one structure.

1) Rank-one structure: Let $\boldsymbol{\ell}_n(\mathbf{t}_n) \in \mathbb{C}^{M\times 1}$ denote the conjugate transpose of the n-th row of $\mathbf{L}(\mathbf{t})$, i.e.,

$$\boldsymbol{\ell}_n(\mathbf{t}_n) = \mathbf{K}^{1/2}\left[e^{-j\frac{2\pi}{\lambda}\mathbf{t}_n^{\mathrm{T}}\mathbf{a}_1},\ldots,e^{-j\frac{2\pi}{\lambda}\mathbf{t}_n^{\mathrm{T}}\mathbf{a}_M}\right]^{\mathrm{T}}. \tag{45}$$

Since $\mathbf{L}^{\mathrm{H}}\mathbf{L} = \sum_{i=1}^{N}\boldsymbol{\ell}_i\boldsymbol{\ell}_i^{\mathrm{H}}$ and $\mathbf{L}^{\mathrm{H}}\bar{\mathbf{g}} = \sum_{i=1}^{N}\boldsymbol{\ell}_i e^{j\frac{2\pi}{\lambda}\mathbf{t}_i^{\mathrm{T}}\mathbf{a}_{\mathrm{e}}}$, we have

$$\boldsymbol{\Phi}(\mathbf{t}) = \boldsymbol{\Gamma}_n + \boldsymbol{\ell}_n(\mathbf{t}_n)\boldsymbol{\ell}_n^{\mathrm{H}}(\mathbf{t}_n), \tag{46}$$
$$\mathbf{v}(\mathbf{t}) = \mathbf{r}_n + \boldsymbol{\ell}_n(\mathbf{t}_n)e^{j\frac{2\pi}{\lambda}\mathbf{t}_n^{\mathrm{T}}\mathbf{a}_{\mathrm{e}}}, \tag{47}$$

where $\boldsymbol{\Gamma}_n \triangleq \sum_{i\neq n}\boldsymbol{\ell}_i(\mathbf{t}_i)\boldsymbol{\ell}_i^{\mathrm{H}}(\mathbf{t}_i) + N\mathbf{I}_M$ and $\mathbf{r}_n \triangleq \sum_{i\neq n}\boldsymbol{\ell}_i(\mathbf{t}_i)e^{j\frac{2\pi}{\lambda}\mathbf{t}_i^{\mathrm{T}}\mathbf{a}_{\mathrm{e}}}$ do not depend on $\mathbf{t}_n$. By the Sherman–Morrison formula [24],

$$\boldsymbol{\Omega}(\mathbf{t}) = \boldsymbol{\Gamma}_n^{-1} - \frac{\boldsymbol{\Gamma}_n^{-1}\boldsymbol{\ell}_n(\mathbf{t}_n)\boldsymbol{\ell}_n^{\mathrm{H}}(\mathbf{t}_n)\boldsymbol{\Gamma}_n^{-1}}{1+\boldsymbol{\ell}_n^{\mathrm{H}}(\mathbf{t}_n)\boldsymbol{\Gamma}_n^{-1}\boldsymbol{\ell}_n(\mathbf{t}_n)}. \tag{48}$$

Given $\boldsymbol{\Gamma}_n^{-1}$ and $\mathbf{r}_n$, (46)–(48) allow ω_m, c_m, d, and thus $F(\mathbf{t}_n)$ to be evaluated at a candidate position with only $\mathcal{O}(M^2)$ operations, compared with $\mathcal{O}(NM^2+M^3)$ operations for computing them from scratch.

2) Stage 1 (grid search): Let $\mathcal{G}\subset\mathcal{C}$ denote a uniform grid over $\mathcal{C}$, $\mathbf{t}_n^{\mathrm{cur}}$ the current position of the n-th MA, and $\mathcal{G}_n \triangleq \{\mathbf{t}_n\in\mathcal{G}\,|\,\|\mathbf{t}_n-\mathbf{t}_i\|\geq D_{\min},\ \forall i\neq n\}$ the set of grid points that are feasible for (P3.2.n). Using (48), we evaluate $F(\mathbf{t}_n)$ at all the candidates in $\mathcal{G}_n\cup\{\mathbf{t}_n^{\mathrm{cur}}\}$ and obtain

$$\hat{\mathbf{t}}_n = \arg\max_{\mathbf{t}_n\in\mathcal{G}_n\cup\{\mathbf{t}_n^{\mathrm{cur}}\}} F(\mathbf{t}_n), \tag{49}$$

which requires $\mathcal{O}(|\mathcal{G}|M^2)$ operations. Since the current position is included in the candidates, $F(\hat{\mathbf{t}}_n)\geq F(\mathbf{t}_n^{\mathrm{cur}})$. The grid spacing is set to a fraction of the shortest period $\lambda/\max_{i,k\in\mathcal{M}\cup\{\mathrm{e}\}}\|\mathbf{a}_k-\mathbf{a}_i\|$ of the above phases, which is at least $\lambda/2$ because $\|\mathbf{a}_i\|\leq 1$. Since the selected grid point is further refined in Stage 2, a moderate spacing suffices, as confirmed numerically in Section V-A.

3) Stage 2 (MM refinement): Starting from $\mathbf{t}_n^{(0)} = \hat{\mathbf{t}}_n$, we refine the position by the MM method [26], where $\mathbf{t}_n^{(k)}$ denotes the position of the n-th MA in the k-th MM iteration. To construct a surrogate function, we derive the gradient of $F(\mathbf{t}_n)$. Let $u_n\in\{x_n,y_n\}$ denote the coordinate of $\mathbf{t}_n$ along the axis $u\in\{x,y\}$, and define $\boldsymbol{\Lambda}_u \triangleq \mathrm{diag}(a_{1,u},\ldots,a_{M,u})$, where $a_{m,x}\triangleq\cos\theta_m\sin\phi_m$ and $a_{m,y}\triangleq\sin\theta_m$ are the entries of $\mathbf{a}_m$, and $a_{\mathrm{e},u}$ is the corresponding entry of $\mathbf{a}_{\mathrm{e}}$. From (45)–(47), the derivatives of $\boldsymbol{\ell}_n$, $\mathbf{v}$, and $\boldsymbol{\Omega}$ with respect to u_n are given by

$$\dot{\boldsymbol{\ell}}_n \triangleq \frac{\partial\boldsymbol{\ell}_n}{\partial u_n} = -j\frac{2\pi}{\lambda}\boldsymbol{\Lambda}_u\boldsymbol{\ell}_n, \tag{50}$$
$$\dot{\mathbf{v}} \triangleq \frac{\partial\mathbf{v}}{\partial u_n} = j\frac{2\pi}{\lambda}\big(a_{\mathrm{e},u}\mathbf{I}_M-\boldsymbol{\Lambda}_u\big)\boldsymbol{\ell}_n e^{j\frac{2\pi}{\lambda}\mathbf{t}_n^{\mathrm{T}}\mathbf{a}_{\mathrm{e}}}, \tag{51}$$
$$\dot{\boldsymbol{\Omega}} \triangleq \frac{\partial\boldsymbol{\Omega}}{\partial u_n} = -\boldsymbol{\Omega}\big(\dot{\boldsymbol{\ell}}_n\boldsymbol{\ell}_n^{\mathrm{H}}+\boldsymbol{\ell}_n\dot{\boldsymbol{\ell}}_n^{\mathrm{H}}\big)\boldsymbol{\Omega}, \tag{52}$$

where (52) follows from $\partial\boldsymbol{\Phi}^{-1} = -\boldsymbol{\Phi}^{-1}(\partial\boldsymbol{\Phi})\boldsymbol{\Phi}^{-1}$. Using (50)–(52), the derivatives $\dot{\omega}_m\triangleq\partial\omega_m/\partial u_n$, $\dot{c}_m\triangleq\partial c_m/\partial u_n$, and $\dot{d}\triangleq\partial d/\partial u_n$ are derived in closed form in Appendix C. Then, the derivatives of the effective channel gains η_m and $\eta_{\mathrm{e},m} = \xi_m/(q\psi+\bar{\sigma}_{\mathrm{e}}^2)$ are given by $\dot{\eta}_m\triangleq\partial\eta_m/\partial u_n = -\eta_m\dot{\omega}_m/\omega_m$ and $\dot{\eta}_{\mathrm{e},m}\triangleq\partial\eta_{\mathrm{e},m}/\partial u_n = \kappa_{\mathrm{e}}\eta_{\mathrm{e},m}\big(\dot{c}_m/\xi_m - q\dot{d}/(q\psi+\bar{\sigma}_{\mathrm{e}}^2)\big)$, respectively. Since $F(\mathbf{t}_n) = \sum_{m=1}^{M}\big[\log_2(1+\eta_m p_m)-\log_2(1+\eta_{\mathrm{e},m}p_m)\big]$, the entries of the gradient $\nabla_{\mathbf{t}_n}F = [\partial F/\partial x_n,\ \partial F/\partial y_n]^{\mathrm{T}}$ are given by

$$\frac{\partial F}{\partial u_n} = \frac{1}{\ln 2}\sum_{m=1}^{M}\left[\frac{p_m\dot{\eta}_m}{1+\eta_m p_m}-\frac{p_m\dot{\eta}_{\mathrm{e},m}}{1+\eta_{\mathrm{e},m}p_m}\right]. \tag{53}$$

Since $F(\mathbf{t}_n)$ is twice continuously differentiable and $\mathcal{C}$ is compact, $\nabla_{\mathbf{t}_n}F$ is Lipschitz continuous over $\mathcal{C}$. By the descent lemma [27, Lemma 5.7], for any δ_n no smaller than this Lipschitz constant, the following quadratic function is a lower bound of $F(\mathbf{t}_n)$ that is tight at $\mathbf{t}_n^{(k)}$:

$$F(\mathbf{t}_n)\geq\hat{F}_n(\mathbf{t}_n|\mathbf{t}_n^{(k)}) \triangleq F(\mathbf{t}_n^{(k)}) + \nabla_{\mathbf{t}_n}F(\mathbf{t}_n^{(k)})^{\mathrm{T}}\big(\mathbf{t}_n-\mathbf{t}_n^{(k)}\big) - \frac{\delta_n}{2}\big\|\mathbf{t}_n-\mathbf{t}_n^{(k)}\big\|^2. \tag{54}$$

An upper bound on the Lipschitz constant could be obtained by bounding the Hessian of $F(\mathbf{t}_n)$ over $\mathcal{C}$. For the composite function $F(\mathbf{t}_n)$, however, such a global bound is difficult to derive and generally loose, which would lead to small MM steps. Instead, δ_n is determined by backtracking [27]: starting from $\max\{\delta_0,\delta_n^{\mathrm{pre}}/2\}$, where $\delta_0>0$ is a constant and δ_n^{pre} is the previously accepted value, δ_n is doubled until the update below satisfies $F(\mathbf{t}_n^{(k+1)})\geq\hat{F}_n(\mathbf{t}_n^{(k+1)}|\mathbf{t}_n^{(k)})$, which holds once δ_n reaches the Lipschitz constant. In this way, δ_n adapts to the local curvature of $F(\mathbf{t}_n)$, while the monotonicity of the MM updates is preserved.

For the minimum-distance constraints, $\|\mathbf{t}_n-\mathbf{t}_i\|^2$ is convex with respect to $\mathbf{t}_n$ and is therefore lower-bounded by its first-order Taylor expansion at $\mathbf{t}_n^{(k)}$ [17], i.e.,

$$\|\mathbf{t}_n-\mathbf{t}_i\|^2\geq\big(\mathbf{t}_n^{(k)}-\mathbf{t}_i\big)^{\mathrm{T}}\big(2\mathbf{t}_n-\mathbf{t}_n^{(k)}-\mathbf{t}_i\big). \tag{55}$$

Replacing $\|\mathbf{t}_n-\mathbf{t}_i\|^2$ in the minimum-distance constraints with the right-hand side of (55) yields the linear constraints

$$\big(\mathbf{t}_n^{(k)}-\mathbf{t}_i\big)^{\mathrm{T}}\big(2\mathbf{t}_n-\mathbf{t}_n^{(k)}-\mathbf{t}_i\big)\geq D_{\min}^2,\quad\forall i\neq n, \tag{56}$$

whose feasible set is a convex subset of that of the minimum-distance constraints with respect to $\mathbf{t}_n$. Combining (54) and (56), we update $\mathbf{t}_n$ by solving

$$\mathbf{t}_n^{(k+1)} = \arg\max_{\mathbf{t}_n}\ \hat{F}_n(\mathbf{t}_n|\mathbf{t}_n^{(k)})\quad\text{s.t. }\mathbf{t}_n\in\mathcal{C},\ (56). \tag{57}$$

Algorithm 2 Two-Timescale AO Algorithm for (P3)

Input: Statistical CSI, P_{tot}, $\mathcal{C}$, $D_{\min}$, Q, $\mathcal{G}$, δ_0, ϵ_{in}, N_{MM}, ϵ, N_{AO}.
Output: $\mathbf{t}^\star$, $\mathbf{p}^\star$, and $q^\star$.

1: Initialize feasible positions $\mathbf{t}$ and obtain $(\mathbf{p}, q)$ by Algorithm 1.
2: **repeat**
3: **for** $n = 1$ to N **do**
4: *Stage 1:* Compute $\mathbf{\Gamma}_n^{-1}$ and $\mathbf{r}_n$, and obtain $\hat{\mathbf{t}}_n$ by (49).
5: *Stage 2:* Starting from $\mathbf{t}_n^{(0)} = \hat{\mathbf{t}}_n$, update $\mathbf{t}_n$ by (57) with backtracking on δ_n until the increase of F normalized by $\max\{1, |F|\}$ is below ϵ_{in} or N_{MM} iterations are reached.
6: **end for**
7: Obtain $(\mathbf{p}', q')$ by Algorithm 1 for the updated $\mathbf{t}$, and set $(\mathbf{p}, q) \leftarrow (\mathbf{p}', q')$ if $F(\mathbf{t}, \mathbf{p}', q') \geq F(\mathbf{t}, \mathbf{p}, q)$.
8: **until** the increase of F normalized by $\max\{1, |F|\}$ is below ϵ or N_{AO} iterations are reached

Completing the square shows that (57) is equivalent to projecting $\mathbf{t}_n^{(k)} + \nabla_{\mathbf{t}_n} F(\mathbf{t}_n^{(k)})/\delta_n$ onto the convex polygon defined by $\mathcal{C}$ and (56). The solution is this point itself if it is feasible and otherwise lies on an edge or at a vertex of the polygon, so that enumerating the projections onto the $N+3$ constraint lines and their pairwise intersections yields the exact solution. Since $\mathbf{t}_n^{(k)}$ is feasible for (57), the update satisfies

$$F(\mathbf{t}_n^{(k+1)}) \geq \hat{F}_n(\mathbf{t}_n^{(k+1)}|\mathbf{t}_n^{(k)}) \geq \hat{F}_n(\mathbf{t}_n^{(k)}|\mathbf{t}_n^{(k)}) = F(\mathbf{t}_n^{(k)}), \tag{58}$$

and $\mathbf{t}_n^{(k+1)}$ is feasible for (P3.2.n) due to (55). The MM iterations are repeated until the increase of F normalized by $\max\{1, |F|\}$ is below ϵ_{in} or N_{MM} iterations are reached.

C. Overall Algorithm, Convergence, and Complexity

Algorithm 2 summarizes the overall AO algorithm for (P3), whose convergence, initialization, and complexity are discussed below.

Convergence: In each iteration of Algorithm 2, the grid search in (49) does not decrease the objective value of (P3) because the current position is among the candidates, and neither do the MM updates in (57) due to (58). The power allocation is likewise accepted only if the objective value does not decrease, so the objective value is nondecreasing over the iterations. It is also upper-bounded by $\sum_{m=1}^{M} \log_2(1+\zeta_m(N-M)(\kappa_m+1)P_{\mathrm{tot}})$ according to (21) and $p_m \leq P_{\mathrm{tot}}$, and it is therefore guaranteed to converge. This guarantee concerns the objective value only; it does not imply that the iterates converge to a stationary point or a globally optimal solution of (P3).

Initialization: Since (P3) is nonconvex, the solution obtained by Algorithm 2 may depend on the initial positions. This dependence is weaker than for purely local updates, because the grid search in Stage 1 allows each MA to move to any feasible grid point in $\mathcal{C}$ in every iteration. In addition, Algorithm 2 can be run from several initializations, e.g., the positions of the FPA array and random feasible positions, and the best solution is retained.

Complexity: In each AO iteration, forming $\mathbf{\Phi}$ and $\mathbf{\Omega}$ requires $\mathcal{O}(NM^2 + M^3)$ operations. For each MA, $\mathbf{\Gamma}_n^{-1}$ is obtained from $\mathbf{\Omega}$ by a rank-one update. Stage 1 requires $\mathcal{O}(|\mathcal{G}|(M^2+N))$ operations, including the feasibility check of the grid points. In Stage 2, the gradient in (53) and each evaluation of F require $\mathcal{O}(M^2)$ operations based on (48), and solving (57) by enumeration requires $\mathcal{O}(N^3)$ operations. Algorithm 1 requires $\mathcal{O}(QN_{\mathrm{b}}M)$ operations, where N_{b} is the number of bisection iterations. The complexity of Algorithm 2 per initialization is therefore $\mathcal{O}\big(N_{\mathrm{AO}}\big(NM^2 + M^3 + N|\mathcal{G}|(M^2+N) + NN_{\mathrm{MM}}N_\delta(M^2+N^3) + QN_{\mathrm{b}}M\big)\big)$, where N_δ is the average number of backtracking trials for δ_n. In contrast to stochastic optimization [19], this complexity does not depend on the number of channel realizations. Since Algorithm 2 depends only on the slowly varying statistical CSI, it is executed only once per frame, whereas the ZF precoding and AN generation in each CI require $\mathcal{O}(NM^2+M^3)$ operations.

V. Simulation Results

A. Simulation Setup and Benchmarks

Unless otherwise specified, we set $N = 8$, $M = 3$, $A = 4\lambda$, $D_{\min} = \lambda/2$, $\kappa_m = \kappa_{\mathrm{e}} = 10$ dB, $\beta_m = \beta_{\mathrm{e}} = 1$, and $\sigma_m^2 = \sigma_{\mathrm{e}}^2 = \sigma^2$, so that $P_{\mathrm{tot}}/\sigma^2$ denotes the transmit SNR, which is set to 20 dB by default. The elevation and azimuth AoDs of the LUs are independently and uniformly distributed within $[-\pi/3, \pi/3]$. Similar to [16], Eve is located in a direction close to that of LU 1, which represents the challenging case discussed in Section I. Its AoDs are $\theta_{\mathrm{e}} = \theta_1 + \Delta\cos\tilde{\phi}$ and $\phi_{\mathrm{e}} = \phi_1 + \Delta\sin\tilde{\phi}$, so that they deviate from those of LU 1 by the AoD offset Δ in the direction specified by $\tilde{\phi}$, which is uniformly distributed over $[0, 2\pi)$. Note that Δ is an offset in the elevation–azimuth coordinates rather than the physical angle between the two directions. By default, $\Delta = 0.1$ rad, for which the normalized LoS correlation $\rho_1(\mathbf{t})$ exceeds 0.94 for the FPA; Eve thus lies well within the main lobe of the beam steered toward LU 1.

For Algorithm 2, the grid $\mathcal{G}$ in Stage 1 has a spacing of $\lambda/10$, which is at most one fifth of the shortest phase period in Section IV-B and yields $|\mathcal{G}| = 1681$ for $A = 4\lambda$. Halving this spacing changes the average ESSR of the proposed design by only 0.01% over 20 AoD realizations. The remaining parameters are $\delta_0 = 1$, $\epsilon_{\mathrm{in}} = 10^{-6}$, $N_{\mathrm{MM}} = 20$, $\epsilon = 10^{-4}$, $N_{\mathrm{AO}} = 50$, $Q = 41$, and $N_{\mathrm{b}} = 60$. Algorithm 2 is executed from a $2\times(N/2)$ uniform planar array (UPA) with $\lambda/2$ spacing and two sets of random feasible positions, and the best solution is selected.

All the results are averaged over 100 random AoD realizations, which are shared by all the schemes so that the comparisons are paired; the standard error of the average ESSR of the proposed design at 20 dB is 0.55% of its value. Since the closed-form approximations are used only for optimization, the ergodic rates of each design are evaluated with the exact SINRs in (14) and (15) over 5×10^3 channel realizations (10^4 in Fig. 3).

The proposed design is compared with the following benchmarks, which all adopt the power allocation in Algorithm 1, so that the performance differences result only from the antenna positions:

- *Rate-oriented MA:* The antenna positions maximize the approximate ergodic sum rate $\sum_{m=1}^{M} \log_2(1 + \eta_m(\mathbf{t})P_{\mathrm{tot}}/M)$ of the LUs with equal power and ignore Eve [17]. For a fair comparison, this problem is tackled

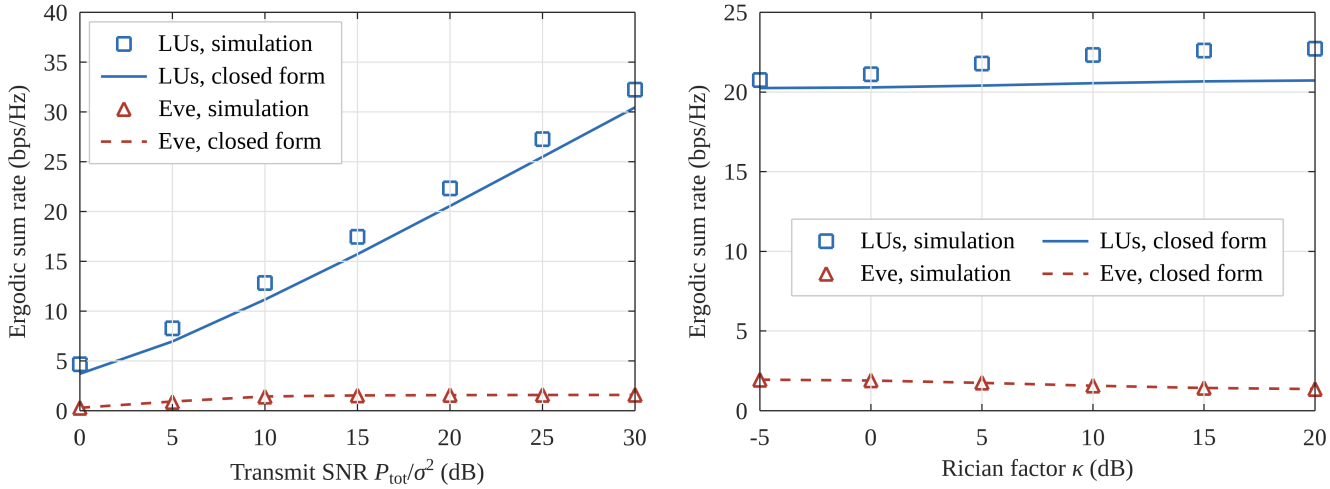


Fig. 3. Ergodic sum rates of the LUs and Eve for the proposed design by Monte Carlo simulations (markers) and by (20) and (27) (lines) versus (a) the transmit SNR P_{tot}/σ^2 with $\kappa_m = \kappa_{\text{e}} = 10$ dB and (b) the Rician factor $\kappa = \kappa_m = \kappa_{\text{e}}$ with $P_{\text{tot}}/\sigma^2 = 20$ dB ($N = 8$, $M = 3$, $A = 4\lambda$, $\Delta = 0.1$ rad).

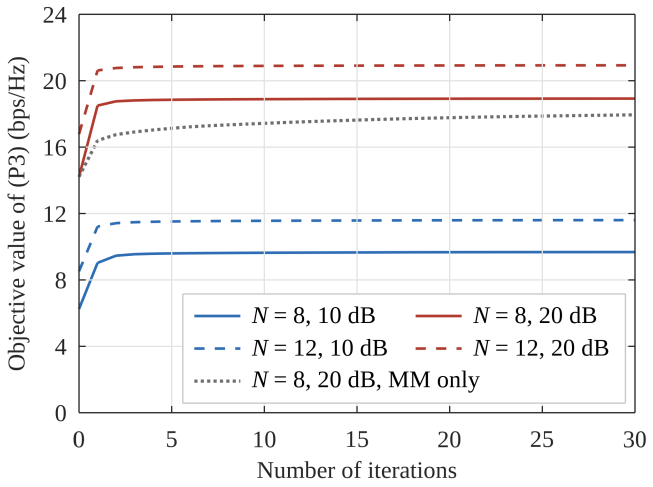


Fig. 4. Convergence behavior of Algorithm 2 for different N and P_{tot}/σ^2 ($M = 3$, $A = 4\lambda$, UPA initialization). "MM only": without the grid search in Stage 1.

by the position update in Section IV-B with the same initializations. This benchmark isolates the gain of the secrecy-aware positioning enabled by (27).

- *AS:* Similar to [16], the BS selects N of $2N$ candidate antennas, which form a UPA with 4 rows, $N/2$ columns, and $\lambda/2$ spacing. The subset is selected by a swap search that maximizes the approximate ESSR in (P3) with the AN power searched over 21 grid points.[3] AS requires no antenna movement but twice as many antennas and an RF switching network.

[3]The swap search starts from the subset obtained by greedily removing candidate antennas and from four random subsets, and it applies the best exchange of one selected and one unselected antenna as long as the metric increases. For $N \leq 10$, it attains the maximum metric of the exhaustive search over all the $\binom{2N}{N}$ subsets in at least 92% of the AoD realizations, and the resulting average ESSR differs from that of the exhaustive search by less than 0.03%.

- *Sparse FPA:* A $2 \times (N/2)$ UPA spans $\mathcal{C}$ with spacings $2A/(N-2)$ and A along the x- and y-axes, respectively. This benchmark has the same aperture as the MAs and thus separates the gain of the optimized positions from that of the large aperture.
- *FPA:* The BS adopts the $2 \times (N/2)$ UPA with $\lambda/2$ spacing.

B. Accuracy of the Closed-Form Approximations

Fig. 3 evaluates the accuracy of (20) and (27) at the designs obtained by Algorithm 2. The approximate wiretap rate in (27) agrees with the Monte Carlo results within maximum absolute errors of 0.052 and 0.013 bps/Hz over the SNRs in Fig. 3(a) and the Rician factors in Fig. 3(b), respectively, which indicates that it captures the LoS correlation between Eve and the LUs. By contrast, (20) underestimates the ergodic sum rate of the LUs, and the gap grows with the Rician factor. This underestimation stems from Jensen's inequality and from the central Wishart approximation in Section III-B, which is exact for Rayleigh fading but overestimates $\mathbb{E}\{[(\mathbf{H}^{\text{H}}(\mathbf{t})\mathbf{H}(\mathbf{t}))^{-1}]_{m,m}\}$ by a factor approaching $N/(N-M)$ as the LoS components dominate. As a result, the approximate ESSR in (34) is lower than the actual ESSR in all the tested cases, e.g., 18.98 versus 20.75 bps/Hz at 20 dB. Since this gap is similar for all the schemes, namely between 1.52 and 1.76 bps/Hz at 20 dB, and smaller than the gains of the proposed design, the approximation remains a suitable design objective.

C. Convergence Behavior of Algorithm 2

Fig. 4 shows the objective value of (P3) versus the number of iterations of Algorithm 2, which is run without the stopping criterion. In all the settings, the objective value increases monotonically and converges within about 15 iterations. This fast convergence results from the grid search in Stage 1, which moves each MA directly to the best feasible grid point instead of letting it traverse the movable region through local updates.

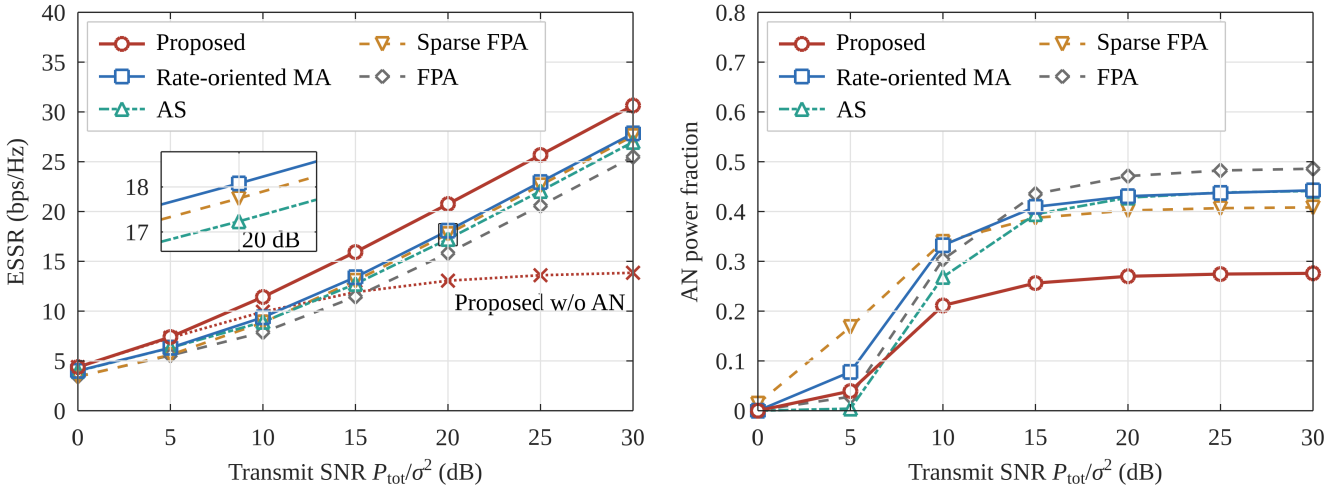


Fig. 5. (a) ESSR and (b) optimized AN power fraction $(N-M)q/P_{\text{tot}}$ versus the transmit SNR P_{tot}/σ^2 ($N=8$, $M=3$, $A=4\lambda$, $\Delta=0.1$ rad).

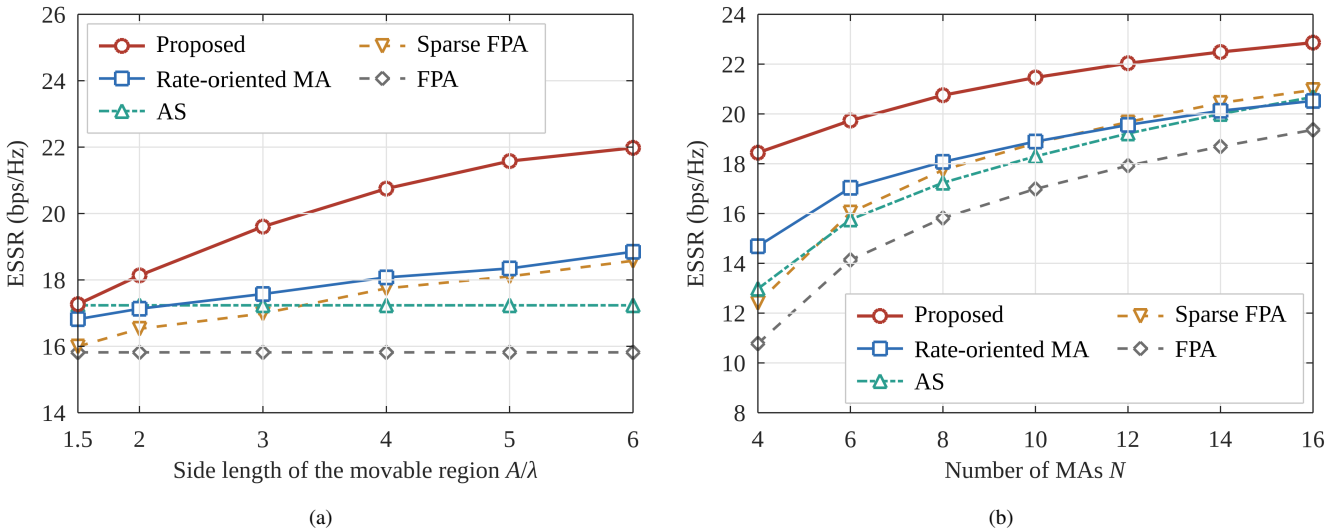


Fig. 6. ESSR versus (a) the side length A of the movable region with $N=8$ and (b) the number of MAs N with $A=4\lambda$ ($M=3$, $P_{\text{tot}}/\sigma^2=20$ dB, $\Delta=0.1$ rad).

With the MM updates only, the objective value increases much more slowly and remains lower, because the MAs are trapped in the local maxima near their initial positions.

D. ESSR and AN Power Versus Transmit SNR

Fig. 5(a) shows that the proposed design achieves the highest ESSR over the entire SNR range, e.g., 14.8% and 31.2% higher than those of the rate-oriented MA and the FPA at 20 dB, respectively. Although the rate-oriented MA exploits the same movable region, its gain over the FPA is less than half of that of the proposed design, because its positions only decorrelate the LUs, whereas the proposed positions also exploit the two Eve-related mechanisms in Section III-D. AS achieves an even smaller gain, since its $2N$ candidates form a compact array whose spatial resolution is insufficient to decorrelate the LoS components of Eve and LU 1. The sparse FPA has the same aperture as the MAs, yet it also achieves less than half of the gain of the proposed design over the FPA, because its fixed positions cannot adapt the LoS correlations to the AoDs of the LUs and Eve. The secrecy gain of the MAs therefore stems mainly from the optimized positions rather than from the large aperture. At high SNR, the absolute ESSR gains of the proposed design approach constants, since the antenna positions improve the constant term rather than the slope of the ESSR (see Section III-D). Without AN, i.e., with $q=0$ in Algorithm 2, the ESSR of the proposed design saturates at high SNR, because the SINRs of the LUs and Eve then grow at the same rate with the transmit power [4].

Fig. 5(b) shows that the optimized AN power fraction increases with the SNR and saturates, which is consistent with (33). The proposed design allocates much less power to the AN than all the benchmarks, e.g., an AN power fraction

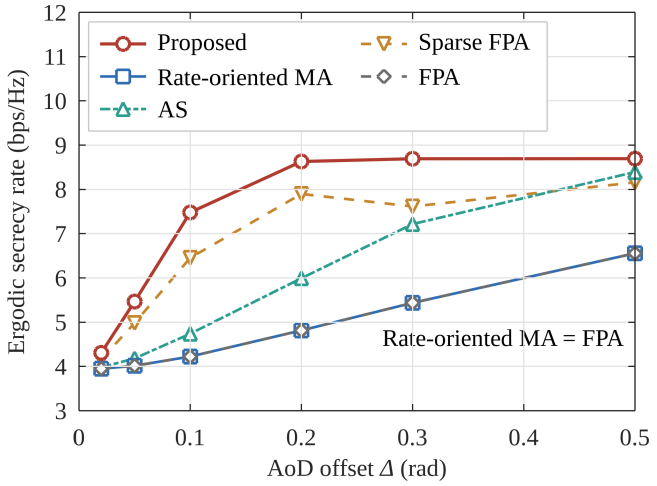


Fig. 7. Ergodic secrecy rate versus the AoD offset Δ between Eve and the LU for $M = 1$ ($N = 8$, $A = 4\lambda$, $P_{\mathrm{tot}}/\sigma^2 = 20$ dB).

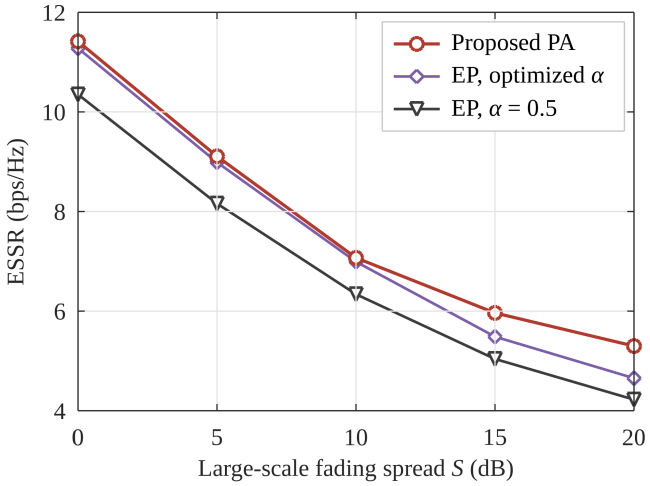


Fig. 8. ESSR versus the large-scale fading spread S of the LUs for different power allocation (PA) schemes ($N = 8$, $M = 3$, $A = 4\lambda$, $P_{\mathrm{tot}}/\sigma^2 = 10$ dB, $\Delta = 0.1$ rad).

of 0.27 versus 0.47 for the FPA at 20 dB. The AN power fractions of the other benchmarks are comparable to that of the FPA. This difference is consistent with Section III-D: the optimized positions decrease $\Xi_m(\mathbf{t})$ and thus the AN power required for secrecy.

E. Impact of the Region Size and the Number of MAs

Fig. 6(a) shows the ESSR versus the side length A of the movable region, where the FPA and AS do not depend on A. The gain of the proposed design grows with A, because a larger region provides more spatial degrees of freedom for decorrelating the LoS components of Eve and the LUs. The ESSRs of the rate-oriented MA and the sparse FPA increase much more slowly: the former exploits the enlarged region only to decorrelate the LUs, and the latter cannot adapt its positions to the AoDs. AS performs comparably to the proposed design only for the smallest region, which its candidate array covers entirely.

Fig. 6(b) shows the ESSR versus the number of MAs N. All the schemes benefit from more antennas, which provide a larger array gain and more dimensions for the AN. The gains of the proposed design over the FPA and AS decrease with N, because the apertures of their arrays grow with N and allow them to separate Eve from LU 1 better even without position optimization. Nevertheless, the proposed design with $N = 4$ MAs outperforms the FPA with $N = 12$ antennas, and that with $N = 8$ MAs outperforms the rate-oriented MA with $N = 16$ MAs. The secrecy-aware positioning can thus substantially reduce the number of antennas and RF chains required for a target ESSR. The sparse FPA, whose grating lobes are strong for small N, outperforms the rate-oriented MA for $N \geq 14$, because more antennas in $\mathcal{C}$ suppress these lobes.

F. Impact of the AoD Offset

Fig. 7 shows the ergodic secrecy rate of a single LU versus the AoD offset Δ, which determines how close Eve is to the LU in direction. For $M = 1$, the objective of the rate-oriented MA does not depend on the antenna positions (see Section III-D), so that it keeps its UPA initialization and coincides with the FPA. The gain of the proposed design over these two schemes therefore stems only from the Eve-aware positioning, which reduces the normalized LoS correlation $\rho_1(\mathbf{t})$ in (30) and (31). This gain first increases with Δ, from 9% at $\Delta = 0.02$ rad to 79% at $\Delta = 0.2$ rad, and then decreases to 33% at $\Delta = 0.5$ rad. For a small Δ, even an aperture of 4λ can hardly decorrelate the LoS components of Eve and the LU, whereas for a large Δ, Eve becomes separable even with Eve-unaware positions. These results confirm that the MAs enhance secrecy even for a single LU. The sparse FPA also benefits from its large aperture, but the proposed design achieves a further gain by adapting the positions to the AoDs. For $M = 3$, the gain of the proposed design over the rate-oriented MA follows the same trend, i.e., 2.4%, 14.8%, and 10.7% at $\Delta = 0.02$, 0.1, and 0.5 rad, respectively.

G. Benefit of the Long-Term Power Allocation

In the default setup, the LUs have identical large-scale fading coefficients and thus similar effective channel gains. To evaluate the long-term power allocation for heterogeneous LUs, we set $[\beta_1, \beta_2, \beta_3] = [0, -S/2, -S]$ dB and $\beta_{\mathrm{e}} = 0$ dB, where the large-scale fading spread S is the ratio of the largest to the smallest large-scale fading coefficient of the LUs in decibels. In this setting, LU 1, whose direction is close to that of Eve, is the strongest LU, and the other LUs become weaker than Eve as S increases. The proposed power allocation, which combines the secrecy water-filling in Proposition 2 with the optimized AN power, is compared with two equal-power (EP) benchmarks with $p_m = \alpha P_{\mathrm{tot}}/M$ and $q = (1-\alpha)P_{\mathrm{tot}}/(N-M)$, where α is either optimized by a one-dimensional search [5] or fixed to 0.5 [16].[4] For all the

[4]Since the power of an individual LU cannot be set to zero under EP, the operator $[\cdot]^+$ is retained in the objective of the EP benchmarks, and the gradient in Stage 2 is computed over the LUs with positive secrecy rates.

schemes, the antenna positions are optimized by Algorithm 2.

Fig. 8 shows the ESSR versus S at $P_{\mathrm{tot}}/\sigma^2 = 10$ dB. The ESSRs of all the schemes decrease with S, because LUs 2 and 3 become weaker. EP with optimized α performs close to the proposed power allocation for $S \leq 10$ dB, since the LUs then have similar effective channel gains, which the optimized positions balance further. As S increases, the gain of the proposed power allocation grows, e.g., to 14% at $S = 20$ dB, because it allocates less or zero power to the LUs whose effective channel gains are comparable to or lower than those of Eve (see Proposition 2). For $S = 20$ dB, this gain increases to 40% at $P_{\mathrm{tot}}/\sigma^2 = 0$ dB and decreases to below 1% at 20 dB, because all the LUs achieve positive secrecy rates at high SNR, where nearly equal powers become optimal, as in classic water-filling. EP with $\alpha = 0.5$ performs worst for all the values of S, which shows the importance of optimizing the power splitting between the confidential signals and the AN. Therefore, both components of the long-term power allocation matter: the information–AN power splitting improves the ESSR for all the considered values of S, and the per-user power allocation further benefits heterogeneous LUs at low-to-moderate SNR.

VI. Conclusion

This paper has investigated two-timescale secure transmission for an MA-enabled multiuser downlink with a passive Eve. The derived closed-form approximation of the ergodic wiretap rate has revealed that, besides decorrelating the LUs, the MAs enhance secrecy by reducing the information leakage and increasing the AN received by Eve, even for a single LU. Based on this approximation, we have developed an AO algorithm, which combines secrecy water-filling with a two-stage position update and whose objective value is guaranteed to converge. Simulation results have shown that the proposed design outperforms the rate-oriented MA design, AS, and FPA arrays, while reducing the AN power and the number of antennas required for secure transmission. Extending this design to multiple multi-antenna eavesdroppers and imperfect CSI of the LUs is left for future work.

Appendix A
Proof of Lemma 1

Let $\mathbf{U} \in \mathbb{C}^{N\times(N-M)}$ have orthonormal columns that span the null space of $\mathbf{H}^{\mathrm{H}}(\mathbf{t})$. Then, $\mathbf{P}^{\perp} = \mathbf{U}\mathbf{U}^{\mathrm{H}}$ and $Y = \|\mathbf{U}^{\mathrm{H}}\mathbf{g}(\mathbf{t})\|^2$. Since $\bar{\mathbf{w}}_m$ is a unit-norm vector in the column space of $\mathbf{H}(\mathbf{t})$, $\tilde{\mathbf{U}} \triangleq [\bar{\mathbf{w}}_m, \mathbf{U}]$ has orthonormal columns. Because $\tilde{\mathbf{g}}$ is independent of $\mathbf{H}(\mathbf{t})$, (3) yields $\mathbf{g}(\mathbf{t})|\mathbf{H}(\mathbf{t}) \sim \mathcal{CN}(\sqrt{\kappa_{\mathrm{e}}\tilde{\beta}_{\mathrm{e}}}\,\bar{\mathbf{g}}(\mathbf{t}), \tilde{\beta}_{\mathrm{e}}\mathbf{I}_N)$. Consequently, $\tilde{\mathbf{U}}^{\mathrm{H}}\mathbf{g}(\mathbf{t})$ is conditionally Gaussian with covariance matrix $\tilde{\beta}_{\mathrm{e}}\tilde{\mathbf{U}}^{\mathrm{H}}\tilde{\mathbf{U}} = \tilde{\beta}_{\mathrm{e}}\mathbf{I}_{N-M+1}$, so that its entries are conditionally independent. As a result, $X_m = |\bar{\mathbf{w}}_m^{\mathrm{H}}\mathbf{g}(\mathbf{t})|^2$ and $Y = \|\mathbf{U}^{\mathrm{H}}\mathbf{g}(\mathbf{t})\|^2$ are conditionally independent. Finally, conditioned on $\mathbf{H}(\mathbf{t})$, the i-th entry of $\tilde{\mathbf{U}}^{\mathrm{H}}\mathbf{g}(\mathbf{t})$ is complex Gaussian with the mean $\sqrt{\kappa_{\mathrm{e}}\tilde{\beta}_{\mathrm{e}}}\,[\tilde{\mathbf{U}}^{\mathrm{H}}\bar{\mathbf{g}}(\mathbf{t})]_i$ and the variance $\tilde{\beta}_{\mathrm{e}}$, so that its squared magnitude has the mean $\tilde{\beta}_{\mathrm{e}}(\kappa_{\mathrm{e}}|[\tilde{\mathbf{U}}^{\mathrm{H}}\bar{\mathbf{g}}(\mathbf{t})]_i|^2 + 1)$ and the variance $\tilde{\beta}_{\mathrm{e}}^2(2\kappa_{\mathrm{e}}|[\tilde{\mathbf{U}}^{\mathrm{H}}\bar{\mathbf{g}}(\mathbf{t})]_i|^2 + 1)$. Applying these moments to $X_m = |\bar{\mathbf{w}}_m^{\mathrm{H}}\mathbf{g}(\mathbf{t})|^2$ and to the sum $Y = \|\mathbf{U}^{\mathrm{H}}\mathbf{g}(\mathbf{t})\|^2$ of conditionally independent terms, where $|\bar{\mathbf{w}}_m^{\mathrm{H}}\bar{\mathbf{g}}(\mathbf{t})|^2 = \bar{X}_m$ and $\|\mathbf{U}^{\mathrm{H}}\bar{\mathbf{g}}(\mathbf{t})\|^2 = \bar{Y}$, we obtain (22) and (23), as well as the conditional variances $\mathrm{Var}\{X_m|\mathbf{H}(\mathbf{t})\} = \tilde{\beta}_{\mathrm{e}}^2(2\kappa_{\mathrm{e}}\bar{X}_m + 1)$ and $\mathrm{Var}\{Y|\mathbf{H}(\mathbf{t})\} = \tilde{\beta}_{\mathrm{e}}^2(2\kappa_{\mathrm{e}}\bar{Y} + N - M)$. Therefore, the conditional relative variances of X_m and Y are small when $\kappa_{\mathrm{e}}\bar{X}_m$ and $\kappa_{\mathrm{e}}\bar{Y} + N - M$ are large, respectively.

Appendix B
Derivation of (25) and (26) and Proof of Proposition 1

For brevity, the argument $\mathbf{t}$ is omitted. Since $\bar{\mathbf{w}}_m$ and $\mathbf{P}^{\perp}$ are invariant to the scaling of the columns of $\mathbf{H}$, we assume $\mathbf{B} = \mathbf{I}_M$ without loss of generality, so that $\mathbf{H} = \mathbf{L}+\tilde{\mathbf{H}}$ by (17), and $\bar{\mathbf{w}}_m$ and $\mathbf{P}^{\perp}$ are given by (12) and (13), respectively. We also use $\mathbb{E}\{\mathbf{H}^{\mathrm{H}}\mathbf{H}\} = \mathbf{\Phi}$, $\mathbb{E}\{\tilde{\mathbf{H}}\} = \mathbf{0}$, and $\mathbb{E}\{\tilde{\mathbf{H}}\mathbf{x}\mathbf{x}^{\mathrm{H}}\tilde{\mathbf{H}}^{\mathrm{H}}\} = \|\mathbf{x}\|^2\mathbf{I}_N$ for any deterministic $\mathbf{x}$.

Derivation of (25)*:* Replacing $(\mathbf{H}^{\mathrm{H}}\mathbf{H})^{-1}$ in the unnormalized ZF direction by $\mathbf{\Omega} = \mathbf{\Phi}^{-1}$ yields $\bar{\mathbf{w}}_m \approx \mathbf{H}\mathbf{\Omega}\mathbf{e}_m/\|\mathbf{H}\mathbf{\Omega}\mathbf{e}_m\|$. Then, we approximate the mean of $|\bar{\mathbf{g}}^{\mathrm{H}}\mathbf{H}\mathbf{\Omega}\mathbf{e}_m|^2/\|\mathbf{H}\mathbf{\Omega}\mathbf{e}_m\|^2$ by the ratio of the means of its numerator and denominator, as in [20, Lemma 1]. These are two separate approximations, since $\mathbb{E}\{(\mathbf{H}^{\mathrm{H}}\mathbf{H})^{-1}\} \neq \mathbf{\Omega}$ in general. Since $\mathbf{H} = \mathbf{L} + \tilde{\mathbf{H}}$ and $\mathbf{L}^{\mathrm{H}}\bar{\mathbf{g}} = \mathbf{v}$, we have

$$\begin{aligned}\mathbb{E}\{|\bar{\mathbf{g}}^{\mathrm{H}}\mathbf{H}\mathbf{\Omega}\mathbf{e}_m|^2\} &= |\bar{\mathbf{g}}^{\mathrm{H}}\mathbf{L}\mathbf{\Omega}\mathbf{e}_m|^2 + \|\bar{\mathbf{g}}\|^2\|\mathbf{\Omega}\mathbf{e}_m\|^2 \\ &= \left|[\mathbf{\Omega}\mathbf{v}]_m\right|^2 + N[\mathbf{\Omega}^2]_{m,m}, \qquad (59)\\ \mathbb{E}\{\|\mathbf{H}\mathbf{\Omega}\mathbf{e}_m\|^2\} &= \mathbf{e}_m^{\mathrm{T}}\mathbf{\Omega}\mathbf{\Phi}\mathbf{\Omega}\mathbf{e}_m = \omega_m, \qquad (60)\end{aligned}$$

whose ratio is given by (25).

Derivation of (26)*:* Replacing $(\mathbf{H}^{\mathrm{H}}\mathbf{H})^{-1}$ in $\mathbf{I}_N - \mathbf{P}^{\perp}$ by $\mathbf{\Omega}$ and using $\mathbb{E}\{\tilde{\mathbf{H}}\mathbf{\Omega}\tilde{\mathbf{H}}^{\mathrm{H}}\} = \mathrm{tr}(\mathbf{\Omega})\mathbf{I}_N$ yield

$$\mathbb{E}\{\mathbf{I}_N - \mathbf{P}^{\perp}\} \approx \mathbf{\Pi} + \mathrm{tr}(\mathbf{\Omega})\mathbf{I}_N, \qquad \mathbf{\Pi} \triangleq \mathbf{L}\mathbf{\Omega}\mathbf{L}^{\mathrm{H}}, \qquad (61)$$

where $\mathbf{\Pi}$ and $\mathrm{tr}(\mathbf{\Omega})\mathbf{I}_N$ represent the parts of the signal subspace induced by the LoS and NLoS components, respectively. However, (61) lets the NLoS component capture the fraction $\mathrm{tr}(\mathbf{\Omega})$ of every direction, including those captured by the LoS component, so that $\bar{\mathbf{g}}^{\mathrm{H}}(\mathbf{I}_N - \mathbf{\Pi} - \mathrm{tr}(\mathbf{\Omega})\mathbf{I}_N)\bar{\mathbf{g}}$ may become negative when $\bar{\mathbf{g}}$ is closely aligned with the column space of $\mathbf{L}$. To avoid this double counting, we let the NLoS component capture a fraction $\chi \in [0, 1]$ of the complement of $\mathbf{\Pi}$ only, i.e.,

$$\mathbb{E}\{\mathbf{I}_N - \mathbf{P}^{\perp}\} \approx \mathbf{\Pi} + \chi(\mathbf{I}_N - \mathbf{\Pi}). \qquad (62)$$

The fraction χ is determined by the identity $\mathrm{tr}(\mathbf{P}^{\perp}) = N - M$, which holds for every realization of $\tilde{\mathbf{H}}$. Since $\mathrm{tr}(\mathbf{\Pi}) = \mathrm{tr}\big(\mathbf{\Omega}(\mathbf{\Phi} - N\mathbf{I}_M)\big) = M - N\mathrm{tr}(\mathbf{\Omega})$, taking the trace of (62) yields $M - N\mathrm{tr}(\mathbf{\Omega}) + \chi\big(N - M + N\mathrm{tr}(\mathbf{\Omega})\big) = M$, i.e., $\chi = N\mathrm{tr}(\mathbf{\Omega})/(N - M + N\mathrm{tr}(\mathbf{\Omega}))$. Therefore, $\mathbb{E}\{\mathbf{P}^{\perp}\} \approx (1 - \chi)(\mathbf{I}_N - \mathbf{\Pi})$, which yields (26) due to $\bar{\mathbf{g}}^{\mathrm{H}}\mathbf{\Pi}\bar{\mathbf{g}} = \mathbf{v}^{\mathrm{H}}\mathbf{\Omega}\mathbf{v}$.

Proof of Proposition 1: For the range, the matrix inversion lemma yields $\mathbf{I}_N - \mathbf{\Pi} = \mathbf{I}_N - \mathbf{L}(\mathbf{L}^{\mathrm{H}}\mathbf{L} + N\mathbf{I}_M)^{-1}\mathbf{L}^{\mathrm{H}} = (\mathbf{I}_N + \mathbf{L}\mathbf{L}^{\mathrm{H}}/N)^{-1} \succ \mathbf{0}$. Together with $\mathbf{\Pi} \succeq \mathbf{0}$, this implies $\mathbf{0} \preceq \mathbf{\Pi} \prec \mathbf{I}_N$. Moreover, $\mathbf{\Phi} \succeq N\mathbf{I}_M$ implies $0 < \mathrm{tr}(\mathbf{\Omega}) \leq M/N$, i.e., $1 - \chi \in [1 - M/N, 1)$. Hence, $d = (1 - \chi)\bar{\mathbf{g}}^{\mathrm{H}}(\mathbf{I}_N - \mathbf{\Pi})\bar{\mathbf{g}} \in [0, N]$ due to $\|\bar{\mathbf{g}}\|^2 = N$. For c_m, the Cauchy–Schwarz inequality yields $|[\mathbf{\Omega}\mathbf{v}]_m|^2 =$

$|\bar{\mathbf{g}}^{\mathrm{H}}\mathbf{L}\boldsymbol{\Omega}\mathbf{e}_m|^2 \le N\mathbf{e}_m^{\mathrm{T}}\boldsymbol{\Omega}\mathbf{L}^{\mathrm{H}}\mathbf{L}\boldsymbol{\Omega}\mathbf{e}_m$, so that the numerator of (25) is at most $N\mathbf{e}_m^{\mathrm{T}}\boldsymbol{\Omega}(\mathbf{L}^{\mathrm{H}}\mathbf{L}+N\mathbf{I}_M)\boldsymbol{\Omega}\mathbf{e}_m = N\omega_m$ due to $N \ge 1$, i.e., $c_m \in [0, N]$. The exact counterparts also lie in $[0, N]$, since $\bar{X}_m, \bar{Y} \le \|\bar{\mathbf{g}}\|^2$ for the unit-norm $\bar{\mathbf{w}}_m$ and the projector $\mathbf{P}^{\perp}$.

If $\kappa_m = 0$, $\forall m \in \mathcal{M}$, then $\mathbf{L} = \mathbf{0}$, $\mathbf{H} = \tilde{\mathbf{H}}$, $\boldsymbol{\Phi} = N\mathbf{I}_M$, and $\boldsymbol{\Pi} = \mathbf{0}$, so that (25) and (26) reduce to $c_m = 1$ and $d = N - M$. In this case, the distribution of $\tilde{\mathbf{H}}$ is invariant to left multiplication by any unitary matrix, which is inherited by $\bar{\mathbf{w}}_m$ and $\mathbf{P}^{\perp}$. As a result, $\bar{\mathbf{w}}_m$ is uniformly distributed on the unit sphere, which yields $\mathbb{E}\{\bar{X}_m\} = \|\bar{\mathbf{g}}\|^2/N = 1$, and $\mathbb{E}\{\mathbf{P}^{\perp}\}$ commutes with every unitary matrix and thus equals $(1 - M/N)\mathbf{I}_N$ due to $\mathrm{tr}(\mathbf{P}^{\perp}) = N - M$, which yields $\mathbb{E}\{\bar{Y}\} = N - M$.

Finally, let $\mathbf{K} = \kappa\mathbf{K}_0$ for a fixed diagonal matrix $\mathbf{K}_0 \succ \mathbf{0}$, so that $\mathbf{L} = \sqrt{\kappa}\mathbf{L}_0$ with $\mathbf{L}_0 \triangleq \tilde{\mathbf{H}}\mathbf{K}_0^{1/2}$, which has full column rank if the LoS components of the LUs are linearly independent. As $\kappa \to \infty$, $\mathbf{H}/\sqrt{\kappa} \to \mathbf{L}_0$ almost surely. Since $\bar{\mathbf{w}}_m$ and $\mathbf{P}^{\perp}$ are invariant to the scaling of $\mathbf{H}$ and continuous at full-column-rank matrices, and $\bar{X}_m$ and $\bar{Y}$ are bounded by N, the dominated convergence theorem yields $\mathbb{E}\{\bar{X}_m\} \to |\bar{\mathbf{g}}^{\mathrm{H}}\bar{\mathbf{w}}_m^{\infty}|^2$ and $\mathbb{E}\{\bar{Y}\} \to \bar{\mathbf{g}}^{\mathrm{H}}\mathbf{P}_{\infty}^{\perp}\bar{\mathbf{g}}$, where $\bar{\mathbf{w}}_m^{\infty} \triangleq \mathbf{L}_0(\mathbf{L}_0^{\mathrm{H}}\mathbf{L}_0)^{-1}\mathbf{e}_m/\|\mathbf{L}_0(\mathbf{L}_0^{\mathrm{H}}\mathbf{L}_0)^{-1}\mathbf{e}_m\|$ and $\mathbf{P}_{\infty}^{\perp} \triangleq \mathbf{I}_N - \mathbf{L}_0(\mathbf{L}_0^{\mathrm{H}}\mathbf{L}_0)^{-1}\mathbf{L}_0^{\mathrm{H}}$. On the other hand, $\kappa\boldsymbol{\Omega} \to (\mathbf{L}_0^{\mathrm{H}}\mathbf{L}_0)^{-1}$, $\boldsymbol{\Pi} \to \mathbf{I}_N - \mathbf{P}_{\infty}^{\perp}$, and $\mathrm{tr}(\boldsymbol{\Omega}) \to 0$. Hence, d converges to $\bar{\mathbf{g}}^{\mathrm{H}}\mathbf{P}_{\infty}^{\perp}\bar{\mathbf{g}}$, and c_m converges to $|[(\mathbf{L}_0^{\mathrm{H}}\mathbf{L}_0)^{-1}\mathbf{L}_0^{\mathrm{H}}\bar{\mathbf{g}}]_m|^2/[(\mathbf{L}_0^{\mathrm{H}}\mathbf{L}_0)^{-1}]_{m,m} = |\bar{\mathbf{g}}^{\mathrm{H}}\bar{\mathbf{w}}_m^{\infty}|^2$, since $N[\boldsymbol{\Omega}^2]_{m,m}$ decays as $\mathcal{O}(\kappa^{-2})$ whereas ω_m decays as $\mathcal{O}(\kappa^{-1})$. This completes the proof.

APPENDIX C
DERIVATIVES OF ω_m, c_m, AND d

Let $\tau_m \triangleq [\boldsymbol{\Omega}^2]_{m,m}$ and $\tilde{\mathbf{v}} \triangleq \boldsymbol{\Omega}\mathbf{v}$. Since $\boldsymbol{\Omega}$ is Hermitian, (52) can be rewritten as $\dot{\boldsymbol{\Omega}} = -(\boldsymbol{\Omega}\dot{\boldsymbol{\ell}}_n)(\boldsymbol{\Omega}\boldsymbol{\ell}_n)^{\mathrm{H}} - (\boldsymbol{\Omega}\boldsymbol{\ell}_n)(\boldsymbol{\Omega}\dot{\boldsymbol{\ell}}_n)^{\mathrm{H}}$. It follows that the derivatives of ω_m, τ_m, and $\mathrm{tr}(\boldsymbol{\Omega})$ with respect to u_n are given by

$$\dot{\omega}_m = [\dot{\boldsymbol{\Omega}}]_{m,m} = -2\mathrm{Re}\big\{[\boldsymbol{\Omega}\dot{\boldsymbol{\ell}}_n]_m[\boldsymbol{\Omega}\boldsymbol{\ell}_n]_m^*\big\}, \tag{63}$$

$$\dot{\tau}_m = 2\mathrm{Re}\big\{[\boldsymbol{\Omega}\dot{\boldsymbol{\Omega}}]_{m,m}\big\} = -2\mathrm{Re}\big\{[\boldsymbol{\Omega}^2\dot{\boldsymbol{\ell}}_n]_m[\boldsymbol{\Omega}\boldsymbol{\ell}_n]_m^* + [\boldsymbol{\Omega}^2\boldsymbol{\ell}_n]_m[\boldsymbol{\Omega}\dot{\boldsymbol{\ell}}_n]_m^*\big\}, \tag{64}$$

$$\frac{\partial \mathrm{tr}(\boldsymbol{\Omega})}{\partial u_n} = \mathrm{tr}(\dot{\boldsymbol{\Omega}}) = -2\mathrm{Re}\big\{\boldsymbol{\ell}_n^{\mathrm{H}}\boldsymbol{\Omega}^2\dot{\boldsymbol{\ell}}_n\big\}, \tag{65}$$

where (64) follows from $[\dot{\boldsymbol{\Omega}}\boldsymbol{\Omega}]_{m,m} = [\boldsymbol{\Omega}\dot{\boldsymbol{\Omega}}]_{m,m}^*$. For c_m in (25), the derivative of $\tilde{\mathbf{v}} = \boldsymbol{\Omega}\mathbf{v}$ is

$$\dot{\tilde{\mathbf{v}}} = \dot{\boldsymbol{\Omega}}\mathbf{v} + \boldsymbol{\Omega}\dot{\mathbf{v}} = -\boldsymbol{\Omega}\dot{\boldsymbol{\ell}}_n\big(\boldsymbol{\ell}_n^{\mathrm{H}}\tilde{\mathbf{v}}\big) - \boldsymbol{\Omega}\boldsymbol{\ell}_n\big(\dot{\boldsymbol{\ell}}_n^{\mathrm{H}}\tilde{\mathbf{v}}\big) + \boldsymbol{\Omega}\dot{\mathbf{v}}, \tag{66}$$

and thus

$$\dot{c}_m = \frac{2\mathrm{Re}\big\{[\tilde{\mathbf{v}}]_m^*[\dot{\tilde{\mathbf{v}}}]_m\big\} + N\dot{\tau}_m - c_m\dot{\omega}_m}{\omega_m}. \tag{67}$$

For $d = (1-\chi)(N - \mathbf{v}^{\mathrm{H}}\boldsymbol{\Omega}\mathbf{v})$ in (26) with $1 - \chi = (N - M)/(N - M + N\mathrm{tr}(\boldsymbol{\Omega}))$ as in Appendix B, we have

$$\frac{\partial(\mathbf{v}^{\mathrm{H}}\boldsymbol{\Omega}\mathbf{v})}{\partial u_n} = 2\mathrm{Re}\{\tilde{\mathbf{v}}^{\mathrm{H}}\dot{\mathbf{v}}\} - 2\mathrm{Re}\big\{(\tilde{\mathbf{v}}^{\mathrm{H}}\dot{\boldsymbol{\ell}}_n)(\boldsymbol{\ell}_n^{\mathrm{H}}\tilde{\mathbf{v}})\big\}, \tag{68}$$

$$\dot{d} = -(1-\chi)\bigg(\frac{\partial(\mathbf{v}^{\mathrm{H}}\boldsymbol{\Omega}\mathbf{v})}{\partial u_n} + \frac{N(N - \mathbf{v}^{\mathrm{H}}\boldsymbol{\Omega}\mathbf{v})}{N - M + N\mathrm{tr}(\boldsymbol{\Omega})}\,\frac{\partial \mathrm{tr}(\boldsymbol{\Omega})}{\partial u_n}\bigg), \tag{69}$$

where (68) follows from $\mathbf{v}^{\mathrm{H}}\dot{\boldsymbol{\Omega}}\mathbf{v} = -2\mathrm{Re}\{(\tilde{\mathbf{v}}^{\mathrm{H}}\dot{\boldsymbol{\ell}}_n)(\boldsymbol{\ell}_n^{\mathrm{H}}\tilde{\mathbf{v}})\}$. Substituting (63), (67), and (69) into (53) yields $\nabla_{\mathbf{t}_n}F$. All the quantities in (63)–(69) follow from matrix-vector products with $\boldsymbol{\Omega}$, requiring $\mathcal{O}(M^2)$ operations.

REFERENCES

[1] A. D. Wyner, "The wire-tap channel," *Bell Syst. Tech. J.*, vol. 54, no. 8, pp. 1355–1387, Oct. 1975.

[2] A. Mukherjee, S. A. A. Fakoorian, J. Huang, and A. L. Swindlehurst, "Principles of physical layer security in multiuser wireless networks: A survey," *IEEE Commun. Surveys Tuts.*, vol. 16, no. 3, pp. 1550–1573, 3rd Quart. 2014.

[3] Y. Wu, A. Khisti, C. Xiao, G. Caire, K.-K. Wong, and X. Gao, "A survey of physical layer security techniques for 5G wireless networks and challenges ahead," *IEEE J. Sel. Areas Commun.*, vol. 36, no. 4, pp. 679–695, Apr. 2018.

[4] S. Goel and R. Negi, "Guaranteeing secrecy using artificial noise," *IEEE Trans. Wireless Commun.*, vol. 7, no. 6, pp. 2180–2189, Jun. 2008.

[5] X. Zhou and M. R. McKay, "Secure transmission with artificial noise over fading channels: Achievable rate and optimal power allocation," *IEEE Trans. Veh. Technol.*, vol. 59, no. 8, pp. 3831–3842, Oct. 2010.

[6] G. Hu, Q. Wu, K. Xu, J. Si, and N. Al-Dhahir, "Secure wireless communication via movable-antenna array," *IEEE Signal Process. Lett.*, vol. 31, pp. 516–520, 2024.

[7] L. Zhu, W. Ma, and R. Zhang, "Movable antennas for wireless communication: Opportunities and challenges," *IEEE Commun. Mag.*, vol. 62, no. 6, pp. 114–120, Jun. 2024.

[8] L. Zhu, W. Ma, and R. Zhang, "Modeling and performance analysis for movable antenna enabled wireless communications," *IEEE Trans. Wireless Commun.*, vol. 23, no. 6, pp. 6234–6250, Jun. 2024.

[9] W. Ma, L. Zhu, and R. Zhang, "MIMO capacity characterization for movable antenna systems," *IEEE Trans. Wireless Commun.*, vol. 23, no. 4, pp. 3392–3407, Apr. 2024.

[10] L. Zhu, W. Ma, B. Ning, and R. Zhang, "Movable-antenna enhanced multiuser communication via antenna position optimization," *IEEE Trans. Wireless Commun.*, vol. 23, no. 7, pp. 7214–7229, Jul. 2024.

[11] L. Zhu, W. Ma, and R. Zhang, "Movable-antenna array enhanced beamforming: Achieving full array gain with null steering," *IEEE Commun. Lett.*, vol. 27, no. 12, pp. 3340–3344, Dec. 2023.

[12] G. Hu, Q. Wu, D. Xu, K. Xu, J. Si, Y. Cai, and N. Al-Dhahir, "Movable antennas-assisted secure transmission without eavesdroppers' instantaneous CSI," *IEEE Trans. Mobile Comput.*, vol. 23, no. 12, pp. 14263–14279, Dec. 2024.

[13] J. Tang, C. Pan, Y. Zhang, H. Ren, and K. Wang, "Secure MIMO communication relying on movable antennas," *IEEE Trans. Commun.*, vol. 73, no. 4, pp. 2159–2175, Apr. 2025.

[14] Z. Cheng, C. Ouyang, and X. Zhang, "Movable antenna aided physical layer security with no eavesdropper CSI," *arXiv:2412.19656*, Dec. 2024.

[15] L. Xie, P. Wang, G. Shen, G. Li, W. Mei, and L. Chen, "Secure communication in MIMOME movable-antenna systems with statistical eavesdropper CSI," *arXiv:2601.14755*, Jan. 2026.

[16] Y. Chen, G. Zhang, M. Cui, H. Fu, Q. Wu, and R. Zhang, "Sensing-assisted secure communication in MA-aided ISAC: CRB analysis and robust design," *IEEE Trans. Wireless Commun.*, 2026, doi: 10.1109/TWC.2026.3688454.

[17] Z. Zheng, Q. Wu, W. Chen, and G. Hu, "Two-timescale design for movable antenna-enabled multiuser MIMO systems," *IEEE Trans. Commun.*, vol. 73, no. 11, pp. 10554–10571, Nov. 2025.

[18] G. Hu, Q. Wu, G. Li, D. Xu, K. Xu, J. Si, Y. Cai, and N. Al-Dhahir, "Two-timescale design for movable antenna array-enabled multiuser uplink communications," *IEEE Trans. Veh. Technol.*, vol. 74, no. 3, pp. 5152–5157, Mar. 2025.

[19] M.-M. Zhao, Q. Wu, M.-J. Zhao, and R. Zhang, "Intelligent reflecting surface enhanced wireless networks: Two-timescale beamforming optimization," *IEEE Trans. Wireless Commun.*, vol. 20, no. 1, pp. 2–17, Jan. 2021.

[20] Q. Zhang, S. Jin, K.-K. Wong, H. Zhu, and M. Matthaiou, "Power scaling of uplink massive MIMO systems with arbitrary-rank channel means," *IEEE J. Sel. Topics Signal Process.*, vol. 8, no. 5, pp. 966–981, Oct. 2014.

[21] J. Zhu, R. Schober, and V. K. Bhargava, "Secure transmission in multicell massive MIMO systems," *IEEE Trans. Wireless Commun.*, vol. 13, no. 9, pp. 4766–4781, Sep. 2014.

[22] P. K. Gopala, L. Lai, and H. El Gamal, "On the secrecy capacity of fading channels," *IEEE Trans. Inf. Theory*, vol. 54, no. 10, pp. 4687–4698, Oct. 2008.

[23] H. Q. Ngo, E. G. Larsson, and T. L. Marzetta, "Energy and spectral efficiency of very large multiuser MIMO systems," *IEEE Trans. Commun.*, vol. 61, no. 4, pp. 1436–1449, Apr. 2013.

[24] R. A. Horn and C. R. Johnson, *Matrix Analysis*, 2nd ed. Cambridge, U.K.: Cambridge Univ. Press, 2013.

[25] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge, U.K.: Cambridge Univ. Press, 2004.

[26] Y. Sun, P. Babu, and D. P. Palomar, "Majorization-minimization algorithms in signal processing, communications, and machine learning," *IEEE Trans. Signal Process.*, vol. 65, no. 3, pp. 794–816, Feb. 2017.

[27] A. Beck, *First-Order Methods in Optimization*. Philadelphia, PA, USA: SIAM, 2017.