

Site Survey Report

Powered by TamoGraph®



Survey Name	Nexa Block Caving - Requirements 2026-Actualizado 1970
Surveyor	Daniel Souza
Location	Block Caving - 2026
Description	Actualizado con el nuevo nivel 1970. Puntos rojos y negros son Hawks y antenas RCP, puntos rojos puntos son Cardinales
Date(s)	Thursday, February 12, 2026

Visualization settings

Client Capabilities


Supported standards	802.11 a/b/g/n/ac
Channel width	40 MHz
Spatial streams	2
Signal correction 2.4 GHz	3 dBm
Signal correction 5 GHz	5 dBm
Signal correction 6 GHz	0 dBm

Map with no visualizations




Signal Level

This visualization shows the signal strength map (also called the coverage map) measured in dBm. Signal strength is one of the most important factors that influence WLAN performance, as in the areas with low signal, establishing a reliable and high-throughput link between the AP and client devices is impossible.

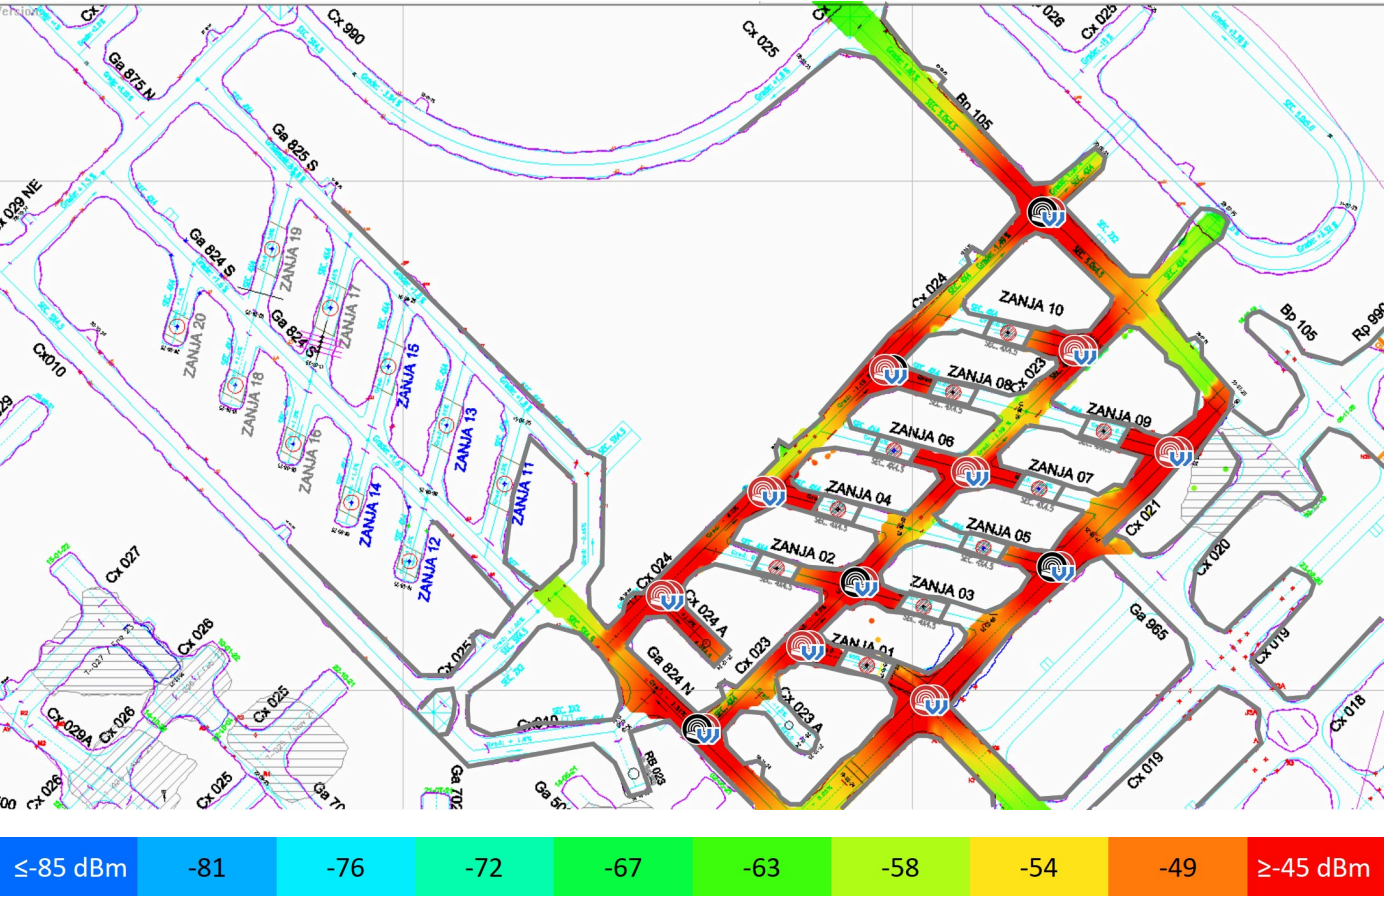


Expected PHY Rate

The physical layer (PHY) rate is the speed at which client devices communicate with the AP. When you move a computer connected to the AP within the WLAN coverage area, the adapter properties dialog in Windows displays the varying connection speed, which may be as high as 450 or 300 Mbps when you are close to the AP or as low as 1 Mbps when you are 50 meters away from it. The displayed speed is the PHY rate.

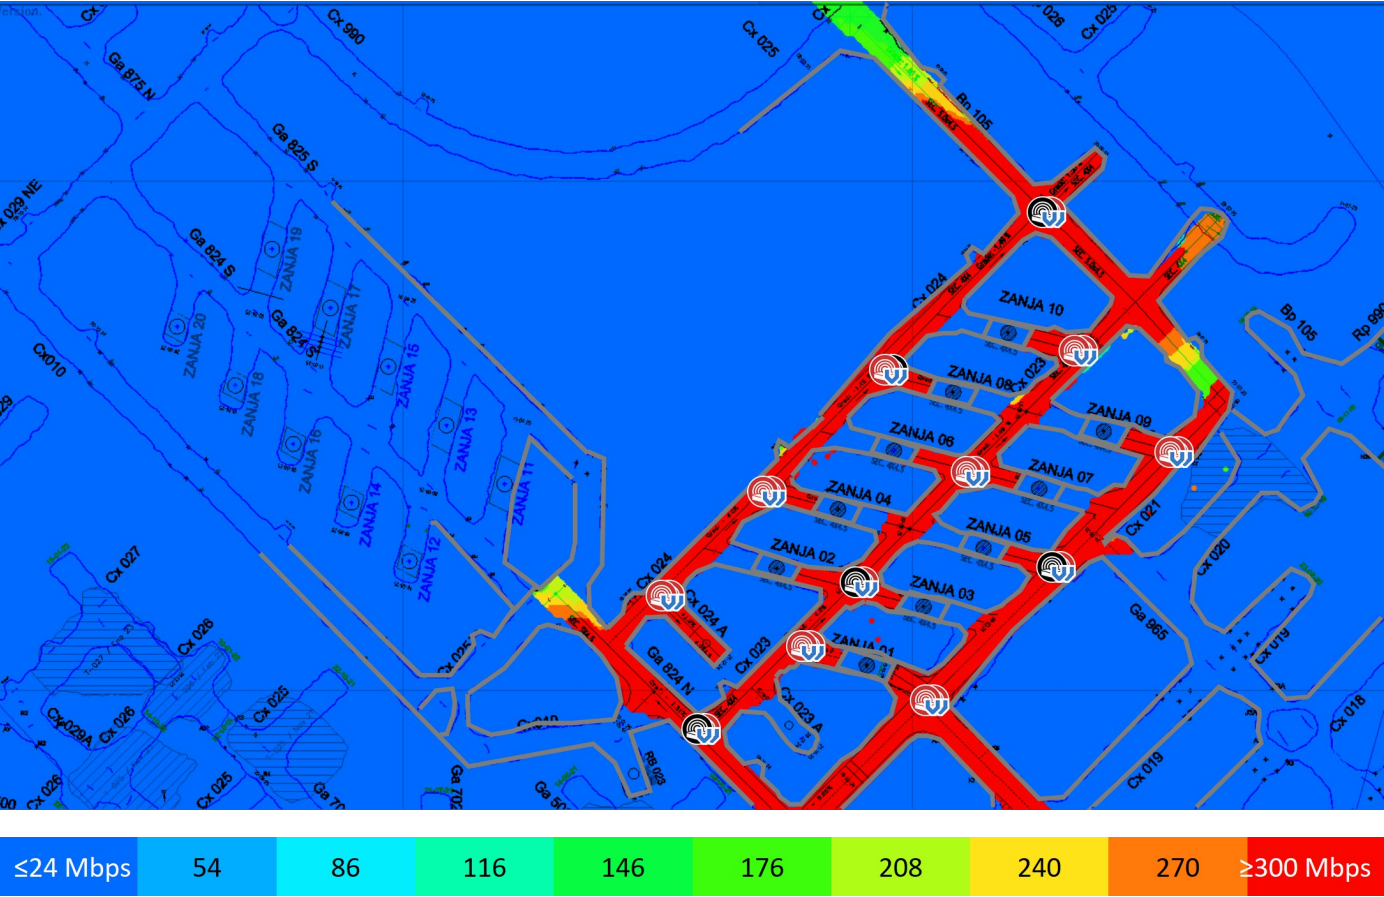


Map with no visualizations

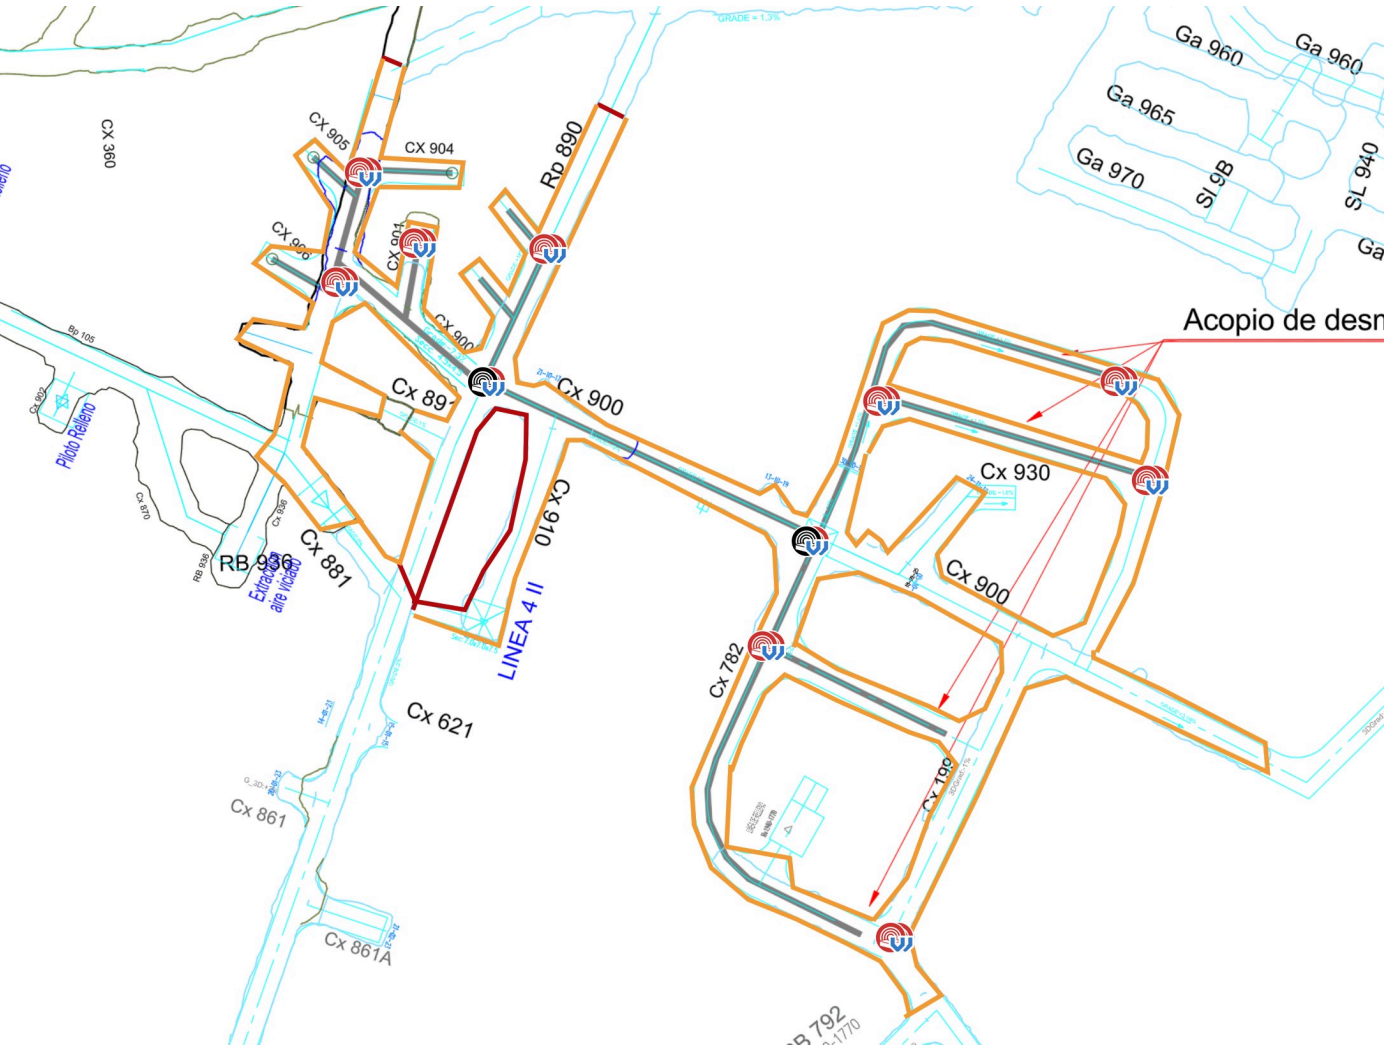


TamoGraph Site Survey

≤-85 dBm	-81	-76	-72	-67	-63	-58	-54	-49	≥-45 dBm
----------	-----	-----	-----	-----	-----	-----	-----	-----	----------

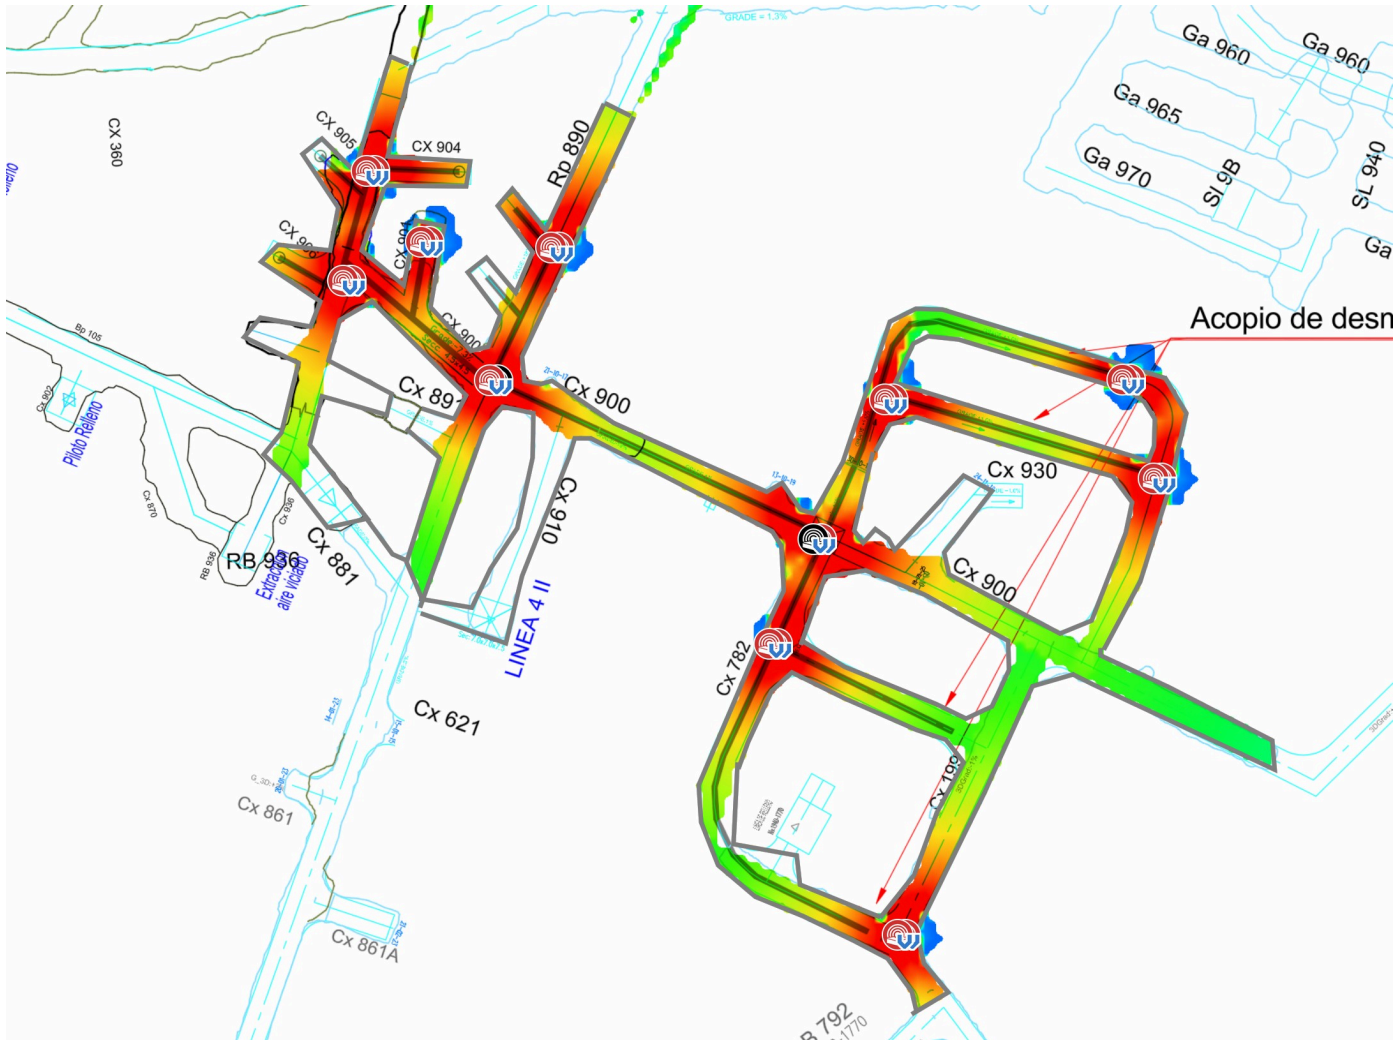

Signal-to-Noise Ratio

This visualization shows the signal-to-noise ratio (SNR) measured in dB. SNR is a measure to quantify by how much the signal level exceeds the noise level. Noise is generated by non-802.11 sources of radio waves (this includes 802.11 frames damaged during propagation). In low SNR zones, client devices may not be able to communicate with APs.

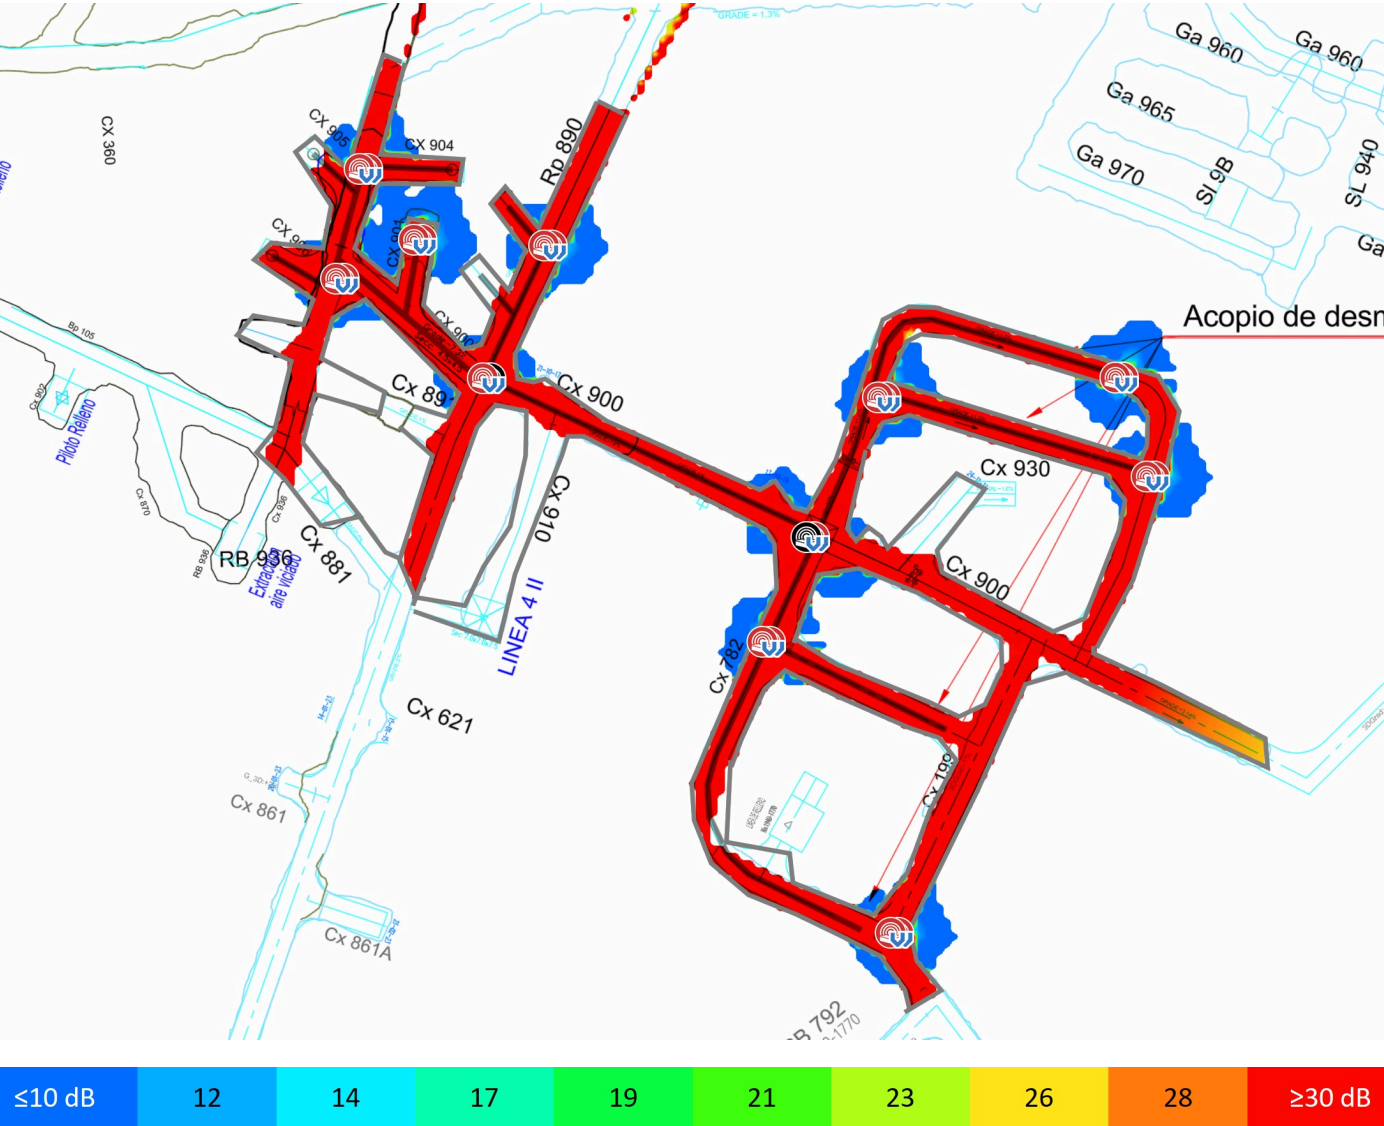

Expected PHY Rate

The physical layer (PHY) rate is the speed at which client devices communicate with the AP. When you move a computer connected to the AP within the WLAN coverage area, the adapter properties dialog in Windows displays the varying connection speed, which may be as high as 450 or 300 Mbps when you are close to the AP or as low as 1 Mbps when you are 50 meters away from it. The displayed speed is the PHY rate.

