



Software Design Specification

Z-Wave Command Class Control Specification

Document No.:	SDS14223
Version:	7
Description:	-
Written By:	NOBRIOT;DEWASSIE
Date:	2019-04-09
Reviewed By:	NOBRIOT;DEWASSIE
Restrictions:	Partners Only

Approved by:

Date	CET	Initials	Name	Justification
2019-04-09	02:00:32	NTJ	Niels Johansen	

This document is the property of Silicon Labs. The data contained herein, in whole or in part, may not be duplicated, used or disclosed outside the recipient for any purpose. This restriction does not limit the recipient's right to use information contained in the data if it is obtained from another source without restriction.



CONFIDENTIAL

REVISION RECORD				
Doc. Rev	Date	By	Pages affected	Brief description of changes
1	20180125	NOBRIOT	ALL	Initial revision
2	20180306	NOBRIOT	Chapter 2 & 3	Fixing references
3	20180418	NOBRIOT	ALL	Updated document template
4	20180701	NOBRIOT	6.2.4.3 4.19 6.5 5.1.4.1 & 5.7.4.1 4.18	Contributions 2018B: <ul style="list-style-type: none"> Added a recommendation for Multi Channel nodes and Association group mirroring Added User Code Command Class, version 2 Added Supervision Command Class, version 1 Added requirements about removing associations Clarified how to use scales with Thermostat Setpoint Command Class
5	20181001	NOBRIOT	3.2	Contributions 2018C: <ul style="list-style-type: none"> Updated the version discovery requirements
6	20190101	DEWASSIE NOBRIOT	4.10.3, 4.11.3, 4.13.4 4.13.4.1.4 5.1.4 & 5.7.4 5.9.1	Contributions 2018D: <ul style="list-style-type: none"> Clarified the mandatory free-text descriptions and requirements for unknown Meter reading, Sensor reading and Notification Changed Notification CC timeout recommendation for State Idle Clarified additional control requirements of Association and Multi Channel Association Command classes Relaxed non-SIS Wake Up Command Class interview requirement
7	20190401	NOBRIOT	5.3 5.5 5.1 & 5.7 4.13.1 4.9	Contributions 2019A: <ul style="list-style-type: none"> Updated Battery Command Class polling requirements Updated Firmware Update battery level recommendations Added Association v3 and Multi Channel Association v4 Updated Notification Command Class interview Added IR Command Class control definitions

Table of Contents

1	ABBREVIATIONS.....	1
2	INTRODUCTION	2
2.1	Purpose.....	2
2.2	Audience and prerequisites.....	2
2.1	Precedence of definitions.....	2
2.2	Terms used in this document	2
3	COMMAND CLASS CONTROL OVERVIEW	3
3.1	Controlled and Supported Command Classes	3
3.1.1	Control via association groups	3
3.1.2	“Full” control	3
3.2	Command Classes support discovery requirements	4
3.3	Command Classes control requirements	4
3.3.1	Mandatory supporting node interview	4
3.3.2	Minimum end user functionalities	5
3.3.3	Command Class control version	5
3.4	Command Classes not present in this document	6
4	APPLICATION COMMAND CLASS CONTROL DEFINITIONS	7
4.1	Barrier Operator Command Class, version 1	7
4.1.1	Mandatory node interview	7
4.1.2	Minimum end user functionalities	7
4.1.2.1	Activate/deactivate supported subsystems	7
4.1.2.2	Initiate opening (or stop closing).....	8
4.1.2.3	Initiate Closing.....	8
4.1.3	Node properties	8
4.1.4	Additional control requirements.....	8
4.2	Basic Command Class, version 1-2	9
4.2.1	Mandatory node interview	9
4.2.2	Minimum end user functionalities	9
4.2.2.1	Set the node On/Off state	9
4.2.3	Node properties	9
4.2.4	Additional control requirements.....	10
4.3	Binary Switch Command Class, version 1-2.....	11
4.3.1	Mandatory node interview	11
4.3.2	Minimum end user functionalities	11
4.3.2.1	Set the node On/Off state	11
4.3.3	Node properties	11
4.4	Central Scene Command Class, version 1-3	12
4.4.1	Mandatory node interview	12
4.4.2	Minimum end user functionalities	12

4.4.3	Node properties	12
4.4.4	Additional control requirements.....	13
4.5	Color Switch Command Class, version 1-3	14
4.5.1	Mandatory node interview	14
4.5.2	Minimum end user functionalities	14
4.5.2.1	Set the color	14
4.5.2.2	Fade/enhance a color component	15
4.5.2.3	Stop fading/enhancing a color component	15
4.5.3	Node properties	15
4.5.4	Additional control requirements.....	15
4.6	Configuration Command Class, version 1-4.....	16
4.6.1	Mandatory node interview	16
4.6.2	Minimum end user functionalities	16
4.6.2.1	Set a configuration parameter value.....	16
4.6.2.2	Reset all configuration parameter values to default	17
4.6.3	Node properties	18
4.6.4	Additional control requirements.....	18
4.7	Door Lock Command Class, version 1-4	19
4.7.1	Mandatory node interview	19
4.7.2	Minimum end user functionalities	19
4.7.2.1	Configure the door lock.....	19
4.7.2.2	Set the door mode.....	20
4.7.3	Node properties	20
4.8	Entry Control Command Class, version 1	21
4.8.1	Mandatory node interview	21
4.8.2	Minimum end user functionalities	21
4.8.2.1	Configure the keypad	21
4.8.3	Node properties	22
4.8.4	Additional control requirements.....	22
4.9	IR Repeater Command Class, version 1	23
4.9.1	Mandatory node Interview	23
4.9.2	Minimum end user functionalities	23
4.9.2.1	Repeat an IR Code	24
4.9.2.2	Learn an IR Code.....	24
4.9.2.3	Erase a learnt IR code	25
4.9.2.4	Repeat a learnt IR code	25
4.9.3	Node properties	25
4.10	Meter Command Class, version 1-5.....	26
4.10.1	Mandatory node interview	26
4.10.2	Minimum end user functionalities	26
4.10.2.1	Reset cumulated data.....	26
4.10.3	Node properties	27
4.10.4	Additional control requirements.....	27
4.11	Multilevel Sensor Command Class, version 1-11.....	28
4.11.1	Mandatory node interview	28

4.11.2	Minimum end user functionalities	28
4.11.3	Node properties	28
4.11.4	Additional control requirements	29
4.12	Multilevel Switch Command Class, version 1-4	30
4.12.1	Mandatory node interview	30
4.12.2	Minimum end user functionalities	30
4.12.2.1	Set the level	30
4.12.2.2	Start level change up or down	31
4.12.2.3	Stop level change	31
4.12.3	Node properties	31
4.13	Notification Command Class, version 1-8	32
4.13.1	Mandatory node interview	32
4.13.2	Minimum end user functionalities	33
4.13.3	Node properties	33
4.13.4	Additional control requirements	33
4.13.4.1	Detailed controller guidelines	33
4.14	Simple AV Control Command Class, version 1-4	39
4.14.1	Mandatory node interview	39
4.14.2	Minimum end user functionalities	39
4.14.2.1	Send a supported AV code	39
4.14.3	Node properties	39
4.15	Sound Switch Command Class, version 1	41
4.15.1	Mandatory node interview	41
4.15.2	Minimum end user functionalities	41
4.15.2.1	Configure the sound switch	41
4.15.2.2	Play/stop a selected or default tone	42
4.15.3	Node properties	42
4.16	Thermostat Mode Command Class, version 1-3	43
4.16.1	Mandatory interview	43
4.16.2	Minimum end user functionalities	43
4.16.2.1	Change mode	43
4.16.3	Node properties	43
4.17	Thermostat Setback Command Class, version 1	44
4.17.1	Mandatory interview	44
4.17.2	Minimum end user functionalities	44
4.17.2.1	Configure setback	44
4.17.3	Node properties	44
4.18	Thermostat Setpoint Command Class, version 1-3	45
4.18.1	Mandatory interview	45
4.18.2	Minimum end user functionalities	46
4.18.2.1	Change setpoint for a supported type	46
4.18.3	Node properties	46
4.19	User Code Command Class, version 1-2	47
4.19.1	Mandatory interview	47
4.19.2	Minimum end user functionalities	49

4.19.2.1	Set/modify a User Code.....	49
4.19.2.2	Erase a User Code.....	50
4.19.2.3	Set the keypad mode (v2).....	50
4.19.2.4	Set the Master Code (v2).....	51
4.19.3	Node properties	51
4.19.4	Additional control requirements.....	51
4.20	Window Covering Command Class, version 1	52
4.20.1	Mandatory interview.....	52
4.20.2	Minimum end user functionalities	52
4.20.2.1	Go to position	52
4.20.2.2	Start level change up or down.....	53
4.20.2.3	Stop level change	53
4.20.3	Node properties	53
4.20.4	Additional control requirements.....	53
5	MANAGEMENT COMMAND CLASS CONTROL DEFINITIONS	54
5.1	Association Command Class, version 1-3	55
5.1.1	Mandatory node interview	55
5.1.2	Minimum end user functionalities	55
5.1.3	Node properties	55
5.1.4	Additional control requirements.....	56
5.1.4.1	Removing associations	56
5.2	Association Group Information (AGI) Command Class, version 1-3	57
5.2.1	Mandatory node interview	57
5.2.2	Minimum end user functionalities	57
5.2.3	Node properties	57
5.3	Battery Command Class, version 1	58
5.3.1	Mandatory node interview	58
5.3.2	Minimum end user functionalities	58
5.3.3	Node properties	58
5.3.4	Additional control requirements.....	58
5.4	Device Reset Locally Command Class, version 1	59
5.4.1	Mandatory node interview	59
5.4.2	Minimum end user functionalities	59
5.4.3	Node properties	59
5.4.4	Additional control requirements.....	59
5.5	Firmware Update Meta Data Command Class, version 1-6	60
5.5.1	Mandatory node interview	60
5.5.2	Minimum end user functionalities	60
5.5.2.1	Firmware update	60
5.5.3	Node properties	61
5.5.4	Additional control requirements.....	61
5.6	Indicator Command Class, version 1-3	62
5.6.1	Mandatory node interview	62
5.6.2	Minimum end user functionalities	63
5.6.2.1	Identify	63

5.6.3	Node properties	63
5.6.4	Additional control requirements.....	63
5.7	Multi Channel Association Command Class, version 2-4.....	64
5.7.1	Mandatory node interview	64
5.7.2	Minimum end user functionalities	64
5.7.3	Node properties	64
5.7.4	Additional control requirements.....	65
5.7.4.1	Removing associations	65
5.8	Version Command Class, version 1-3	66
5.8.1	Mandatory node interview	66
5.8.2	Minimum end user functionalities	66
5.8.3	Node properties	66
5.8.4	Additional control requirements.....	66
5.9	Wake-Up Command Class, version 1-2.....	67
5.9.1	Mandatory node interview	67
5.9.2	Minimum end user functionalities	67
5.9.3	Node properties	67
5.9.4	Additional control requirements.....	68
6	TRANSPORT-ENCAPSULATION COMMAND CLASS CONTROL DEFINITIONS.....	69
6.1	CRC-16 Encapsulation Command Class, version 1.....	69
6.1.1	Mandatory node interview	69
6.1.2	Minimum end user functionalities	69
6.1.3	Node properties	69
6.1.4	Additional control requirements.....	69
6.2	Multi Channel Command Class, version 3-4	70
6.2.1	Mandatory node interview	70
6.2.2	Minimum end user functionalities	70
6.2.3	Node properties	71
6.2.4	Additional control requirements.....	71
6.2.4.1	Root Device and End Point Command Classes	71
6.2.4.2	S0 only Multi Channel nodes.....	71
6.2.4.3	Association and Multi Channel Association mapping.....	71
6.3	Security 0 Command Class	72
6.3.1	Mandatory node interview	72
6.3.2	Minimum end user functionalities	72
6.3.3	Node properties	72
6.3.4	Additional control requirements.....	72
6.4	Security 2 Command Class	73
6.4.1	Mandatory node interview	73
6.4.2	Minimum end user functionalities	73
6.4.3	Node properties	73
6.4.4	Additional control requirements.....	73
6.5	Supervision Command Class, version 1	74
6.5.1	Mandatory node interview	74
6.5.2	Minimum end user functionalities	74

6.5.3	Node properties	74
6.5.4	Additional control requirements.....	74
REFERENCES.....		75

Table of Figures

<u>Figure 1, Barrier Operator Command Class interview</u>	<u>7</u>
<u>Figure 2, Basic Command Class interview</u>	<u>9</u>
<u>Figure 3, Binary Switch Command Class interview</u>	<u>11</u>
<u>Figure 4, Central Scene Command Class interview</u>	<u>12</u>
<u>Figure 5, Color Switch Command Class interview</u>	<u>14</u>
<u>Figure 6, Configuration Command Class interview</u>	<u>16</u>
<u>Figure 7, Door Lock Command Class interview</u>	<u>19</u>
<u>Figure 8, Entry Control Command Class interview</u>	<u>21</u>
<u>Figure 9, IR Repeater Command Class interview</u>	<u>23</u>
<u>Figure 10, Meter Command Class interview</u>	<u>26</u>
<u>Figure 11, Multilevel Sensor Command Class interview</u>	<u>28</u>
<u>Figure 12, Multilevel Switch Command Class interview</u>	<u>30</u>
<u>Figure 13, Notification Command Class interview</u>	<u>32</u>
<u>Figure 14, Push/Pull node discovery, AGI table probing</u>	<u>34</u>
<u>Figure 15, Push/Pull node discovery, Notification Command Class test.....</u>	<u>35</u>
<u>Figure 16, detecting and clearing persistent notifications, identical sequence numbers</u>	<u>37</u>
<u>Figure 17, detecting and clearing persistent notifications with incremental sequence numbers</u>	<u>37</u>
<u>Figure 18, Pull node event retrieval until receiving queue empty</u>	<u>38</u>
<u>Figure 19, Simple AV Control Command Class interview</u>	<u>39</u>
<u>Figure 20, Sound Switch Command Class interview</u>	<u>41</u>
<u>Figure 21, Thermostat Mode Command Class interview</u>	<u>43</u>
<u>Figure 22, Thermostat Setback Command Class interview</u>	<u>44</u>
<u>Figure 23, Thermostat Setpoint Command Class interview</u>	<u>45</u>
<u>Figure 24, User Code Command Class interview</u>	<u>48</u>

<u>Figure 25, Window Covering Command Class interview</u>	52
<u>Figure 26, Association Command Class interview</u>	55
<u>Figure 27, Association Group Information Command Class interview</u>	57
<u>Figure 28, Battery Command Class interview</u>	58
<u>Figure 29, Firmware Update Meta Data Command Class interview</u>	60
<u>Figure 30, Firmware Update Meta Data::Firmware Update</u>	61
<u>Figure 31, Indicator Command Class interview</u>	62
<u>Figure 32, Multi Channel Association Command Class interview</u>	64
<u>Figure 33, Version Command Class interview</u>	66
<u>Figure 34, Wake Up Command Class interview</u>	67
<u>Figure 35, Multi Channel Command Class interview</u>	70

Table of Tables

<u>Table 1, Barrier Operator::Activate/deactivate supported subsystems</u>	7
<u>Table 2, Barrier Operator::Initiate opening (or stop closing)</u>	8
<u>Table 3, Barrier Operator::Initiate closing</u>	8
<u>Table 4, Basic::Set the node state</u>	9
<u>Table 5, Binary Switch::Set the node state</u>	11
<u>Table 6, Color Switch::Set the color</u>	14
<u>Table 7, Color Switch::Fade/enhance a color component</u>	15
<u>Table 8, Color Switch::Stop fading/enhancing a color component</u>	15
<u>Table 9, Configuration::Set a (normal) configuration parameter value</u>	17
<u>Table 10, Configuration::Set an extended range configuration parameter value</u>	17
<u>Table 11, Configuration::Reset all configuration parameter values to default</u>	18
<u>Table 12, Door Lock::Configure the door lock</u>	20
<u>Table 13, Door Lock::Set the door mode</u>	20
<u>Table 14, Entry Control Keypad::Configure the keypad</u>	21
<u>Table 15, IR Repeater::Repeat an IR Code</u>	24
<u>Table 16, IR Repeater::Learn an IR Code</u>	24

<u>Table 17, IR Repeater::Stop learning an IR Code</u>	25
<u>Table 18, IR Repeater::Erase an IR Code from memory</u>	25
<u>Table 19, IR Repeater::Repeat a learnt IR Code</u>	25
<u>Table 20, Meter::Reset cumulated data</u>	26
<u>Table 21, Multilevel Switch::Set the level</u>	30
<u>Table 22, Multilevel Switch::Start level change up/down</u>	31
<u>Table 23, Multilevel Switch::Stop level change up/down</u>	31
<u>Table 24, Simple AV Control::Send a supported AV code</u>	39
<u>Table 25, Sound Switch::Configure the sound switch</u>	41
<u>Table 26, Sound Switch::Play/stop a selected or default tone</u>	42
<u>Table 27, Thermostat Mode::Change mode</u>	43
<u>Table 28, Thermostat Setback::Change setback for a supported type</u>	44
<u>Table 29, Thermostat Setpoint::Change setpoint for a supported type</u>	46
<u>Table 30, User Code::Set a User Code</u>	49
<u>Table 31, User Code::Set a User Code (v2)</u>	49
<u>Table 32, User Code::Erase a User Code</u>	50
<u>Table 33, User Code::Erase a User Code (v2)</u>	50
<u>Table 34, User Code::Set the keypad mode</u>	50
<u>Table 35, User Code::Set the Master Code</u>	51
<u>Table 36, Window covering::Go to a position</u>	52
<u>Table 37, Window covering::Start level change up or down</u>	53
<u>Table 38, Window covering::Stop level change</u>	53
<u>Table 39, Indicator::Identify</u>	63

1 ABBREVIATIONS

Abbreviation	Explanation
AGI	Association Group Information (Command Class)
AOS	Always On Slave
CSC	Central Static Controller
DT	Device Type
IP	Internet Protocol
LAN	Local Area Network
LSB	Less significant bit
LSS	Listening Sleeping Slave
MSB	Most significant bit
NIF	Node Information Frame
NOP	No Operation (Command Class)
PAN	Personal Area Network
PC	Portable Controller
PS	Portable Slave
QR	Quick Reponse
RPC	Reporting Portable Controller
RSS	Reporting Sleeping Slave
RT	Role Type
S0	Security 0 Command Class
S2	Security 2 Command Class
SIS	SUC NodeID Server
SSC	Sub Static Controller
SUC	Static Update Controller
Z/IP	Z-Wave for IP

2 INTRODUCTION

2.1 Purpose

This document describes the requirement associated to the control of Z-Wave Command Classes. It contains a list of requirements applying for all Z-Wave compliant node controlling a given Command Class.

2.2 Audience and prerequisites

This document is public. The reader is expected to be familiar with Z-Wave development, Command Classes, Device Types and Role Types.

2.1 Precedence of definitions

Individual Z-Wave Role Type, Z-Wave Plus v2 Device Type and Command Class Specifications approved as a final version during the type/class development process **MUST** take precedence over this document temporarily until such individual specifications have been integrated into this document.

2.2 Terms used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document **MUST** be interpreted as described in IETF RFC 2119 [1].

3 COMMAND CLASS CONTROL OVERVIEW

3.1 Controlled and Supported Command Classes

A node can support and/or control a given Command Class.

If a Command Class is supported:

The node implements all the Command Class functionalities and can be set and read back by other nodes. When a Command Class is supported, the node is required to implement the whole Command Class and observe the requirements specified in [2], [3], [4] and [5].

If a Command Class is controlled:

The node implements the ability to interview, read and/or set other nodes supporting the Command Class. Nodes controlling Command Classes MAY use a subset of the Commands within a Command Class (for example only Set commands).

CL:0000.00.13.01.1

3.1.1 Control via association groups

A Basic Set Command sent to Association Group destinations is a form of (static or partial) Command Class control via association groups.

Even if using a Command Class for controlling other nodes via association groups, the usage MUST comply with the Command Class description ([2], [3], [4] and [5]) and the controlling node use properly formed commands.

CL:0000.00.11.02.1

3.1.2 “Full” control

When a Command Class is marked as controlled during certification, the controlling node is said to implement “full” control of the actual Command Class and it MUST observe the requirements for the Command Class defined in this document.

CL:0000.00.11.03.1

The Z-Wave Plus v2 Device Type Specification [7] mandates some nodes to control a given set of Command Classes. It means that the controlling node MUST respect the requirements described in this document for the actual Command Classes.

CL:0000.00.11.04.1

3.2 Command Classes support discovery requirements

- CL:0000.00.11.05.1 A controlling node MUST read the capabilities and secure capabilities of a node/End Point once before trying to control a given Command Class.
- CL:0000.00.11.06.2 A controlling node MUST read the Command Class version number of a supporting node using the Version Command Class prior to controlling the Command Class. There can be 2 exceptions to this rule:
- If the controlling node controls only version 1 of a given Command Class, it may skip requesting the supporting node version for the actual Command Class.
 - A controlling node may issue version 1 commands in the supporting node interview before knowing the supporting node Command Class' version. (e.g., when interviewing the Version Command Class itself)
- CL:0000.00.11.07.1 A node controlling a given command class MUST allow an end user to control the command class in all listening supporting nodes present in the network operating with a security class that is granted to the controlling node.
- CL:0000.00.11.08.1 A node controlling a Command Class MUST allow an end user to control a sleeping supporting node if it is the Wake Up destination.

3.3 Command Classes control requirements

This specification defines how to control Command Classes by specifying:

- A required Command Class interview or capability discovery
- A minimum required set of actions that an end user can perform or trigger and their associated Z-Wave commands
- A minimum required set of information relating to the supporting node that the end user can see or access.
- An optional set of additional requirements to controlling nodes

3.3.1 Mandatory supporting node interview

- CL:0000.00.21.01.1 The mandatory node interview specifies the frame flow that MUST be observed on the Z-Wave radio.
- CL:0000.00.21.02.1 This interview MUST be performed prior to issuing any control command to the supporting node. Preferably, it should be done during the commissioning phase of the supporting node or shortly after the inclusion of the controlling node.
- CL:0000.00.23.01.1 A controlling node MAY issue additional commands that are not specified in the frame flows and MAY issue some commands in a different order. The mandatory frame flow indicates the minimum set of commands that MUST be transmitted to a destination.
- CL:0000.00.21.03.1
- CL:0000.00.21.04.1 A controlling node MUST NOT skip or abort the interview of a Command Class if another independent Command Class could not be correctly interviewed.

CL:0000.00.22.01.1

The following order for reading Command Class capabilities is RECOMMENDED after discovering the Security Class and encapsulation capabilities of a node:

- Version Command Class
- Z-Wave Plus Info Command Class
- Wake Up Command Class
- Association OR Multi Channel Association Command Class
- Association Group Information (AGI) Command Class
- Actuator Command Classes
- Data reporting Command Classes
- Multi Channel Command Class (and repeat the above order for each End Point, if any)

CL:0000.00.22.02.1

Some interviews or controlling scenarios may trigger no response in return to get type commands. In this case, it is RECOMMENDED to use timeouts according to [6].

3.3.2 Minimum end user functionalities

The minimum end user functionalities section specifies what minimum set of actions an end user can perform on a supporting node when using the controlling node.

CL:0000.00.31.01.1

CL:0000.00.33.01.1

Each section describing a required functionality indicates the command(s) that MUST be transmitted on the Z-Wave radio. Fields not present or described in the mandatory command(s) MAY be used freely by the controlling node either automatically or based on user input.

CL:0000.00.31.02.1

Fields indicated as “user defined” MUST be filled based on end user input. In this case, the end user MUST be able to select any value. (e.g. if the field is 2 bytes long, values from 0 to 65535 MUST be available)

CL:0000.00.31.03.1

Fields indicated as “User defined among supported” MUST be filled based on user input and the supported values by the supporting node. The controlling node MUST allow the end user to set values supported by a supporting node even if it does not know what a given value represents.

CL:0000.00.31.04.1

Fields indicated as “User defined among x..y and z” MUST be filled based on user input and MUST be able to select between the indicated values.

CL:0000.00.31.05.1

The product documentation MUST point out how to perform each action associated to the minimum end user functionalities required by a Command Class.

3.3.3 Command Class control version

CL:0000.00.11.09.1

Like a supporting node implements a version of its supported Command Classes, a controlling node MUST also implement a given version of a Command Class it controls. A node controlling version 3 of a Command Class will be able to control the functionalities of version 1, 2 and 3 supporting nodes.

CL:0000.00.11.0A.1

If a controlling node controls a node supporting a lower version, it MUST use the commands and format corresponding to the version it controls and MUST NOT use the fields described in the mandatory commands if they belong to a newer version.

A node controlling a Command Class is not mandated to interview, provide minimum end user functionality or show node properties belonging to a newer version of the actual Command Class.

CL:0000.00.11.0B.1

When a version is indicated in the mandatory interview or mandatory commands for end user functionalities, it MUST represent the minimum common version number between the supporting and controlling node. For example, with a version 4 controlling node and version 2 supporting node, the interview, minimum end user functionalities and properties MUST follow version 1 and 2 indications.

3.4 Command Classes not present in this document

CL:0000.00.13.02.1

CL:0000.00.11.0C.1

A node MAY advertise that it controls a Command Class not (yet) defined in this document during certification. In this case, the controlling node MUST comply with the following guidelines:

- It MUST use all Get type commands to read the nodes capabilities during the node interview
- It SHOULD provide the end user actions using all Set type Commands available in the Command Class
- It SHOULD show or let the end user access all relevant state/property/configuration relating to the Command Class using the Report type Commands available in the Command Class.

A controller following this guideline is likely to be compliant when a new control specification is released for an actual Command Class.

4 APPLICATION COMMAND CLASS CONTROL DEFINITIONS

4.1 Barrier Operator Command Class, version 1

4.1.1 Mandatory node interview

CL:0066.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 1.

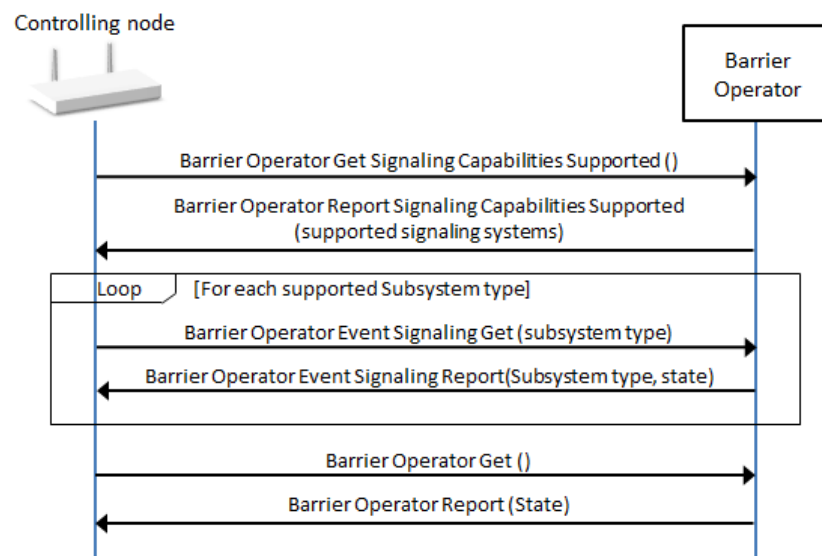


Figure 1, Barrier Operator Command Class interview

4.1.2 Minimum end user functionalities

CL:0066.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.1.2.1 Activate/deactivate supported subsystems

CL:0066.01.31.02.1

For all supported subsystems, the end user must be able to activate and deactivate each of them. When the end user performs this action, the issued command **MUST** comply with Table 1.

Table 1, Barrier Operator::Activate/deactivate supported subsystems

Field	Value
Command	BARRIER_OPERATOR_SIGNAL_SET
Subsystem type	User defined among supported subsystems.
State	User defined among 0x00 and 0xFF.

4.1.2.2 Initiate opening (or stop closing)

CL:0066.01.31.03.1

When the end user performs this action, the issued command MUST comply with Table 2.

Table 2, Barrier Operator::Initiate opening (or stop closing)

Field	Value
Command	BARRIER_OPERATOR_SET
Target Value	0xFF

4.1.2.3 Initiate Closing

CL:0066.01.31.04.1

When the end user performs this action, the issued command MUST comply with Table 3.

Table 3, Barrier Operator::Initiate closing

Field	Value
Command	BARRIER_OPERATOR_SET
Target Value	0x00

4.1.3 Node properties

CL:0066.01.42.01.1

The controlling node SHOULD have a UI allowing the end user to see/access the following properties:

- Last known Barrier State (Open, Closed, stopped at a % position or unknown)
- Last known Subsystems' state (ON/OFF), if any

4.1.4 Additional control requirements

CL:0066.01.52.01.1

A node controlling this command class SHOULD also control the Notification Command Class.

4.2 Basic Command Class, version 1-2

4.2.1 Mandatory node interview

CL:0020.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 2.

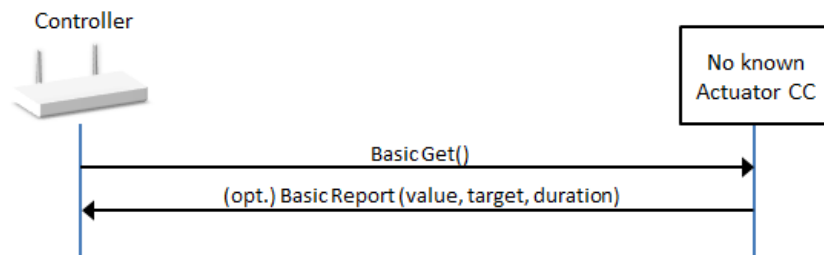


Figure 2, Basic Command Class interview

CL:0020.01.21.02.2

A controlling node **MUST** conclude that the Basic Command Class is not supported by a node (or endpoint) if no Basic Report is returned.

4.2.2 Minimum end user functionalities

CL:0020.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.2.2.1 Set the node On/Off state

CL:0020.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 4.

Table 4, Basic::Set the node state

Field	Value
Command	BASIC_SET
Value	User defined among 0x00 and 0xFF. More values MAY be available to the end user.

4.2.3 Node properties

CL:0020.01.43.01.1

A controlling node **MAY** have a UI allowing the end user to see the following properties:

- Last known state (On or Off)

CL:0020.01.42.01.1

A controlling node **SHOULD NOT** assume that the last state is as defined in the last Set Command and **SHOULD** issue a subsequent Basic Get Command even if receiving a Supervision SUCCESS status after issuing a Basic Set Command.

4.2.4 Additional control requirements

CL:0020.01.51.01.2

A controlling node MUST NOT use the Basic Command Class for controlling a node (or endpoint) if the controlling node controls at least one actuator command class supported by a node (or endpoint). The actuator command classes are defined in the Application Command Class specification ([2]).

4.3 Binary Switch Command Class, version 1-2

4.3.1 Mandatory node interview

CL:0025.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 3.

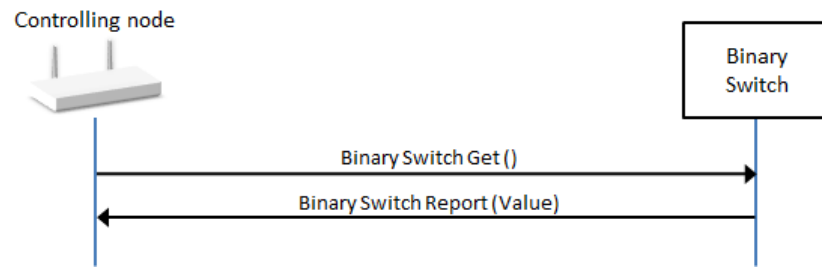


Figure 3, Binary Switch Command Class interview

4.3.2 Minimum end user functionalities

CL:0025.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.3.2.1 Set the node On/Off state

CL:0025.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 5.

Table 5, Binary Switch::Set the node state

Field	Value
Command	SWITCH_BINARY_SET
Value	User defined among 0x00 and 0xFF.
Duration (v2)	User defined or 0xFF

4.3.3 Node properties

CL:0025.01.51.01.1

A node controlling this Command Class **SHOULD** have a UI allowing the end user to see the following properties:

- Last known state (On or Off)

4.4 Central Scene Command Class, version 1-3

4.4.1 Mandatory node interview

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 4.

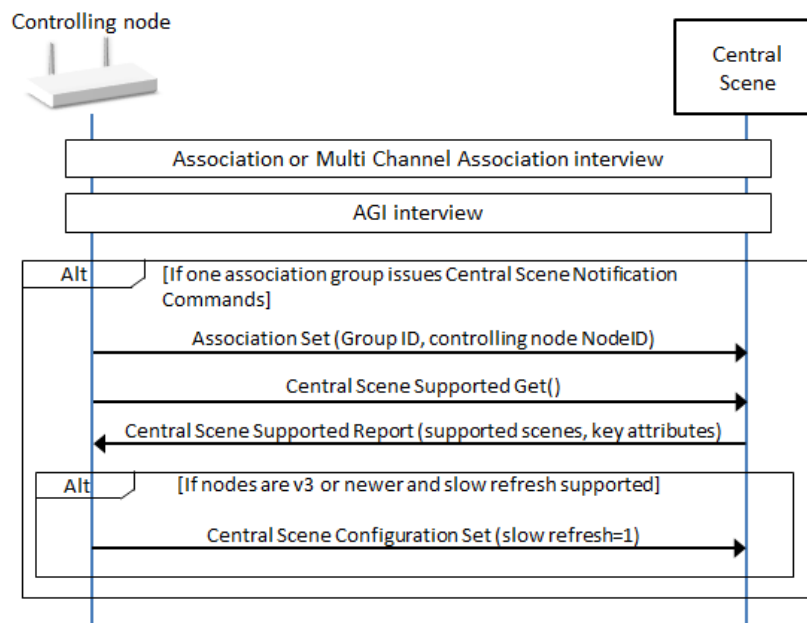


Figure 4, Central Scene Command Class interview

4.4.2 Minimum end user functionalities

There is no minimum end user functionalities associated with the control of this Command Class.

A controlling node **SHOULD** allow the user to define which other nodes to actuate when receiving a Central Scene Notification from a given node with a given key attribute and SceneID.

4.4.3 Node properties

The controlling node **MUST** have a UI allowing the end user to see how many Scenes ID (or buttons) and key attributes are supported by a node.

The controlling node **MUST** make received Central Scene Notifications available to the end user.

4.4.4 Additional control requirements

- CL:005B.01.51.01.1 A node controlling this command class MUST also control:
- Association Command Class, version 2
 - Association Group Information, version 3
- CL:005B.01.51.02.1 A controlling node MUST associate itself to a group issuing Central Scene Notification Commands in order to provide end user functionalities.
- CL:005B.01.51.03.1 A controlling node MUST NOT remove associations in order to associate itself to an association group issuing Central Scene Notification Commands.
- CL:005B.01.53.01.1 It is OPTIONAL for a controlling node to provide end user functionalities and node properties if it cannot associate itself to an association group sending Central Scene Notification Commands. (e.g. all Association Groups sending the relevant command are full)

4.5 Color Switch Command Class, version 1-3

4.5.1 Mandatory node interview

CL:0033.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 5.

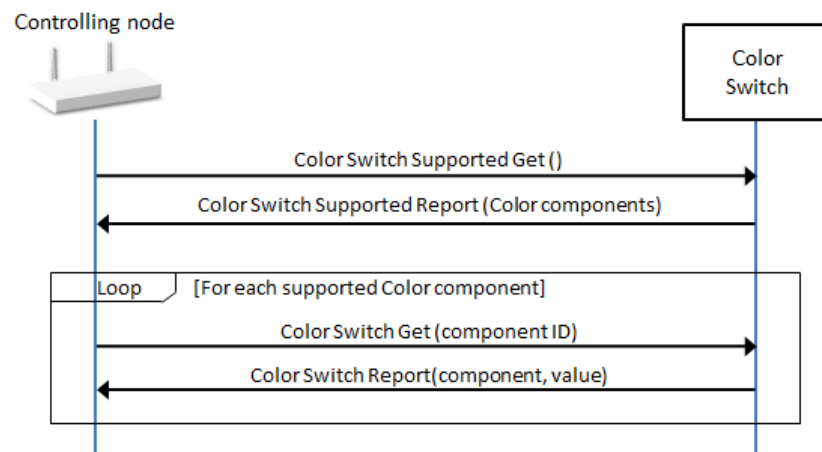


Figure 5, Color Switch Command Class interview

4.5.2 Minimum end user functionalities

CL:0033.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.5.2.1 Set the color

CL:0033.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 6.

Table 6, Color Switch::Set the color

Field	Value
Command	SWITCH_COLOR_SET
Color component count	Determined by the controlling node based on user input
Color Component ID x	User defined among supported
Value x	User defined
Duration (v2)	User defined or 0xFF

CL:0033.01.31.03.1

For this functionality, the color selected by the end user **MUST** be set using a single command.

4.5.2.2 Fade/enhance a color component

CL:0033.01.31.04.1

When the end user performs this action, the issued command MUST comply with Table 7.

Table 7, Color Switch::Fade/enhance a color component

Field	Value
Command	SWITCH_COLOR_START_LEVEL_CHANGE
Up/down	User defined
Color Component ID	User defined among supported
Duration (v3)	User defined or 0xFF

4.5.2.3 Stop fading/enhancing a color component

CL:0033.01.31.05.1

When the end user performs this action, the issued command MUST comply with Table 8.

Table 8, Color Switch::Stop fading/enhancing a color component

Field	Value
Command	SWITCH_COLOR_STOP_LEVEL_CHANGE
Color Component ID	User defined among supported

4.5.3 Node properties

CL:0033.01.42.01.1

A controlling node SHOULD have a UI allowing the end user to see the following properties:

- Last known configured color or color components values

4.5.4 Additional control requirements

CL:0033.01.51.01.1

A node controlling this Command Class MUST also control:

- Binary Switch Command Class, version 2
- Multilevel Switch, version 4

4.6 Configuration Command Class, version 1-4

4.6.1 Mandatory node interview

CL:0070.03.21.01.1

A node controlling this Command Class MUST perform a supporting node interview according to Figure 6.

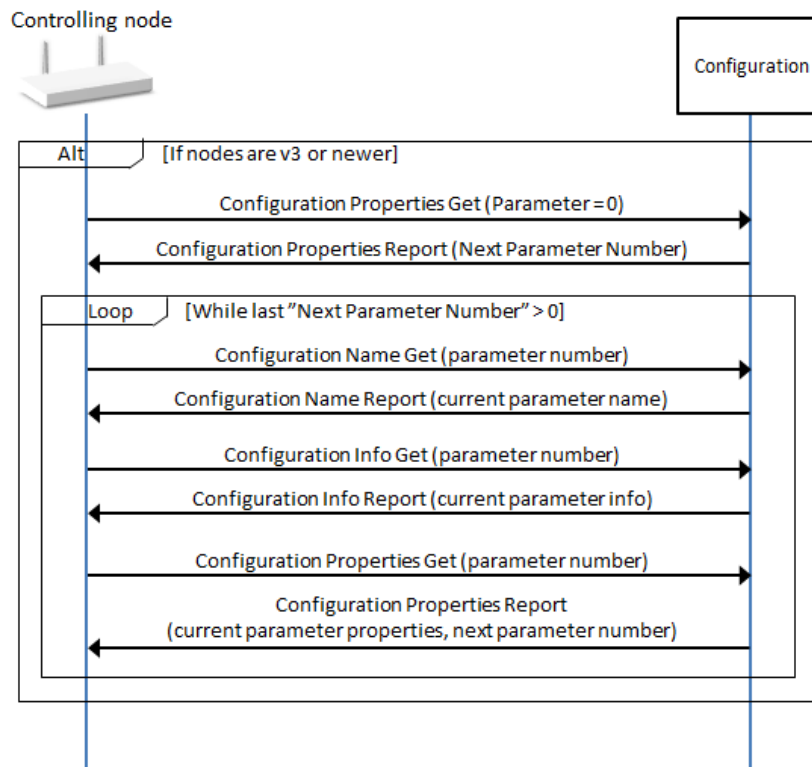


Figure 6, Configuration Command Class interview

4.6.2 Minimum end user functionalities

CL:0070.01.31.01.1

A node controlling this command class MUST allow the end user to perform the actions described below.

4.6.2.1 Set a configuration parameter value

CL:0070.01.31.02.1

When the end user performs this action, the issued command MUST comply with Table 9 for parameters numbers smaller than 256 and Table 10 for parameter numbers greater or equal to 256.

Table 9, Configuration::Set a (normal) configuration parameter value

Field	Value
Command	CONFIGURATION_SET
Parameter number	For version 2 or older: User defined For version 3 or newer: User defined among supported parameter numbers.
Size	For version 2 or older: User defined among 1, 2 and 4. For version 3 or newer: Automatically determined from configuration parameter number properties
Default	User defined or 0x00 For version 3 or older: this field SHOULD NOT be set to 1.
Configuration Value	For version 2 or older: User defined. For version 3 or newer: User defined among supported values

Table 10, Configuration::Set an extended range configuration parameter value

Field	Value
Command (v2)	CONFIGURATION_BULK_SET
Parameter offset (v2)	For version 2: User defined among any value (256..65535). For version 3 or newer: User defined among supported parameter numbers.
Number of Parameters (v2)	User defined or 0x01.
Size (v2)	For version 2: User defined among 1, 2 and 4. For version 3 or newer: Automatically determined from configuration parameter number properties
Default (v2)	User defined or 0x00 For version 3 or older: this field SHOULD NOT be set to 1.
Handshake (v2)	0x00
Configuration Value (v2)	For version 2: User defined. For version 3 or newer: User defined among supported values

4.6.2.2 Reset all configuration parameter values to default

When the end user performs this action, the issued command MUST comply with Table 11.

CL:0070.04.31.01.1

Table 11, Configuration::Reset all configuration parameter values to default

Field	Value
Command (v4)	CONFIGURATION_DEFAULT_RESET

4.6.3 Node properties

CL:0070.03.41.01.1

If nodes are version 3, the controlling node MUST have a UI allowing the end user to see supported parameter numbers, their current value, their allowed value range and their default value.

Values MUST be presented according to the Format advertised in the Configuration Properties Report Command.

CL:0070.01.41.01.1

If nodes are version 1 or 2, the controlling node MUST have a UI showing the known parameters that have been set by the end user and their current value.

4.6.4 Additional control requirements

CL:0070.04.51.01.1

If nodes are version 4, a node controlling this command class MUST NOT issue a Bulk Set Command supporting nodes advertising “No Bulk support” in the Configuration Properties Report Commands.

CL:0070.04.51.02.1

If nodes are version 4, a node controlling this command class MUST NOT allow an end user to issue a Configuration Set or a Bulk Set Command for parameters advertised as “read-only” in the Configuration Properties Report Command.

4.7 Door Lock Command Class, version 1-4

4.7.1 Mandatory node interview

CL:0062.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 7.

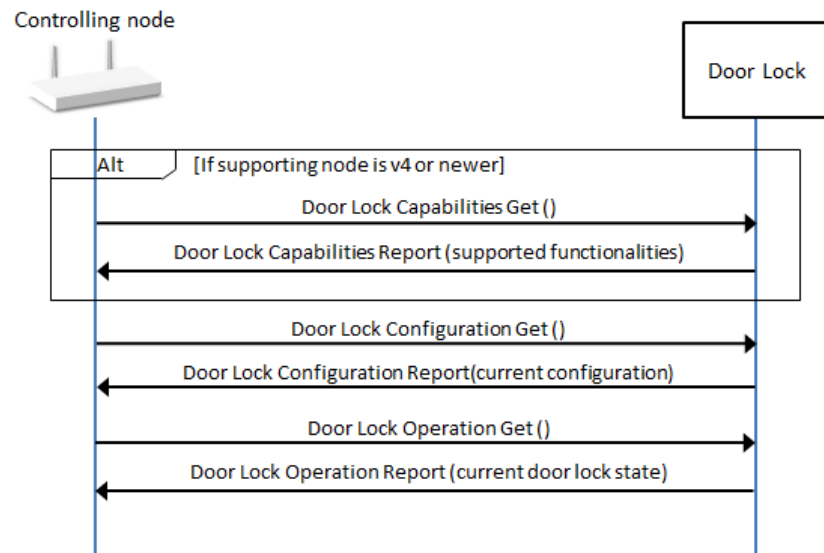


Figure 7, Door Lock Command Class interview

4.7.2 Minimum end user functionalities

CL:0062.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.7.2.1 Configure the door lock

CL:0062.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 12.

Table 12, Door Lock::Configure the door lock

Field	Value
Command	DOOR_LOCK_CONFIGURATION_SET
Operation type	For version 4 or newer: User defined among supported operation types. For version 3 or older: User defined among 0x01..0x02
Outside Door Handles Mode	Free (0xF recommended)
Inside Door Handles Mode	Free (0xF recommended)
Lock Timeout Minutes	User defined (0x00..0xFD) if Operation Type is set to 0x02, else 0xFE
Lock Timeout seconds	User defined (0x00..0x3B) if Operation Type is set to 0x02, else 0xFE
Auto-relock time (v4)	User defined if supported, else 0
Hold and release time (v4)	User defined if supported, else 0
BTB (v4)	User defined if supported, else 0
TA (v4)	User defined if supported, else 0

4.7.2.2 Set the door mode

CL:0062.01.31.03.1

When the end user performs this action, the issued command MUST comply with Table 13.

Table 13, Door Lock::Set the door mode

Field	Value
Command	DOOR_LOCK_OPERATION_SET
Door Lock Mode	For version 4 or newer: User defined among supported modes. For version 3 or older: User defined among 0x00 and 0xFF. Timed Operation modes MUST NOT be selectable by the end user if the door lock is not configured in Timed Operation

4.7.3 Node properties

CL:0062.01.41.01.1

Controller SHOULD have a UI allowing the end user to see the following properties:

- Last known Door Lock mode (Secure, Unsecured, etc.)
- Current door lock configuration

4.8 Entry Control Command Class, version 1

4.8.1 Mandatory node interview

CL:006F.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 8.

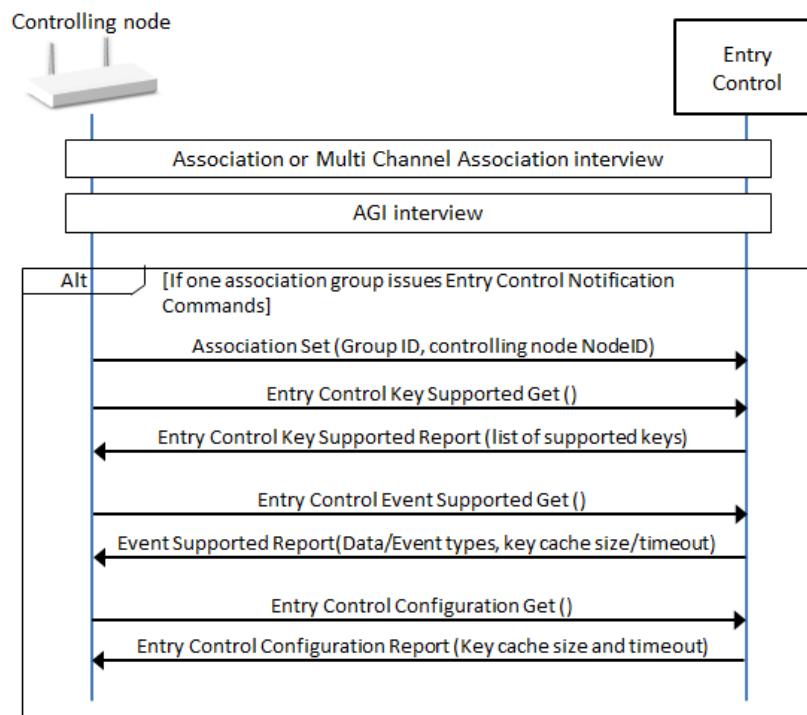


Figure 8, Entry Control Command Class interview

4.8.2 Minimum end user functionalities

CL:006F.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.8.2.1 Configure the keypad

CL:006F.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 14.

Table 14, Entry Control Keypad::Configure the keypad

Field	Value
Command	ENTRY_CONTROL_CONFIGURATION_SET
Key Cache Size	User defined among supported values
Key Cache Timeout	User defined among supported values

4.8.3 Node properties

- CL:006F.01.41.01.1 A controlling node **MUST** have a UI allowing the end user to see the received Entry Control Notifications (Event type and data)

4.8.4 Additional control requirements

- CL:006F.01.51.01.1 A node controlling this command class **MUST** also control:
- Association Command Class, version 2
 - Association Group Information, version 3
- CL:006F.01.51.02.1 A controlling node **MUST** associate itself to a group issuing Entry Control Notification Commands before performing a supporting node interview and providing end user functionalities.
- CL:006F.01.51.03.1 A controlling node **MUST NOT** remove associations in order to associate itself to an association group issuing Entry Control Notification Commands.
- CL:006F.01.52.01.1 A controlling node **SHOULD NOT** provide end user functionalities if it cannot associate itself to an association group sending Entry Control Notification Commands. (e.g. all Association Groups sending the relevant command are full)
- CL:006F.01.52.02.1 A controlling node **SHOULD** have a UI allowing the end user to define what actions to take based on received Entry Control Notifications.
- CL:006F.01.52.03.1 A controlling node **SHOULD** also control Door Lock Command Class and Barrier Operator Command Class. It **SHOULD** also allow the user to set the door mode or initiate opening/closing of a given node based on received Entry Control Notifications.

4.9 IR Repeater Command Class, version 1

4.9.1 Mandatory node Interview

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 9.

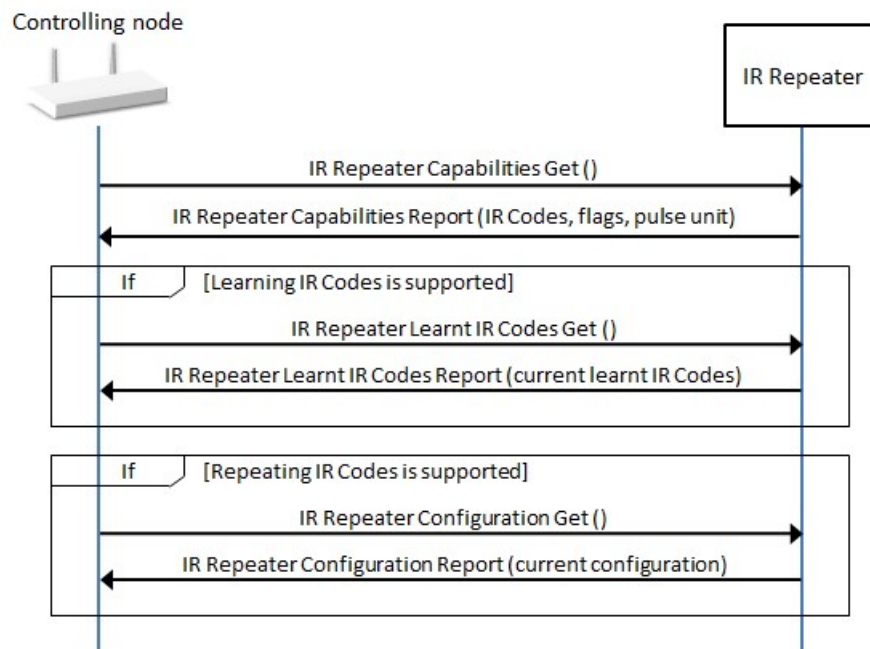


Figure 9, IR Repeater Command Class interview

4.9.2 Minimum end user functionalities

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.9.2.1 Repeat an IR Code

This action **MUST** be available to the end user if the supporting node supports repeating IR Codes.

When the end user performs this action, the issued commands **MUST** comply with Table 15.

Table 15, IR Repeater::Repeat an IR Code

Field	Value
Command	IR_REPEATER_REPEAT
Sequence number	Controlling node defined. It MUST be incremented at each new repeat action
Sub carrier	Controlling node defined within the capabilities of the supporting node
Duty Cycle	Controlling node defined within the capabilities of the supporting node
Pulse time unit	Controlling node defined within the range advertised by the supporting node in the IR Repeater Capabilities Report Command
Report Number	Controlling node defined.
Last	1 for the last command, 0 else.
Data	Controlling node defined. The end user MUST be able to select an IR Code that will be transferred

4.9.2.2 Learn an IR Code

This action **MUST** be available to the end user if the supporting node supports Learning IR Codes.

When the end user performs this action, the issued command **MUST** comply with Table 16.

Table 16, IR Repeater::Learn an IR Code

Field	Value
Command	IR_REPEATER_IR_CODE_LEARNING_START
IR Code identifier	User defined among available IR Codes slots
Timeout	Controlling node or User defined.
Pulse time unit	Controlling node defined within the range advertised by the supporting node in the IR Repeater Capabilities Report Command

The Controlling node **MUST** inform the user about the status of the IR Code learning when the IR Code Learning Status Command is received.

The controlling node **MAY** allow the end user to interrupt the learning process, if it does, the issued command **MUST** comply with Table 17.

Table 17. IR Repeater::Stop learning an IR Code

Field	Value
Command	IR_REPEATER_IR_CODE_LEARNING_STOP

4.9.2.3 Erase a learnt IR code

This action MUST be available to the end user if the supporting node supports Learning IR Codes.

When the end user performs this action, the issued command MUST comply with Table 18.

Table 18, IR Repeater::Erase an IR Code from memory

Field	Value
Command	IR_REPEATER_LEARNT_IR_CODE_REMOVE
IR Code identifier	User defined among available IR Codes slots that have a defined IR Code

4.9.2.4 Repeat a learnt IR code

This action MUST be available to the end user if the supporting node supports Repeating IR Codes.

When the end user performs this action, the issued command MUST comply with Table 18.

Table 19, IR Repeater::Repeat a learnt IR Code

Field	Value
Command	IR_REPEATER_REPEAT_LEARNT_CODE
IR Code identifier	User defined among available Learnt IR Codes slots

4.9.3 Node properties

If the supporting node supports IR Code learning:

- A controlling node MUST have a UI allowing the end user to see the which IR Code Identifiers contain a valid learnt code.

4.10 Meter Command Class, version 1-5

4.10.1 Mandatory node interview

CL:0032.01.21.01.1

A node controlling this Command Class MUST perform a supporting node interview according to Figure 10.

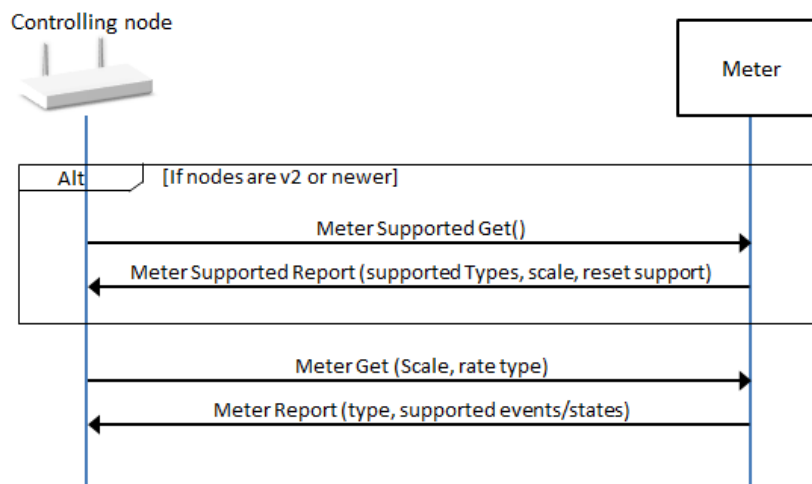


Figure 10, Meter Command Class interview

4.10.2 Minimum end user functionalities

CL:0032.02.31.01.1

A node controlling this command class MUST allow the end user to perform the actions described below.

4.10.2.1 Reset cumulated data

CL:0032.02.31.02.1

This action MUST be available to the end user if both nodes implement version 2 or newer and the supporting node indicates that meter reset is supported.

CL:0032.02.31.03.1

When the end user performs this action, the issued command MUST comply with Table 20.

Table 20, Meter::Reset cumulated data

Field	Value
Command (v2)	METER_RESET

4.10.3 Node properties

- CL:0032.01.41.01.1 A controlling node MUST have a UI allowing the end user to see the last readings for each scale and all cumulated values.
- CL:0032.01.41.02.1 A controlling node MUST always show the value even if the Type and/or Scale are unknown.
- CL:0032.01.42.01.1 A controlling node SHOULD implement the capability to update its list of Meter Type and Scales, so that new Meter Types and scales added in more recent versions are not presented as unknown.
- CL:0032.01.41.03.1 If a controlling node receives an unknown Meter Type or Scale, it MUST allow the end user to identify the Meter reading and MAY allow the user to assign a free-text description to that Meter reading

4.10.4 Additional control requirements

- CL:0032.01.51.01.1 Unless unsolicited Meter Report Commands are received, a controlling node MUST:
- Probe the current meter readings for each supported scale (and rate type if v4 nodes) at least every 6 hours for listening nodes.
 - Probe the current meter readings for each supported scale (and rate type if v4 nodes) when the supporting node issues a Wake Up Notification Command for sleeping nodes.

4.11 Multilevel Sensor Command Class, version 1-11

4.11.1 Mandatory node interview

CL:0031.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 11.

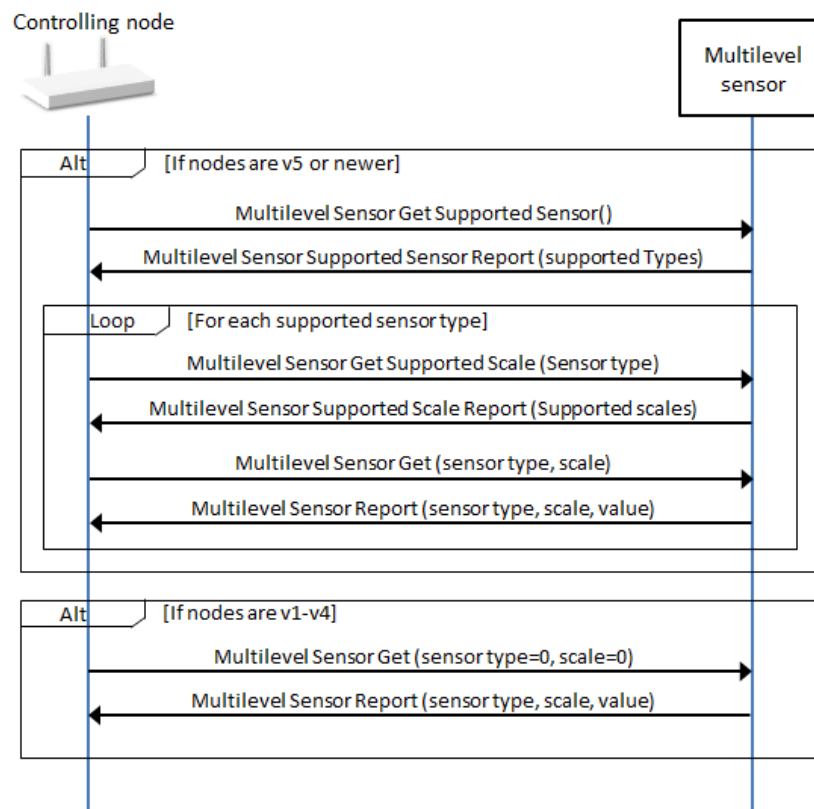


Figure 11, Multilevel Sensor Command Class interview

4.11.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

4.11.3 Node properties

CL:0031.01.41.01.1

A controlling node **MUST** allow the end user to see the received readings for every Sensor types

CL:0031.01.41.02.1

A controlling node **MUST** always show the sensor reading values even if the Sensor Type and/or Scale are unknown.

CL:0031.01.42.01.1

A controlling node **SHOULD** implement the capability to update its list of Sensor Type and Scales, so that new Sensor Types and Scales added in [9] are not presented as unknown.

CL:0031.01.41.03.2

If a controlling node receives an unknown Sensor Type or Scale, it **MUST** allow the end user to identify the Sensor reading and **MAY** allow the end user to assign a free-text description to the sensor reading.

4.11.4 Additional control requirements

CL:0031.01.51.01.1

Unless unsolicited Multilevel Sensor Report Commands are received, a controlling node **MUST**:

- Probe the current reading for each supported sensor type at least every 6 hours for listening nodes.
- Probe the current reading for each supported sensor type when the supporting node issues a Wake Up Notification Command for sleeping nodes.

CL:0031.01.52.01.1

A node controlling this command class **SHOULD** also control:

- Association Command Class, version 2
- Association Group Information, version 3

CL:0031.01.52.02.1

A controlling node **SHOULD** associate itself to an association group issuing Multilevel Report Commands after performing a supporting node interview and providing end user functionalities.

CL:0031.01.51.02.1

A controlling node **MUST NOT** remove associations in order to associate itself to an association group issuing Multilevel Report Commands.

CL:0031.01.52.03.1

Controller **SHOULD** have a UI allowing the end user to define rules or commands based on received readings.

4.12 Multilevel Switch Command Class, version 1-4

4.12.1 Mandatory node interview

CL:0026.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 12.

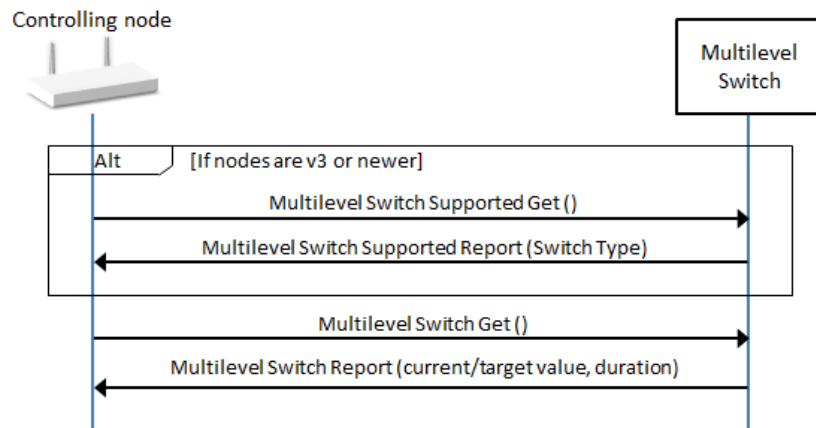


Figure 12, Multilevel Switch Command Class interview

4.12.2 Minimum end user functionalities

CL:0026.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.12.2.1 Set the level

CL:0026.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 21.

Table 21, Multilevel Switch::Set the level

Field	Value
Command	SWITCH_MULTILEVEL_SET
Value	User defined among 0x00..0x63 and 0xFF
Duration (v2)	User defined or 0xFF

4.12.2.2 Start level change up or down

CL:0026.01.31.03.1

When the end user performs this action, the issued command MUST comply with Table 22.

Table 22, Multilevel Switch::Start level change up/down

Field	Value
Command	SWITCH_MULTILEVEL_START_LEVEL_CHANGE
(Primary Switch) Up/Down	User defined among 0x00 and 0x01
Secondary Switch Inc/Dec	User defined if supported
Duration (v2)	User defined or 0xFF
Secondary Switch Step Size (v3)	User defined if supported

4.12.2.3 Stop level change

CL:0026.01.31.04.1

When the end user performs this action, the issued command MUST comply with Table 23.

Table 23, Multilevel Switch::Stop level change up/down

Field	Value
Command	SWITCH_MULTILEVEL_STOP_LEVEL_CHANGE

4.12.3 Node properties

CL:0026.01.42.01.1

Controller SHOULD have a UI allowing the end user to see the following properties:

- Last known state (xx %)

4.13 Notification Command Class, version 1-8

4.13.1 Mandatory node interview

CL:0071.02.21.01.2

A node controlling this command class **MUST** perform a supporting node interview according to Figure 13.

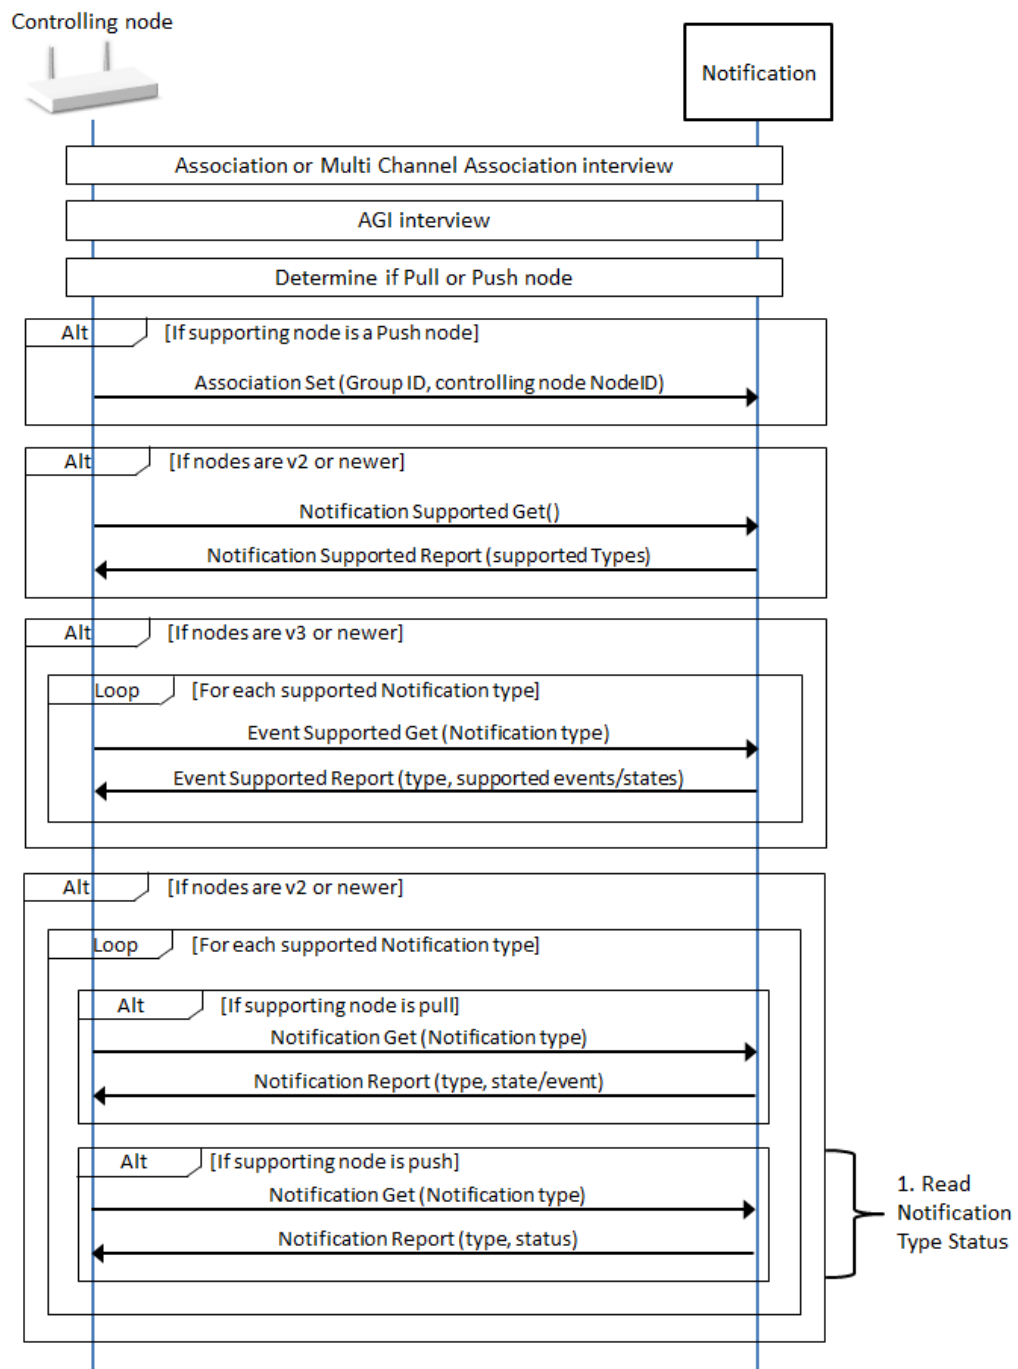


Figure 13, Notification Command Class interview

CL:0071.02.23.01.1

The step denoted as “1. Read Notification Type Status” in Figure 13 **MAY** be replaced by Notification Set commands for each Notification Type, with the Status field set to 0x00 or 0xFF.

4.13.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

4.13.3 Node properties

CL:0071.01.41.01.1

A controlling node MUST have a UI allowing the end user to see the received Notification Reports (Notification Type and event/state)

4.13.4 Additional control requirements

CL:0071.01.51.01.1

A controlling node MUST probe state/event notifications from pull nodes

- at least every 6 hours for listening nodes.
- when the supporting node issues a Wake Up Notification Command for sleeping nodes.

CL:0071.01.51.02.1

A node controlling this command class MUST also control:

- Association Command Class, version 2
- Association Group Information, version 3

CL:0071.01.51.03.1

For Push supporting nodes, a controlling node MUST associate itself to a group issuing Notification Report Commands before performing a supporting node interview and providing end user functionalities.

CL:0071.01.53.01.1

For Push supporting nodes, it is OPTIONAL for a controlling node to provide end user functionalities and node properties if it cannot associate itself to an association group sending Notification Report Commands. (e.g. all Association Groups sending the relevant command are full)

CL:0071.01.51.04.1

A controlling node MUST NOT remove associations in order to associate itself to an association group issuing Notification Report Commands.

CL:0071.01.52.01.1

Controller SHOULD have a UI allowing the end user to define rules or commands based on received notifications events/states.

CL:0071.01.52.02.1

A controlling node SHOULD implement the capability to update its Notifications list, so that new Notifications added in [8] are not presented as unknown.

CL:0071.01.51.05.2

If a controlling node receives an unknown Notification, it MUST allow the end user to identify this notification and MAY allow the end user to assign a free-text description to that Notification.

4.13.4.1 Detailed controller guidelines

This section presents guidelines for controlling legacy sensors nodes supporting the Notification Command Class, version 3-8.

Alarm Command Class version 2 supporting nodes operate in Push mode only. The guidelines presented in 4.13.4.1.6 Controlling Pull Mode Sensors can also be used for controlling Alarm CC version 2 supporting nodes.

4.13.4.1.1 Sensor database

The following sections present discovery methods for sensor properties, such as Push/Pull mode or the use of state idle notifications. Some sensor properties (e.g. configuration parameters, Association group properties, state variables dependencies) cannot always be discovered.

CL:0071.01.52.03.1

If a controlling node has a database of known certified Notification sensors, it **SHOULD** be consulted first before attempting to interview the Notification Command Class of a supporting node. If the supporting node is present in the database, a controlling node **SHOULD** read the sensor properties from the database and skip any discovery.

4.13.4.1.2 Push/Pull mode discovery

CL:0071.01.51.06.1

A supporting node does not advertise whether it operates in Push or Pull mode. Therefore a controlling node **MUST** discover what mode a supporting node implements.

CL:0071.01.52.04.1

The **RECOMMENDED** discovery steps for a controlling node are the following:

If the supporting node does not support the Association Command Class, it may be concluded that the supporting node implements Pull Mode and discovery may be aborted.

If the supporting node supports the AGI Command Class, probe the AGI table in the following way or read the already probed AGI table:

1. Discover how many Association groups the supporting node (and its eventual End Points) implements by issuing an Association Supported Groupings Get Command.
2. For each association group, issue an Association Group Command List Get for the grouping identifier. Inspect the returned Association Group Command List Report and look for the following pair:
{Command Class x = COMMAND_CLASS_NOTIFICATION, Command x = NOTIFICATION_REPORT}. If a match is found, conclude that the supporting node implements Push Mode and stop the discovery process.

If no match is found at the end of the AGI test, conclude that the supporting node implements Pull Mode. The AGI test is illustrated in Figure 14.

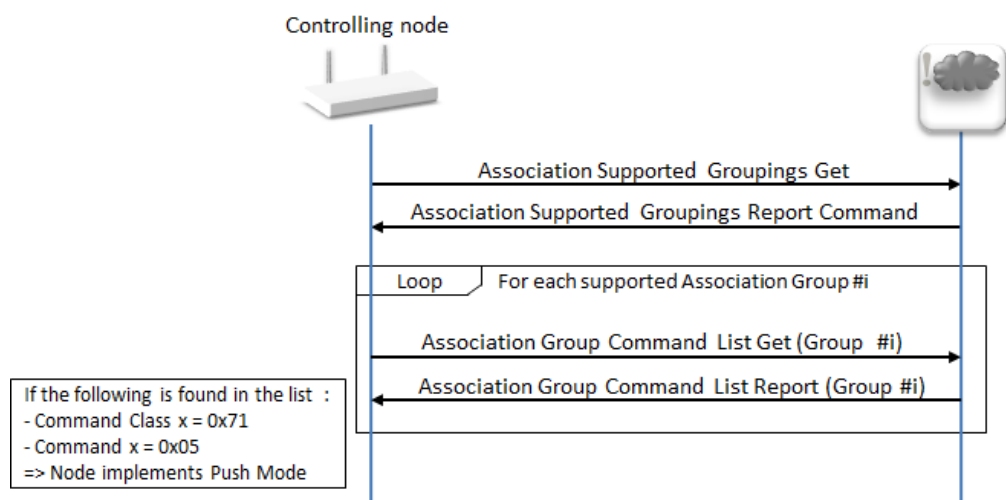


Figure 14, Push/Pull node discovery, AGI table probing

If the supporting node does not support the AGI Command Class, proceed with the following Notification Command Class test:

1. Discover the list of supported Notification Types by issuing a Notification Supported Get Command.
2. For each supported Notification Type, query the supported Events/States via the Event Supported Get Command.
3. Set the status of one of the Supported Notification Types at the target node using a Notification Set Command with the following values:
 - a. Notification Type = (a supported type discovered in step 1)
 - b. Notification Status = 0xFF
4. Issue a Notification Get Command with the following values:
 - a. Notification Type = (Same as step 3.a).
 - b. Notification Event = (a supported Event/State discovered in step 2).
5. The supporting node returns a Notification Report Command.
 - a. If the Notification Status is 0xFF, the target node implements Push Mode
 - b. If the Notification Status is 0xFE or 0x00, the target node implements Pull Mode
 - c. If the target node did not return a report within 10 seconds, it implements Pull Mode

The Notification Command Class test is illustrated in Figure 15.

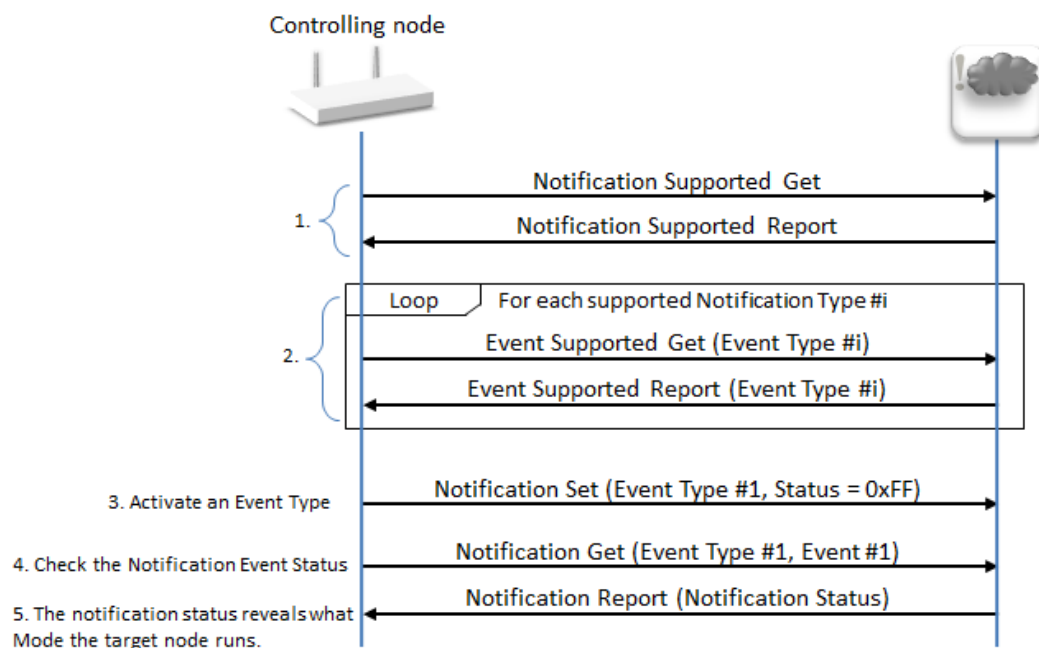


Figure 15, Push/Pull node discovery, Notification Command Class test

4.13.4.1.3 Unknown Notifications

This Command Class defines some Notifications as event or states. It is RECOMMENDED to treat an unknown Notification as its own state variable.

4.13.4.1.4 State idle

CL:0071.01.52.06.1

A controlling node receiving a “State idle” Notification for an event or state of which the “State idle” Notification does not apply (e.g. the “heartbeat” event) SHOULD ignore the Notification. Refer to [8] for state variables to which the “State idle” notification applies.

CL:0071.01.52.07.2

CL:0071.01.53.02.1

It is not mandatory for nodes supporting Notification Command Class, version 7 or older to send a “State idle” Notification for returning a state variable to idle. Thus, there is a risk that a “State idle” is never sent. A controlling node SHOULD NOT use timeouts to consider a state variable to be idle for example 5 minutes after the last received Notification for v8 or newer supporting nodes. It MAY allow the end user to mark states variables as idle.

4.13.4.1.5 Parameter encapsulation

CL:0071.01.53.03.1

A node implementing version 5 or older MAY use the following parameter encapsulation format: (User ID, User Code Report Command) instead of (User Code Report Command).

CL:0071.01.52.08.1

A controlling node SHOULD accept the end user Code Report Event Parameter with a User ID byte prefixed at the beginning of the Notification Event Parameter for backwards compatibility. A controlling node can detect the beginning of the end user Code Report by finding the following consecutive bytes: {byte x= COMMAND_CLASS_USER_CODE, byte x+1 = USER_CODE_REPORT}.

4.13.4.1.6 Controlling Pull Mode Sensors

The following sections present guidelines for controlling Pull sensors nodes.

4.13.4.1.6.1 Notification Get Command

This command is used to retrieve the next Notification from the receiving node’s queue. Below are recommendations for what values controlling nodes should set in the fields of this command.

Notification Type (8 bits)

CL:0071.01.52.09.1

A controlling node SHOULD set the Notification Type field to 0xFF.

Earlier specification text suggested that Pull nodes must not ignore this command if the Notification Type is set to a supported type; rather than 0xFF. Therefore, Pull sensors may respond to a Notification Get for a supported Notification type by retrieving the next notification in the queue matching the specified Notification Type.

Notification Event /State (8 bits)

CL:0071.01.52.0A.1

A controlling node SHOULD set this field to 0x00.

A receiving node will have an unpredictable behavior if this field is set to a supported Event.

4.13.4.1.6.2 Detecting and clearing persistent notifications.

It is optional for Pull nodes to specify a sequence number in notifications.

CL:0071.01.52.0B.1

A controlling node receiving twice the same Notification with identical sequence number **SHOULD** consider the Notification as persistent. An example is given in Figure 16.

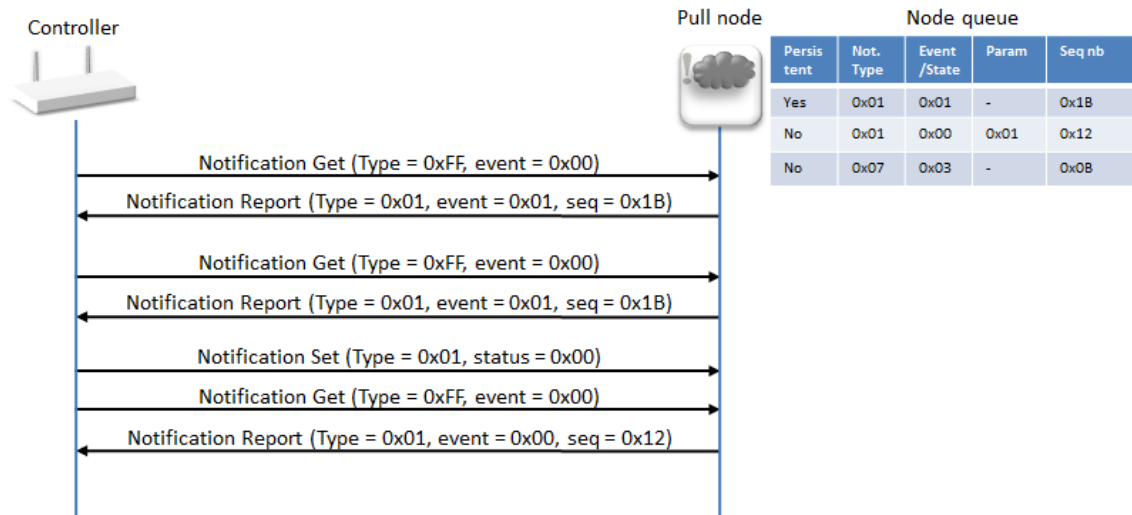


Figure 16, detecting and clearing persistent notifications, identical sequence numbers

Due to unclear specification text, sensors may issue persistent Notifications without a sequence number field or with a new sequence number every time. Therefore, a controlling node **SHOULD** consider a notification to be persistent if it receives the same Notification (type and event/state) 5 times or more. An example is given in Figure 17.

CL:0071.01.52.0C.1

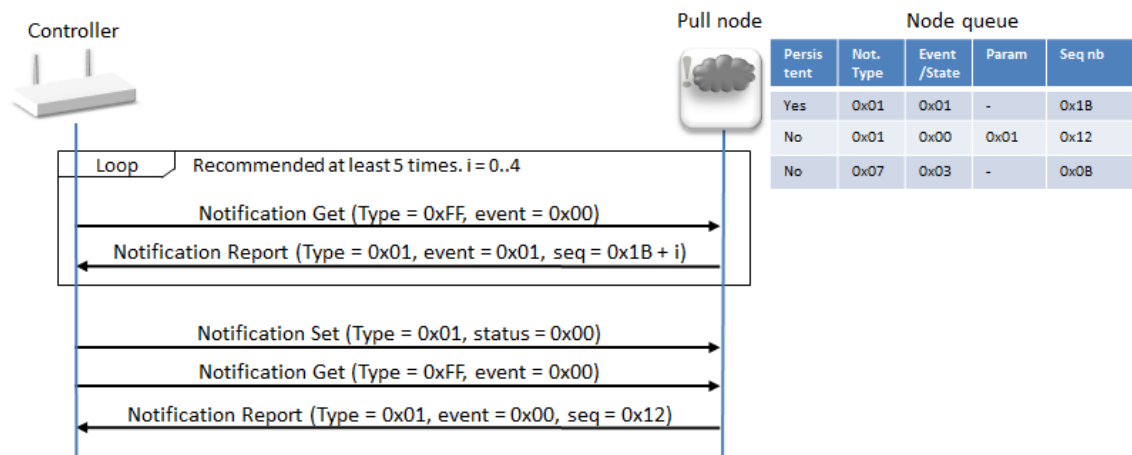


Figure 17, detecting and clearing persistent notifications with incremental sequence numbers

4.13.4.1.6.3 Status and queue empty

CL:0071.01.52.0D.1

A controlling node SHOULD stop issuing Notification Get Commands when receiving a Queue empty notification (0xFE). Illustration is given in Figure 18.

CL:0071.01.53.04.1

All fields following the Status field MAY be omitted in the Notification Report if it advertises a Status of 0xFE (queue empty).

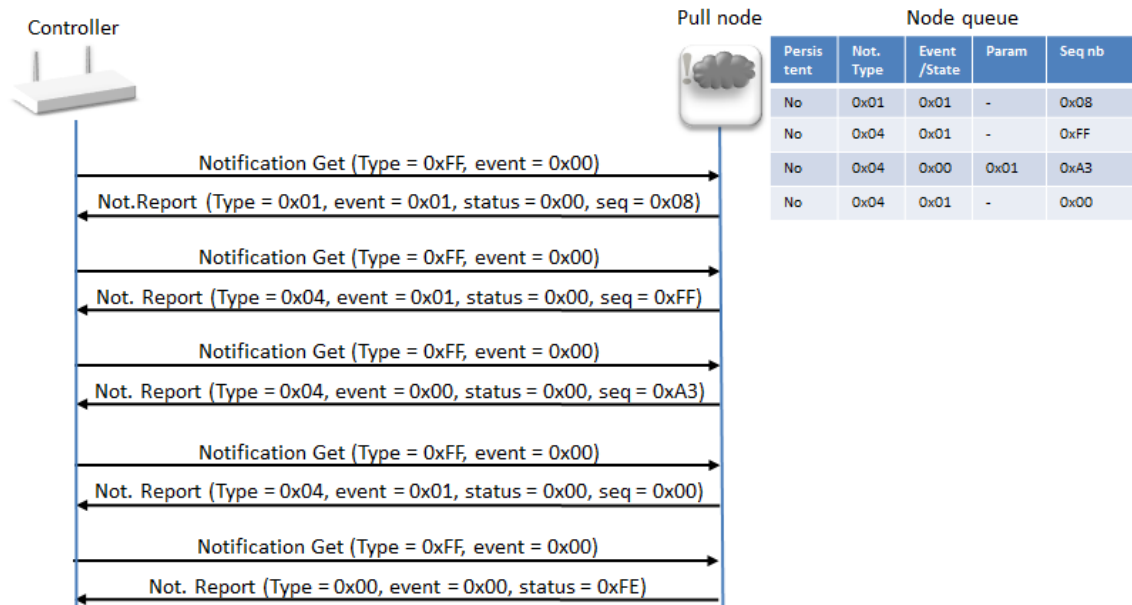


Figure 18, Pull node event retrieval until receiving queue empty

4.14 Simple AV Control Command Class, version 1-4

4.14.1 Mandatory node interview

CL:0094.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 19.

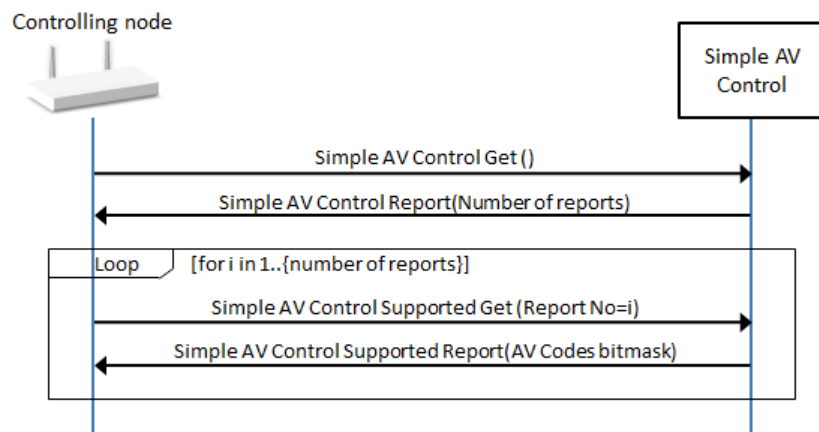


Figure 19, Simple AV Control Command Class interview

4.14.2 Minimum end user functionalities

CL:0094.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.14.2.1 Send a supported AV code

CL:0094.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 24.

Table 24, Simple AV Control::Send a supported AV code

Field	Value
Command	SIMPLE_AV_CONTROL_SET
Sequence number	Controlling node defined. This field MUST be incremented every time the end user perform this action
Key attributes	User defined
Command x	User defined among supported AV codes

CL:0094.01.31.03.1

The end user **MUST** be able to select among all supported AV codes even if the controlling node does not know what the code actually represents.

4.14.3 Node properties

CL:0094.01.41.01.1

Controller **SHOULD** have a UI allowing the end user to see the following properties:

- List of supported AV Codes

4.15 Sound Switch Command Class, version 1

4.15.1 Mandatory node interview

CL:0079.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 20.

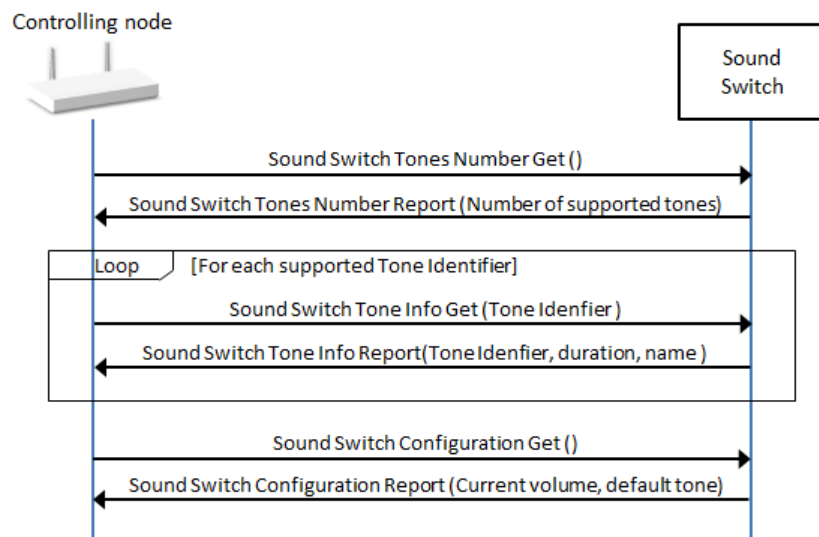


Figure 20, Sound Switch Command Class interview

4.15.2 Minimum end user functionalities

CL:0079.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.15.2.1 Configure the sound switch

CL:0079.01.31.02.1

The end user **MUST** be able to configure the volume and default tone at the supporting node. When the end user performs this action, the issued command **MUST** comply with Table 25.

Table 25, Sound Switch::Configure the sound switch

Field	Value
Command	SOUND_SWITCH_CONFIGURATION_SET
Volume	User defined among 0x00..0x64 or 0xFF
Default Tone identifier	User defined among supported or 0x00

4.15.2.2 Play/stop a selected or default tone

CL:0079.01.31.03.1

The end user MUST be able to play the default tone, play a selected tone or stop playing a tone. When the end user performs this action, the issued command MUST comply with Table 26.

Table 26, Sound Switch::Play/stop a selected or default tone

Field	Value
Command	SOUND_SWITCH_TONE_PLAY_SET
Tone identifier	User defined among supported tones, 0x00 and 0xFF.

4.15.3 Node properties

CL:0079.01.42.01.1

Controller SHOULD allow the end user to see/access the following properties:

- (Last known) configured volume
- (Last known) configured default tone
- List of supported tones and their duration

4.16 Thermostat Mode Command Class, version 1-3

4.16.1 Mandatory interview

CL:0040.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 21.

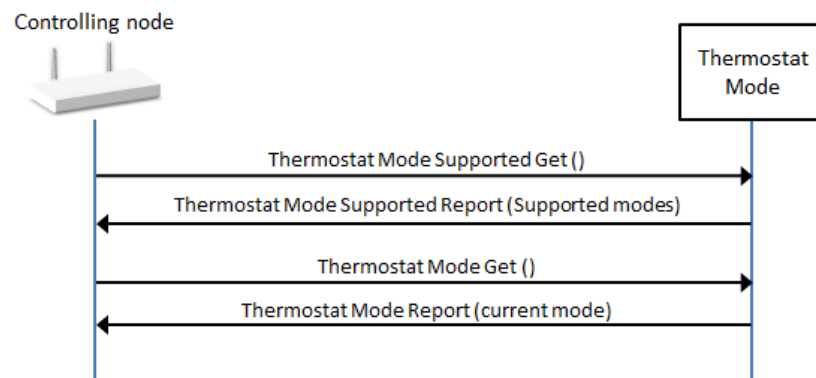


Figure 21, Thermostat Mode Command Class interview

4.16.2 Minimum end user functionalities

CL:0040.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.16.2.1 Change mode

CL:0040.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 27.

Table 27, Thermostat Mode::Change mode

Field	Value
Command	THERMOSTAT_MODE_SET
Mode	User defined among supported modes

CL:0040.01.31.03.1

The end user **MUST** be able to select between all supported modes by the supporting node, even if the controlling node does not know what a given mode represents.

4.16.3 Node properties

CL:0040.01.42.01.1

A controlling node **SHOULD** have a UI allowing the end user to see the following properties:

- Last known mode

4.17 Thermostat Setback Command Class, version 1

4.17.1 Mandatory interview

CL:0047.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 22.

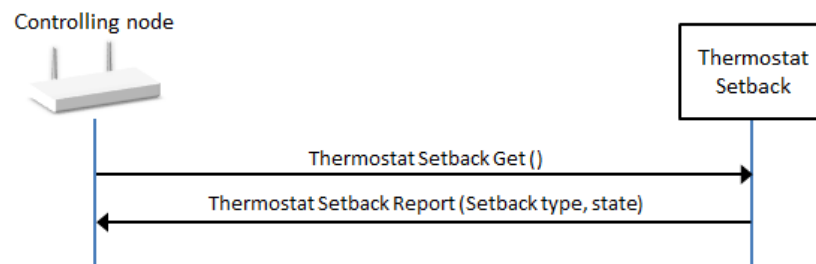


Figure 22, Thermostat Setback Command Class interview

4.17.2 Minimum end user functionalities

CL:0047.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.17.2.1 Configure setback

CL:0047.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 28.

Table 28, Thermostat Setback::Change setback for a supported type

Field	Value
Command	THERMOSTAT_SETBACK_SET
Setback Type	User defined among 0x00..0x02
Setpoint State	User defined among 0x00..0x7A and 0x80..0xFF

4.17.3 Node properties

CL:0047.01.42.01.1

Controller **SHOULD** have a UI allowing the end user to see the following properties:

- Last known setback type and state.

4.18 Thermostat Setpoint Command Class, version 1-3

4.18.1 Mandatory interview

CL:0043.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 23.

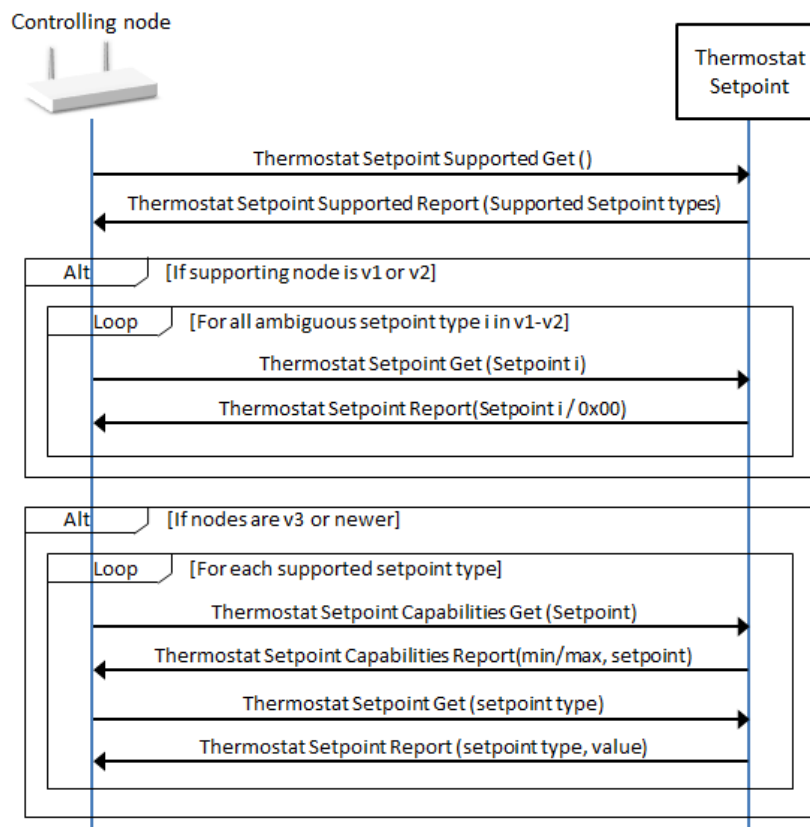


Figure 23, Thermostat Setpoint Command Class interview

It has been found that early implementations of this Command Class applied two non-interoperable interpretations of the bit mask advertising the support for specific Setpoint Types in the Thermostat Setpoint Supported Report Command.

Refer to the Thermostat Setpoint Command Class definition for the possible bitmask interpretations [2].

CL:0043.01.21.02.1

A controlling node **MUST** determine the supported Setpoint Types of a version 1 and version 2 supporting node by sending one Thermostat Setpoint Get Command at a time while incrementing the requested Setpoint Type.

CL:0043.01.21.03.1

If the same Setpoint Type is advertised in the returned Thermostat Setpoint Report Command, the controlling node **MUST** conclude that the actual Setpoint Type is supported.

CL:0043.01.21.04.1

If the Setpoint Type 0x00 (type N/A) is advertised in the returned Thermostat Setpoint Report Command, the controlling node **MUST** conclude that the actual Setpoint Type is not supported.

4.18.2 Minimum end user functionalities

CL:0043.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.18.2.1 Change setpoint for a supported type

CL:0043.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 29.

Table 29, Thermostat Setpoint::Change setpoint for a supported type

Field	Value
Command	THERMOSTAT_SETPOINT_SET
Setpoint Type	User defined among supported
Setpoint Value	If nodes are version 3 or newer: User defined among supported values If nodes are version 1 or 2: User defined.
Precision	User defined
Scale	Controller defined
Size	User defined

CL:0043.01.31.03.1

If controlling a version 1 or 2 supporting node, the controlling node **MUST** allow the user to define the Setpoint Value freely. The controlling node **MUST** read back the value with a Thermostat Mode Get(Setpoint type) or use Supervision Get encapsulation and indicate to the end user if the operation was successful.

CL:0043.01.31.04.1

The end user **MUST** be able to set the setpoint for any setpoint type, even if the controlling node does not know what a given type represents.

CL:0043.01.31.05.1

The Scale field value **MUST** be identical to the value received in the Thermostat Setpoint Report for the actual Setpoint Type during the node interview.

CL:0043.01.31.06.1

The controlling node **SHOULD** let the user define the Setpoint Value in their preferred scale but **MUST** convert the value into the supporting node's scale for issuing the Z-Wave Command

4.18.3 Node properties

CL:0043.01.42.01.1

A controlling node **SHOULD** have a UI allowing the end user to see the following properties:

- Last known setpoint value for each supported setpoint type.

4.19 User Code Command Class, version 1-2

4.19.1 Mandatory interview

CL:0063.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 24.

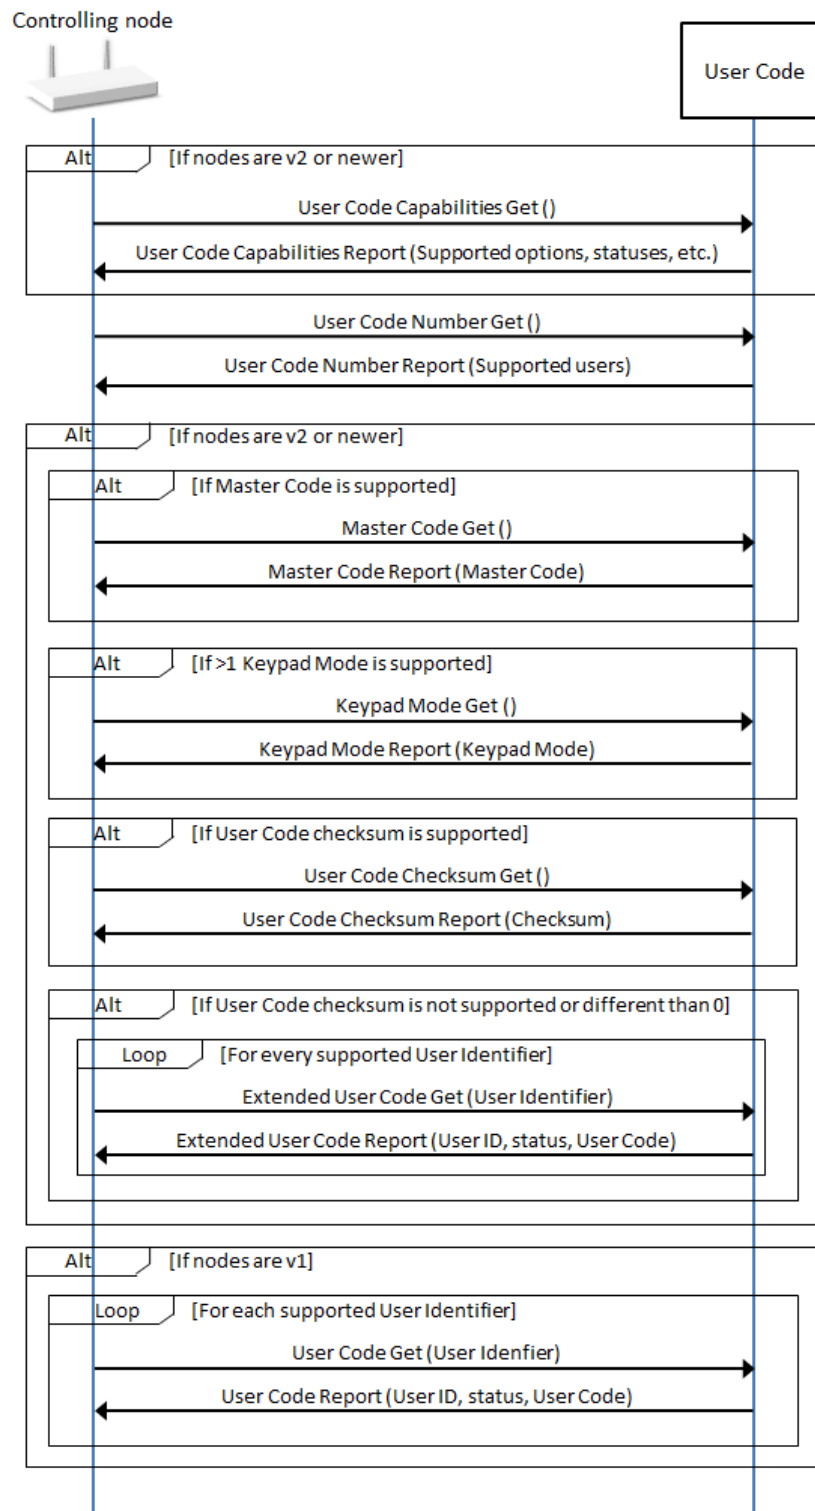


Figure 24, User Code Command Class interview

4.19.2 Minimum end user functionalities

CL:0063.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.19.2.1 Set/modify a User Code

CL:0063.01.31.02.1

When the end user performs this action, the issued command **MUST** comply with Table 30 if nodes are v1 or Table 31 if nodes are v2 or newer.

Table 30, User Code::Set a User Code

Field	Value
Command	USER_CODE_SET (0x01)
User Identifier	User defined or controlling node defined among supported User Identifiers.
User ID status	Used defined among 0x01 and 0x02 0x02 must be used to set a reserved/forbidden user code.
User Code	User defined among 0x30..0x39 with a length in the range 4..10 bytes.

A forbidden or reserved User Code is a User Code that cannot be used at the supporting node and cannot be allocated to a new user, for example if User Code can also be updated locally via a user interface.

Table 31, User Code::Set a User Code (v2)

Field	Value
Command (v2)	EXTENDED_USER_CODE_SET (0x0B)
Number of User Codes (v2)	Controlling node defined
User Identifier 1..M (v2)	User defined or controlling node defined among supported User Identifiers.
User ID status (v2)	Used defined among supported User ID statuses.
User Code Length (v2)	Controlling node defined based on the length of the User Code field.
User Code (v2)	User defined among supported ASCII characters with a length in the range 4..10 bytes.

4.19.2.2 Erase a User Code

CL:0063.01.31.03.1

When the end user performs this action, the issued command MUST comply with Table 32 if nodes are v1 and Table 33 if nodes are v2 or newer.

Table 32, User Code::Erase a User Code

Field	Value
Command	USER_CODE_SET
User Identifier	User defined or controlling node defined among supported User Identifiers.
User ID status	0x00
User Code	0x00000000

CL:0063.01.31.04.1

A controlling node MAY allow the end user to erase all user codes at once. In this case, the User Identifier field MUST be set to 0x00.

Table 33, User Code::Erase a User Code (v2)

Field	Value
Command (v2)	EXTENDED_USER_CODE_SET (0x0B)
Number of User Codes (v2)	Controlling node defined
User Identifier 1..M (v2)	User defined or controlling node defined among supported User Identifiers.
User ID status (v2)	0x00
User Code Length (v2)	0x00
User Code (v2)	Omitted

4.19.2.3 Set the keypad mode (v2)

CL:0063.01.31.05.1

This action MUST be available to the end user if nodes are v2 or newer and the supporting node supports more than one keypad mode. When the end user performs this action, the issued command MUST comply with Table 34.

Table 34, User Code::Set the keypad mode

Field	Value
Command (v2)	USER_CODE_KEYPAD_MODE_SET (0x08)
Keypad Mode (v2)	User defined among supported keypad modes.

4.19.2.4 Set the Master Code (v2)

CL:0063.01.31.06.1

This action **MUST** be available to the end user if nodes are v2 or newer and the supporting node supports the Master Code functionality. When the end user performs this action, the issued command **MUST** comply with Table 35.

Table 35, User Code::Set the Master Code

Field	Value
Command (v2)	MASTER_CODE_SET (0x0E)
Master Code Length (v2)	Controlling node defined based on the length of the User Code field. It MUST be possible to de-activate the Master Code if the supporting node supports Master Code Deactivation.
Master Code (v2)	User defined among supported ASCII characters with a length in the range 4..10 bytes.

4.19.3 Node properties

CL:0063.01.41.01.1

Controller **MUST** have a UI allowing the end user to see the following properties:

- Number of supported User Codes
- The list of last known set User Codes
- The current keypad mode, if the supporting node supports more than one (v2)
- The current set Master Code, if the supporting node supports a Master Code (v2)

4.19.4 Additional control requirements

It has been found that some version 1 nodes wrongfully report obfuscated User Codes in the User Code Report (e.g. '*****').

CL:0063.01.52.01.1

A controlling node **SHOULD** understand that a code has been set correctly but cannot be read back with such nodes

CL:0063.01.52.02.1

If nodes are version 2 or newer, a controlling node **SHOULD** verify the User Code checksum (if supported) periodically (e.g. once a day) to ensure that User Code databases are synchronized.

4.20 Window Covering Command Class, version 1

4.20.1 Mandatory interview

CL:006A.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 25.

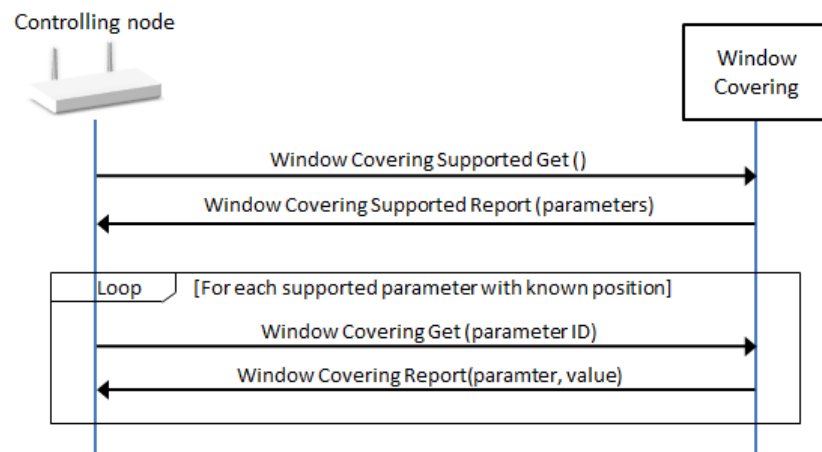


Figure 25, Window Covering Command Class interview

4.20.2 Minimum end user functionalities

CL:006A.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

4.20.2.1 Go to position

CL:006A.01.31.02.1

This action **MUST** be available to the end user for parameters ID with known positions (odd parameters IDs). When the end user performs this action, the issued command **MUST** comply with Table 36.

Table 36, Window covering::Go to a position

Field	Value
Command	WINDOW_COVERING_SET
Parameter count	User defined ($\geq 0x01$)
Parameter ID x	User defined among supported (odd values)
Value x	User defined among 0x00..0x63
Duration	User defined or 0xFF

4.20.2.2 Start level change up or down

CL:006A.01.31.03.1

This action MUST be available to the end user for all supported parameters ID. When the end user performs this action, the issued command MUST comply with Table 37.

Table 37, Window covering::Start level change up or down

Field	Value
Command	WINDOW_COVERING_START_LEVEL_CHANGE
Up/Down	User defined among 0x00 and 0x01
Parameter ID	User defined among supported parameters ID
Duration	User defined or 0xFF

4.20.2.3 Stop level change

CL:006A.01.31.04.1

This action MUST be available to the end user for all supported parameters ID. When the end user performs this action, the issued command MUST comply with Table 38.

Table 38, Window covering::Stop level change

Field	Value
Command	WINDOW_COVERING_STOP_LEVEL_CHANGE
Parameter ID	User defined among supported parameters ID

4.20.3 Node properties

CL:006A.01.42.01.1

Controller SHOULD have a UI allowing the end user to see the following properties:

- Last known position/value for all parameters IDs with known position

4.20.4 Additional control requirements

CL:006A.01.51.01.2

A controlling node MUST NOT interview and provide controlling functionalities for the Multilevel Switch Command Class for a node (or endpoint) supporting this Command Class, as it is a fully redundant and less precise application functionality.

5 MANAGEMENT COMMAND CLASS CONTROL DEFINITIONS

5.1 Association Command Class, version 1-3

5.1.1 Mandatory node interview

CL:0085.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 26.

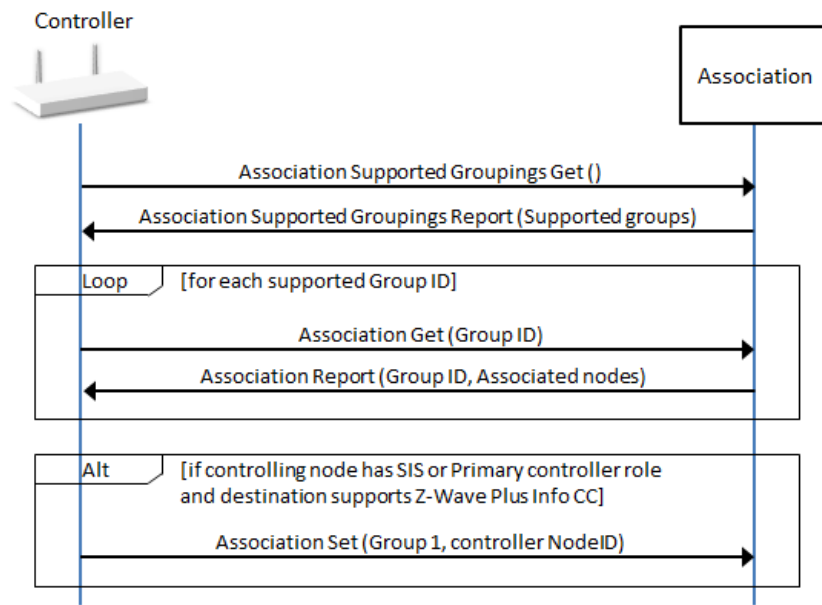


Figure 26, Association Command Class interview

5.1.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

CL:0085.01.31.01.1

A controlling node implementing a UI that allows an end user to establish association between nodes **MUST NOT** restrict the end user from establishing associations that are allowed. Refer to 5.1.4 for allowed associations.

5.1.3 Node properties

No node property is required to be made available to the end user for this Command Class.

5.1.4 Additional control requirements

If the supporting node also supports Multi Channel Association and the controlling node controls Multi Channel Association, the controlling node MUST interview and control the Multi Channel Association Command Class instead of this Command Class.

A controlling node MUST use the Association Group Information (AGI) Command Class to probe the commands that a given association group will be sending before creating associations towards other nodes.

If an association group in a Node A sends one or more controlling commands:

- A controlling node MUST NOT associate Node A to a Node B destination that does not support the Command Class that the Node A will be controlling.
- A controlling node MAY create an association to a destination supporting an actuator Command Class if the actual association group sends Basic Control Command Class.

For Association version 1 and version 2:

- A controlling node MUST NOT associate Node A to a Node B destination if Node A and Node B's highest Security Class are not identical.

For Association version 3:

- A controlling node MUST NOT associate Node A to a Node B destination if Node A was not granted Node B's highest Security Class.

If an association group in Node A sends only supporting commands:

- A controlling node MAY create an association to any Node B destination if the actual association group sends commands reflecting the support of a Command Class by the sending Node/End Point. Refer to [10] for supporting/controlling commands.
- A controlling node MUST NOT associate Node A to a Node B destination if Node B was not granted Node A's highest Security Class.

5.1.4.1 Removing associations

A controlling node MUST NOT remove already associated nodes to a destination Group to associate themselves, unless:

- The destination NodeID/Endpoint has left the network (i.e. SIS has received a Device Reset Locally Notification)
- The destination of a group has changed capabilities and does not support the command received via the association group (also if a Multi Channel End Point is removed).
- An end user has actively confirmed to remove associations
- The lifeline group is full and the controlling node has the SIS Role.

5.2 Association Group Information (AGI) Command Class, version 1-3

5.2.1 Mandatory node interview

CL:0059.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 27.

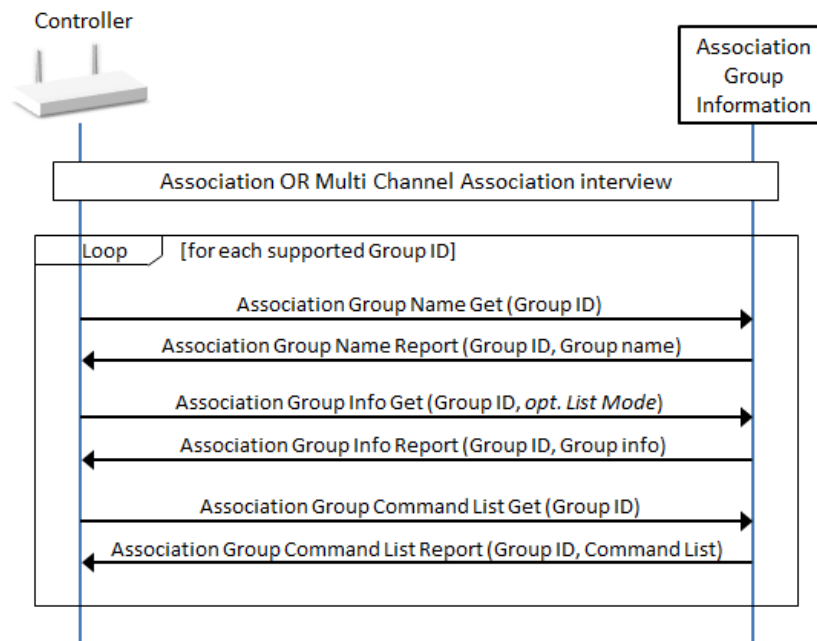


Figure 27, Association Group Information Command Class interview

CL:0059.01.23.01.1

A controlling node **MAY** issue a single Association Group Info Get Command by using the List Mode flag.

5.2.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

5.2.3 Node properties

No node property is required to be made available to the end user for this Command Class.

5.3 Battery Command Class, version 1

5.3.1 Mandatory node interview

CL:0080.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 28.

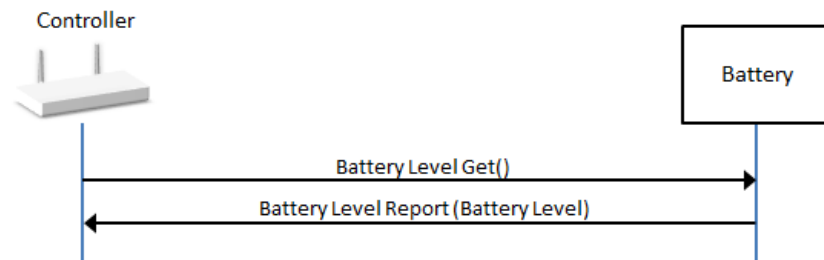


Figure 28, Battery Command Class interview

5.3.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

5.3.3 Node properties

CL:0080.01.41.01.1

A controlling node **MUST** allow the end user to see the last known battery level.

5.3.4 Additional control requirements

CL:0080.01.52.01.1

Unless unsolicited Battery Report Commands are received, a controlling node **SHOULD** Probe the current battery level at least every month

CL:0080.01.51.02.1

A controlling node **MUST** indicate to the end user that the battery needs to be replaced or reloaded when the supporting node issues a Battery Report with the *Battery Level* field set to 0xFF.

5.4 Device Reset Locally Command Class, version 1

5.4.1 Mandatory node interview

No mandatory node interview is required for this Command Class.

5.4.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

5.4.3 Node properties

No node property is required to be made available to the end user for this Command Class.

5.4.4 Additional control requirements

CL:005A.01.52.01.1

A controlling node receiving the Device Reset Locally Notification Command SHOULD consider the sending node to be a failing node and accordingly perform relevant maintenance operations like removing failing nodes, removing associations to failing nodes, etc.

CL:005A.01.51.01.1

A controlling node receiving the Device Reset Locally Notification Command MUST indicate to the end user that the node has been reset and left the Z-Wave network.

5.5 Firmware Update Meta Data Command Class, version 1-6

5.5.1 Mandatory node interview

CL:007A.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 29.

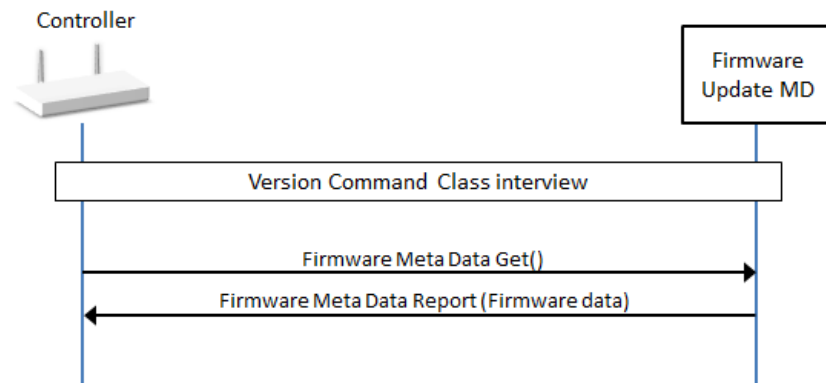


Figure 29, Firmware Update Meta Data Command Class interview

5.5.2 Minimum end user functionalities

5.5.2.1 Firmware update

CL:007A.01.32.01.1

A controlling node **SHOULD** provide a method for updating the firmware of a supporting node. The end user **SHOULD** be able to select a firmware file or ask the controller to look for updates automatically.

CL:007A.01.31.01.1

If this functionality is available, the issued commands **MUST** comply with Figure 30 when the end user performs this action.

CL:007A.01.33.01.1

A controlling node **MAY** use additional commands such as Firmware Update Activation Set Command for the firmware update.

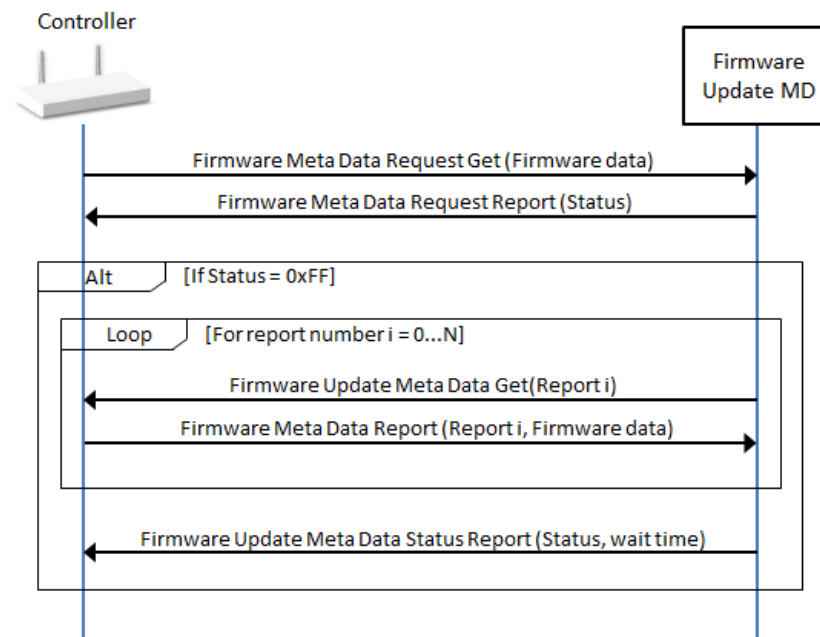


Figure 30, Firmware Update Meta Data::Firmware Update

CL:007A.01.32.02.1 If a controlling node allows the end user to interrupt an ongoing firmware update transfer, it SHOULD issue a FIRMWARE_UPDATE_MD_REPORT Command with the *Last* field set to 1 prematurely.

5.5.3 Node properties

No node property is required to be made available to the end user for this Command Class.

CL:007A.01.42.01.1 A controlling node SHOULD have a UI allowing the end user to see the Firmware version of a supporting node.

5.5.4 Additional control requirements

CL:007A.01.52.01.1 If the supporting node supports Battery Command Class and the controlling node controls Battery Command Class, the controlling node SHOULD issue a Battery Get and read the battery level before initiating a Firmware Update.

CL:007A.01.52.02.1 A controlling node SHOULD NOT initiate a Firmware Update if the supporting node Battery level is less than 50%.

CL:007A.01.51.01.1 A controlling node MUST perform a full interview of a node after performing a firmware update.

5.6 Indicator Command Class, version 1-3

5.6.1 Mandatory node interview

CL:0087.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview according to Figure 31.

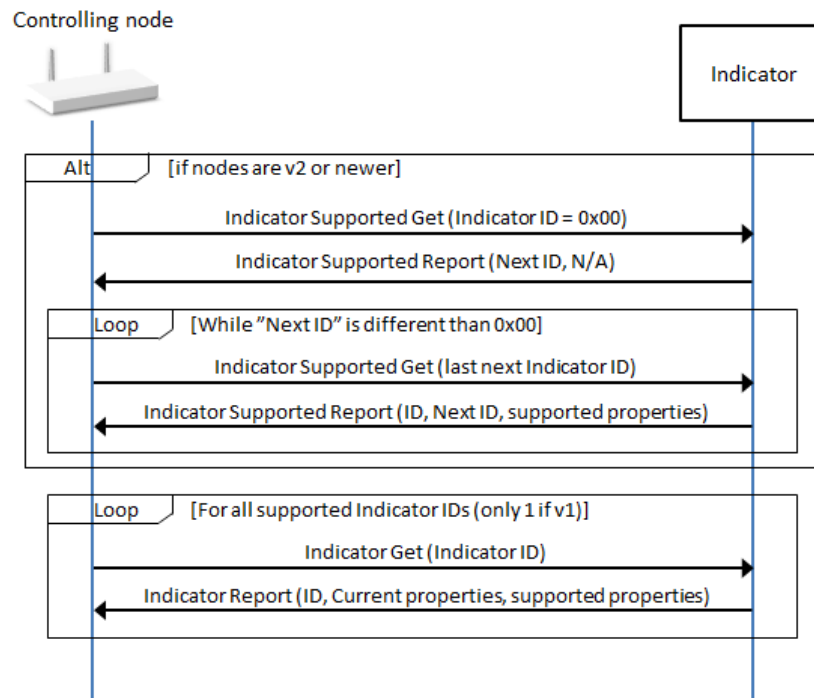


Figure 31, Indicator Command Class interview

5.6.2 Minimum end user functionalities

CL:0087.01.31.01.1

A node controlling this command class **MUST** allow the end user to perform the actions described below.

5.6.2.1 Identify

CL:0087.01.31.02.1

If the supporting and controlling nodes are version 3 or newer, the end user **MUST** be able to instruct the node to identify itself. When the end user performs this action, the issued command **MUST** comply with Table 39.

Table 39, Indicator::Identify

Field	Value
Command	INDICATOR_SET
Indicator 0 Value	0x00
Indicator object count	0x03
Indicator ID 1	0x50
Property ID 1	0x03
Value 1	0x08
Indicator ID 2	0x50
Property ID 2	0x04
Value 2	0x03
Indicator ID 3	0x50
Property ID 3	0x05
Value 3	0x06

The supporting node will be switched on 600ms and switched off 200ms three times.

5.6.3 Node properties

CL:0087.01.42.01.1

The controlling node **SHOULD** have a UI allowing the end user to see/access the following properties:

- Last known Indicators' state (ON/OFF or x%), if any

5.6.4 Additional control requirements

CL:0087.01.51.01.1

A node controlling this command class **MUST NOT** reuse the identify command for any other purpose than a node identification application.

CL:0087.01.52.01.1

A node controlling this Command Class **SHOULD NOT** make a supporting node blink 3 times for any indication.

5.7 Multi Channel Association Command Class, version 2-4

5.7.1 Mandatory node interview

CL:008E.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 32.

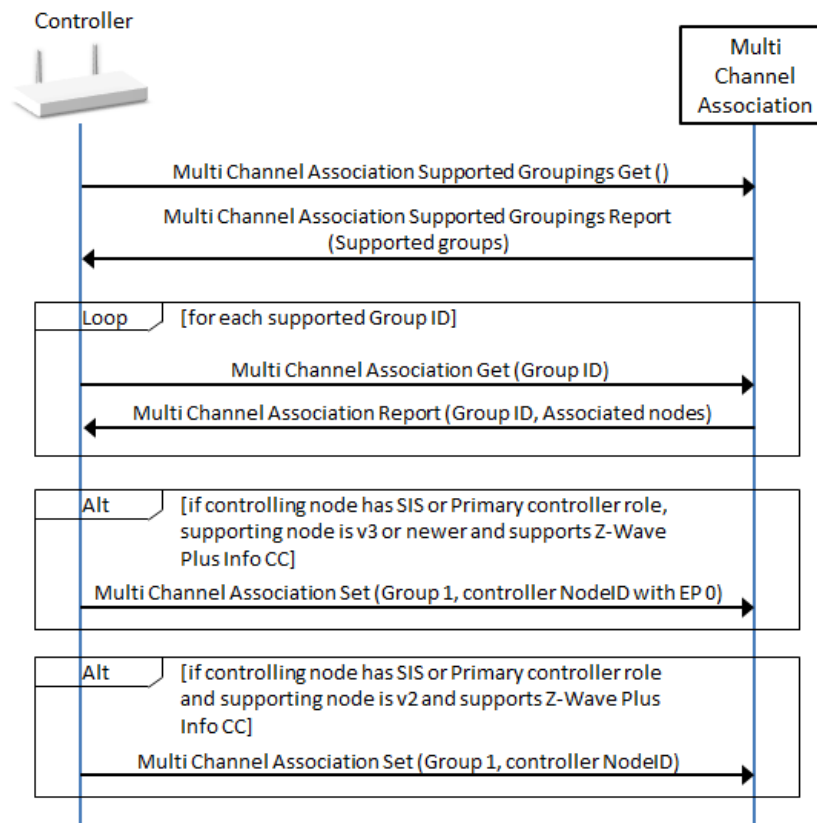


Figure 32, Multi Channel Association Command Class interview

CL:008E.01.21.02.1

The lifeline association **MUST** be an End Point Association (controller NodeID after the MULTI_CHANNEL_ASSOCIATION_SET_MARKER) if the nodes both implement Multi Channel Association, version 3 or newer.

5.7.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

CL:008E.01.31.01.1

A controlling node implementing a UI which allows an end user to establish association between nodes **MUST NOT** restrict the end user from establishing associations that are allowed. Refer to 5.7.4 for allowed associations.

5.7.3 Node properties

No node property is required to be made available to the end user for this Command Class.

5.7.4 Additional control requirements

If the supporting node also supports Association and the controlling node controls Association, the controlling node MUST NOT interview and control the Association Command Class.

CL:008E.01.51.01.1

A controlling node MUST use the Association Group Information (AGI) Command Class to probe the commands that a given association group will be sending before creating associations towards other nodes.

CL:008E.01.51.02.1

If an association group in a Node A sends one or more controlling commands:

CL:008E.01.51.03.3

- A controlling node MUST NOT associate Node A to a Node B destination that does not support the Command Class that the Node A will be controlling.

CL:008E.01.53.01.3

- A controlling node MAY create an association to a destination supporting an actuator Command Class if the actual association group sends Basic Control Command Class.

For Multi Channel Association version 2 and version 3:

CL:008E.02.51.01.1

- A controlling node MUST NOT associate Node A to a Node B destination if Node A and Node B's highest Security Class are not identical.

For Multi Channel Association version 4:

CL:008E.04.51.01.1

- A controlling node MUST NOT associate Node A to a Node B destination if Node A was not granted Node B's highest Security Class.

If an association group sends only supporting commands:

CL:008E.01.53.02.2

- A controlling node MAY create an association to any destination if the actual association group sends commands reflecting the support of a Command Class by the sending Node/End Point. Refer to [10] for supporting/controlling commands.

CL:008E.01.51.06.1

- A controlling node MUST NOT associate Node A to a Node B destination if Node B was not granted Node A's highest Security Class.

5.7.4.1 Removing associations

CL:008E.01.51.05.1

A controlling node MUST NOT remove already associated nodes to a destination Group to associate themselves, unless:

- The destination NodeID/Endpoint has left the network (i.e. SIS has received a Device Reset Locally Notification)
- The destination has changed capabilities and does not support the command received via the association group (also if a Multi Channel End Point is removed).
- An end user has actively confirmed to remove associations
- The lifeline group is full and the controlling node has the SIS Role.

5.8 Version Command Class, version 1-3

5.8.1 Mandatory node interview

CL:0086.01.21.01.1

A node controlling this command class **MUST** perform a supporting node interview according to Figure 33.

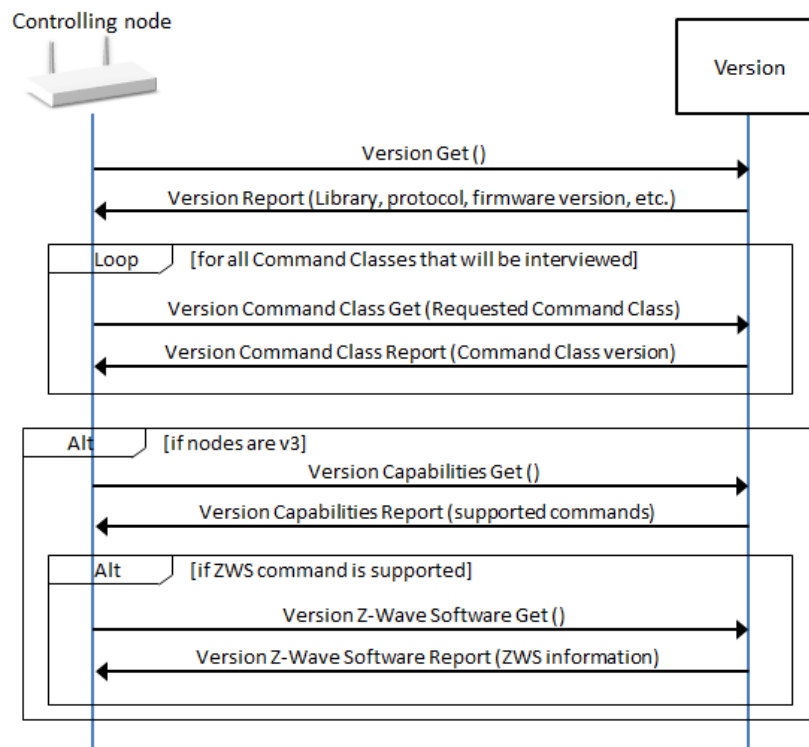


Figure 33, Version Command Class interview

5.8.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

5.8.3 Node properties

No node property is required to be made available to the end user for this Command Class.

5.8.4 Additional control requirements

CL:0086.01.51.01.1

A controlling node interviewing a Multi Channel End Point **MUST** request the End Point's Command Class version from the Root Device if the End Point does not advertise support for the Version Command Class.

5.9 Wake-Up Command Class, version 1-2

5.9.1 Mandatory node interview

CL:0084.01.23.01.1 If the controlling node has the inclusion controller or secondary controller role in a network, it MAY skip the node interview. In any case, it MUST NOT issue a Wake-Up Interval Set to a supporting node.

CL:0084.01.21.01.2 If the controlling node has the SIS or primary controller role in a network, it MUST perform a supporting node interview according to Figure 34.

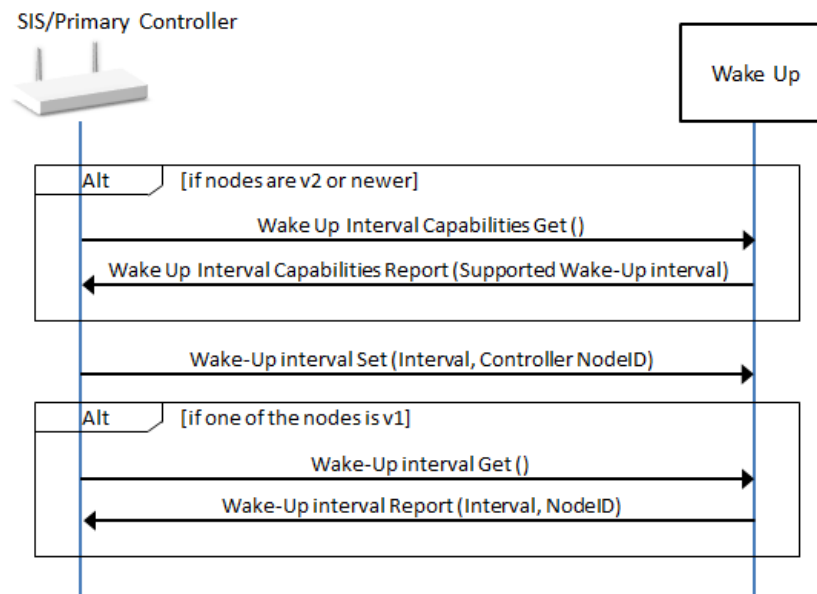


Figure 34, Wake Up Command Class interview

CL:0084.01.21.03.1 A controlling node MUST set a supported Wake Up Interval time value when commissioning a version 2 supporting node.

CL:0084.01.21.04.1 A controlling node MUST set its own NodeID as the Wake-Up destination.

5.9.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

5.9.3 Node properties

No node property is required to be made available to the end user for this Command Class.

CL:0084.01.42.01.1 A controlling node queuing commands for a Wake-Up node SHOULD indicate to the end user that the commands will be transmitted when the destination wakes up again.

CL:0084.01.43.01.1 A controlling node MAY show to the end user the expected time until the next Wake-Up.

5.9.4 Additional control requirements

- CL:0084.01.52.01.1 A controlling node SHOULD verify that the Wake Up Interval Set Command executed successfully by either using Supervision encapsulation or reading back the Wake Up Interval settings.
- CL:0084.01.52.02.1 If the Wake Up Interval Set Command was ignored by a version 1 supporting node, the controlling node SHOULD try again using the currently defined interval at the supporting node and its NodeID.
- CL:0084.01.52.03.1 A controlling node SHOULD read the Wake Up Interval of a supporting node when the delays between Wake Up periods are larger than what was last set at the supporting node.

6 TRANSPORT-ENCAPSULATION COMMAND CLASS CONTROL DEFINITIONS

6.1 CRC-16 Encapsulation Command Class, version 1

6.1.1 Mandatory node interview

No node interview is required for this Command Class

6.1.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

6.1.3 Node properties

No node property is required to be made available to the end user for this Command Class.

6.1.4 Additional control requirements

- CL:0056.01.52.01.1 A controlling node SHOULD use CRC-16 encapsulation to communicate with a supporting node when no security encapsulation is used and the communication speed is lower than 100 kbits/s.
- CL:0056.01.51.01.1 A controlling node MUST support the CRC-16 Command Class and correctly handle received commands encapsulated with CRC-16.
- CL:0056.01.51.02.1 A controlling node MUST use CRC-16 encapsulation to return a response to a command if the request was received using CRC-16 encapsulation (aka “answer-as-asked”).

6.2 Multi Channel Command Class, version 3-4

6.2.1 Mandatory node interview

CL:0060.01.21.01.1

A node controlling this Command Class **MUST** perform a supporting node interview as follows:

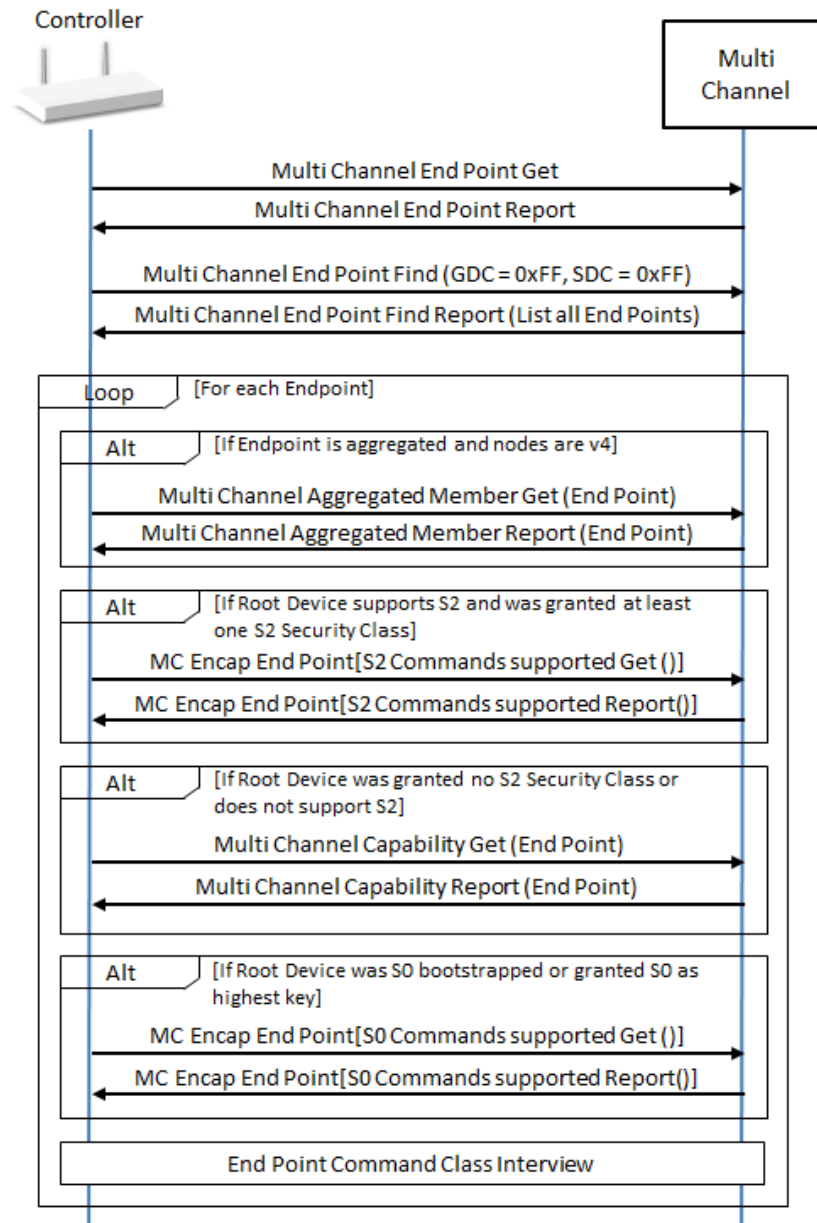


Figure 35, Multi Channel Command Class interview

6.2.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

6.2.3 Node properties

No node property is required to be made available to the end user for this Command Class.

6.2.4 Additional control requirements

CL:0060.01.51.01.1

A node controlling this Command Class MUST provide control of all its controlled command classes on every End Point.

6.2.4.1 Root Device and End Point Command Classes

When End Point functionality is advertised in the Root Device NIF, service discovery mechanisms like mDNS and installer-style GUIs risk presenting a Root Device functionality which is actually a mirror representation of an End Point functionality.

CL:0060.01.52.01.1

Therefore, application command classes of the Root Device capabilities that are also advertised by at least one End Point SHOULD be filtered out by controlling nodes before presenting the functionalities via service discovery mechanisms like mDNS or to users in a GUI.

6.2.4.2 S0 only Multi Channel nodes

The following considerations apply for nodes supporting S0 and Multi Channel Command Class but do not support S2 Command Class.

Legacy S0 only nodes may implement some secure and some non-secure End Points. Such a node supporting S0 must advertise S0 in the Multi Channel Capability Report Command for a given End point if the End Point can be addressed with S0 encapsulation.

It has been found that legacy nodes do not always advertise S0 in their Multi Channel Capability Report Command but still support their Command Classes with S0 encapsulation.

CL:0060.01.52.02.1

A controlling node SHOULD use S0 encapsulation with all End Points if the Root Device was bootstrapped with the S0 Command Class.

CL:0060.01.53.01.1

A controlling node MAY interview and control Command Classes present in the Multi Channel Capability Report of an End Point non-securely if the End Point does not respond to S0 encapsulated traffic.

6.2.4.3 Association and Multi Channel Association mapping

The following considerations apply for nodes supporting Association and/or Multi Channel Association and Multi Channel Command Class.

The Association groups functionality may be fully or partially mirrored between the Root Device and End Points. For example, an Association Remove Command issued to the Root Device may clear the association destination at the End Point groups.

CL:0060.01.52.03.1

A controlling node SHOULD read back the destinations in every group, including End Points groups after configuring associations.

6.3 Security 0 Command Class

6.3.1 Mandatory node interview

CL:0098.01.21.01.1

A node controlling this Command Class MUST observe the Z-Wave Plus Role Type specification [6] requirements when including an S0 node.

6.3.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

6.3.3 Node properties

No node property is required to be made available to the end user for this Command Class.

6.3.4 Additional control requirements

CL:0098.01.51.01.1

A node is controlling S0 when it can perform S0 bootstrapping of other nodes. The S0 bootstrapping process is described in the S0 Command Class [4] and a controlling node MUST observe these requirements.

CL:0098.01.51.02.1

A node controlling this Command Class MUST provide control of all its controlled command classes using S0 encapsulation.

6.4 Security 2 Command Class

6.4.1 Mandatory node interview

CL:009F.01.21.01.1

A node controlling this command class MUST observe the Z-Wave Plus Role Type specification [6] requirements when including an S2 node.

6.4.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

6.4.3 Node properties

No node property is required to be made available to the end user for this Command Class.

6.4.4 Additional control requirements

CL:009F.01.51.01.1

S2 Security is controlled when a node can perform S2 bootstrapping of other nodes. The Bootstrapping process is described in the S2 Command Class [4] and a controlling node MUST observe these requirements.

CL:009F.01.51.02.1

A node controlling this Command Class MUST provide control of all its controlled command classes using S2 encapsulation and at all its granted S2 Security Classes.

6.5 Supervision Command Class, version 1

6.5.1 Mandatory node interview

There is no mandatory node interview for a node controlling this Command Class.

6.5.2 Minimum end user functionalities

No minimum end user functionality is required for this Command Class.

6.5.3 Node properties

No node property is required to be made available to the end user for this Command Class.

6.5.4 Additional control requirements

A node issuing Supervision Get Commands MUST declare the Supervision Command Class as controlled during certification.

Any node issuing Supervision Get Commands MUST comply with the following:

- The Session ID field MUST be incremented each time a new unique Supervision Get Command is issued.
- A sending node MAY use the same Session ID for a multicast and singlecast follow-up carrying the same encapsulated command. A sending node MAY also use the same Session ID for all destinations of singlecast follow-up commands.

REFERENCES

- [1] IETF RFC 2119, Key words for use in RFC's to Indicate Requirement Levels,
<http://tools.ietf.org/pdf/rfc2119.pdf>
- [2] Silicon Labs, SDS13781, Z-Wave Application Command Class Specification
- [3] Silicon Labs, SDS13782, Z-Wave Management Command Class Specification
- [4] Silicon Labs, SDS13783, Z-Wave Transport-Encapsulation Command Class Specification
- [5] Silicon Labs, SDS13784, Z-Wave Network-Protocol Command Class Specification
- [6] Silicon Labs, SDS11846, Z-Wave Plus Role Type Specification.
- [7] Silicon Labs, SDS14224, Z-Wave Plus v2 Device Type Specification.
- [8] Silicon Labs, SDS13713, Notification Command Class, list of assigned Notifications
- [9] Silicon Labs, SDS13812, Multilevel Sensor Command Class, list of assigned Multilevel Sensor types and scales
- [10] Silicon Labs, SDS13548, List of defined Z-Wave Command Classes