

Base M5GO Bottom2

SKU:A014-C



Description

Base M5GO Bottom2 is an expansion base specifically designed for Core2. The base integrates an MPU6886 six-axis IMU sensor, a digital microphone (SPM1423), and a 500 mAh lithium battery. Two sets of HY2.0-4P expansion interfaces expose commonly used ADC/DAC/UART pins, enabling connection to various types of sensors. A total of 10 programmable RGB LEDs (SK6812) on both sides of the base, combined with frosted light-diffusing strips, deliver a soft and comfortable lighting effect. The bottom features a pogo pin magnetic charging interface; when attached to a charging dock, current flows safely into the internal battery through the built-in TP4057 charging IC. In addition to charging, the pogo pin interface also exposes the host controller's I2C bus, allowing external expansion via magnetic attachment. Built-in mounting magnets and a LEGO-compatible hole pattern on the back enable seamless integration with other LEGO structural designs.

Features

- Compatible with Core2
- Digital microphone
- Programmable LED light bars
- 500mAh lithium battery
- HY2.0-4P expansion ports

- Compatible with LEGO brick structures
- Supports magnetic charging base

Includes

- 1 x Base M5GO Bottom2
- 2 x M3*16 Screws
- 2 x M3*18 Screws

Applications


- CORE2 expansion

Specifications

Specification	Parameter
Microphone	SPM1423
LED	SK6812 x 10
IMU	MPU6886
Product Size	54.0 x 54.0 x 15.0mm
Product Weight	30.0g
Package Size	132.0 x 95.0 x 16.0mm
Gross Weight	47.4g

Schematics

[Base M5GO Bottom2 Schematics PDF](#)

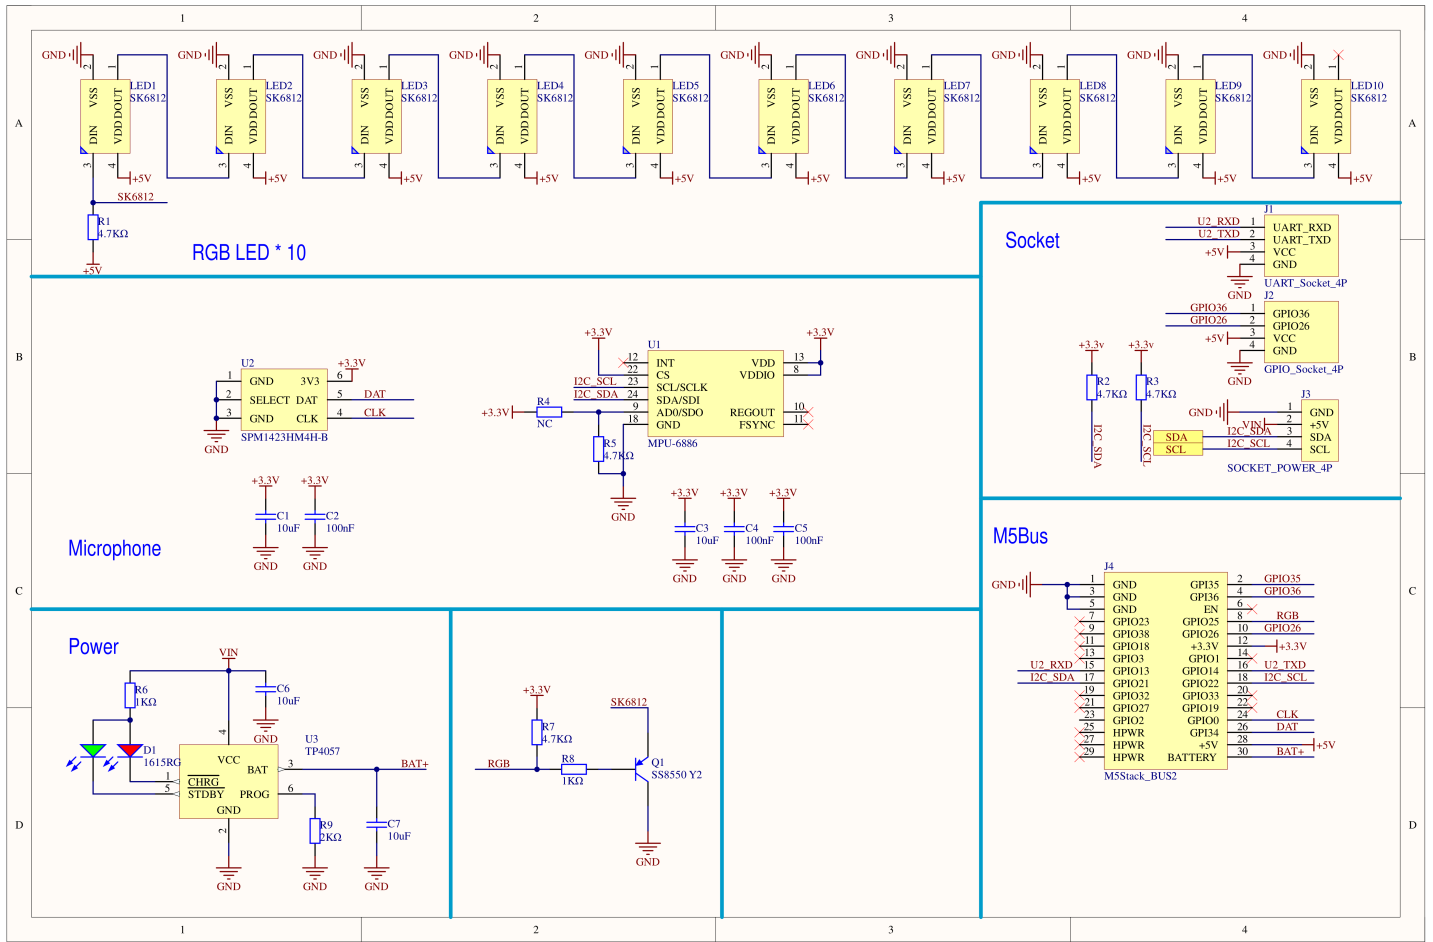

PinMap

SK6812-LED Bar

ESP32 Chip	G25
SK6812	DATA

SPM1423 - Microphone

ESP32 Chip	G34	G0
SPM1423	DAT	CLK

MPU6886 & Pogo Pin

ESP32 Chip	G21	G22
MPU6886	SDA	SCL
Pogo Pin	SDA	SCL

HY2.0-4P

ESP32 Chip	G26	G36
PORT.B	G26(DAC)	G36(ADC)


ESP32 Chip	G13	G14
PORT.C	G13(RXD2)	G14(TXD2)

M5-Bus

PIN	LEFT	RIGHT	PIN
GND	1	2	NC
GND	3	4	PORT.B
GND	5	6	NC
NC	7	8	RGB LED
NC	9	10	PORT.B
NC	11	12	3V3
NC	13	14	NC
UART_RX	15	16	UART_TX
IMU_SDA	17	18	IMU_SCL
NC	19	20	NC
NC	21	22	NC
NC	23	24	I2S_LRCK
NC	25	26	I2S_DIN
NC	27	28	5V
NC	29	30	BAT

|

Model Size

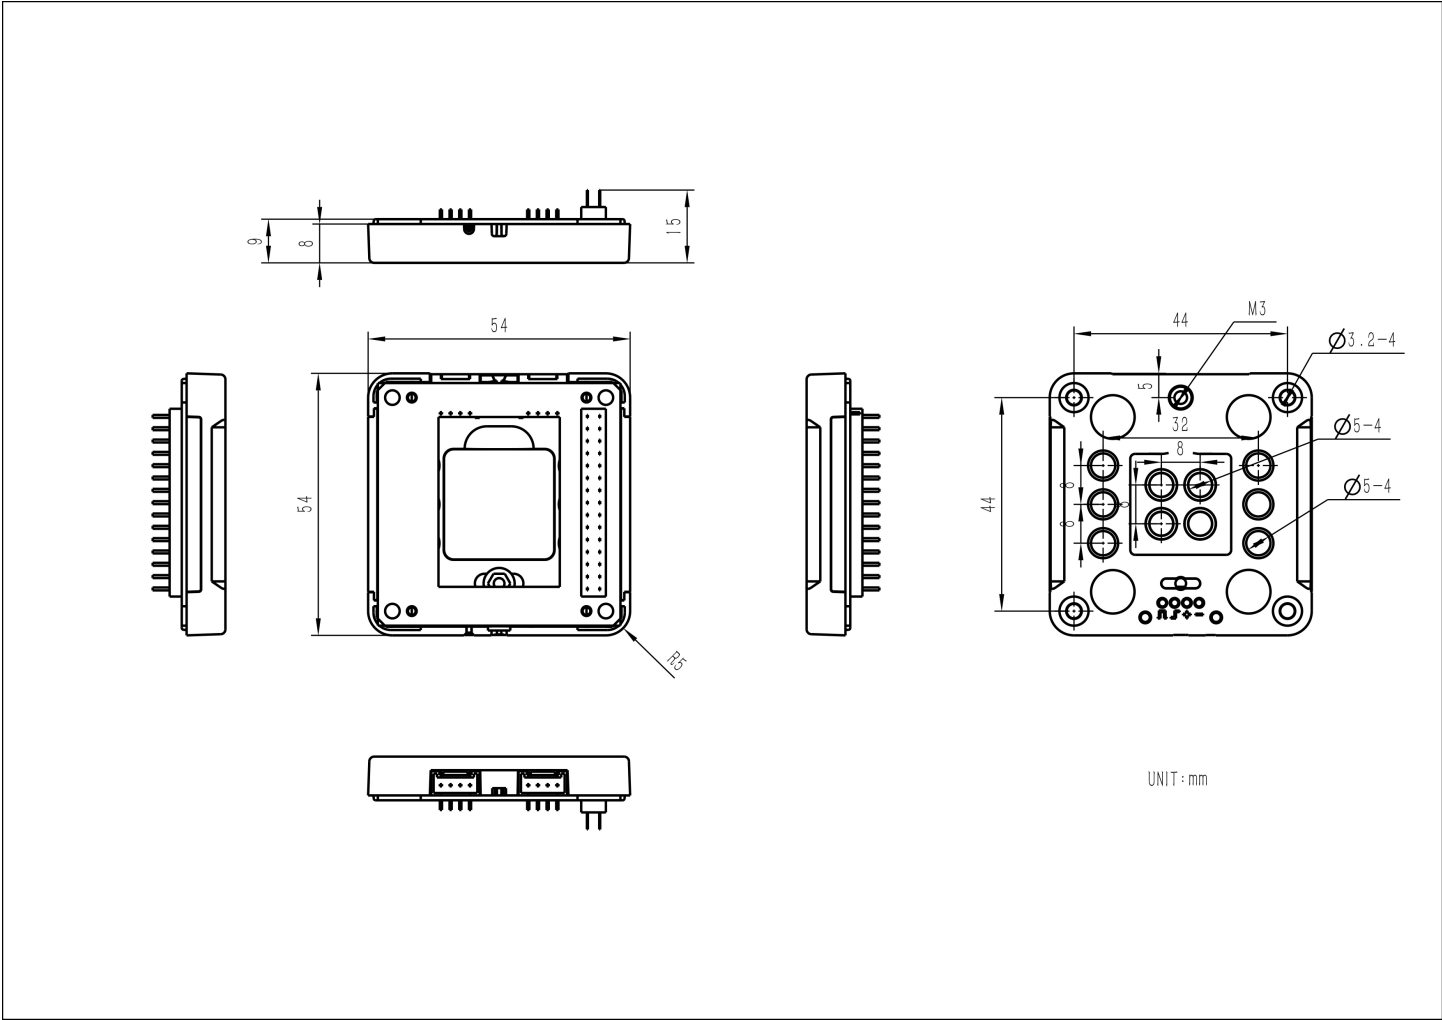

Datasheets

- [SPM1423](#)
- [MPU6886](#)

Softwares

Arduino

- [Base M5GO Bottom2 Test Example](#)

EasyLoader

Easyloader	Download	Note
Base M5GO Bottom2 Test Easyloader	download	/

Video

- IMU data acquisition, microphone data acquisition for spectrum display, control LED light flashing.

Product Comparison

Product Comparison



Base M5GO Bottom

Base M5GO Bottom2

Base M5GO Bottom3

Core	Basic (Core)	Core2	CoreS3
RGB	10*SK6812	10*SK6812	10*WS2812
IMU	/	MPU6886	/
IR	IR	/	IR
BATTERY	500mAh	500mAh	500mAh
MIC	SPQ2410	SPM1423	/