PRODUCTION SPEC · FOR THE PRINT VENDOR

leevorá LED standee, 2 × 4 ft, double-sided

Print-ready files are supplied. Please follow this sheet exactly and confirm the checklist on page 2 before the full run.

Files supplied

`SideA_PRINT_CMYK.pdf` / `SideB_PRINT_CMYK.pdf`	**Master print file.** 1:1, CMYK FOGRA39 (output intent embedded), type outlined, 10 mm bleed, crop marks, TrimBox/BleedBox set.
`Side*_PRINT_CMYK_10mm-bleed.tif`	Same artwork, flattened. 630 × 1239 mm, 150 ppi, CMYK, ICC embedded. Use it if your RIP prefers TIFF.
`Side*_FLEX-WRAP_CMYK_75mm-extension.tif`	Only for flex that wraps around the frame: 760 × 1369 mm. The artwork is centred and the extra 75 mm per side is background only.
`Side*_RIP-MASTER_sRGB_10mm-bleed.tif`	The same artwork in sRGB. Use it **only** if your RIP has an ICC profile for the actual backlit media. Otherwise print the CMYK files.
`Side*_softproof.png, *_day/_night previews`	Colour reference only. Do not print these.

Specification


Unit	Double-sided LED light-box standee, 2 × 4 ft (610 × 1219 mm visible face), portrait, outdoor. **Two different artworks**: Side A (woman/skin) and Side B (man/hair).
Build (recommended)	Aluminium profile box, 100–125 mm deep, hinged faces. Each face: 2 mm clear UV-stable polycarbonate → **backlit PET film 175–200 µm** printed 2× density → 3 mm opal acrylic. A 3 mm white ACP **centre divider** stops light and image bleeding between faces. Est. ₹14–25k.
Build (budget)	"LED glow sign" frame with 440–510 gsm **backlit flex** (not frontlit/star flex), Konica solvent in **backlit mode**, the same LEDs and the divider. Use the FLEX-WRAP file. Est. ₹6–11k.
Print	150 ppi at 100% (supplied). Backlit mode / 2-pass double-strike. Eco-solvent 720×1440, 8+ pass for film. Let solvent prints dry ≥24 h before sealing.
Colour	Files are already CMYK FOGRA39 (TAC ≤ 300%). **Don't re-convert or "boost" them.** If you have a media ICC profile for backlit film or flex, print the sRGB master through it instead. Run a strip test (dark green, gold, cream, aqua, skin, QR) on the real media in the real box, lit and unlit, and send me a photo before the full run.

Size & margins	Trim 610 × 1219 mm. Bleed 10 mm per side. All type, logo and the QR sit ≥40 mm inside the trim. Send me the frame drawing if the lip is wider than 25 mm.
LEDs	Back-lit modules (not edge-lit): 12 V, 3 × SMD2835 lensed (160–175°), IP65+, on a 90–110 mm grid with the edge row ≤50 mm from the frame. **4000 K neutral white, CRI ≥80, one bin for both faces.** Avoid 6500 K: it greys the cream and turns the gold green. Fit a PWM dimmer, photocell, timer (off 23:00), 30 mA RCCB and earthing.
Evenness test	Light the box with a blank face: no LED dots visible at 1 m and no dark corners.


> **वेंडर के लिए ज़रूरी बातें:** (1) फ़ाइल पहले से CMYK में है, दोबारा convert या colour "boost" मत करना। (2) Backlit flex/film ही लगाना, frontlit/star flex नहीं। (3) LED 4000K (neutral white) लगाना, 6500K नहीं। (4) पूरी printing से पहले strip test का lit और unlit फ़ोटो भेजना। (5) बीच में divider ज़रूर लगाना, ताकि एक side की light दूसरी side पर न दिखे। (6) Text, logo और QR को frame के lip के नीचे मत छुपाना, ये किनारे से 40 mm अंदर हैं।

Pre-press checklist

- ☐ Frame drawing: outer size, visible area, lip, depth
- ☐ Printer, media, mode and ICC named in writing
- ☐ Strip test photo (lit + unlit) approved
- ☐ A 1:1 face crop proof approved
- ☐ Side A / Side B confirmed, and which faces the street
- ☐ QR on the printed proof scans with two phones (Android + iPhone)
- ☐ Blank-face LED test: no dots, matched 4000 K
- ☐ IP65, RCCB, earthing, timer set, 2-hour burn-in
- ☐ Base ballasted or anchored against wind

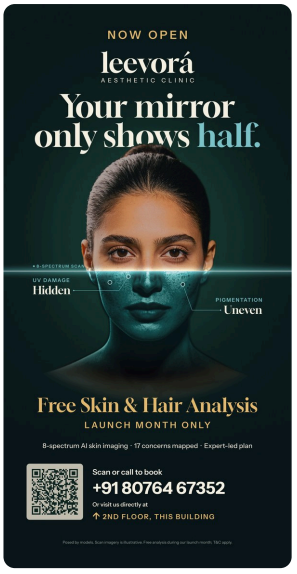

Side A

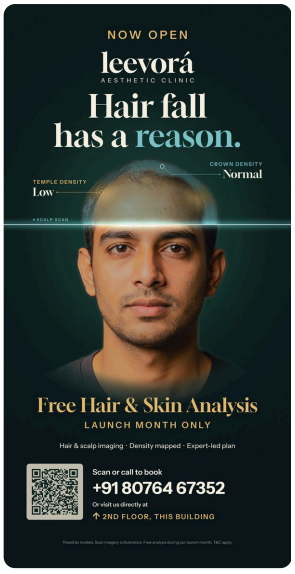

Side B

Price figures are estimates from Delhi listings (ex-GST, ex-installation), not quotes.