

Invoice

Maria Zumarraga


PO: P24-058

1650 Dogwood street

Prince George V2L 1C2

Installation date: February 27,2025

Invoice date: March 2,2025

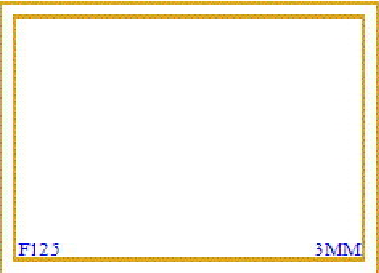Viewed From Outside	Item # 1	Qty: 1	Window
	BMS (WxH): 25.5 x 18.5		Window: \$817.01
	WS (WxH): 25.25 x 18.25		Installation: \$150.00
	RSO (WxH): 26.25 x 19.25		
	SqFt: 3.20 LnFt: 7.25		
	Ext Clr: White		CMR: 0
	Int Clr: White		Grill Type:
	BM Clr: White		Grill Color:
	Ext Opts: 1/8 Flush Sill Nosing		Trns Type:
	Int Opts: Vinyl Jamb 1 7/8 in		Trns Overall Size (WxH):
	Custom Jamb Size: 0		Curved/Ln Config (WxH):
Casement	Casing: Vinyl Casing 3 3/8 in Flat		Trns Leg H:
	Rosettes: Rosettes 3 3/8 Flat		
	SDL Type:		
	Handle:		
	Tilt Opts:		
	Room Location: Storage		

Panel : 1 Frame: F125

Size(WxH): 25.25 x 18.25

Window

Low-E_Clear_Low-E

U-Factor(M)	Solar Heat Gain	Energy Rating	Energy Star	ES Most Efficient	NRCan Reference
0.91	0.52	50	Y	Y	NR7082-48766112-ES5

Compact Report ER Ratings


Customer PO: P24-058

Estimate ID: 12960

Production ID: 9673

Customer: HTR BC WINDOWS

Viewed From Outside

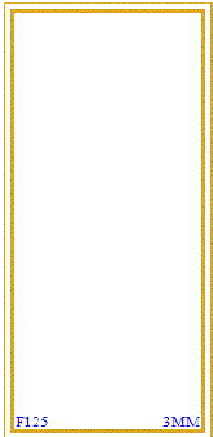

Casement

Item # 2 Qty: 1

Window

BMS (WxH): 25 x 52.5

WS (WxH): 24.75 x 52.25

RSO (WxH): 25.75 x 53.25

SqFt: 8.98 LnFt: 12.83

Ext Clr: White

Int Clr: White

BM Clr: White

Ext Opts: 1/8 Flush Sill Nosing

Int Opts: Vinyl Jamb 1 7/8 in

Custom Jamb Size: 0

Casing: Vinyl Casing 3 3/8 in Flat

Rosettes: Rosettes 3 3/8 Flat

SDL Type:

Handle:

Tilt Opts:

Room Location: Storage

Window: \$996.42

Installation: \$150.00

CMR: 0

Grill Type:

Grill Color:

Trns Type:

Trns Overall Size (WxH):

Curved/Ln Config (WxH):

Trns Leg H:

Panel : 1 Frame: F125

Size(WxH): 24.75 x 52.25

Window

Low-E_Clear_Low-E

U-Factor(M)

Solar Heat Gain

Energy Rating

Energy Star

ES Most Efficient

NRCan Reference

0.91

0.52

50

Y

Y

NR7082-48766112-ES5

Compact Report ER Ratings

Customer PO: P24-058

Estimate ID: 12960

Production ID: 9673

Customer: HTR BC WINDOWS

Viewed From Outside

Item # 3 Qty: 1

Window

BMS (WxH): 57.5 x 21.25

WS (WxH): 54 x 17.75

RSO (WxH): 55 x 18.75

SqFt: 6.66 LnFt: 11.96

Ext Clr: White

Int Clr: White

BM Clr: White

Ext Opts: 2 in Brick Mold No Fin

Int Opts: Drywall Return

Custom Jamb Size: 0

Casing: None

Rosettes: None

SDL Type:

Handle: None

Tilt Opts: LIFT OUT

Room Location: Bas. Rec Room

Window: \$1,110.79
Installation: \$150.00

CMR: 27

Grill Type:


Grill Color:

Trns Type:

Trns Overall Size (WxH):

Curved/Ln Config (WxH):

Trns Leg H:



Lift Out Slider

Panel : 1 Frame: VL1

Size(WxH): 54 x 17.75

Window

Low-E_Clear_Low-E * Low-E_Clear_Low-E

U-Factor(M)

Solar Heat Gain

Energy Rating

Energy Star

ES Most Efficient

NRCan Reference

1.04

0.43

39

Y

Y

NR7082-38846001-ES5

Compact Report ER Ratings

Customer PO: P24-058

Estimate ID: 12960

Production ID: 9673

Customer: HTR BC WINDOWS

Viewed From Outside

Item # 4 Qty: 1

Window

BMS (WxH): 35.5 x 19.5

WS (WxH): 32 x 16

RSO (WxH): 33 x 17

SqFt: 3.56 LnFt: 8.00

Ext Clr: White

Int Clr: White

BM Clr: White

Ext Opts: 2 in Brick Mold No Fin

Int Opts: Drywall Return

Custom Jamb Size: 0

Casing: None

Rosettes: None

SDL Type:

Handle:

Tilt Opts:

Room Location: Bas. Rec Room

Window: \$858.32

Installation: \$150.00

CMR: 0

Grill Type:


Grill Color:

Trns Type:

Trns Overall Size (WxH):

Curved/Ln Config (WxH):

Trns Leg H:

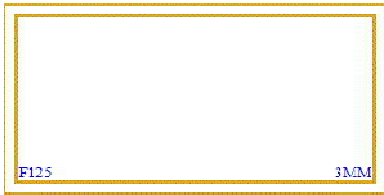

Casement

Panel : 1 Frame: F125

Size(WxH): 32 x 16

Window

Low-E_Clear_Low-E

U-Factor(M)

Solar Heat Gain

Energy Rating

Energy Star

ES Most Efficient

NRCan Reference

0.91

0.52

50

Y

Y

NR7082-48766112-ES5

Compact Report ER Ratings

Customer PO: P24-058

Estimate ID: 12960

Production ID: 9673

Customer: HTR BC WINDOWS

Viewed From Outside

Item # 5 Qty: 1

Window

BMS (WxH): 32 x 20.5

WS (WxH): 28.5 x 17

RSO (WxH): 29.5 x 18

SqFt: 3.36 LnFt: 7.58

Ext Clr: White

Int Clr: White

BM Clr: White

Ext Opts: 2 in Brick Mold No Fin

Int Opts: Drywall Return

Custom Jamb Size: 0

Casing: None

Rosettes: None

SDL Type:

Handle:

Tilt Opts:

Room Location: Bas. Rec Room

Window: \$834.63
Installation: \$150.00

CMR: 0

Grill Type:


Grill Color:

Trns Type:

Trns Overall Size (WxH):

Curved/Ln Config (WxH):

Trns Leg H:

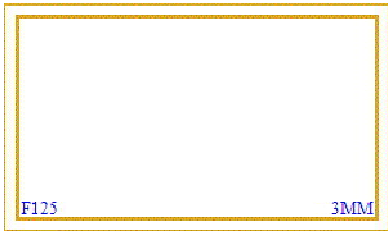

Casement

Panel : 1 Frame: F125

Size(WxH): 28.5 x 17

Window

Low-E_Clear_Low-E

U-Factor(M)

Solar Heat Gain

Energy Rating

Energy Star

ES Most Efficient

NRCan Reference

0.91

0.52

50

Y

Y

NR7082-48766112-ES5

Compact Report ER Ratings

Customer PO: P24-058

Estimate ID: 12960

Production ID: 9673

Customer: HTR BC WINDOWS

Viewed From Outside

Item # 6 Qty: 1

Window

Window: \$1,175

Installation: \$150.00

BMS (WxH): 63.75 x 21.25

WS (WxH): 60.25 x 17.75

RSO (WxH): 61.25 x 18.75

SqFt: 7.43 LnFt: 13.00

Ext Clr: White

Int Clr: White

BM Clr: White

Ext Opts: 2 in Brick Mold No Fin

Int Opts: Drywall Return

Custom Jamb Size: 0

Casing: None

Rosettes: None

SDL Type:

Handle: None

Tilt Opts: LIFT OUT

Room Location: Bas. Bedroom 1

CMR: 30.125

Grill Type:


Grill Color:

Trns Type:

Trns Overall Size (WxH):

Curved/Ln Config (WxH):

Trns Leg H:



Lift Out Slider

Panel : 1 Frame: VL1

Size(WxH): 60.25 x 17.75

Window

Low-E_Clear_Low-E * Low-E_Clear_Low-E

U-Factor(M)

Solar Heat Gain

Energy Rating

Energy Star

ES Most Efficient

NRCan Reference

1.04

0.43

39

Y

Y

NR7082-38846001-ES5

Compact Report ER Ratings


Customer PO: P24-058

Estimate ID: 12960

Production ID: 9673

Customer: HTR BC WINDOWS

Viewed From Outside

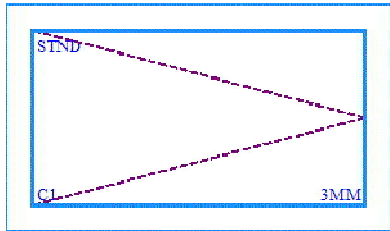

Casement

Item # 7 Qty: 1

BMS (WxH): 32 x 20.5

WS (WxH): 28.5 x 17

RSO (WxH): 29.5 x 18

SqFt: 3.36 LnFt: 7.58

Ext Clr: White

Int Clr: White

BM Clr: White

Ext Opts: 2 in Brick Mold No Fin

Int Opts: Drywall Return

Custom Jamb Size: 0

Casing: None

Rosettes: None

SDL Type:

Handle: Encore Handle

Tilt Opts:

Room Location: Bas. Bedroom 1

Window

Window: \$1,034.93

Installation: \$150.00

CMR: 0

Grill Type:

Grill Color:

Trns Type:

Trns Overall Size (WxH):

Curved/Ln Config (WxH):

Trns Leg H:

Panel : 1 Frame: C1

Size(WxH): 28.5 x 17

Window

Low-E_Clear_Low-E

U-Factor(M)

Solar Heat Gain

Energy Rating

Energy Star

ES Most Efficient

NRCan Reference

0.98

0.38

40

Y

Y

NR7082-38253799-ES5

Compact Report ER Ratings

Customer PO: P24-058

Estimate ID: 12960

Production ID: 9673

Customer: HTR BC WINDOWS

Viewed From Outside

Item # 8 Qty: 1

Window

BMS (WxH): 32 x 21.25

WS (WxH): 28.5 x 17.75

Window: \$914.82

Installation: \$150.00

RSO (WxH): 29.5 x 18.75

SqFt: 3.51 LnFt: 7.71

Ext Clr: White

Int Clr: White

BM Clr: White

Ext Opts: 2 in Brick Mold No Fin

Int Opts: Drywall Return

Custom Jamb Size: 0

Casing: None

Rosettes: None

SDL Type:

Handle: None

Tilt Opts: LIFT OUT

Room Location: Bas. Rec. Room

CMR: 14.25

Grill Type:


Grill Color:

Trns Type:

Trns Overall Size (WxH):

Curved/Ln Config (WxH):

Trns Leg H:

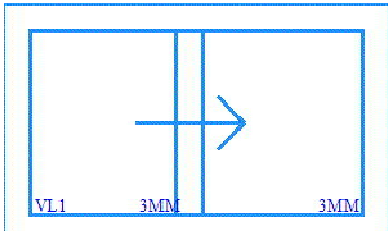

Lift Out Slider

Panel : 1 Frame: VL1

Size(WxH): 28.5 x 17.75

Window

Low-E_Clear_Low-E * Low-E_Clear_Low-E

U-Factor(M)

Solar Heat Gain

Energy Rating

Energy Star

ES Most Efficient

NRCan Reference

1.04

0.43

39

Y

Y

NR7082-38846001-ES5

HTR Windows and Doors BC

202 Balmoral Pl

Port Moody BC, V3H 4B9

(289) 597-8838

Quote



Quote Number: 1229013

Reference: P24-058

Item: 1 of 2

Date: 16 Dec 2024

System

RHH Steel Single Door

Outswing

Frame Size (tip to tip) - 33 3/8" x 80 1/2"

Weatherstrip White

Frame

Cut Down Frame Height to 80 1/2" (Cut Down 1")

5 1/4" Composite Smooth Jambs - (4 5/8"+5/8")

5/8" Frame Extension Perimeter Only

Panel

Steel Door Panel :Sydney 32"x79"

Glass Lite

Door Glass: Commodity - 22" x 17" Clear Low-E

Door Lite Frame: 22" x 17" PVC Colonial Lite Frame

Hardware

Ball-Bearing Satin Nickel Hinges

Finish

Door Slab Panel:

Interior Factory White, Exterior Factory White

Full System Frame:

Interior Factory White, Exterior Factory White

Full System Brick Mould: Factory White

Door Glass Frame Paint:

Interior Factory White, Exterior Factory White

Brickmould

Step 2" Composite Smooth Brickmould Supplied

Sill

Standard Outswing Sill Mill Finish White Crown - Depth 6 3/4"- Horn
36 1/8"

Lock Preparation

For Operating Door - Prep Door for Passage and Deadbolt

Energy Star Label

Energy Star Certification:1839-001-0186-01 Energy Star:NV1-367-
LQ-DLO-0N3-N-FIX-ITIN-CN

Door: \$1,209.85


Installation: \$250. 00

View From Outside



Top View

Interior



Location/Notes:

Tag/Location: Storage Room

Notes:

Quote Customer Details:

Reference: P24-058

Name: Maria Zumarraga

Address: 1650 Dogwood St

City: Prince George BC

Postal Code: v2l 1c2

Phone: (778) 349-7753

HTR Windows and Doors BC
202 Balmoral Pl
Port Moody BC, V3H 4B9
(289) 597-8838

Quote



Quote Number: 1229013
Reference: P24-058
Item: 2 of 2
Date: 16 Dec 2024

System

LHH Steel Single Door
Outswing
Frame Size (tip to tip) - 33 3/8" x 78"
Weatherstrip White

Frame

Cut Down Frame Height to 78" (Cut Down 3.5")
5 1/4" Composite Smooth Jambs - (4 5/8"+5/8")
5/8" Frame Extension Perimeter Only

Panel

Steel Door Panel :Sydney 32"X79"

Hardware

Ball-Bearing Satin Nickel Hinges

Finish

Door Slab Panel:
Interior Factory White, Exterior Factory White
Full System Frame:
Interior Factory White, Exterior Factory White
Full System Brick Mould: Factory White

Brickmould

Step 2" Composite Smooth Brickmould Supplied

Sill

Standard Outswing Sill Mill Finish White Crown - Depth 6 3/4"- Horn
36 1/8"

Lock Preparation

For Operating Door - Prep Door for Passage and Deadbolt
Raise door bores 2"

Energy Star Label

Energy Star Certification:1839-001-0001-01 Energy Star:NV1-367-
OP-000-000-N-FIX-0000-00

Door: \$1,209.85
Installation: \$250. 00

Participant Income Qualified Program eligibility code: ESP2-7f5e4588

SUBTOTAL: (10 windows)	\$11,861.64
GST (5%)	\$593.08
TOTAL:	\$12,454.72
REBATE %	Level 2 up to \$9,500.00

Eligible Rebate (Level 2) (10 Windows):	\$7,472.83
---	------------


Customer Portion:	\$4,981.89
-------------------	------------

View From Outside



Top View

Interior



Location/Notes:

Tag/Location: Hallway

Notes:

Quote Customer Details:

Reference: P24-058

Name: Maria Zumarraga

Address: 1650 Dogwood St

City: Prince George BC

Postal Code: v2l 1c2

Phone: (778) 349-7753



Canada

energystar.gc.ca

NR7082-48766112-ES5

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE

Energy Performance Ratings Évaluation des propriétés énergétiques

U-Factor Facteur-U 0.91 W/m ² ·K	Solar Heat Gain Coefficient Coefficient de gain de chaleur solaire 0.52
Energy Rating Rendement énergétique 50	Visual Transmittance Transmission visible 0.62

Weather Seal Windows Low Fixed Window - GreenON

Vinyl Frame, Triple Glaze, Low-E coating (e=0.07,S3)
Argon / air filled
WSL-K-11-00011-00001



Energy performance and visual transmittance ratings certified to **CSA A440.2-19**. Ratings are determined for a fixed set of environmental conditions and a specific product. Certification agency does not recommend or warrant product for any specific use.

Les taux de performance énergétique et de transmission visible sont certifiés **CSA A440.2-19**. Les taux sont déterminés selon une série de conditions environnementales fixes et une taille de produit particulière. L'agence de certification ne recommande ni ne garantit le produit aux fins d'utilisation particulière.

Physical Performance Ratings Évaluation des propriétés physiques

Class LC-PG2400 Size tested. 1702 x 1702 mm (67.0 x 67.0 in) Type FW

Design Pressure	+/- 2400 Pa (+/- 50 psf)
Water Test Pressure:	720 Pa
Canadian Air Infiltration/Exfiltration:	A3

Conforms to: **AAMA/WDMA/CSA 101/I.S.2/A440-11 & A440 S1-19**
En conformité avec: **AAMA/WDMA/CSA 101/I.S.2/A440-11 & A440 S1-19**



Canada
energystar.gc.ca

NR7082-38846001-ES5

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE

Energy Performance Ratings
Évaluation des propriétés énergétiques

U-Factor Facteur-U 1.04 W/m ² •K	Solar Heat Gain Coefficient Coefficient de gain de chaleur solaire 0.43
Energy Rating Rendement énergétique 39	Visual Transmittance Transmission visible 0.52

Weather Seal Windows
Single Slider - Lift Out - GreenON

Vinyl Frame, Triple Glaze, Low-E coating (e=0.07,S3)
Argon / air filled
KPCL-1336-0014-0010.0



Energy performance and visual transmittance ratings certified to CSA A440.2-19. Ratings are determined for a fixed set of environmental conditions and a specific product. Certification agency does not recommend or warrant product for any specific use.

Les taux de performance énergétique et de transmission visible sont certifiés CSA A440.2-19. Les taux sont déterminés selon une série de conditions environnementales fixes et une taille de produit particulière. L'agence de certification ne recommande ni ne garantit le produit aux fins d'utilisation particulière.

Physical Performance Ratings
Évaluation des propriétés physiques

Class R-PG30 Size tested. 1600 x 1110 mm (63.0 x 43.7 in) Type HS

Design Pressure +/- 2800 Pa (+/- 60 psf)
Water Test Pressure: 220 Pa
Canadian Air Infiltration/Exfiltration: A2

Conforms to: AAMA/WDMA/CSA 101/I.S.2/A440-11 & A440 S1-19
En conformité avec: AAMA/WDMA/CSA 101/I.S.2/A440-11 & A440 S1-19



Canada
energystar.gc.ca

NR7082-38253799-ES5

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE

Energy Performance Ratings
Évaluation des propriétés énergétiques

U-Factor Facteur-U 0.98 W/m ² •K	Solar Heat Gain Coefficient Coefficient de gain de chaleur solaire 0.38
Energy Rating Rendement énergétique 40	Visual Transmittance Transmission visible 0.45

Weather Seal Windows
Operable Casement - GreenON

Vinyl Frame, Triple Glaze, Low-E coating (e=0.07,S3)
Argon / air filled
KPCL-1336-0008-0015.0



Energy performance and visual transmittance ratings certified to CSA A440.2-19. Ratings are determined for a fixed set of environmental conditions and a specific product. Certification agency does not recommend or warrant product for any specific use.

Les taux de performance énergétique et de transmission visible sont certifiés CSA A440.2-19. Les taux sont déterminés selon une série de conditions environnementales fixes et une taille de produit particulière. L'agence de certification ne recommande ni ne garantit le produit aux fins d'utilisation particulière.

Physical Performance Ratings
Évaluation des propriétés physiques

Class CW-PG50 Size tested. 910 x 2030 mm (35.83 x 79.92 in) Type C

Design Pressure +/- 2400 Pa (+/- 50 psf)
Water Test Pressure: 720 Pa
Canadian Air Infiltration/Exfiltration: A3

Conforms to: AAMA/WDMA/CSA 101/I.S.2/A440-11 & A440 S1-19
En conformité avec: AAMA/WDMA/CSA 101/I.S.2/A440-11 & A440 S1-19

ENERGY STAR® Certified in Canada
Certifié ENERGY STAR au Canada



Canada
energystar.gc.ca

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE

Energy Performance Ratings
Évaluation des propriétés énergétiques

U-Factor
Facteur-U
W/m²•K

0.97

Solar Heat Gain Coefficient
Coefficient de gain de chaleur solaire

0.10

Energy Rating
Rendement énergétique

24

Visual Transmittance
Transmission visible

0.09

Queen's Doors

Hinged - Single Leaf

Wood Frame

Glaze

1/4 Lite

Layers of Glazing

2

1839-001-0186-01

NV1-367-LQ-DLO-0N3-N-FIX-ITIN-CN



Energy performance and visual transmittance ratings certified to CSA A440.2-19. Ratings are determined for a fixed set of environmental conditions and a specific product. Certification agency does not recommend or warrant product for any specific use.

Les taux de performance énergétique et de transmission visible sont certifiés CSA A440.2-19. Les taux sont déterminés selon une série de conditions environnementales fixes et une taille de produit particulière. L'agence de certification ne recommande ni ne garantit le produit aux fins d'utilisation particulière.

ENERGY STAR® Certified in Canada
Certifié ENERGY STAR au Canada



Canada
 energystar.gc.ca

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE

Energy Performance Ratings
Évaluation des propriétés énergétiques

U-Factor Facteur-U W/m ² •K	Solar Heat Gain Coefficient Coefficient de gain de chaleur solaire
0.75	0.01
Energy Rating Rendement énergétique	Visual Transmittance Transmission visible
24	0

Queen's Doors

Hinged - Single Leaf

Wood Frame

Glaze	Layers of Glazing
None	0

1839-001-0001-01

NV1-367-OP-000-000-N-FIX-0000-00



Energy performance and visual transmittance ratings certified to CSA A440.2-19. Ratings are determined for a fixed set of environmental conditions and a specific product. Certification agency does not recommend or warrant product for any specific use.

Les taux de performance énergétique et de transmission visible sont certifiés CSA A440.2-19. Les taux sont déterminés selon une série de conditions environnementales fixes et une taille de produit particulière. L'agence de certification ne recommande ni ne garantit le produit aux fins d'utilisation particulière.