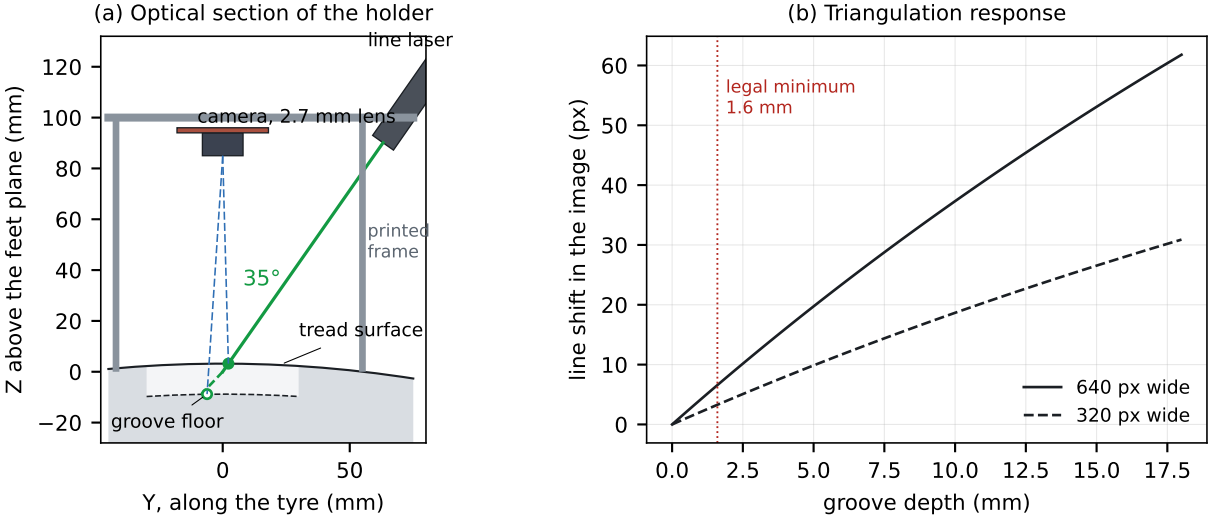
(a) Optical section of the holder
line laser
camera, 2.7 mm lens
printed
frame
35°
tread surface
groove floor
Z above the feet plane (mm)
Y, along the tyre (mm)
120
100
80
60
40
20
0
−20
0
50
(b) Triangulation response
legal minimum
1.6 mm
line shift in the image (px)
groove depth (mm)
640 px wide
320 px wide
60
50
40
30
20
10
0
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5