



SFR3230/3X and SFR1240/3X Models Shown



SFR1260A/3X (w/optional ammeter)

FEATURES

- Available in 12VDC, 24 VDC and 32 VDC models
- Charging outputs for Lead-Acid, AGM, Gel and Lead Calcium
- Optional ammeter available on all models
- Full cutoff when full charge reached - no "trickle" charge
- Temperature sensor reduces output to prevent overcharging
- Ignition protected for engine room installations
- Three bank charging (4 bank option available for 60 amp models)
- LED charge status and fault indicators
- Current limiting protection
- Drip proof cabinet
- AC fuse protection
- Automatic reset DC Breaker
- Reliable ferro-resonant technology
- Field repairable for long voyages
- Two year parts and labor warranty

The line of Sentry SFR chargers is in an elite class, setting the standard for dependable battery chargers. Sentry chargers are designed to operate for decades in the harsh marine environment. They are completely field serviceable and come with a 2-year parts and labor warranty.

Sentry SFR battery chargers are designed for fully automatic, unattended operation, with charging outputs for Lead-Acid, AGM, Gel and Lead Calcium batteries. Once batteries reach full charge, Sentry chargers turn off completely. There is no output trickle to overcharge or dehydrate batteries. Additionally, optional temperature sensor reduces output to prevent overcharging.

Sentry chargers have negative ground with three outputs, allowing three separate banks of batteries to be charged simultaneously. A fourth output is available on some models.

For long voyages, Sentry SFR is the charger to have aboard. The manual/ automatic switch allows you to bypass the voltage regulating circuit, and most repairs can be accomplished with just a few spare parts.

Front-panel includes LED charge status and fault indicators and manual/ automatic selector switch.

Optional ammeter is available on all Sentry models.

All models are current limited and ignition protected for engine room installations.

TECHNICAL SPECIFICATIONS

Model	SFR1220/3B	SFR1240/3X	SFR1240/3XJ	SFR1260/3X	SFR2430/3X	SFR2440/3X	SFR2440/3XJ	SFR2460/3XJ	SFR3230/3X
Type of Battery	Lead Acid/Gel/AGM	Lead Acid/Gel/AGM	Lead Acid/Gel/AGM	Lead Acid/Gel/AGM	Lead Acid/Gel/AGM	Lead Acid/Gel/AGM	Lead Acid/Gel/AGM	Lead Acid/Gel/AGM	Lead Acid/Gel/AGM
DC Output Voltage	12V	12V	12V	12V	24V	24 V	24 V	24 V	32 V
DC Output Current	20 A	40 A	40 A	60 A	30 A	40 A	40 A	60 A	30 A
Lead-Acid/Gel (Cl/CO)	12.5/14.0	12.5/14.0	12.5/14.0	12.5/14.0	25.0/28.0	25.0/28.0	25.0/28.0	25.0/28.0	33.4/37.5
AGM (Cut In/Cut Out)	12.7/14.25	12.7/14.25	12.7/14.25	12.7/14.25	25.4/28.5	25.4/28.5	25.4/28.5	25.4/28.5	34.2/38.4
# Output Banks	3	3	3	***3	3	3	3	***3	3
AC Input Voltage	115 VAC	*115/230 VAC	*115/230 VAC	*115/230 VAC	*115/230 VAC	*115/230 VAC	*115/230 VAC	*115/230 VAC	*115/230 VAC
AC Input Current	4A	7/3.5 A	7/3.5 A	12/6 A	7/3.5 A	13/6.5 A	13/6.5 A	20/10 A	17/8.5 A
Input Frequency	60 Hz	60 Hz	**50/60 Hz	60 Hz	60 Hz	60 Hz	**50/60 Hz	**50/60 Hz	60 Hz
Height in/mm	14.50 / 368	14.50 / 368	14.50 / 368	16.25 / 413	14.50 / 368	16.25 / 413	16.25 / 413	16.25 / 413	16.25 / 413
Width in/mm	13.25 / 336	13.25 / 336	13.25 / 336	13.75 / 349	13.25 / 336	13.75 / 349	13.75 / 349	15.25 / 387	13.75 / 349
Depth in/mm	6.0 / 152	6.0 / 152	6.0 / 152	7.25 / 184	6.0 / 152	7.25 / 184	7.25 / 184	7.75 / 200	7.25 / 184
Weight lb/kg	24 / 11	28 / 12.7	28 / 12.7	38 / 17.3	29 / 13.2	39 / 17.7	39 / 17.7	60 / 27.3	45 / 20.5
DC Output Fuse	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
AC Input Fuse	****5A	****10A	****10A	****15A	****10A	****15A	****15A	****20A	****20A
Temp Sensor Comp	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
CE Approved	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Ignition Protected	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Internal Fan	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Current Limited	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Battery Isolation	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Charger Indicators	LED	LED	LED	LED	LED	LED	LED	LED	LED
Ammeter	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Full/Charging Indicator	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fault Indicator	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Manual/Auto Switch	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Field Repairable	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Warr.-Parts & Labor	2	2	2	2	2	2	2	2	2

NOTE: All Sentry models include a control circuit switch for charging Flooded Lead-Acid, AGM, Gel and Lead Calcium batteries. Refer to Sentry SFR manual for battery type charging.

*NOTE: voltage is changed with a rocker switch.


**NOTE: frequency is changed with a slide switch.

***NOTE: 4 outputs available on special order.

****NOTE: AC fuses rated slow blow at 250VAC.

*****NOTE: Most chargers are available in 60Hz only. Contact Sentry for details.

INTERPRETING MODEL NUMBERS

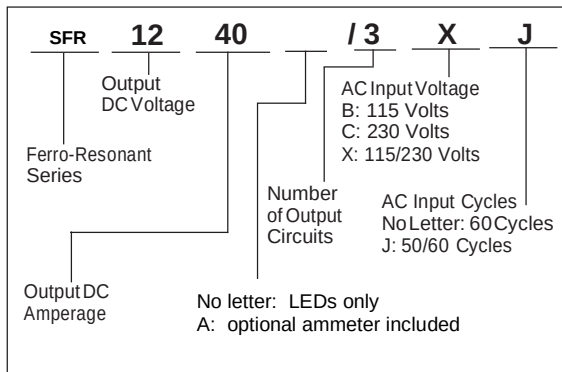

Automatic Ferro-Resonant Battery Charger

Linear Devices Corp.

11126 Air Park Road, Suite G

Ashland, VA 23005

www.sentrychargers.com

Ph: 804-368-8428, Fax: 804-368-8438

Toll Free 1-888-532-8768

January 2021

Sold and Serviced by:





SVE1270/3XJ Model Shown

FEATURES

- Selectable charging outputs for Open Lead-Acid, Sealed Lead-Acid, AGM, Gel, Lead Calcium, Spiralcell, Lithium-ion (LiFeS04) batteries and Winter Storage Mode
- Easy to read LED display showing charge modes and fault status
- Automatically switches to 115vac or 230vac and 50Hz or 60Hz power
- Three isolated bank charging outputs
- Lightweight and compact size
- Battery temperature sensor to prevent overcharging
- AC and DC fuse protection
- CAN BUS J1939 interface to connect to any monitoring system
- Conformal coated PC Board for corrosion protection
- Direct replacement for Sentry "SM" series chargers
- Two year parts warranty

The line of Sentry Voyager Elite marine battery chargers are heavy duty and extremely reliable. Each charger comes equipped with a CAN BUS J1939 interface which can be connected to any monitoring system. The circuit board is conformal coated for added protection from the harsh marine environment.

Sentry Voyager Elite battery chargers are designed with a rotary switch to select the correct charging curve for your batteries. The battery charge selections are Lead-Acid, AGM, Gel, Lead Calcium, Spiralcell, Lithium-ion (LiFeS04) and Winter Storage Mode. Each charger will charge three independent and isolated battery banks. A battery temperature sensor is included to prevent overcharging batteries in a high ambient temperature.

The Voyager Elite series charger is a direct replacement for the Sentry "SM" series battery charger. Please refer to the specification sheet for dimensional details.

The charger is designed to automatically switch to match 115vac or 230vac incoming power and 50Hz or 60Hz frequency.

The easy to read display shows charging status of Boost, Equalization or Absorption and Float modes. The display will also show fault status of high temperature fault, battery fuse fault and output voltage fault.


All Sentry Voyager Elite chargers come with a 2 year parts warranty from date of manufacture.

TECHNICAL SPECIFICATIONS

Model	SVE1270/3XJ	SVE1290/3XJ	SVE2440/3XJ	SVE2460/3XJ	SVE2480/3CJ	SVE24100/3CJ	SVE24150/3CJ
DC Output Voltage	12V	12V	24V	24V	24V	24V	24V
DC Output Current	70 A	90 A	40 A	60 A	80 A	100 A	150A
Charging Curves	**9	**9	**9	**9	**9	**9	**9
# Output Banks	3	3	3	3	3	3	3
AC Input Voltage	*115/230	*115/230	115/230	115/230	230 VAC	230 VAC	230VAC
AC Input Current	13A/6A	16A/7A	14A/6 A	15A/9A	15A	17A	20A
Input Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Height in / mm	14.1/358	14.1/358	14.1/358	14.1/358	14.1/358	14.1/358	14.1/358
Width in / mm	13.6/346	13.6/346	13.6/346	13.6/346	13.6/346	13.6/346	13.6/346
Depth in / mm	5/128	5/128	5/128	5/128	5/128	7.7/196	7.7/196
Weight lb / kg	13.2/6	13.2/6	13.2/6	13.2/6	13.2/6	25.4/11.5	25.4/11.5
DC Output Fuse	4x30A	4x30A	3x25A	3x25A	5x25A	5x25A	6x25A
AC Input Fuse	20A	20A	20A	20A	20A	2x20A	2x20A
CE Approved	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Ventilation	Fan	Fan	Fan	Fan	Fan	Fan	Fan
Battery Isolation	Yes	Yes	Yes	Yes	Yes	Yes	Yes
LED Charge status	Yes	Yes	Yes	Yes	Yes	Yes	Yes
LED Fault indicator	Yes	Yes	Yes	Yes	Yes	Yes	Yes
CAN BUS	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Warranty Parts	2	2	2	2	2	2	2

****NOTE:** 9 Charging Curves: Open Flooded Lead-Acid, Sealed Lead-Acid, Lead Calcium, Calcium Calcium, (AGM, Gel), Spiral cell, Lithium LiFeSo4, Storage Open Lead-Acid and Storage Sealed Lead-Acid

INTERPRETING MODEL NUMBERS

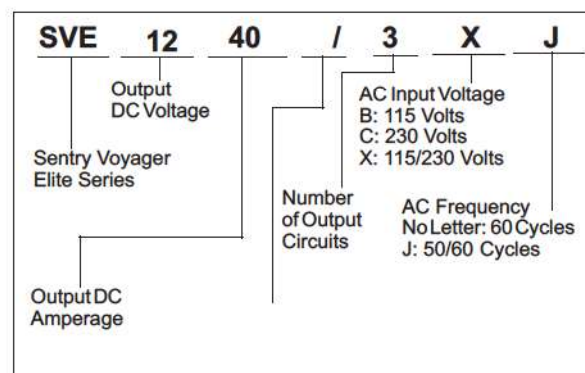

Marine Battery Chargers
 Linear Devices Corp.
 11126 Air Park Road, Suite G
 Ashland, VA 23005
 Ph: 804-368-8428, Fax: 804-368-8438
 Toll Free 1-888-532-8768
 Email: sales@sentrychargers.com
sentrychargers.com



Sentry Voyager Marine Battery Chargers



SV1260/3XJ, SV1215/3BJ and SV2420/3XJ Models Shown

FEATURES

- Selectable charging outputs for Lead-Acid, AGM, Gel, Lead Calcium, Spiralcell or Lithium-ion (LiFeS04)
- Automatically switches to 115vac or 230vac and 50Hz or 60Hz power
- Three isolated bank charging outputs
- Lightweight and compact size
- "Night Mode" button for silent operation
- AC and DC fuse protection
- Automatic weekly equalization
- Conformal coated PC Board for corrosion protection
- Direct replacement for Sentry "SM" series chargers
- LED charge mode and fault status indicator
- Two year parts warranty

Sentry Voyager marine battery chargers are light weight, compact and easy to install. The circuit board is conformal coated for added protection from the harsh marine environment.

Sentry Voyager battery chargers are designed with dip switches to select the correct battery charging curve. Battery charge selections are Lead-Acid, AGM, Gel, Lead Calcium, Spiralcell or Lithium-ion (LiFeS04). Each charger will charge three independent and isolated battery banks.

The Voyager series charger is a direct replacement for the Sentry "SM" series battery charger. Please refer to the specification sheet for dimensional details.

The charger is designed to automatically switch to match 115vac or 230vac incoming power and 50Hz or 60Hz frequency.

Equipped with an LED indicator, Voyager chargers display charging status of Boost, Equalization and float modes. The LED indicator will also show fault status of high temperature fault, battery fuse fault and output voltage fault.

All Sentry Voyager chargers come with a 2 year parts warranty from date of manufacture.


TECHNICAL SPECIFICATIONS

Model	SV1215/3BJ	SV1225/3XJ	SV1240/3XJ	SV1260/3XJ	SV2420/3XJ	SV2430/3XJ
DC Output Voltage	12V	12V	12V	12V	24V	24V
DC Output Current	15 A	25 A	40 A	60 A	20 A	30 A
Charging Curves	**4	**4	**4	**4	**4	**4
# Output Banks	3	3	3	3	3	3
AC Input Voltage	*115 VAC	115/230 VAC	115/230 VAC	115/230 VAC	115/230 VAC	115/230 VAC
AC Input Current	4.0 A	4/2 A	7/3.5 A	12/6 A	7/3.5 A	10/5 A
Input Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Height in / mm	9.4 / 238	13.9 / 354	13.9 / 354	11.25 / 285	13.9 / 354	11.25 / 285
Width in / mm	4.7 / 120	4.7 / 120	4.7 / 120	9.4 / 240	4.7 / 120	9.4 / 240
Depth in / mm	3.79 / 96	3.79 / 96	3.79 / 96	4.2 / 107	3.79 / 96	4.2 / 107
Weight lb / kg	2 / 1.3	4 / 1.9	4 / 1.9	6 / 3	4 / 1.9	6 / 3
DC Output Fuse	20A	2x15A	2x25A	3x25A	2x15A	3x15A
AC Input Fuse	6A	6A	10A	16A	10A	16A
CE Approved	Yes	Yes	Yes	Yes	Yes	Yes
Ventilation	Convection	Fan	Fan	Fan	Fan	Fan
Battery Isolation		Yes	Yes	Yes	Yes	Yes
LED Charge status		Yes	Yes	Yes	Yes	Yes
LED Fault indicator	Yes	Yes	Yes	Yes	Yes	Yes
Quiet Night Mode	Yes	Yes	Yes	Yes	Yes	Yes
CAN BUS	No	No	No	Yes	No	Yes
Warranty Parts	2	2	2	2	2	2

*NOTE: Contact Sentry for 230vac models

**NOTE: 4 Charging Curves: Flooded Lead-Acid, (AGM, Gel, Sprial), Lead Calcium and Lithium LiFeS04

INTERPRETING MODEL NUMBERS

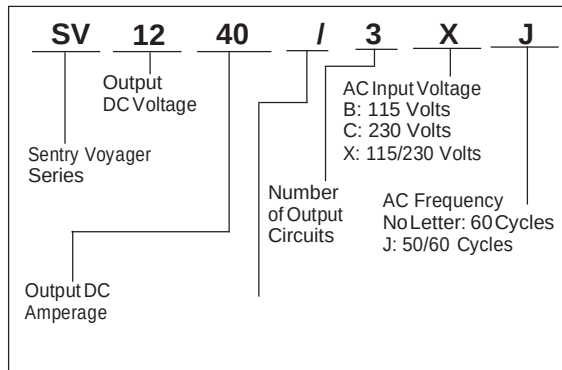

Sold and Serviced by:

Linear Devices Corp.
11126 Air Park Road, Suite G
Ashland, VA 23005
Email: sales@sentrychargers.com
Web: www.sentrychargers.com
Ph: 804-368-8428, Fax: 804-368-8438
Toll Free 1-888-532-8768
July 2022

Sentry