Click to rotate

Unicable II
Programmable Unicable II 32UB LNB

Model: IDLU-32UL40-UNBOO-OPP
Item: 5278

This Unicable2 LNB enables installations with up to 32 satellite receivers connected over a single coax cable and using the EN50494/EN50607 protocols providing access to unlimited number of transponders (also known as 'Dynamic' mode) . Alternatively, it can be configured to deliver a fixed mapping of transponder frequencies to IF frequencies (also known as 'Static' mode), allowing an unlimited number of receivers to be connected and providing them access to up to 32 transponders (or more, depending on the bandwidth of the desired transponders) based on digital channel stacking technology.

Digital channel stacking technology uses fast wideband analog to digital converters and applies digital signal processing to select desired transponder channels, up convert them and stack them as IF signals over the Unicable output ports. The Unicable2 LNB offers a full flexibility of channel selection, supports many more set-top-boxes over existing cabling thus significantly reducing cost and simplifying installations at subscribers homes. The Static mode, allowing an unlimited number of receivers to be connected to the LNB, makes multi-room distribution and MDU installations substantially cheaper and simpler than ever before.
The operating mode - dynamic or static - output power level, channel bandwidth, UB numbers, center frequencies and dish alignment mode are all programmable and can be configured and updated in the field using a dedicated programmer device*.

The LNB can be powered over a connected STB or by an AC/DC adapter over a power inserter in case the STB is unable to provide the necessary power. The Unicable2 LNB is backward compatible, fully compliant with both EN50494 and EN50607 standards and integrates seamlessly into EN50494-only or mixed EN50494/EN50607 installations of compatible STBs, Next Generation PVRs and HGWs.

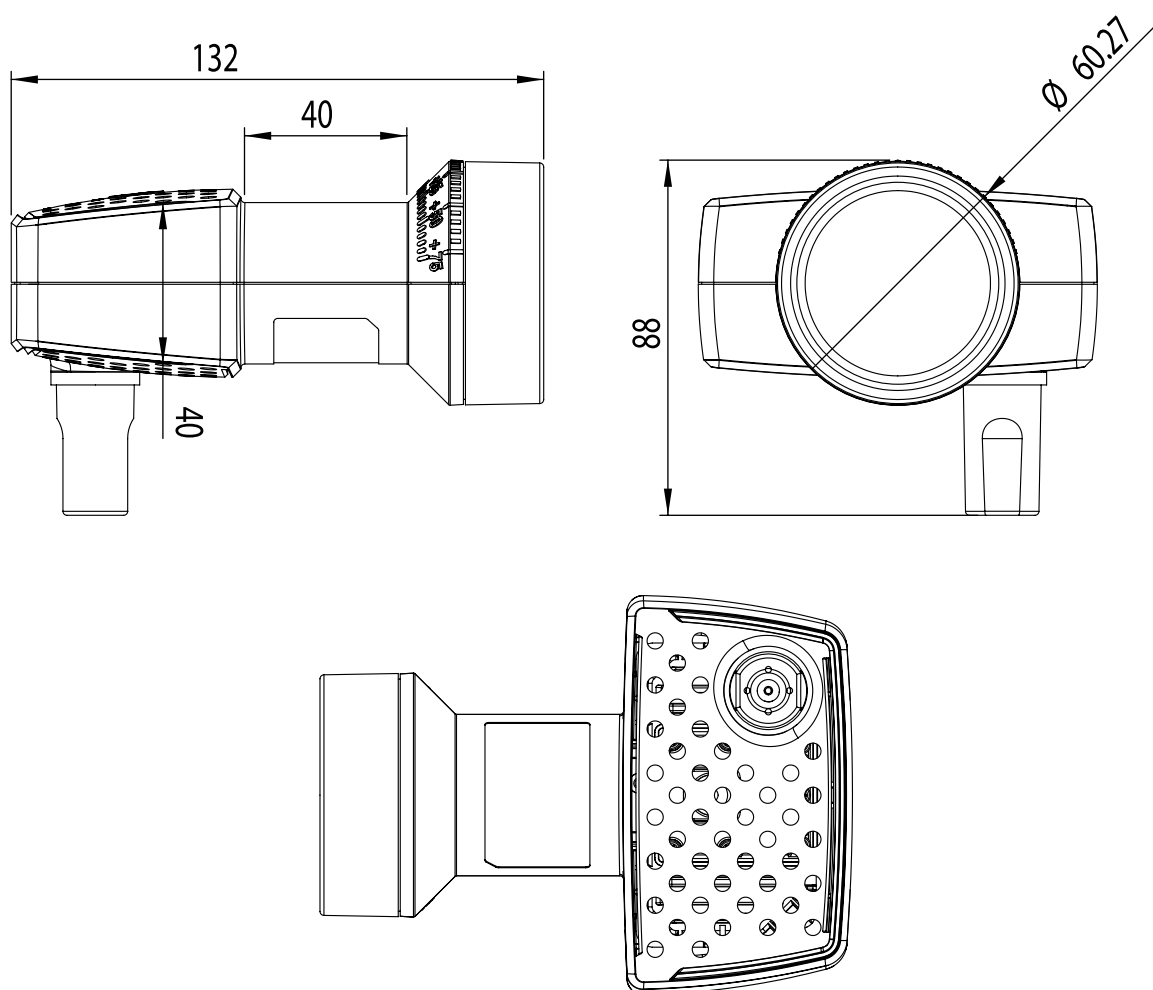For more information on the Unicable2 technology and its advantages please refer to: www.inverto.tv/unicable2

Main Features:
- Low phase Noise HDTV-DVBS2 compliant
- Low Noise Figure
- Very high cross-pol isolation
- Programmable Static frequency mapping mode
- Dish alignment mode

* Programmer not included, sold separately as an optional accessory.

Technical Specifications:

Input Frequency Range	10.7 ~ 12.75 GHz
Noise Figure	1 dB Max.
LO Frequency	10.4 GHz
LO Initial Accuracy	+/- 1.0
LO Temperature Drift	+/- 2.5
LO Phase Noise @ 10K Hz	-80 dBc / Hz
Unicable Conversion Gain (AGC)	55 dB Min.
Gain Variation	+/- 0.75 dB/UB
Image Rejection	40 dB Min.
Cross-pol Isolation	22 dB Min.
O/P 1 dB Compression Point	0 dBm min.
O/P VSWR	2.5 : 1 max.
Output Impedance	75Ω (F-type)
IF Channel (User Band) bandwidth	Configurable 10~64MHz (default 36MHz)
Output IF Channels (UBs)	Up to 32, Default 32UBs:

CH0 1210MHz (EN50494+EN50607)
CH1 1420MHz (EN50494+EN50607)
CH2 1680MHz (EN50494+EN50607)
CH3 2040MHz (EN50494+EN50607)
CH4 984MHz (EN50494+EN50607)
CH5 1020MHz (EN50494+EN50607)
CH6 1056MHz (EN50494+EN50607)
CH7 1092MHz (EN50494+EN50607)
CH8 1128MHz (EN50607)
CH9 1164MHz (EN50607)
CH10 1256MHz (EN50607)
CH11 1292MHz (EN50607)
CH12 1328MHz (EN50607)
CH13 1364MHz (EN50607)
CH14 1458MHz (EN50607)
CH15 1494MHz (EN50607)

CH16 1530MHz (EN50607)	CH24 1860MHz (EN50607)
CH17 1566MHz (EN50607)	CH25 1896MHz (EN50607)
CH18 1602MHz (EN50607)	CH26 1932MHz (EN50607)
CH19 1638MHz (EN50607)	CH27 1968MHz (EN50607)
CH20 1716MHz (EN50607)	CH28 2004MHz (EN50607)
CH21 1752MHz (EN50607)	CH29 2076MHz (EN50607)
CH22 1788MHz (EN50607)	CH30 2112MHz (EN50607)
CH23 1824MHz (EN50607)	CH31 2148MHz (EN50607)

Channel isolation	25 dB Min.
Unicable Control Signals	DiSEqC1.x/DiSEqC2.x, EN50494/EN50607
DC Power	400mA@13.5V
Working Temperature	- 30°C~ + 60°C
Weight	350g

132

40

40

Ø 60.27

88

For further details contact: **sales@inverto.tv**

FTA Communication Technologies S.a r.l   Tel. +352 264 367 1   Fax. +352 264 313 68

www.inverto.tv