

Name : K Jahnavi

Reg no: 192512169

Ex.No.4: OFDMA Resource Block Allocation

AIM: To simulate and analyze OFDMA (Orthogonal Frequency Division Multiple Access) resource block allocation and evaluate system performance in terms of resource utilization and user throughput using MATLAB.

Objective

1. To determine the Number of Resource Blocks (RBs) allocated in an OFDMA system based on available bandwidth and system configuration.
2. To evaluate the Resource Block Utilization (%) by analyzing how efficiently available RBs are assigned to active users.
3. To calculate the User Throughput (Mbps) based on allocated resource blocks and modulation efficiency in the OFDMA system.

Procedure:

```
clc; clear; close all;
```

```
% System parameters
```

```
bandwidth = 10e6;
```

```
rb_size = 180e3;          % Total Resource Blocks % 10 MHz % 180 kHz per RB
```

```
total_RB = floor(bandwidth / rb_size); % Users
```

```
users = 1:6; % RB allocation (simple equal + remainder distribution)
```

```
base = floor(total_RB / length(users));
```

```
alloc = base * ones(1,length(users));
```

```
alloc(1:mod(total_RB,length(users))) = alloc(1:mod(total_RB,length(users))) + 1;
```

```
utilization = (alloc / total_RB) * 100;
```

```
disp('Total Resource Blocks:')
```

```
disp(total_RB)
```

```
disp('RB Allocation per User:')
```

```
disp(alloc)
```

```
figure
```

```
% ----- Graph 1: RB Allocation per User -----
```

```
subplot(2,1,1)
```

```
stem(users, alloc, 'filled', 'LineWidth', 2)
```

```
title('192512216 OFDMA Resource Block Allocation per User')
```

```
xlabel('User Index')
```

```
ylabel('Number of Resource Blocks')
```

```
grid on
```

```
% ----- Graph 2: RB Utilization -----
```

```
subplot(2,1,2)
```

```
plot(users, utilization, '-o', 'LineWidth', 2)
```


```
title('192512216 OFDMA Resource Block Utilization (%)')
```

```
xlabel('User Index')
```

```
ylabel('Utilization (%)')
```

```
grid on
```

Output:

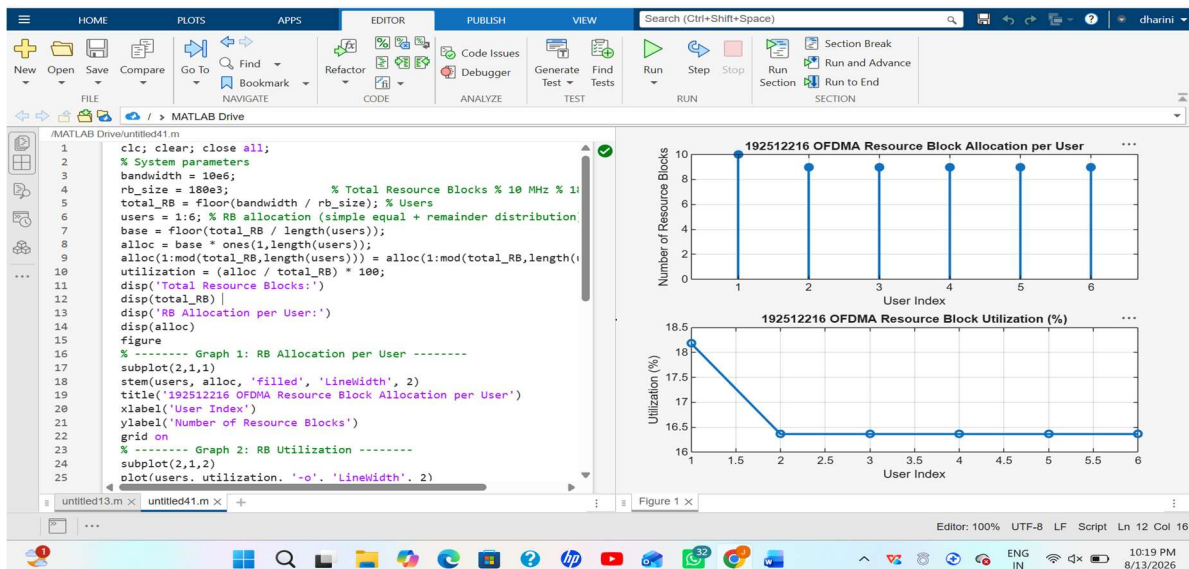

Objective 2:

```
clc; clear; close all;

% Total system resource blocks

total_RB = 50; % Number of active users

users = 1:5; % RB allocation to users (example scenario)

alloc = [12 10 9 8 11]; % Resource Block Utilization (%)

util = (alloc / total_RB) * 100;

disp('Resource Block Utilization (%) per User:')

disp(util')

figure

% ----- Graph 1: RB Allocation -----

subplot(2,1,1)

plot(users, alloc, '-o', 'LineWidth', 2)

title('192512216 OFDMA Resource Block Allocation per User')

xlabel('User Index')

ylabel('Number of Resource Blocks')

grid on

% ----- Graph 2: Utilization (%) -----

subplot(2,1,2)

plot(users, util, '-s', 'LineWidth', 2)


title('192512216 OFDMA Resource Block Utilization (%)')

xlabel('User Index')

ylabel('Utilization (%)')

grid on
```

Output:

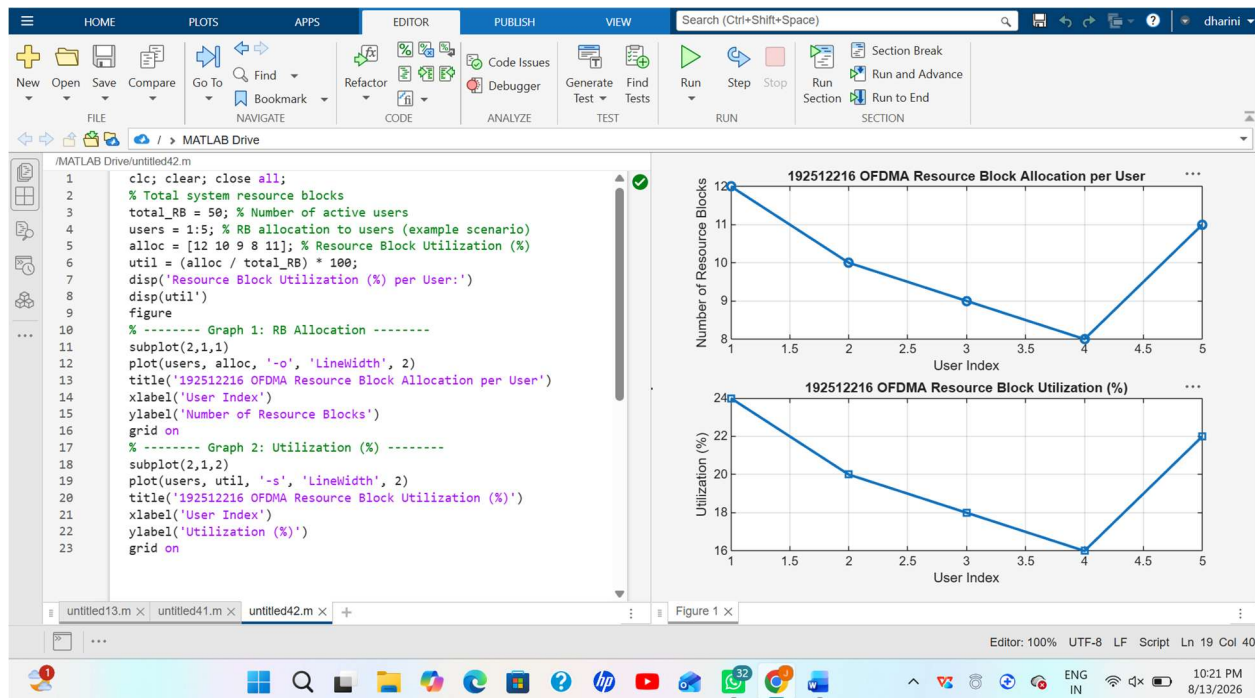

Objective 3:

clc; clear; close all;

% System parameters

rb_bw = 180e3;

users = 1:5; % Bandwidth per RB (180 kHz) % Allocated Resource Blocks per user

alloc_RB = [12 10 9 8 11]; % Modulation efficiency (bits/symbol)

mod_eff = [2 4 6 4 2]; % QPSK, 16QAM, 64QAM etc. % Throughput calculation (Mbps)

throughput = (alloc_RB .* rb_bw .* mod_eff) / 1e6;

disp('User Throughput (Mbps):')

disp(throughput')

figure

% ----- Graph 1: Throughput per User -----

subplot(2,1,1)

plot(users, throughput, '-o', 'LineWidth', 2)

```
title('192512216 OFDMA User Throughput')
```

```
xlabel('User Index')
```

```
ylabel('Throughput (Mbps)')
```

```
grid on
```

```
% ----- Graph 2: RB vs Throughput -----
```

```
subplot(2,1,2)
```

```
plot(alloc_RB, throughput, '-s', 'LineWidth', 2)
```


```
title('192512216 Resource Blocks vs Throughput Relationship')
```

```
xlabel('Allocated Resource Blocks')
```

```
ylabel('Throughput (Mbps)')
```

```
grid on
```

output:

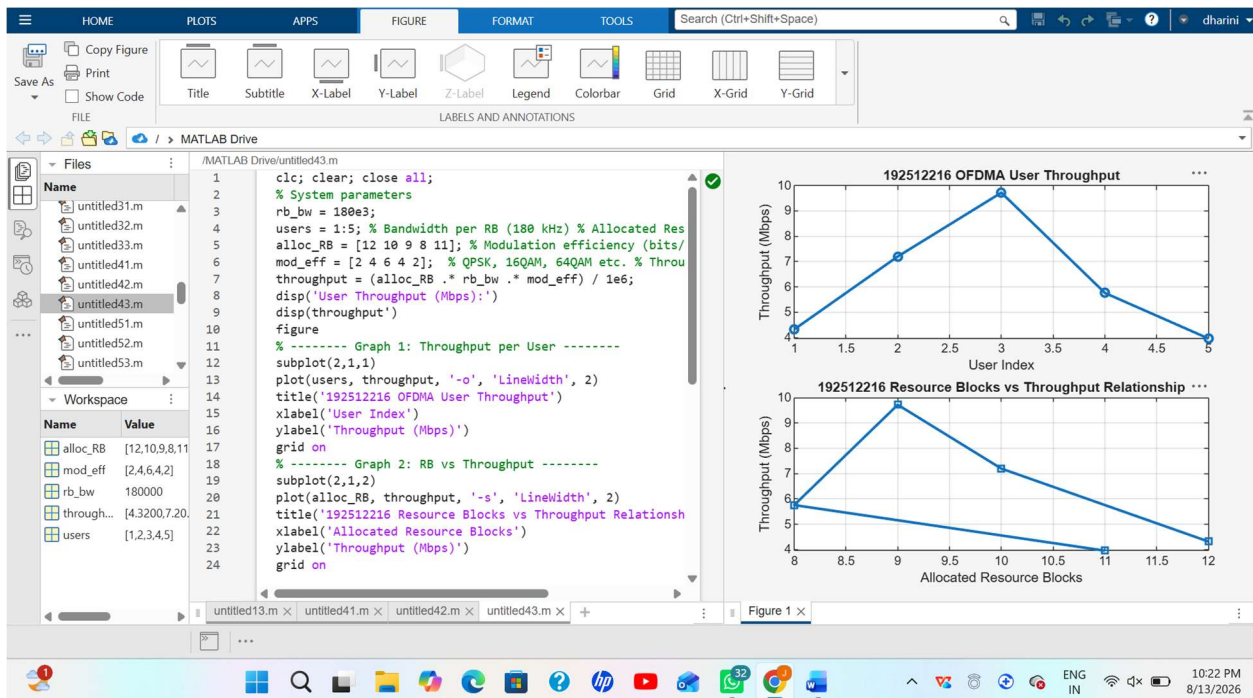

Result:

1. The Resource Block (RB) allocation was successfully simulated for multiple users in the OFDMA system, demonstrating how available spectrum is distributed among active users.

2. The Resource Block Utilization (%) analysis showed efficient usage of system resources, indicating how effectively the available RBs are assigned to users.

3. The User Throughput (Mbps) was successfully calculated based on RB allocation and modulation efficiency, showing that higher allocated RBs and higher modulation schemes result in increased throughput.