



# Data Sheet

RELEASE A



**GRF2071**

**Ultra-Low Noise Amplifier  
0.7 to 2.7 GHz**

## FEATURES

- Excellent NF Performance
- High Gain
- Outstanding Linearity
- Flexible Bias Voltage and Current
- Compact 2.0 x 2.0 mm DFN-8 Package
- Process: GaAs pHEMT

**Reference: 5.0 V/1.9 GHz/60 mA**

- Gain: 19.0 dB
- OIP3: 36.0 dBm
- OP1dB: 20.0 dBm
- Evaluation Board Noise Figure: 0.36 dB

## APPLICATIONS

- Cellular Infrastructure
- Small Cells and Cellular Repeaters
- Distributed Antenna Systems
- High Performance GPS

## DESCRIPTION

GRF2071 is a broadband, linear, ultra-low Noise amplifier designed for small cell, wireless infrastructure, and other high performance RF applications requiring ultra-low NF, high Gain, and linearity.

This device is a member of a family of pin-compatible, ultra-low Noise devices which cover a wide range of frequency bands with industry leading NF and Gain:


[GRF2070](#): 0.1 to 1.5 GHz      [GRF2071](#): 0.7 to 2.7 GHz


[GRF2072](#): 1.5 to 3.8 GHz      [GRF2073](#): 2.0 to 6.0 GHz

[GRF2074](#): 1.0 to 6.0 GHz (Next-gen Process)

Please consult with the GRF applications engineering team for application notes and custom tuning/evaluation board data. De-embedded S-Parameters with Noise Parameters are available on the website.

## BLOCK DIAGRAM

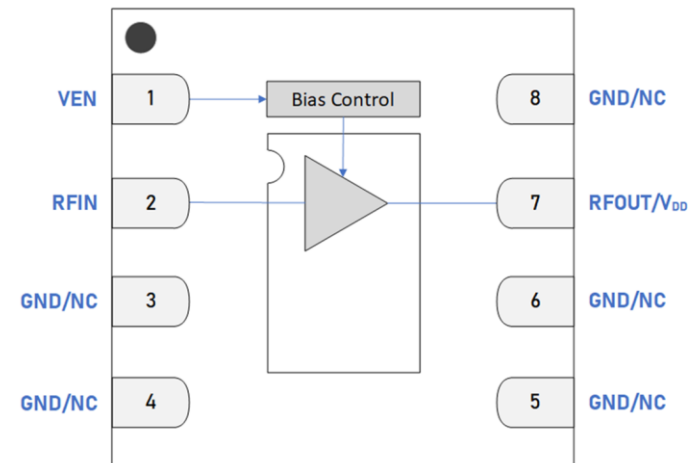

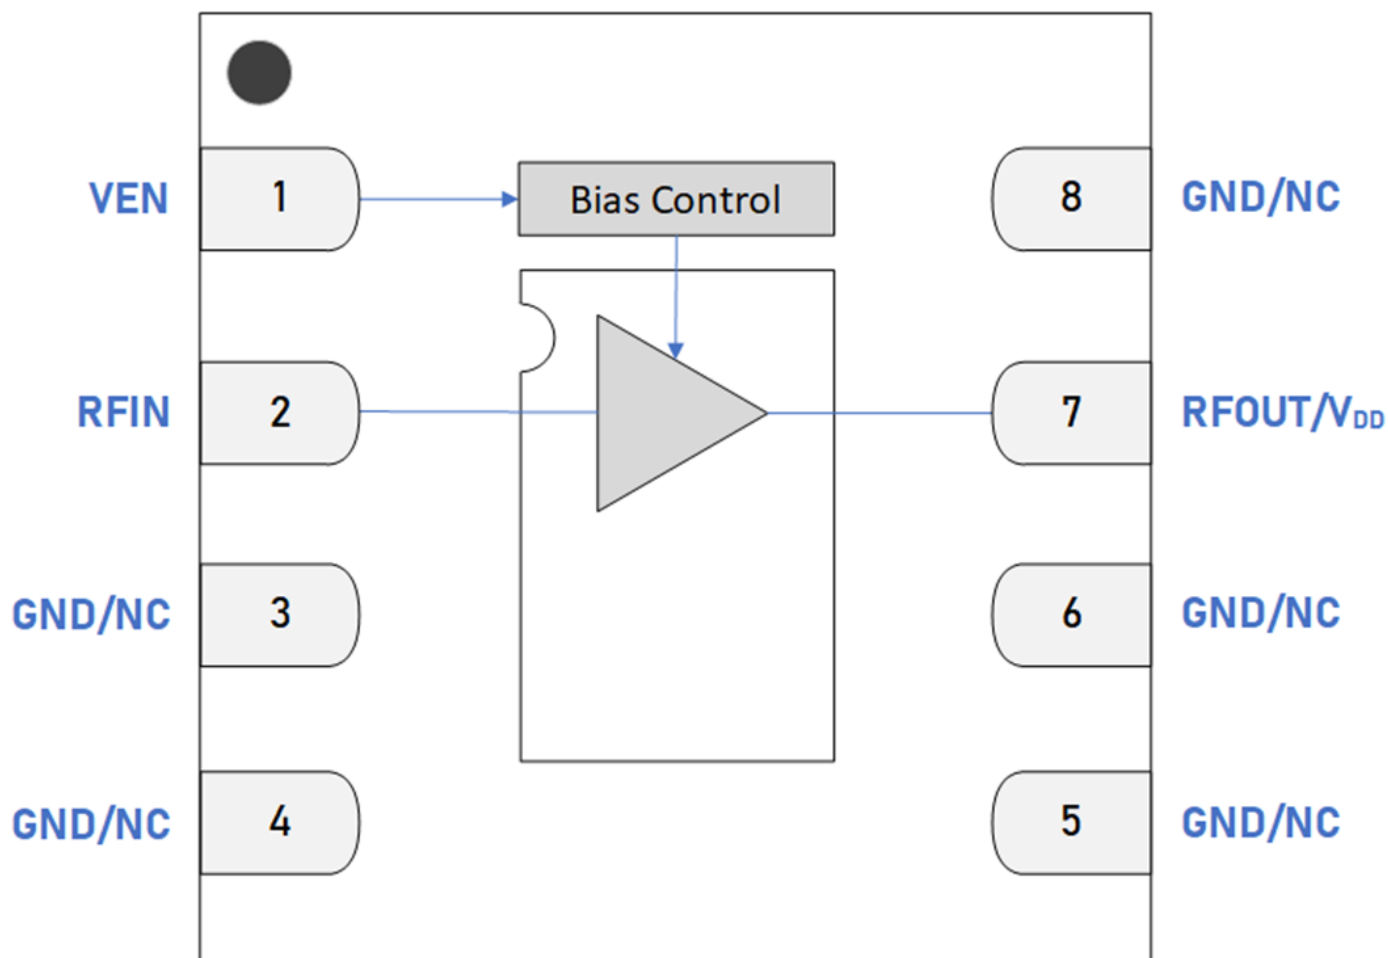

2.0 x 2.0 mm DFN-8 Pin Out (Top View)

## Pin Assignments

Pin	Name	Description	Note
1	V <sub>ENABLE</sub>	Enable Voltage Input	V <sub>ENABLE</sub> and series resistor set I <sub>DDQ</sub> . V <sub>ENABLE</sub> ≤ 0.2 volts disables device.
2	RF_IN	RF Input	External match must provide DC block.
3-6, 8	GND/NC	No Connect or Ground	No internal connection to die. We recommend connecting these pins to GND.
7	RF_Out/V <sub>DD</sub>	RF Output	Provide device V <sub>DD</sub> via external bias inductor.
PKG BASE	GND	Ground	Provides DC and RF ground for LNA, as well as thermal heat sink. Recommend multiple 8 mil vias beneath the package for optimal RF and thermal performance. Refer to evaluation board top layer graphic on schematic page.

## Absolute Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	$V_{DD}$	0	6.0	V
RF Input Power (CW, Load VSWR < 2:1, $V_{DD}$ = 5.0 V)	$P_{IN\ MAX}$		23.0	dBm
Operating Temperature (Package Heat Sink)	$T_{PKG\ HEAT\ SINK}$	-40	105	°C
Maximum Channel Temperature (MTTF > 10 <sup>6</sup> Hours)	$T_{MAX}$		170	°C
Maximum Dissipated Power	$P_{DISS\ MAX}$		500	mW

### Electrostatic Discharge

Charged Device Model	CDM	1500		V
Human Body Model	HBM	500		V

### Storage

Storage Temperature	$T_{STG}$	-65	150	°C
Moisture Sensitivity Level	MSL		1	—



**Caution! ESD Sensitive Device.**

**Exceeding Absolute Maximum Rating conditions may cause permanent damage.**

Note: For additional information, please refer to [Manufacturing Note MN-001 — Package and Manufacturing Information](#).



All Guerrilla RF products are provided in RoHS compliant lead (Pb)-free packaging requiring no exemptions . Additional information for this topic can be found at this link - [Environmental and Restricted Substance Statement Library](#)

## Recommended Operating Conditions

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Power Supply Voltage	$V_{DD}$	0	5.0	6.0	V	
Operating Temperature (Package Heat Sink)	$T_{PKG \text{ HEAT SINK}}$	-40		105	°C	
RF Frequency Range	$F_{RF}$	0.7	1.9	2.7	GHz	Typical Application Schematic with external matching components (Notes 1,2)

**Note 1:** Operation outside this range is possible, but with degraded performance of some parameters.

**Note 2:** Contact the Guerrilla RF Applications team for guidance on optimizing the tuning of the device for alternative bands.

## Nominal Operating Parameters – General

The following conditions apply unless noted otherwise: Typical Application Schematic using the 0.7 to 2.7 GHz tuning set,  $M3 = 1.3k\ \Omega$ ,  $V_{DD} = 5.0\ V$ ,  $V_{ENABLE} = 5.0\ V$ ,  $I_{DD} = 60\ mA$ ,  $F_{TEST} = 1.9\ GHz$ ,  $T_{PKG\ HEAT\ SINK} = 25\ ^\circ C$ . Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Supply Current	$I_{DD}$		60		mA	
Enable Current	$I_{ENABLE}$		3.0		mA	
Switching Rise Time	$T_{RISE}$		700		ns	
Switching Fall Time	$T_{FALL}$		300		ns	

### Disabled Mode

Leakage Current	$I_{LEAKAGE}$		150	250	$\mu A$	$V_{DD}: 5.0\ V; V_{ENABLE}: 0.0\ V$
-----------------	---------------	--	-----	-----	---------	--------------------------------------

### Thermal Data

Thermal Resistance: (Infrared Scan)	$\Theta_{jc}$		60		$^\circ C$	On standard evaluation board. <b>See Note 3</b>
-------------------------------------	---------------	--	----	--	------------	--

**Note 3:** MTTF >  $10^6$  hours for  $T_{CHANNEL} \leq 170\ ^\circ C$ .

## Nominal Operating Parameters – RF



The following conditions apply unless noted otherwise: Typical Application Schematic using the 0.7 to 2.7 GHz tuning set,  $M3 = 1.3k\ \Omega$ ,  $V_{DD} = 5.0\ V$ ,  $V_{ENABLE} = 5.0\ V$ ,  $I_{DD} = 60\ mA$ ,  $F_{TEST} = 1.9\ GHz$ ,  $T_{PKG\ HEAT\ SINK} = 25\ ^\circ C$ . Evaluation board losses are included within the specifications.

Parameter	Symbol	Specification			Unit	Condition
		Min.	Typ.	Max.		
Gain	S21	18.0	19.0	21.0	dB	
Reverse Isolation	S12		-24.0		dB	RF: 1.7 to 2.7 GHz
Evaluation Board Noise Figure	NF		0.36	0.56	dB	Evaluation Board SMA to SMA
Output 3 <sup>rd</sup> Order Intercept	OIP3		36.0		dBm	4.0 dBm $P_{OUT}$ per tone at 2 MHz Spacing (1899 and 1901 MHz)
Output 1 dB Compression Power	OP1dB	18.5	20.0		dBm	

## Typical Operating Curve Conditions



The following conditions apply unless noted otherwise: Typical Application Schematic using the 0.7 to 2.7 GHz tuning set,  $M3 = 1.3k\ \Omega$ ,  $V_{DD} = 5.0\ V$ ,  $V_{ENABLE} = 5.0\ V$ ,  $I_{DD} = 60\ mA$ ,  $F_{TEST} = 1.9\ GHz$ ,  $T_{PKG\ HEAT\ SINK} = 25\ ^\circ C$ . Evaluation board losses are included within the plots.

## GRF2071 Typical Operating Curves

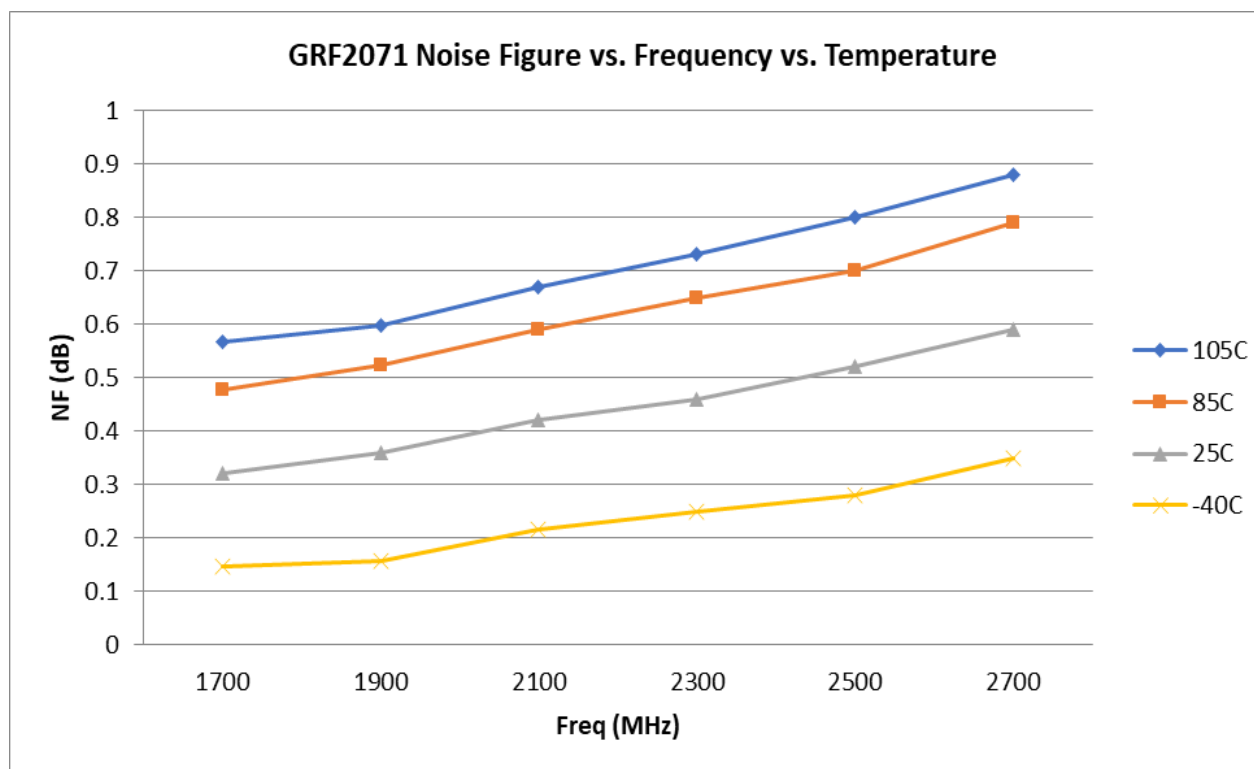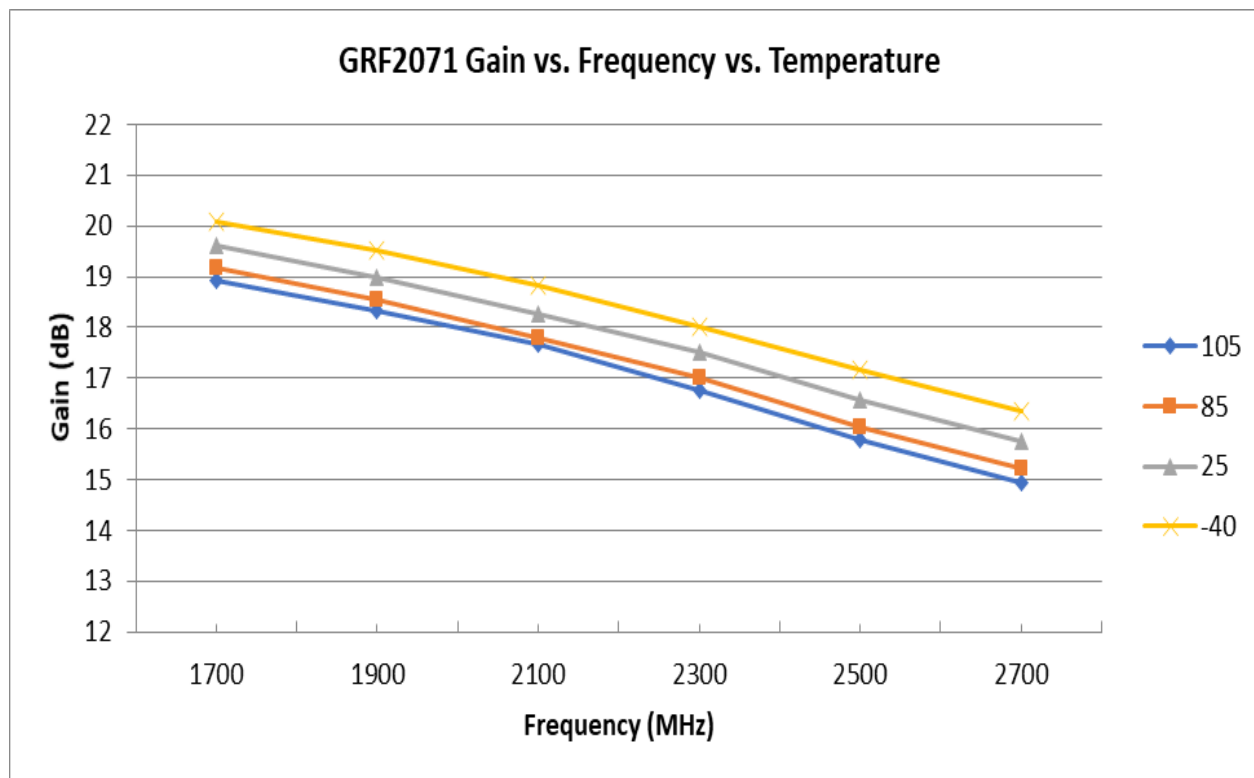





## GRF2071 Typical Operating Curves

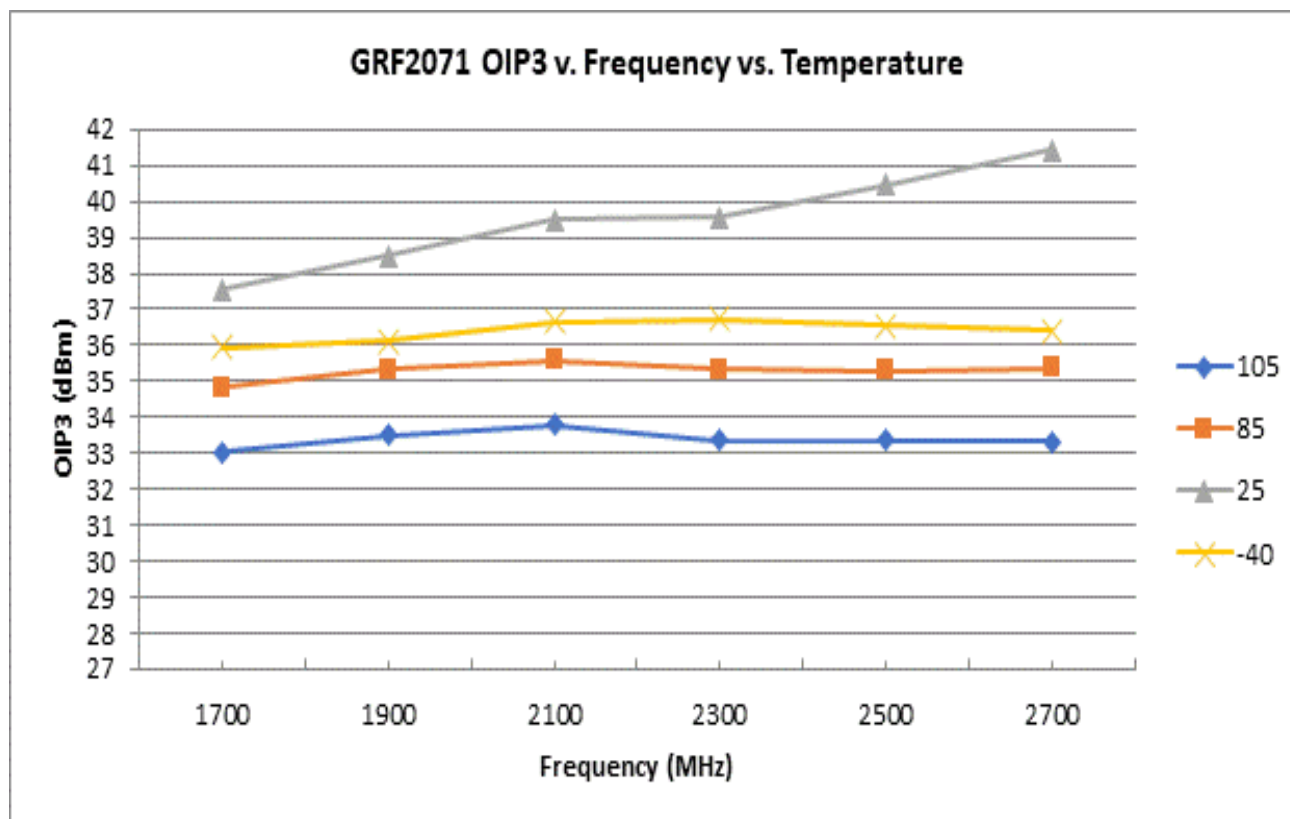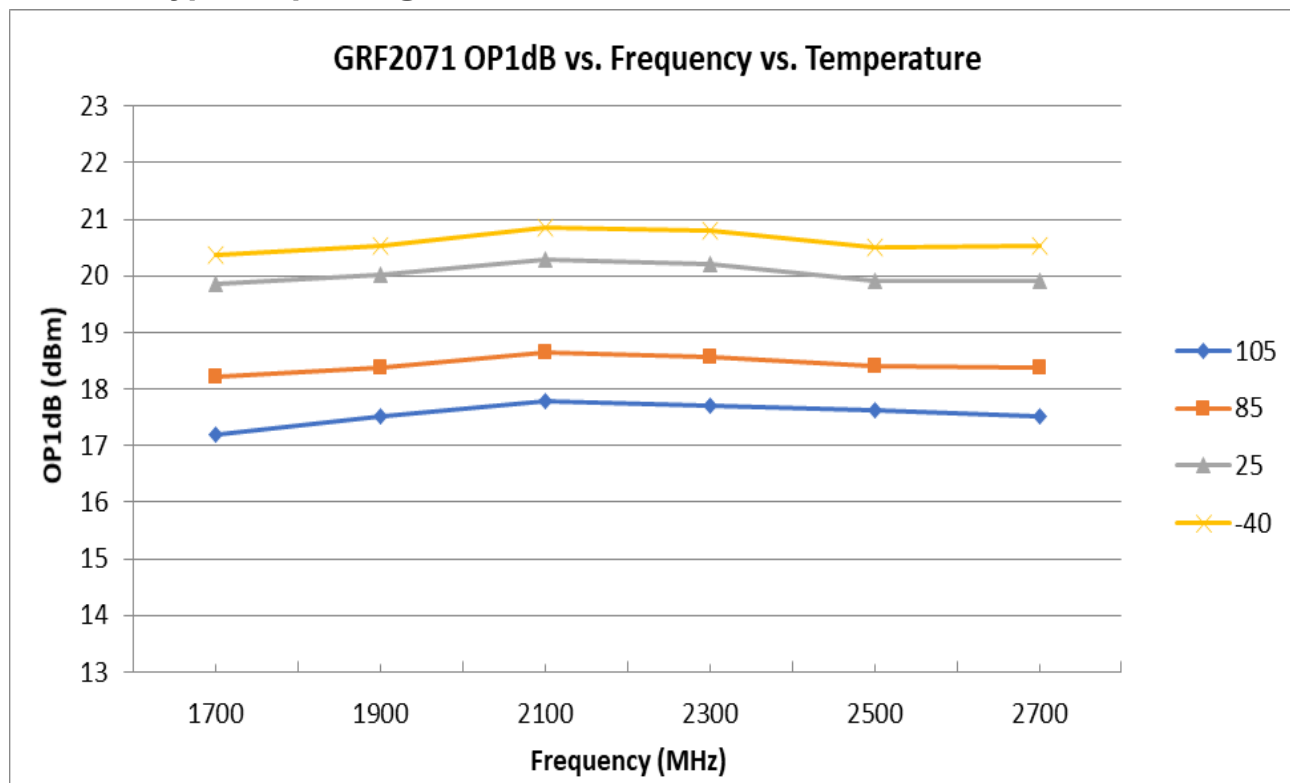


## GRF2071 Typical Operating Curves: S-Parameters (1.7 to 2.7 GHz Tune)

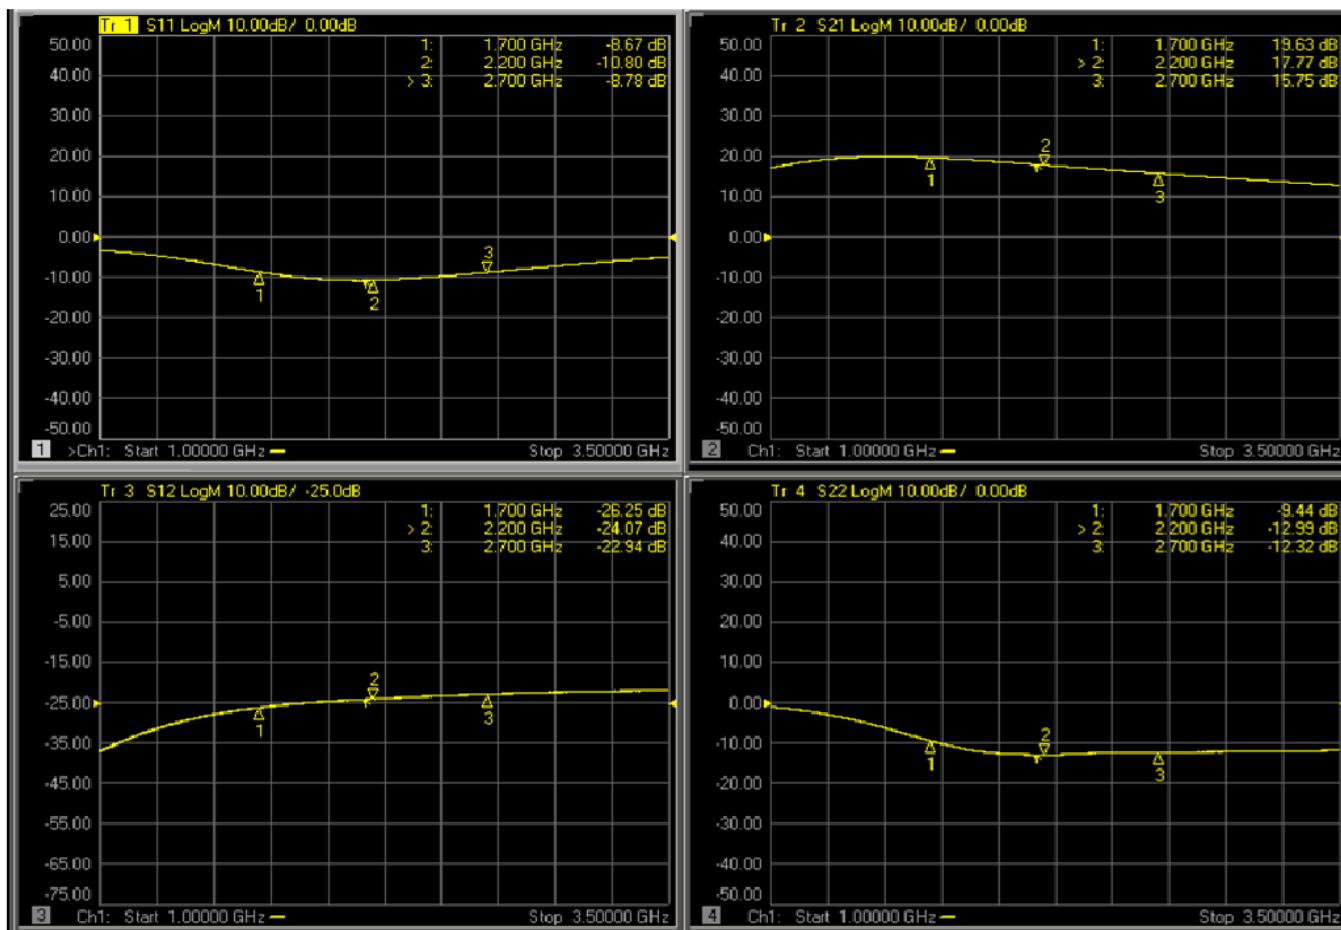


### GRF2071 Typical Operating Curves: Stability Mu Factor (1.7 to 2.7 GHz Tune)

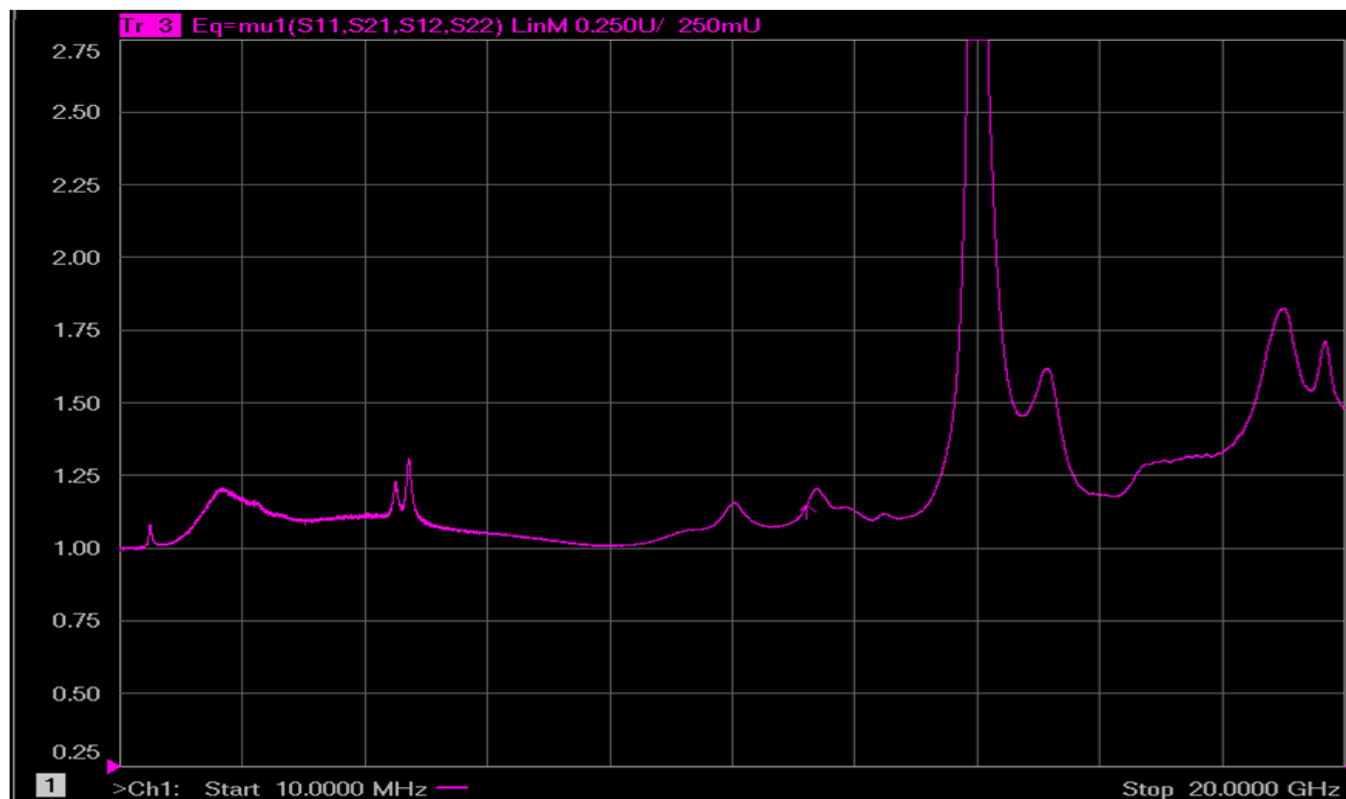

**Note:** Mu Factor  $\geq 1.0$  implies unconditional stability.

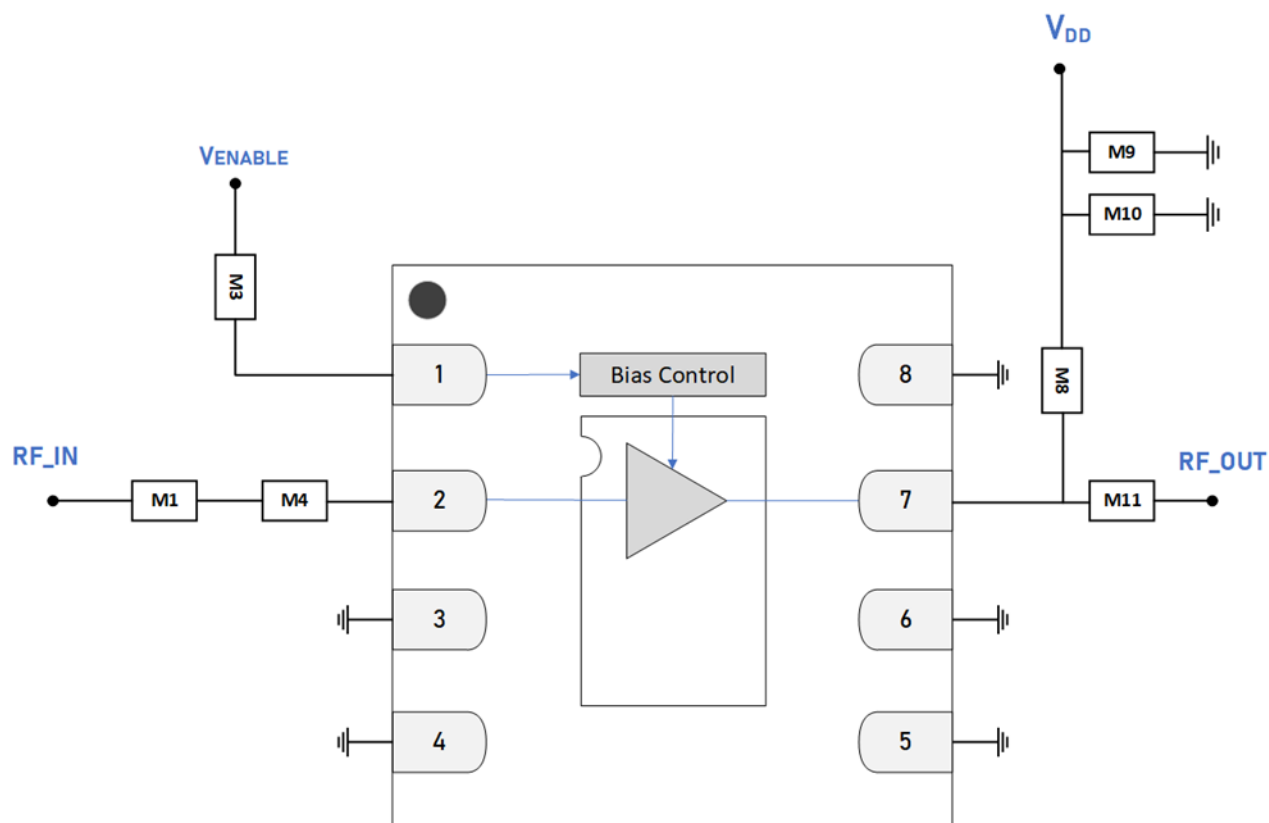

GRF2071 Application Schematic

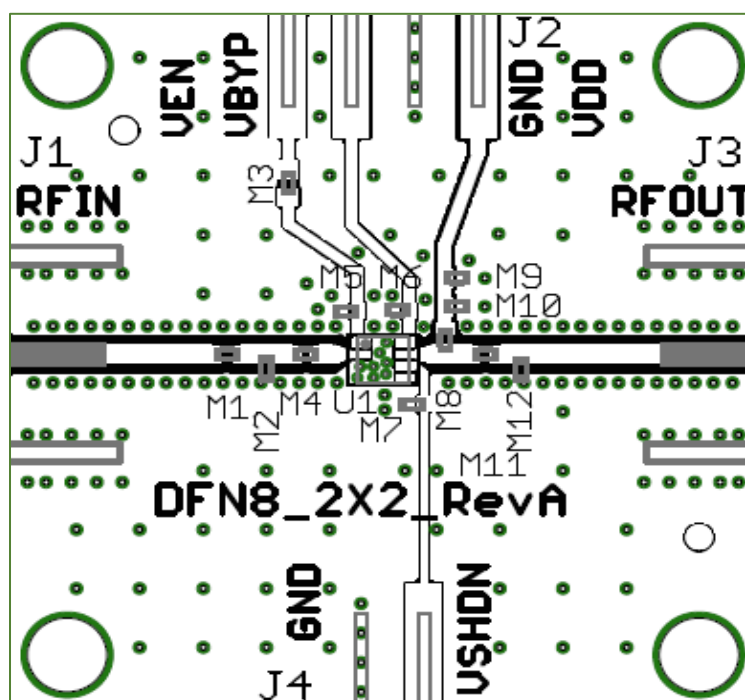



GRF2071 Evaluation Board Assembly Diagram

## GRF2071 Evaluation Board Assembly Diagram Reference (1.7 to 2.7 GHz Tune)

Component	Type	Manufacturer	Family	Value	Package Size	Substitution
M1	Capacitor	Murata	GJM	12 pF	0402	ok
M3	Resistor	Various	5%	Sets I <sub>DDQ</sub>	0402	ok
M4	Inductor	Coilcraft	HP	2.0 nH	0402	ok
M8	Inductor	Murata	LQG	3.3 nH	0402	ok
M9	Capacitor	Murata	GRM	0.1 $\mu$ F	0402	ok
M10	Capacitor	Murata	GRM	100 pF	0402	ok
M11	Capacitor	Murata	GJM	2.7 pF	0402	ok
Evaluation Board	DFN8_2x2_RevA					


## GRF2071 Bias Resistor Selection Curves:

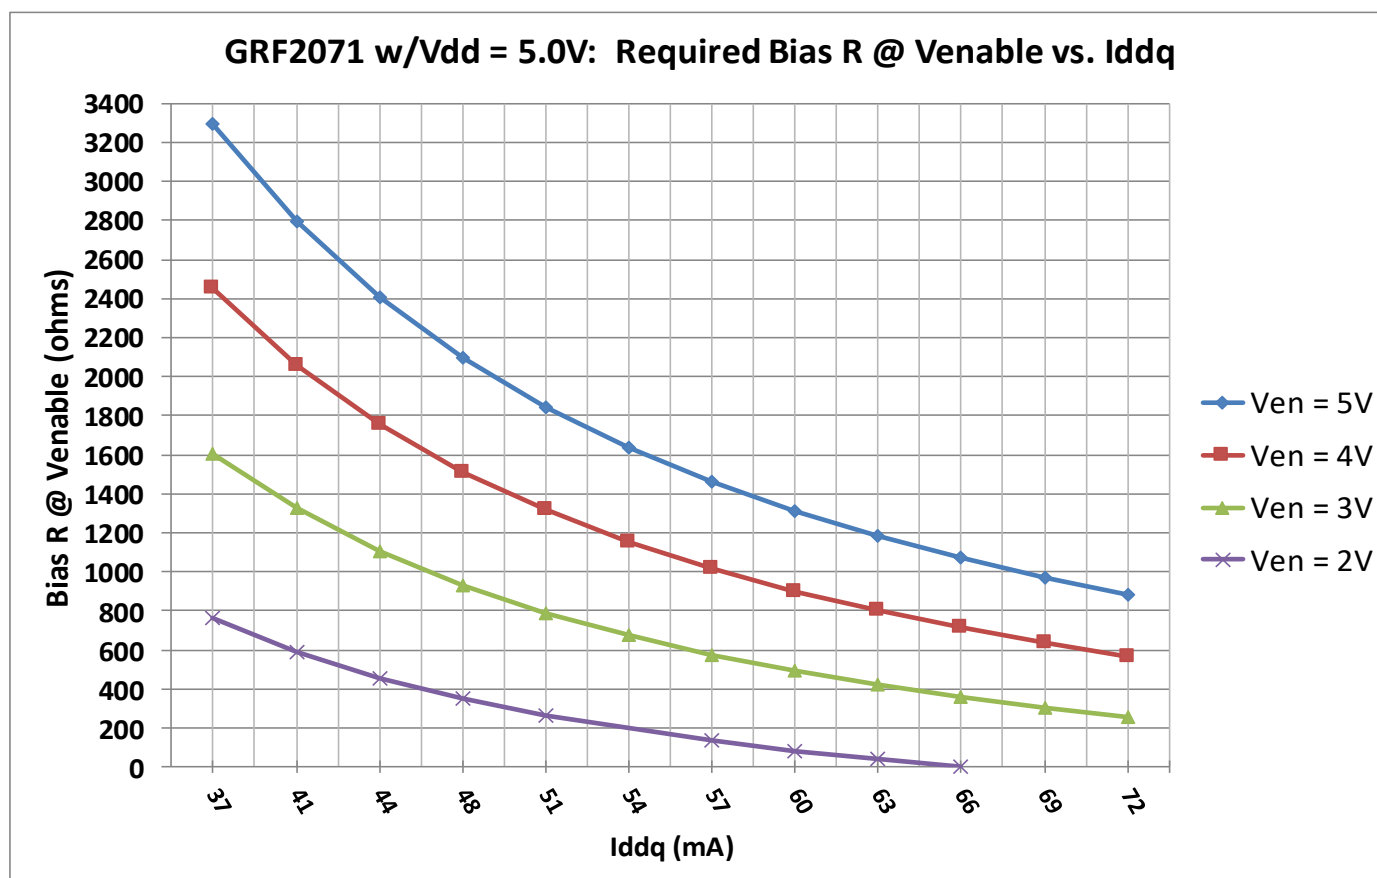

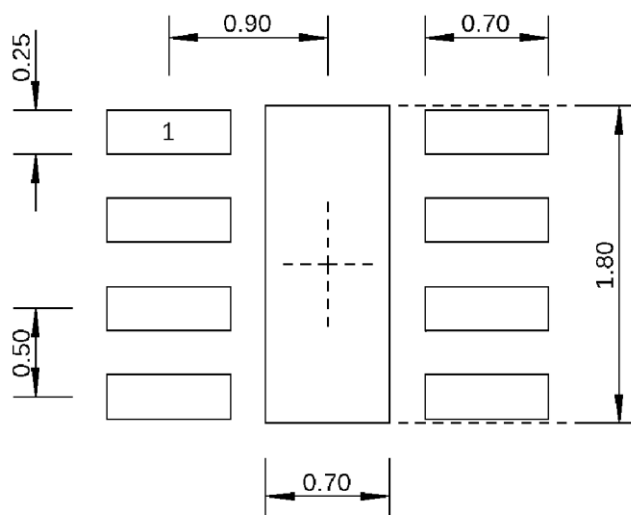

Dimensions in millimeters

### 2.0 x 2.0 mm DFN-8 Suggested PCB Footprint (Top View)

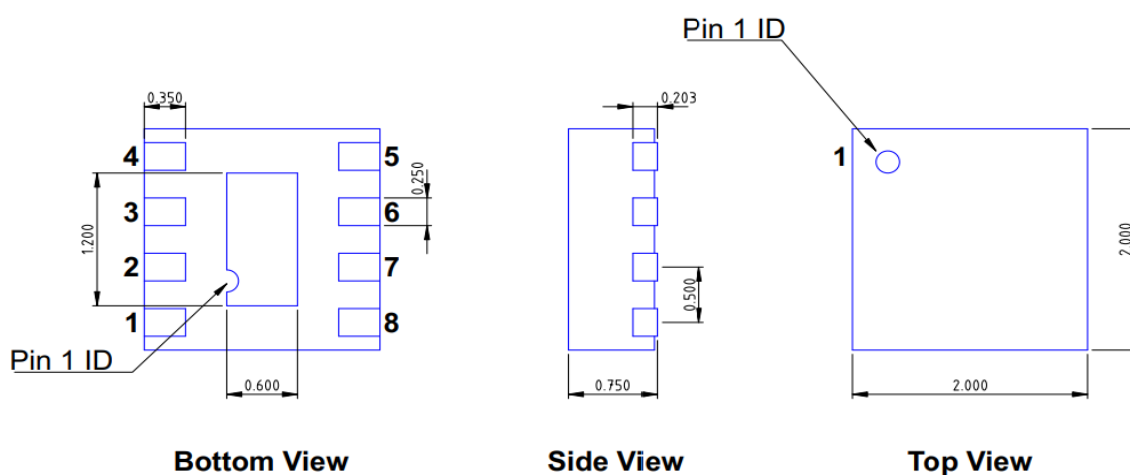

### DFN8\_2X2MM

Dimensions in millimeters  
Dimensional Tolerance:  $\pm 0.05$

### 2.0 x 2.0 mm DFN-8 Package Dimensions

## Package Marking Diagram



Line 1 "YWW" = YEAR (single digit) and "WW" = WEEK that the part was assembled


Line 2 "XXXX" = PART NUMBER

## Tape and Reel Information


Guerrilla RF's tape and reel specification complies with Electronics Industries Association (EIA) standards for "Embossed Carrier Tape of Surface Mount Components for Automatic Handling" (reference EIA-481). See the following page for the Tape and Reel Specification and Device Package Information table, which includes units per reel.

Devices are loaded with pins down into the carrier pocket with protective cover tape and reeled onto a plastic reel. Each reel is packaged in a cardboard box. There are product labels on the reel, the protective ESD bag and the outside surface of the box.

For the Tape and Reel Reference Table, please refer to: [Package Manufacturing Information | Guerrilla RF \(guerrilla-rf.com\)](#)

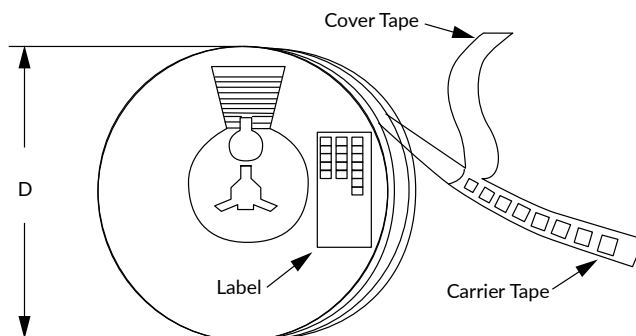

Tape and Reel Packaging with Reel Diameter Noted (D)

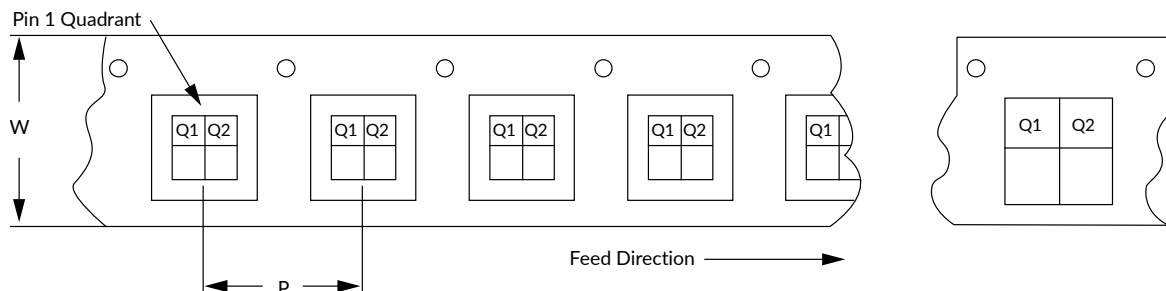

Carrier Tape Width (W), Pitch (P), Feed Direction and Pin 1 Quadrant Information

## Revision History

Revision Date	Description of Change
September 7, 2021	Converted format to new template.





## Datasheet Classifications

Data Sheet Status	Notes
Advance	S-Parameter and NF data based on EM simulations for the fully packaged device using foundry-supplied transistor S-Parameters. Linearity estimates based on device size, bias condition and experience with related devices.
Preliminary	All data based on evaluation board measurements taken within the Guerrilla RF Applications Lab. Any MIN/MAX limits represented within the datasheet are based solely on <i>estimated</i> part-to-part variations and process spreads. All parametric values are subject to change pending the collection of additional data.
Release Ø	All data based on measurements taken with <i>production-released</i> material. TYP values are based on a combination of ATE and bench-level measurements, with MIN/MAX limits defined using <i>modelled estimates</i> that account for part-to-part variations and expected process spreads. Although unlikely, future refinements to the TYP/MIN/MAX values may be in order as multiple lots are processed through the factory.
Release A-Z	All data based on measurements taken with production-released material <i>derived from multiple lots which have been fabricated over an extended period of time</i> . MIN/MAX limits may be refined over previous releases as more statistically significant data is collected to account for process spreads.

Information in this datasheet is specific to the Guerrilla RF, Inc. ("Guerrilla RF") product identified.

This datasheet, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions on this datasheet or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any datasheet, datasheet information, materials, products, product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this datasheet for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, datasheets, and datasheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its datasheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATASHEETS AND DATASHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.