



Assembly Manual

Small package. Big fun. Micron.

Introduction	03	
Frame	06	

This printer wouldn't have happened if it were not for all the hard work from the following users on the Voron Discord and Dømm Discord

- TheWarolf
- L.e.o.p.a.r.d
- deepfriedheroin
- faithblinded
- zruncho
- Finn
- DocSparky
- gfunnymoney

STL FILE KEY

The STL files naming convention is the same as for VORON designs, namely :

PRIMARY COLOR

Example `z_drive_main_a_x2.stl`
These files will have nothing at the start of the filename.

ACCENT COLOR

Example `[a]_z_motor_mount_a_x2.stl`
These files will have "[a]" to the front to mention that they are intended to be printed with an accent color.

QUANTITY REQUIRED

Example `[a]_z_motor_mount_a_x2.stl`
If a file ends with "_x#", that is telling you the quantity of that part required to build this system..

PRINT GUIDELINES

The print guidelines are also the same as for VORON designs, namely :

FDM MATERIAL

As with the standard Voron Design printers, Its is recommended to print these parts in ABS.

LAYER HEIGHT

Recommended : 0.2mm

EXTRUSION WIDTH

Recommended : Forced 0.4mm

INFILL PERCENTAGE

Recommended : 40%

INFILL TYPE

Grid, Gyroid, Honeycomb, Triangle or Cubic.

WALL COUNT

Recommended : 4

SOLID TOP/BOTTOM LAYERS

Recommended : 5

SUPPORTS REQUIRED

None at all.

HOW TO GET HELP

If you need assistance with your build you can head over the DOOMCUBE Discord group and post your questions (typically in the « micron » channel). It is the primary development channel involving the Micron! You can also check the Github page for the latest releases.



<https://discord.gg/EAANfEk25f>




<https://github.com/hartk1213/Micron>

FRAME


MICRON



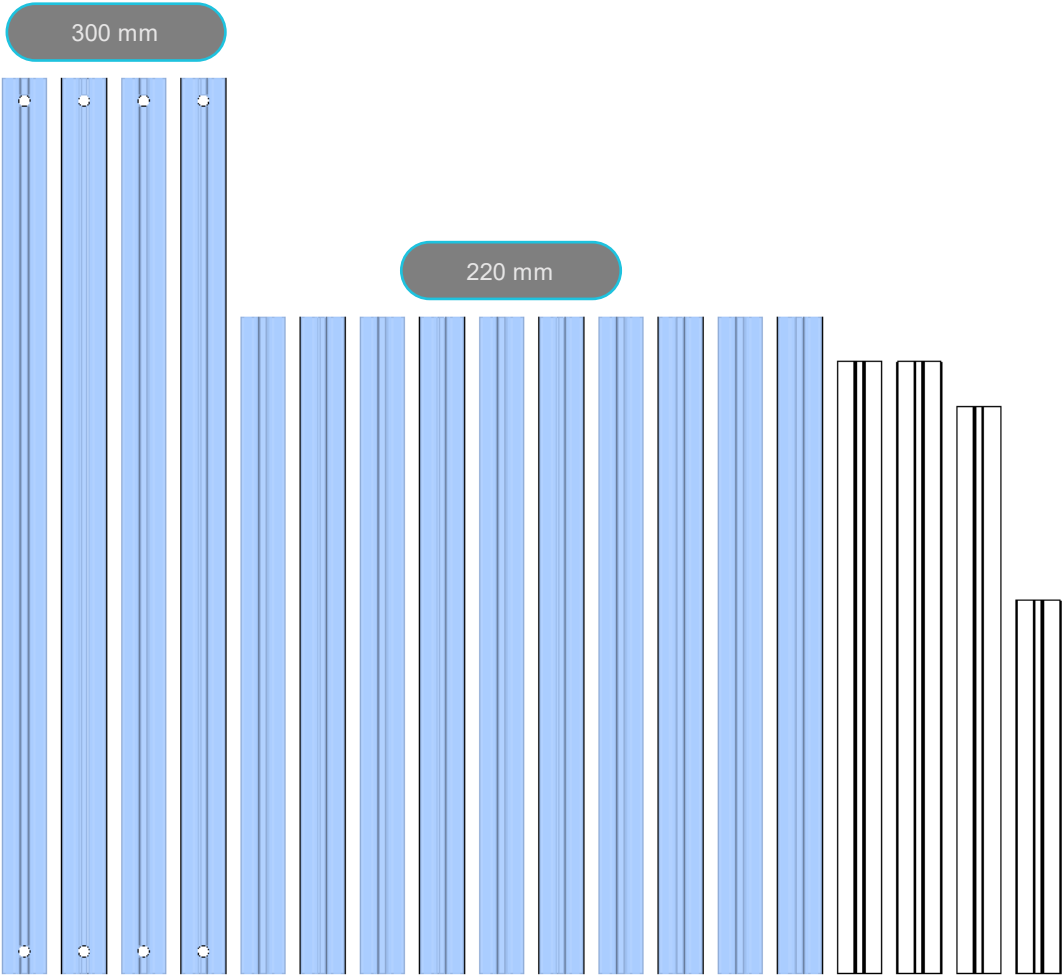


GETTING EXTRUSIONS TOGETHER
Separate the extrusions you're going to need for this section of the build. We've laid out all the parts you should have and highlighted the ones that will be used in the following sections.

Z RAIL

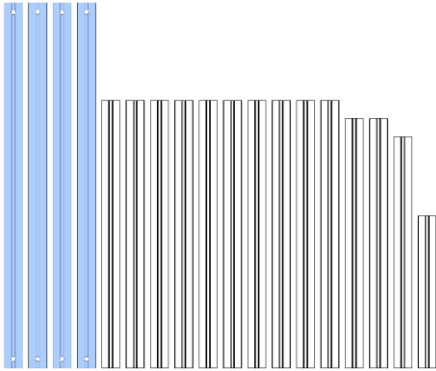


MICRON

~36mm

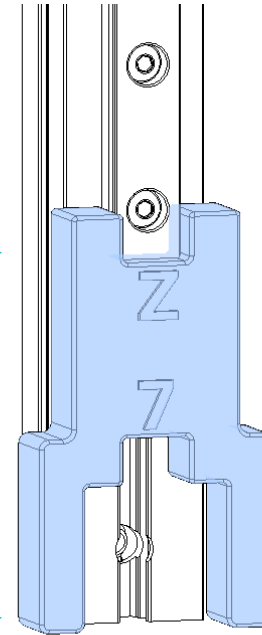

M2x6 BHCS

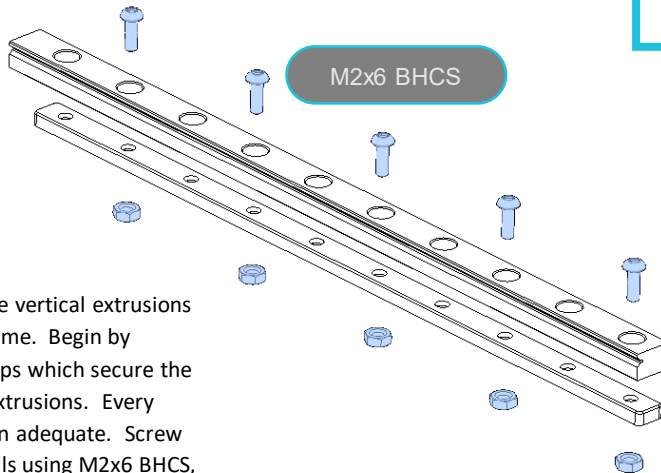

Z RAILS



The Z rails attach to the vertical extrusions before building the frame. Begin by loading the M2 nut traps which secure the Z rails to the vertical extrusions. Every other hole is more than adequate. Screw the nut traps to the rails using M2x6 BHCS, leaving them loose enough so they may be easily slid into place on the extrusions. We will align and secure them in the next step.

Z RAILS ALIGNMENT

Stand up one of the vertical extrusions and use the printed rail alignment tool as shown to align the bottom of the rail. It should end up ~36mm from the bottom of the vertical extrusion. Use a second rail alignment tool on the upper half of the rail, using the section marked '7', to properly center the rail on the extrusion. Repeat this process for all 4 Z extrusions and rails.


Z RAIL STOPS

MICRON

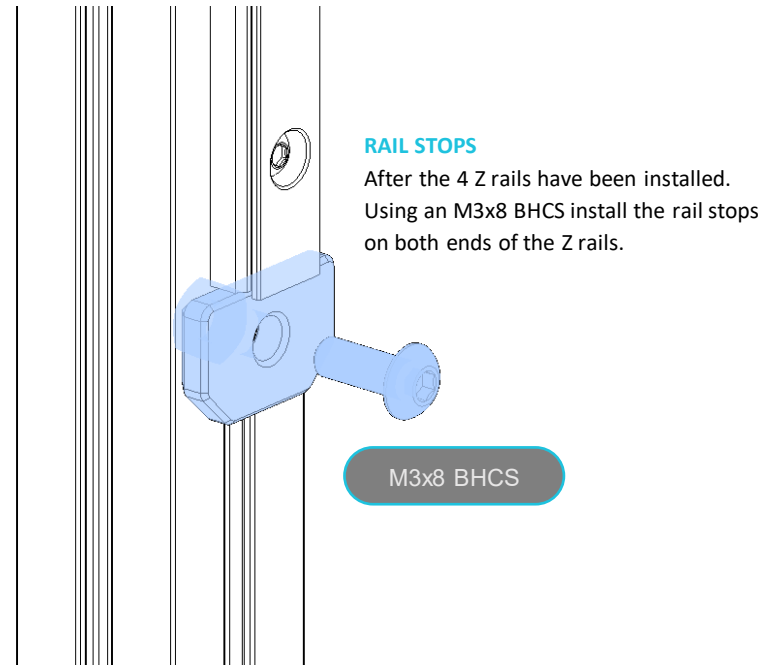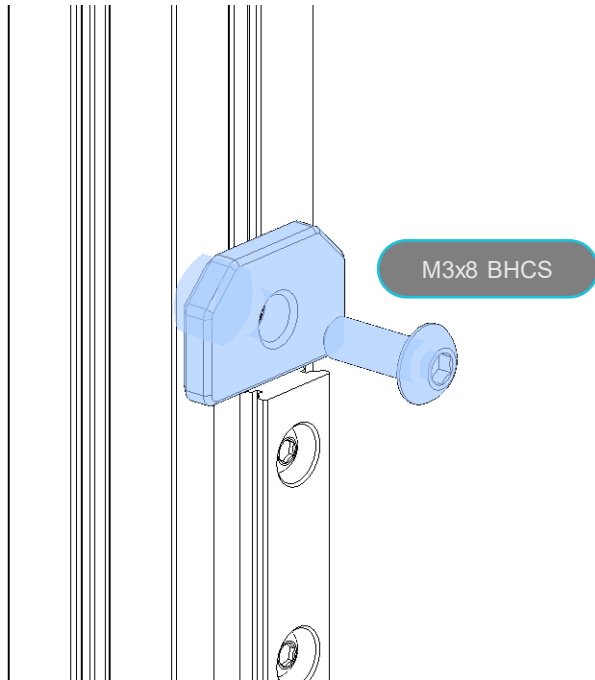

BLIND JOINTS

BLIND JOINT ASSEMBLY DESCRIPTION.

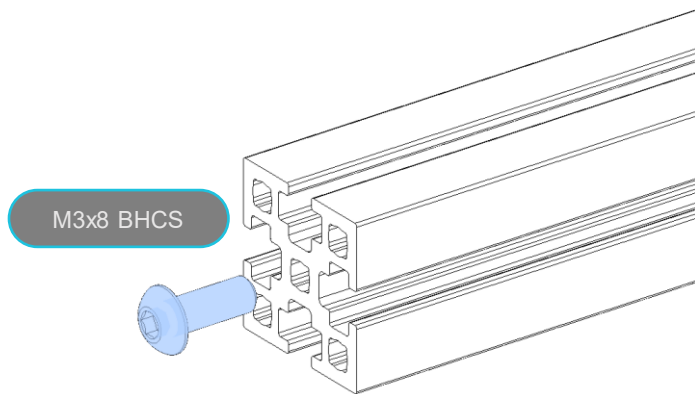


NO DROP NUTS

To make it easier to align the preloaded nuts, you can use the printed holders referred to from now on as NDN that keep them in the correct spacing. Note that there are 3 different sizes, the manual will call out where they can be helpful.

Large – 21.7mm


Medium – 12mm

Small – 10mm

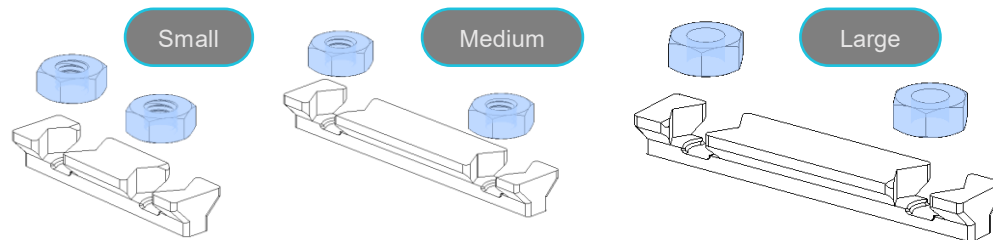


ASSEMBLE FIRST CORNER

MICRON

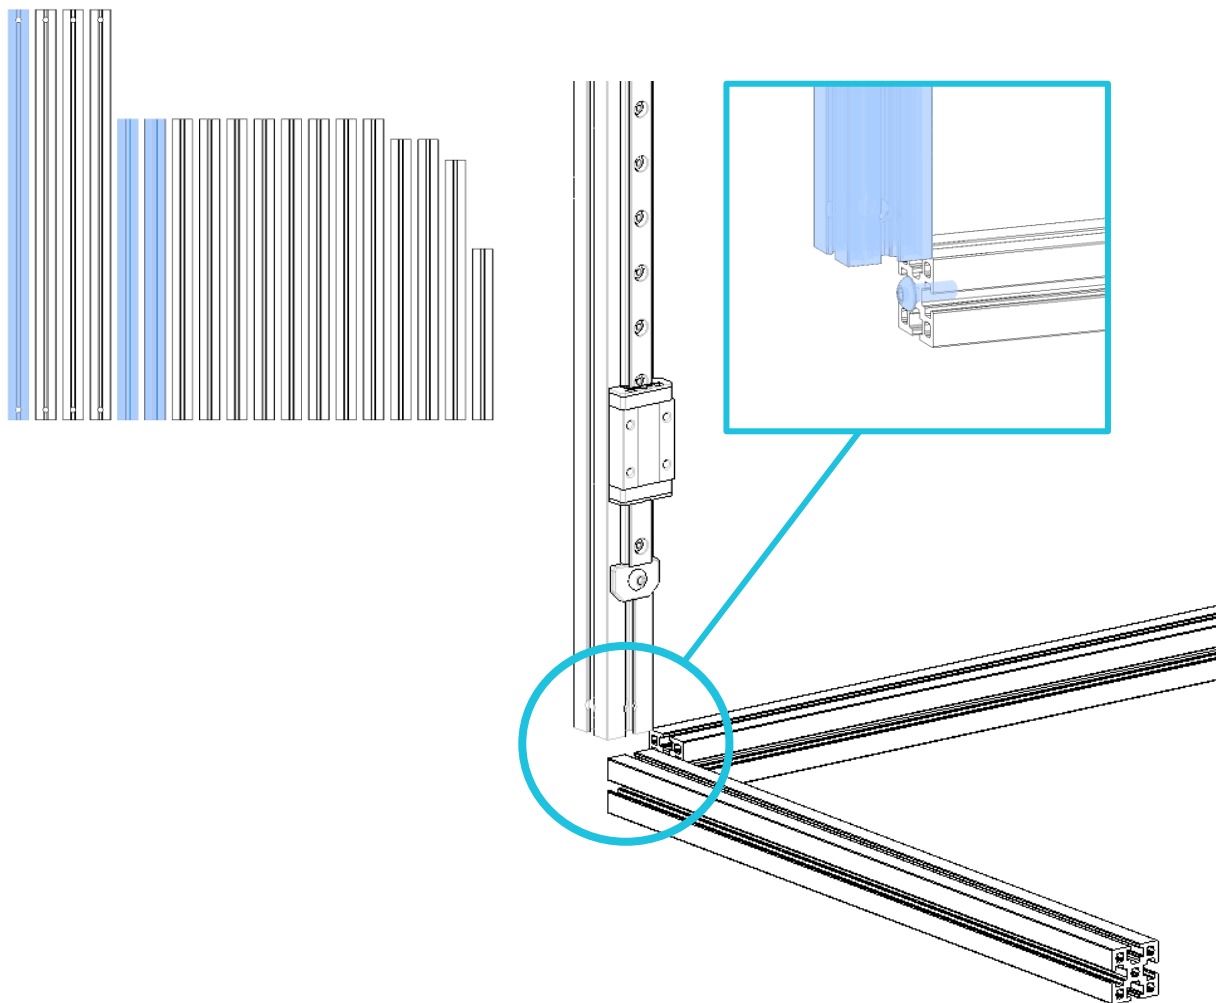

ASSEMBLE SECOND CORNER

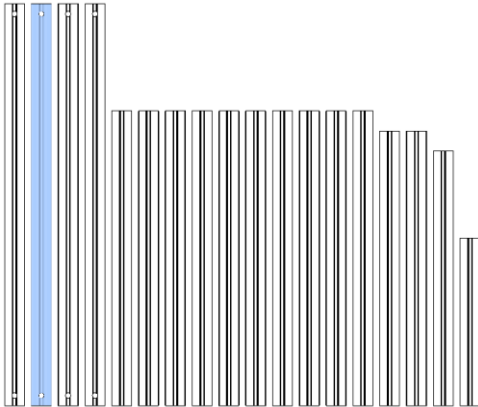


SECOND CORNER

Before attaching the 2nd vertical extrusion, you need to preload 4 m3 nuts on top, and 8 m3 nuts on the bottom of the extrusion.


PRELOADING NUTS

If using the printed nut holder, this will be inserted on the bottom in the following order.

- Single Nut
- Large NDN
- Single Nut
- Single Nut
- Large NDN
- Single Nut

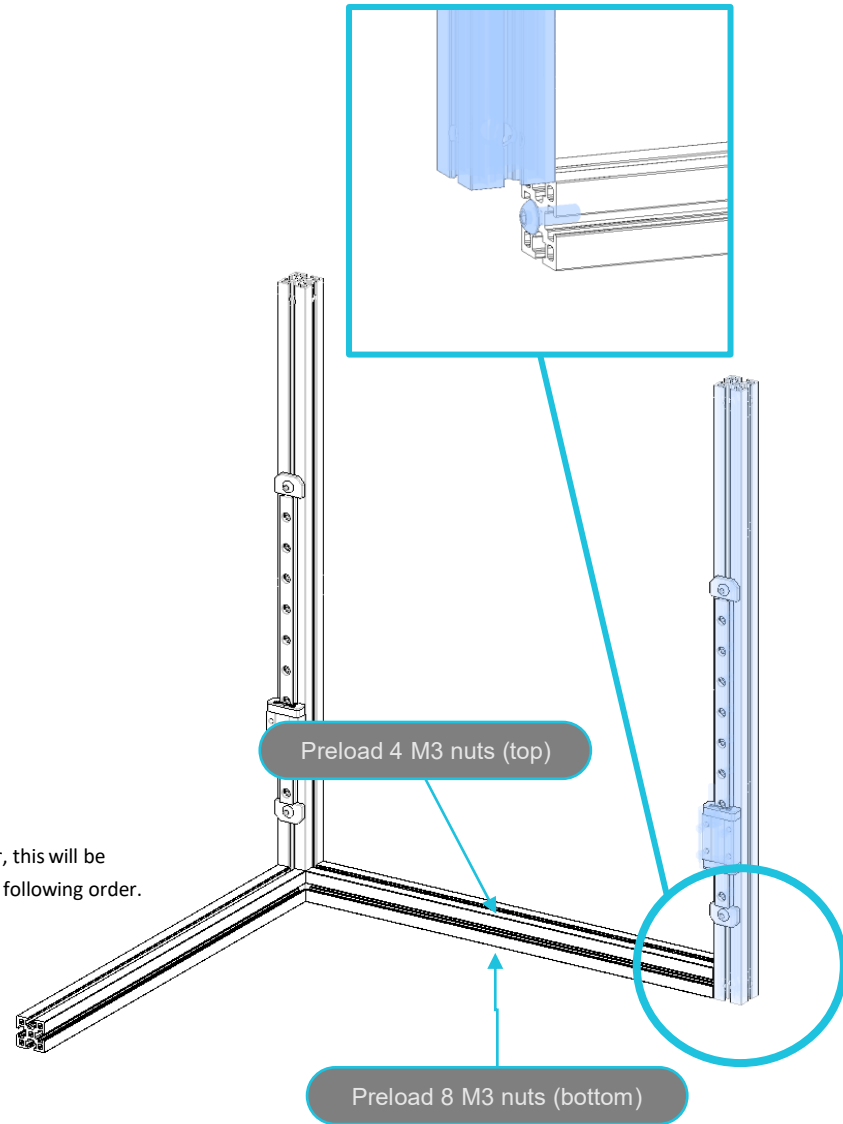

ASSEMBLE THIRD CORNER

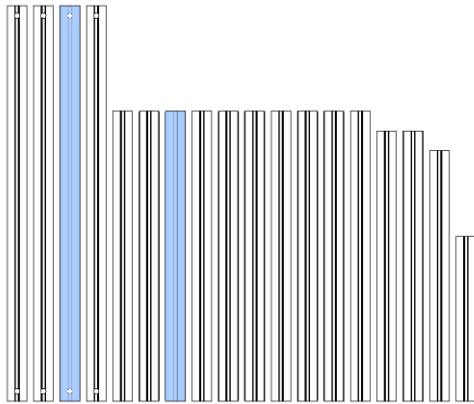


THIRD CORNER

In the same way to the previous step, the horizontal extrusion needs 4 m3 nuts on top and 8 m3 nuts on the bottom. In addition, you need 3 m3 nuts on the outside of the extrusion as well.


PRELOADING NUTS

If using the printed nut holder, this will be inserted on the bottom in the following order.

- Medium NDN
- 4 Loose M3 Nuts
- Medium NDN

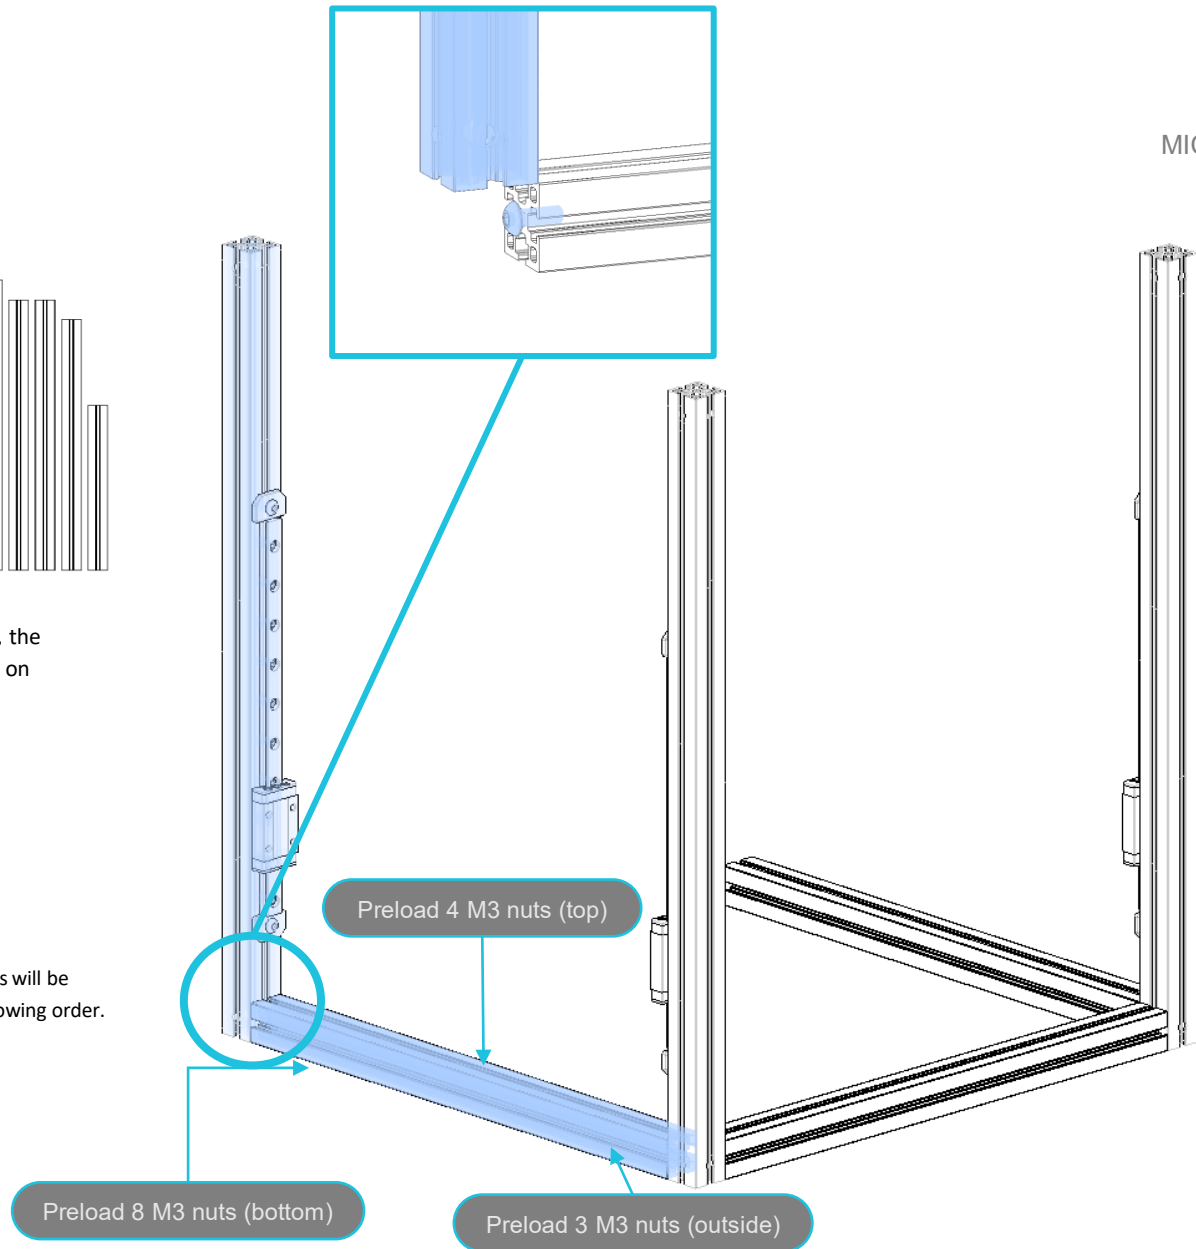

ASSEMBLE THE FOURTH CORNER

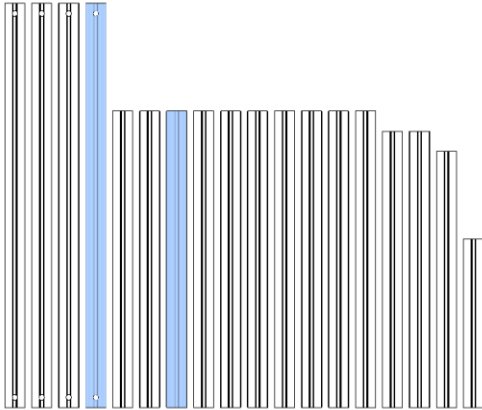


FOURTH CORNER

The final vertical extrusion will now be installed along with the front bottom extrusion. The front extrusion needs 8 m3 nuts in the bottom of it and 2 on top

PRELOADING NUTS


If using the printed nut holder, this will be inserted on the bottom in the following order.

- Single Nut
- Large NDN
- Single Nut
- Single Nut
- Large NDN
- Single Nut

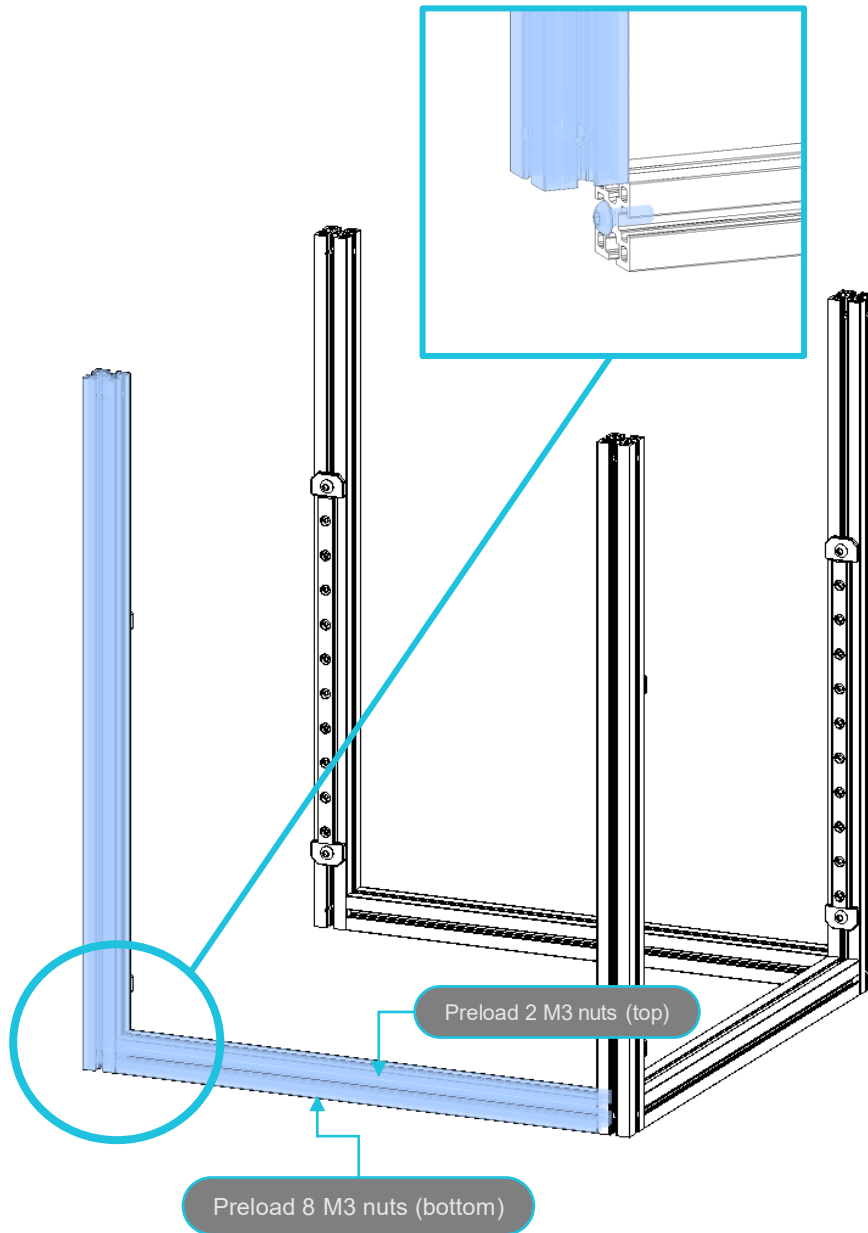

MICRON

FINAL LOWER EXTRUSION

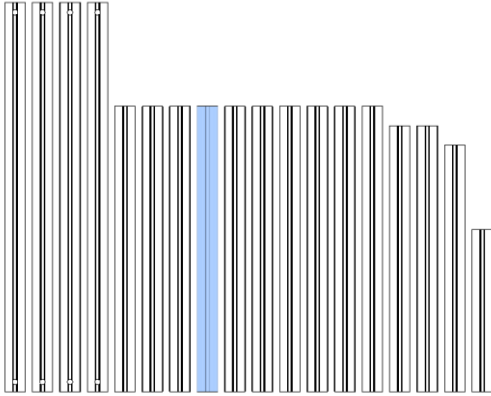


FINAL LOWER EXTRUSION

The final lower extrusion which is located on the side needs 3 on the outside, 4 on top, and 8 on the bottom


PRELOADING NUTS

If using the printed nut holder, this will be inserted on the bottom in the following order.

- Medium NDN
- 4 Loose M3 Nuts
- Medium NDN


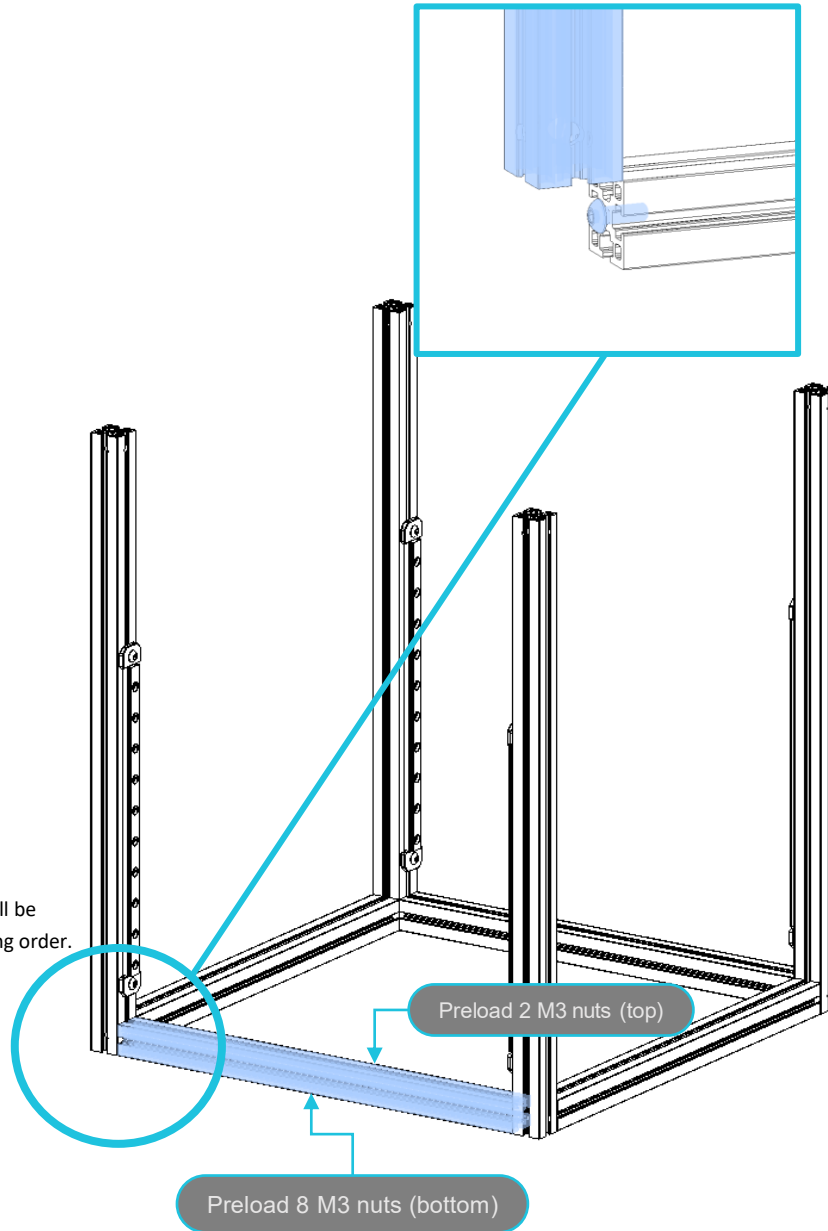


TOP OF FRAME

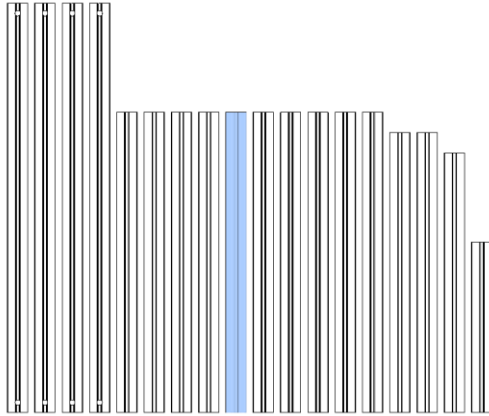


TOP OF FRAME

The first of the top extrusions needs 4 nuts on the inside, 3 on top, and 3 on the outside.

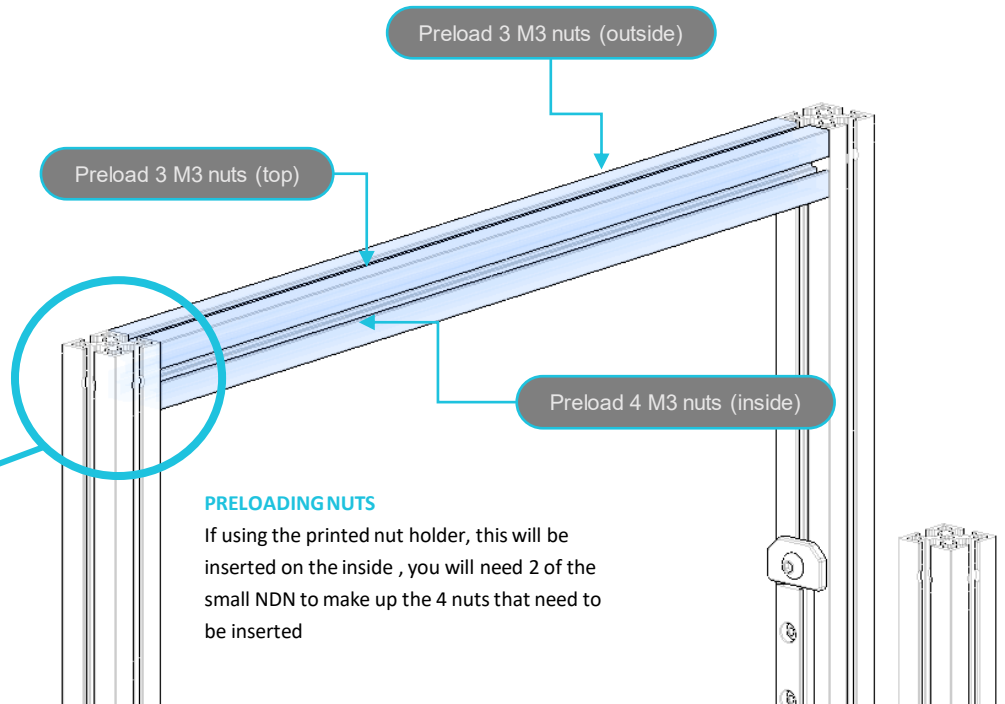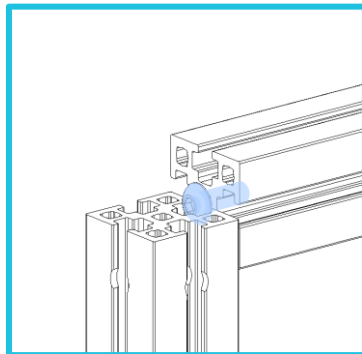


TOP OF FRAME

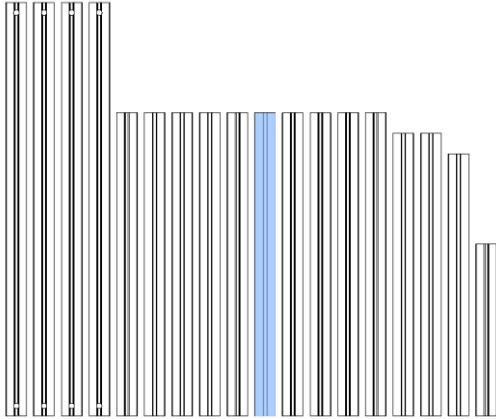

TOP OF FRAME


The rear of the top extrusions needs only 3 nuts in the top of it

MICRON

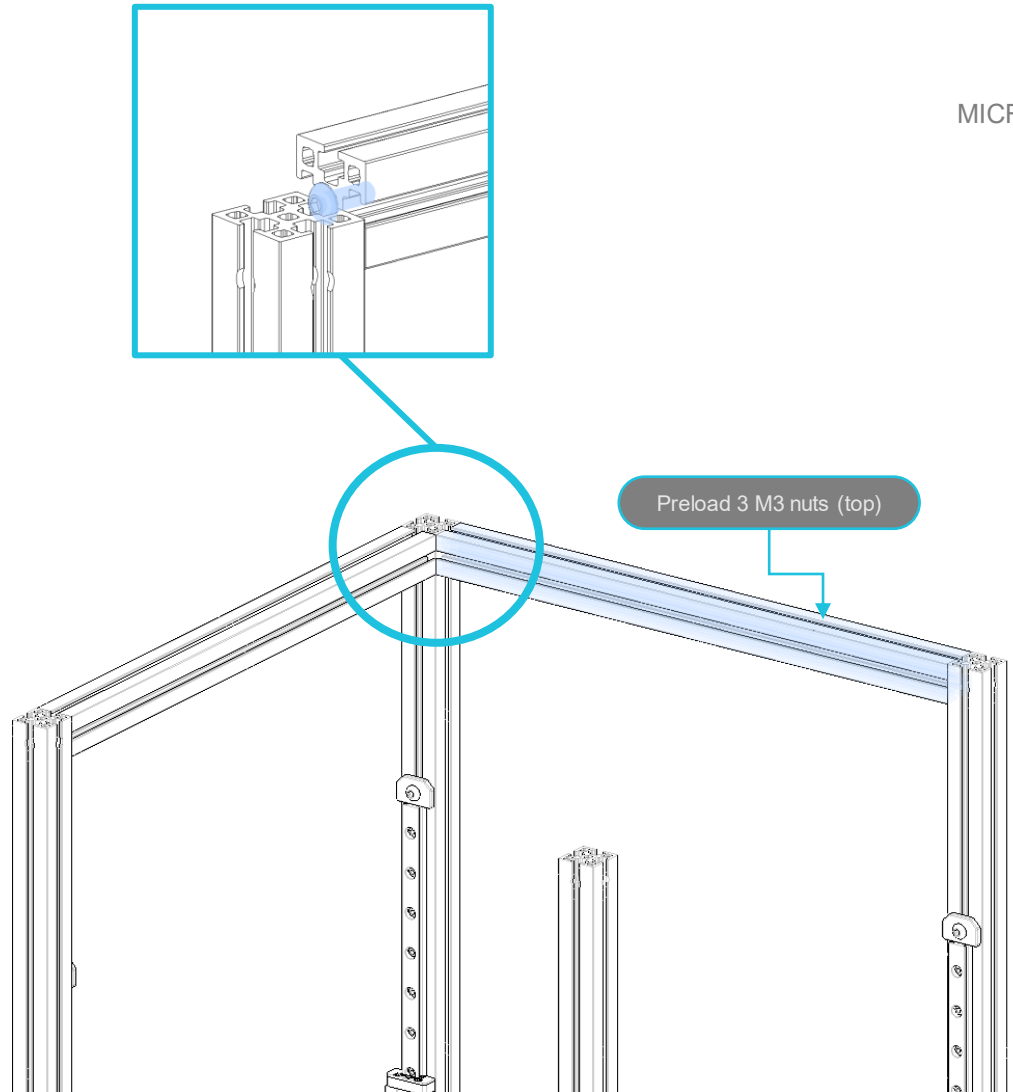


TOP OF FRAME

MICRON

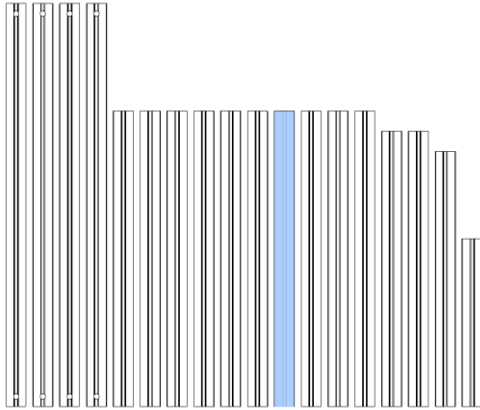


TOP OF FRAME

The first of the top extrusions needs 4 nuts on the inside, 3 on top, and 3 on the outside.

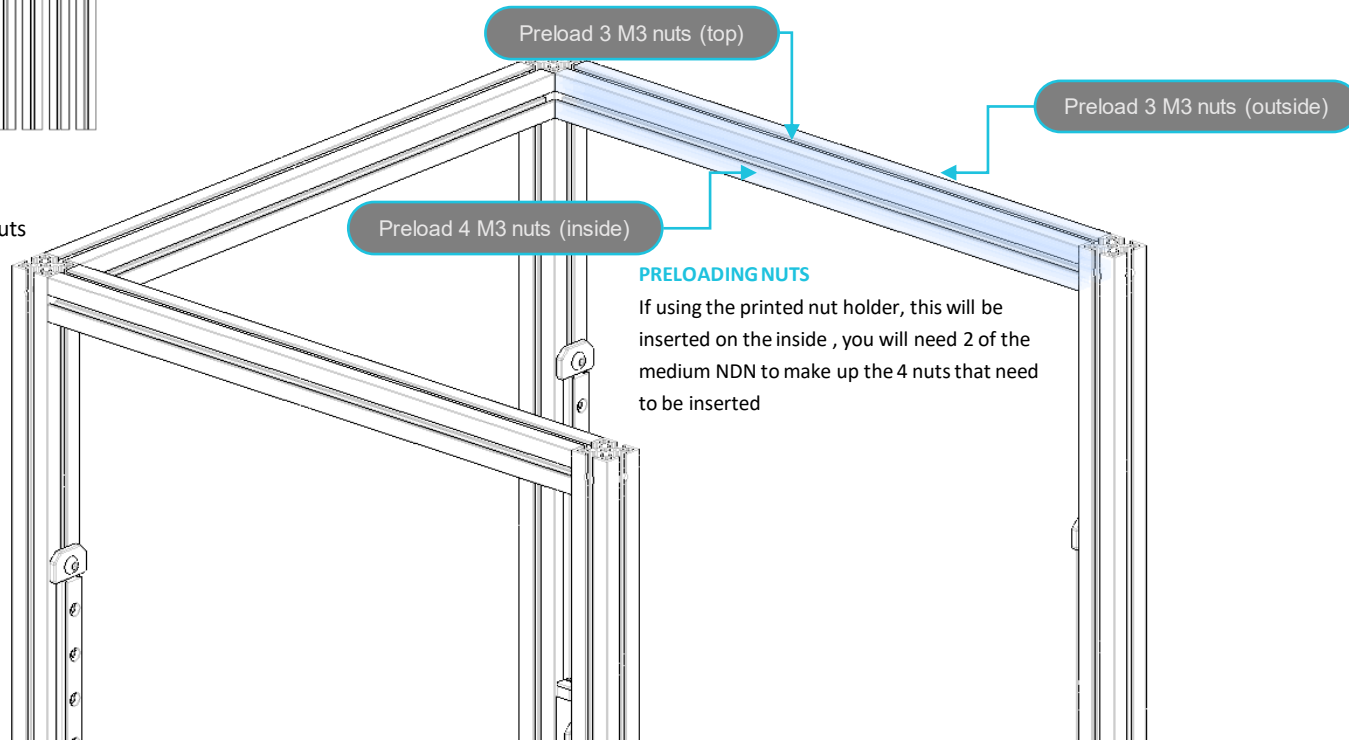


FRAME

MICRON

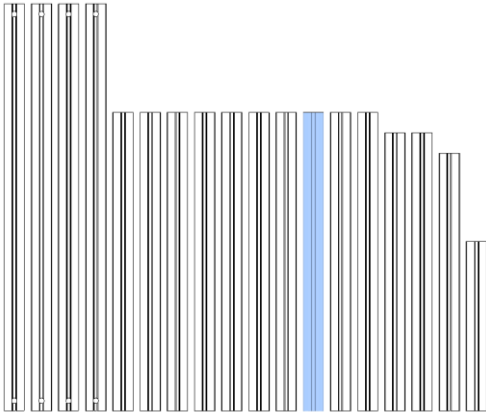



TOP OF FRAME

The final top extrusion requires 3 preloaded nuts

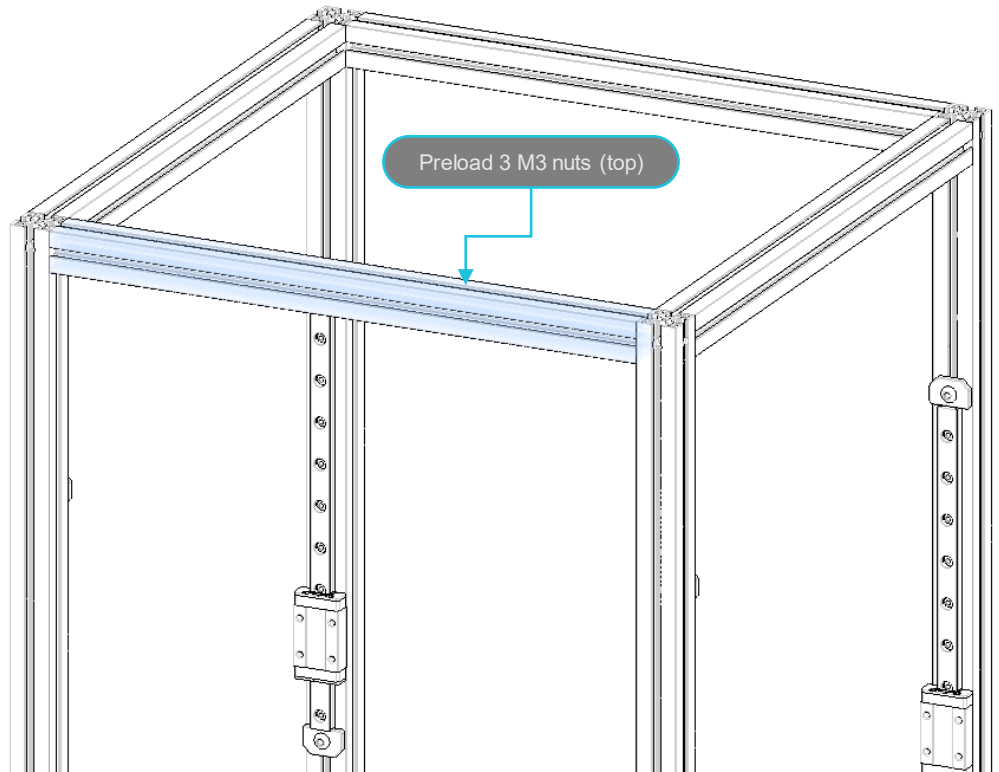


FRONT BED MOUNT

MICRON

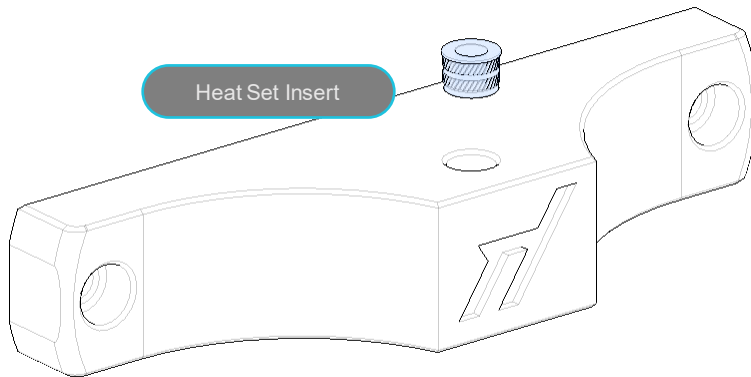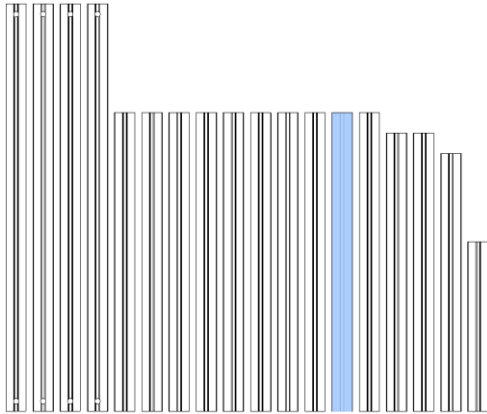


FRONT BED MOUNT

After the heat set has been inserted, make sure that it is mounted in the center of the extrusion.

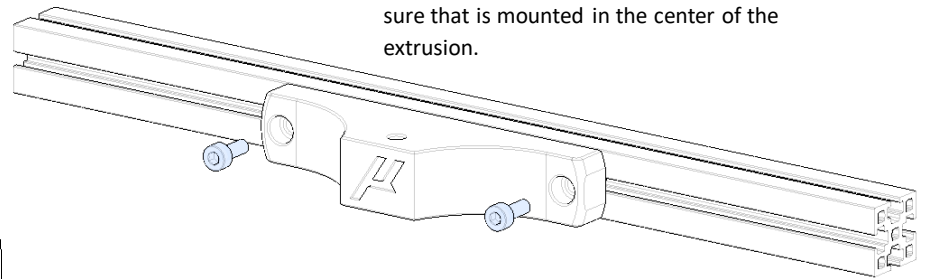


BED EXTRUSIONS

MICRON

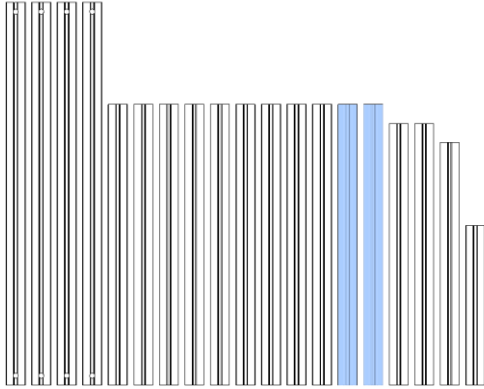

BED EXTRUSIONS

Before you attach the 4 angled brackets, you need to make sure you preload all the M3 nuts. Then screw in the 1515 angled brackets to the ends of both bed extrusions using M3x8 SHCS

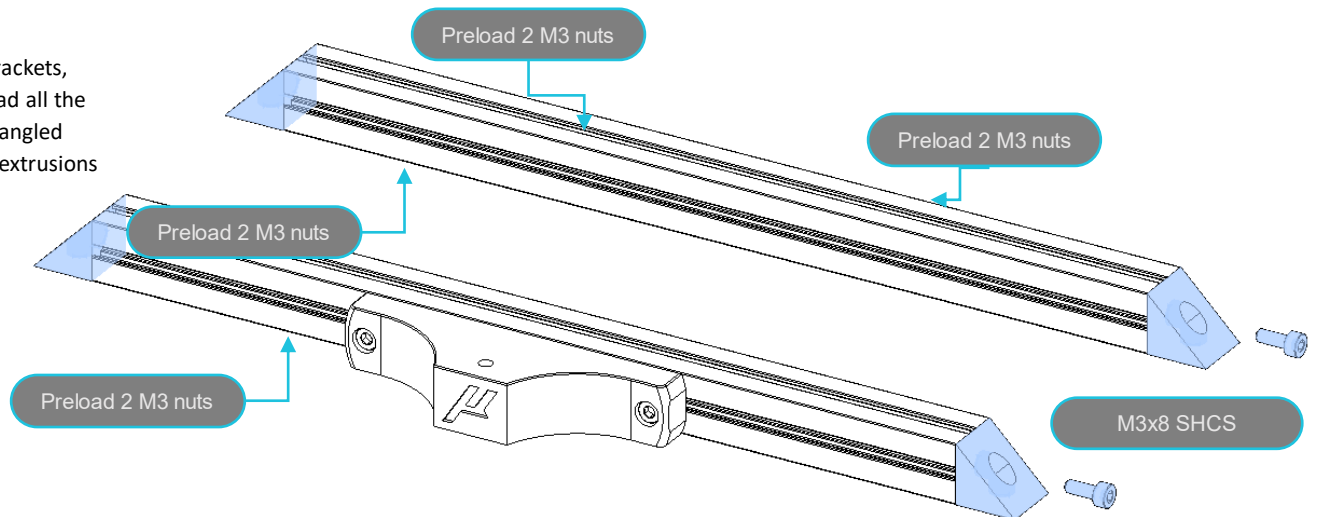


BED ASSEMBLY


MICRON

BED EXTRUSIONS

Mount the bed extrusion as shown, making sure to space them out 45mm from the front and then 70mm apart


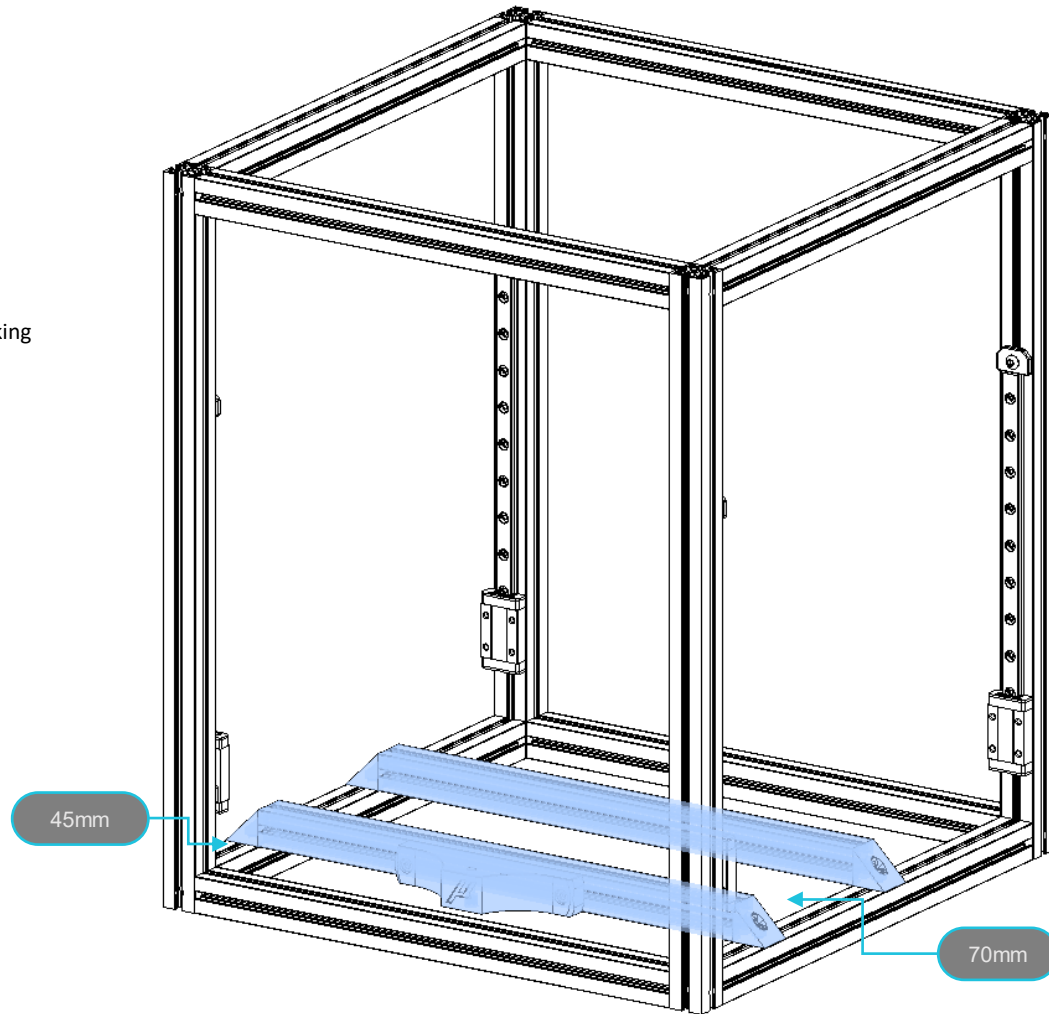


Install the deck panel , using 4 M3x8 BHCS.

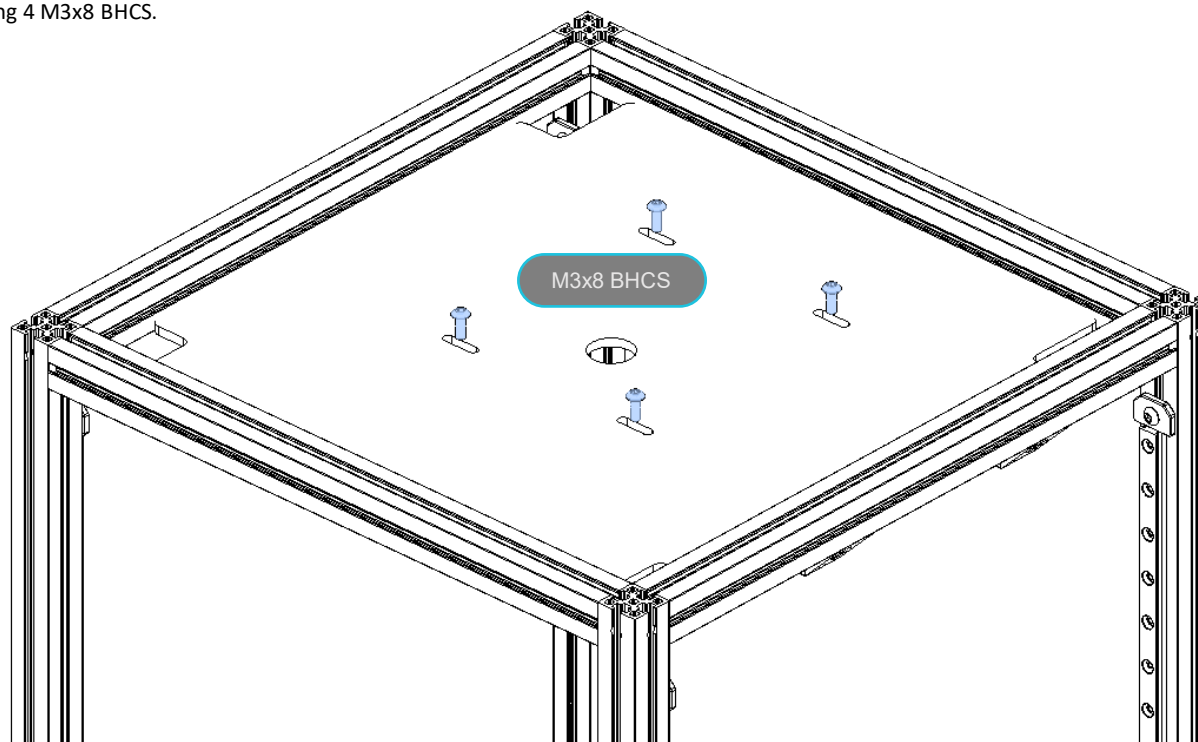

Z JOINTS

Install the 4 KGLM-03 bearings into the printed part. Attach these to the Z rail carriages using 4 M2x6 SHCS

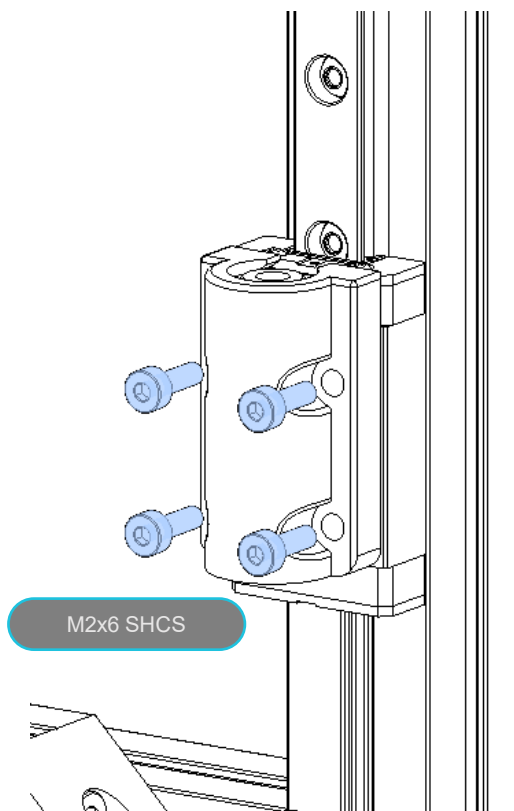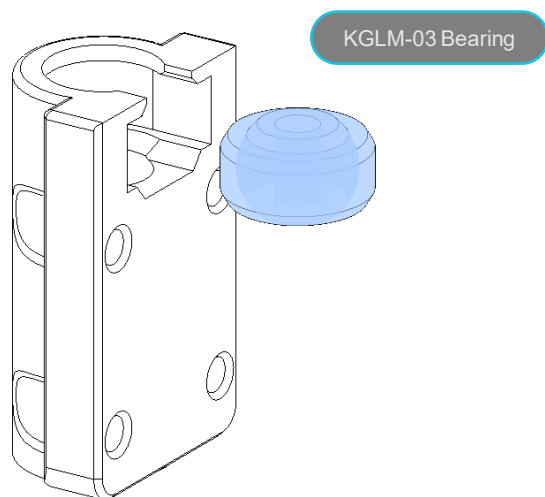


Z BELT COVERS

MICRON


Z BELT COVERS

mounting the Z belt covers uses 2 M3x8 BHCS each

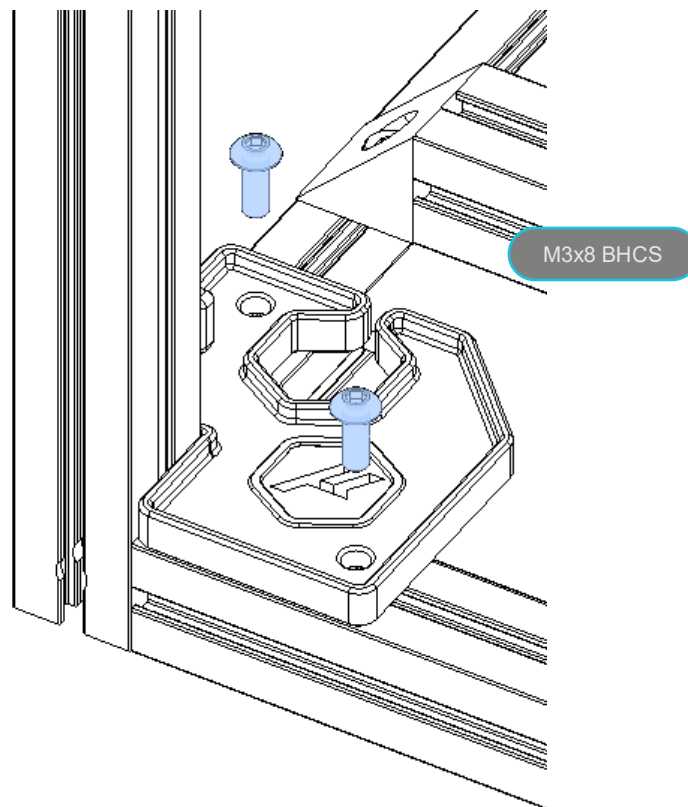


FRAME


MICRON

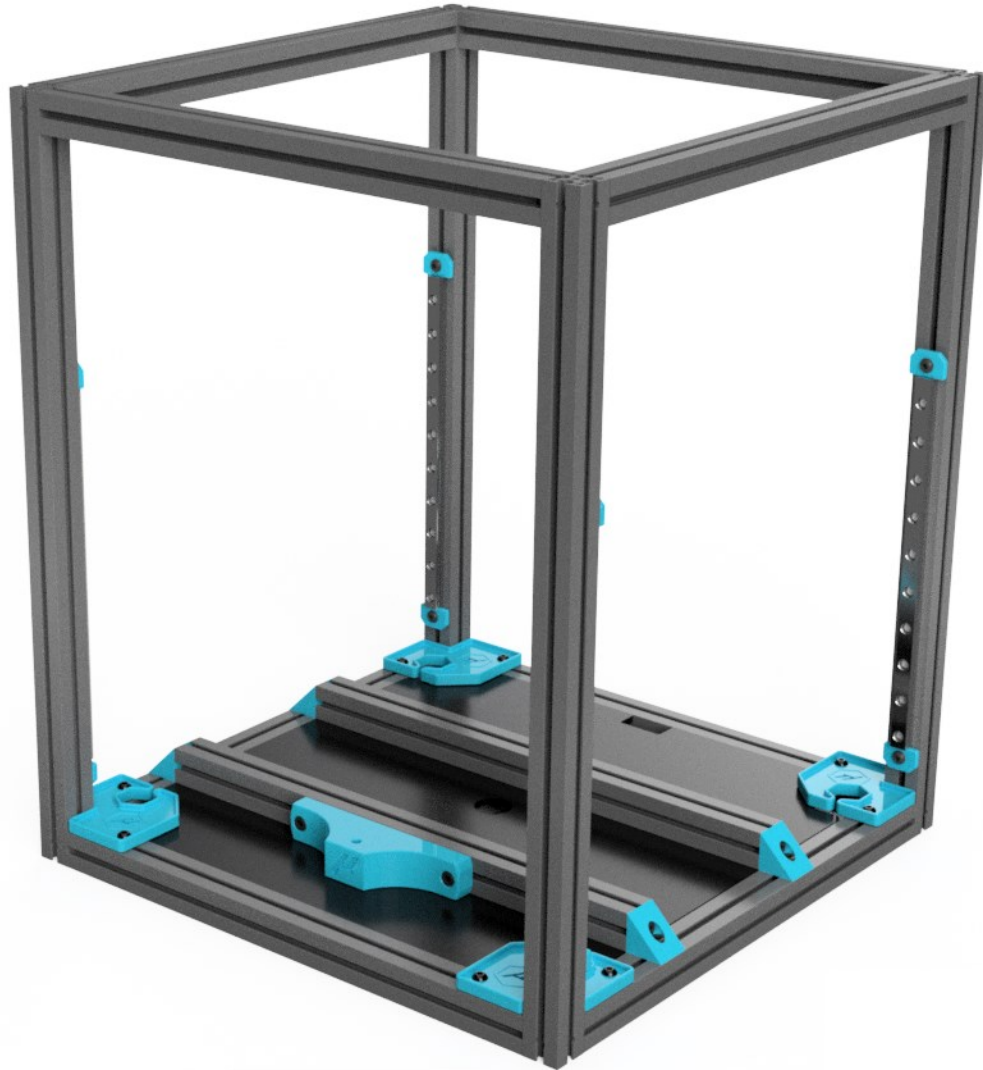

FRAME

At this point your frame should be looking like this.

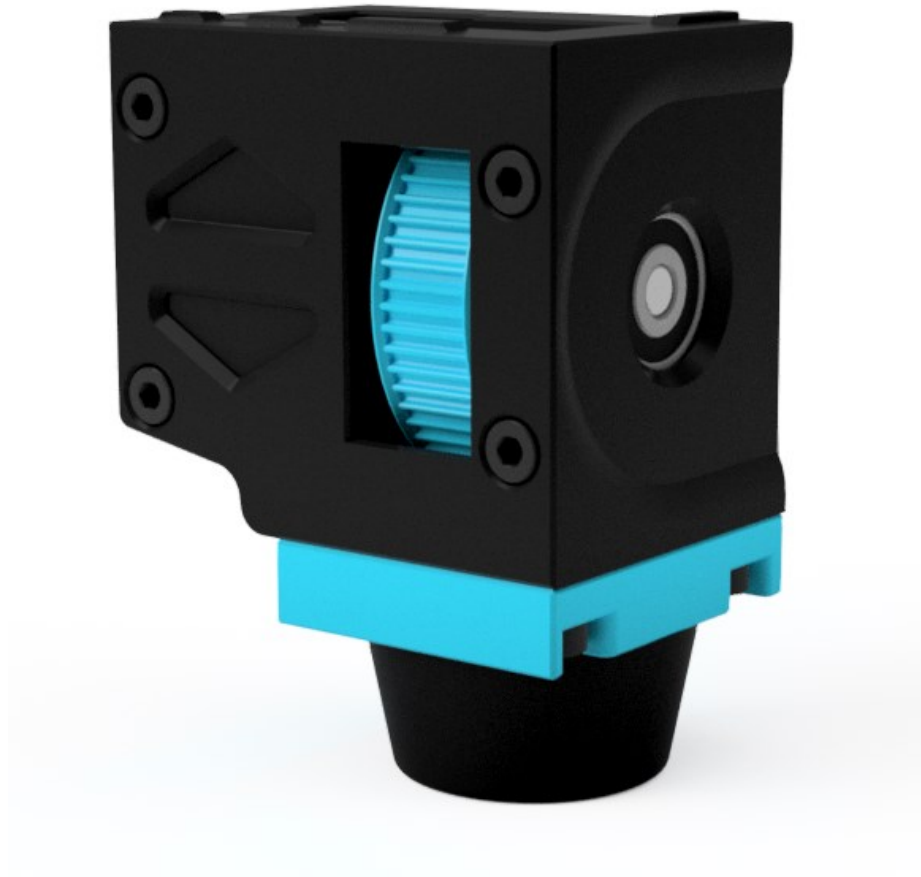

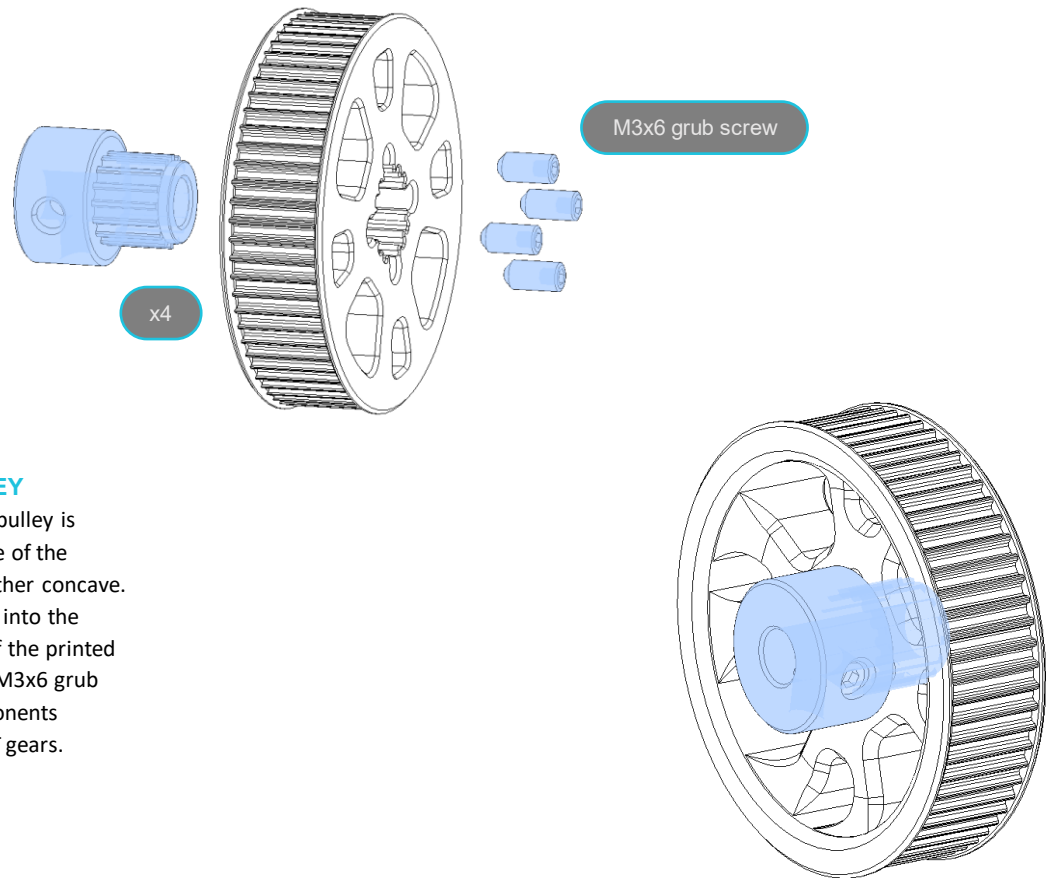


ASSEMBLING 64T PULLEY

Assembly of the printed 64T pulley is simple. Observe that one side of the printed part is flat, and the other concave. Insert a deflanged 16T pulley into the socket on the concave side of the printed part, as shown below. Use 4 M3x6 grub screws to lock the two components together. Repeat for all 4 64T gears.

Z DRIVE SHAFT ASSEMBLY

MICRON


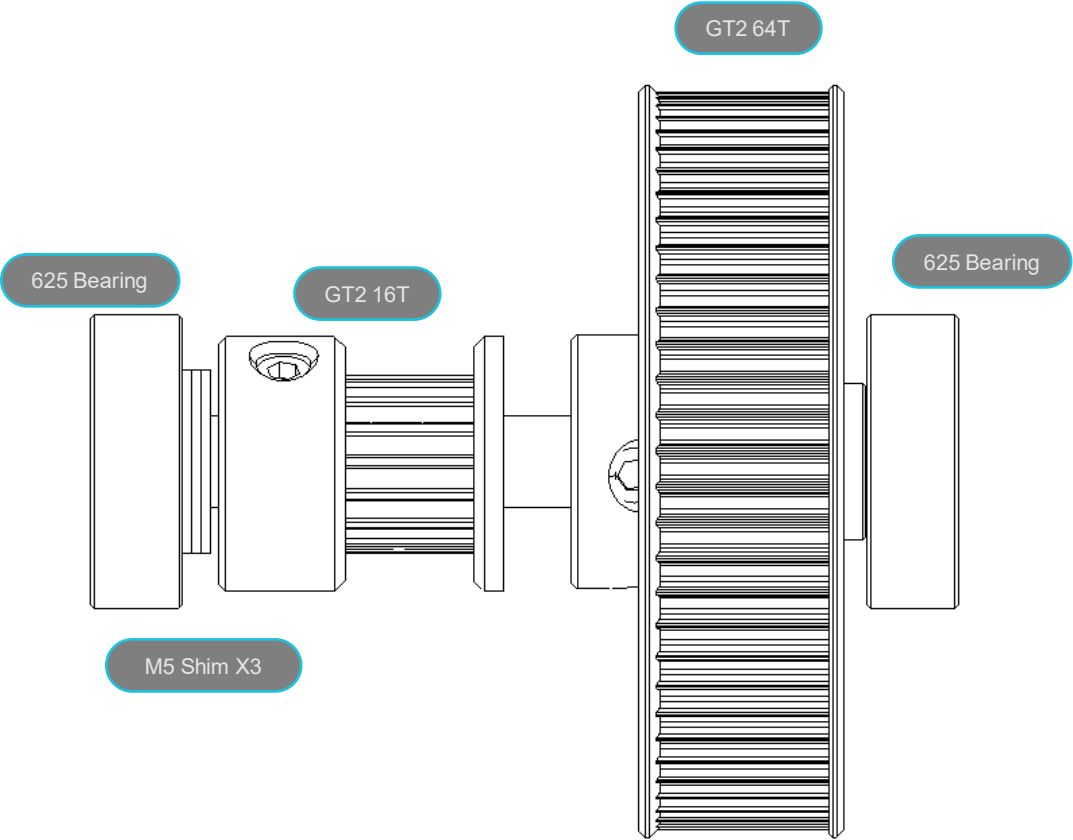



Z DRIVE ASSEMBLY

MICRON

Z DRIVE ASSEMBLY


Begin by installing the heatset inserts into the Z drive parts. Each pair of Z drive halves has a total of 8 required heatsets, as shown in the illustrations below.

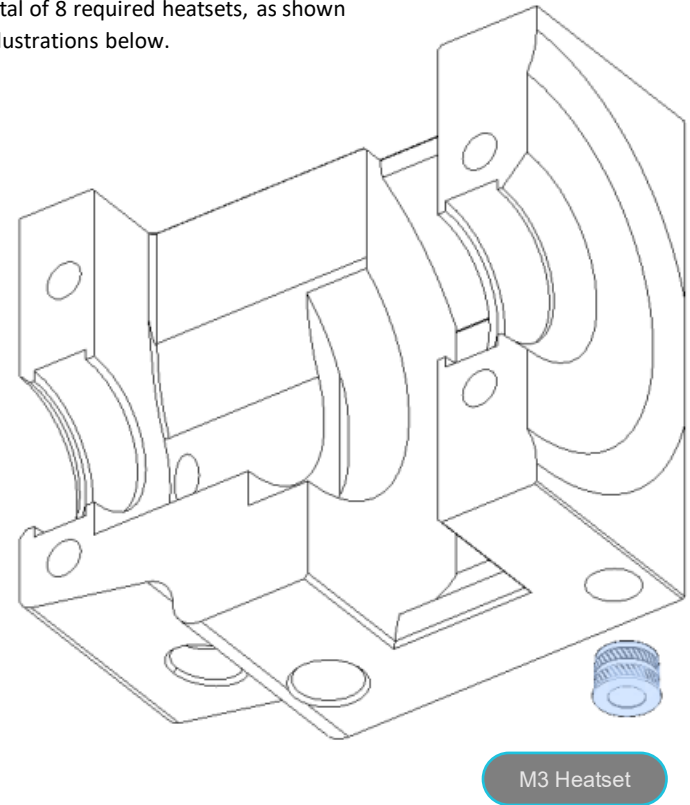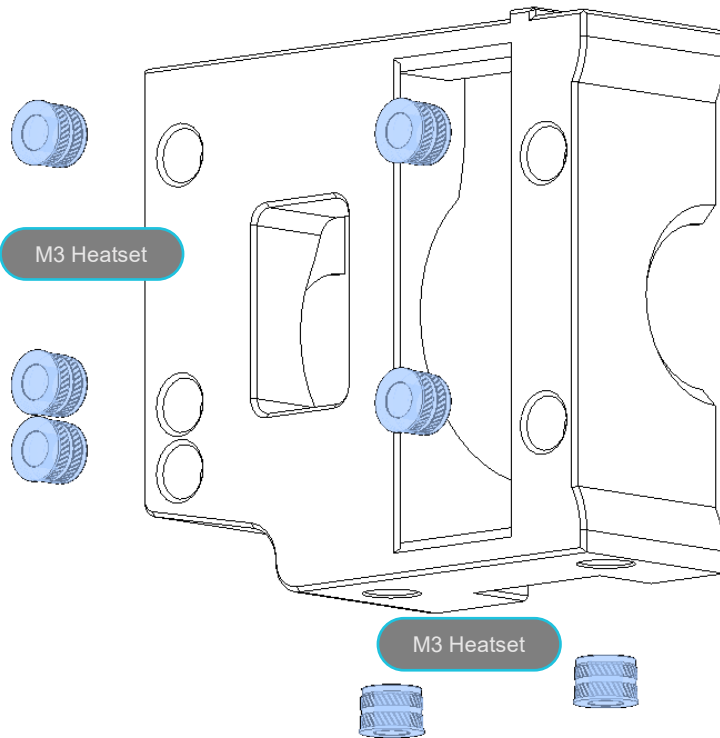

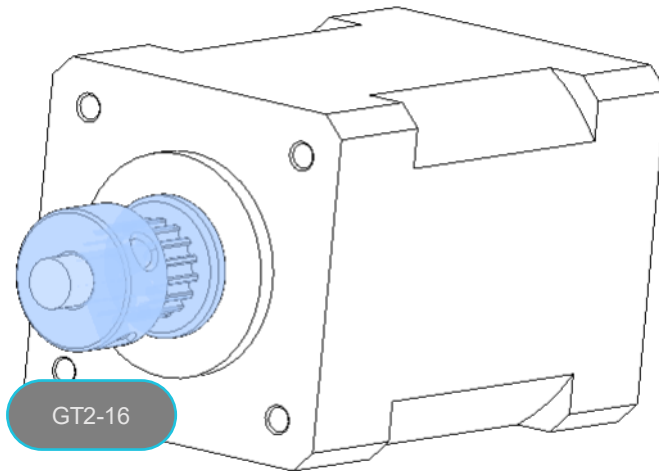


Z MOTOR PULLEY

To continue with the Z drive assembly, attach a GT2 16T pulley as shown to each of the 4 Z motors. Tighten one of the set screw just tight enough to keep the pulleys from falling off. **DO NOT USE LOCTITE AT THIS POINT!** We will determine the precise positioning of these pulleys once the motors are mounted to the printer. For now, we are just putting the pulleys in place, so we don't have to slide them on to mounted motors.

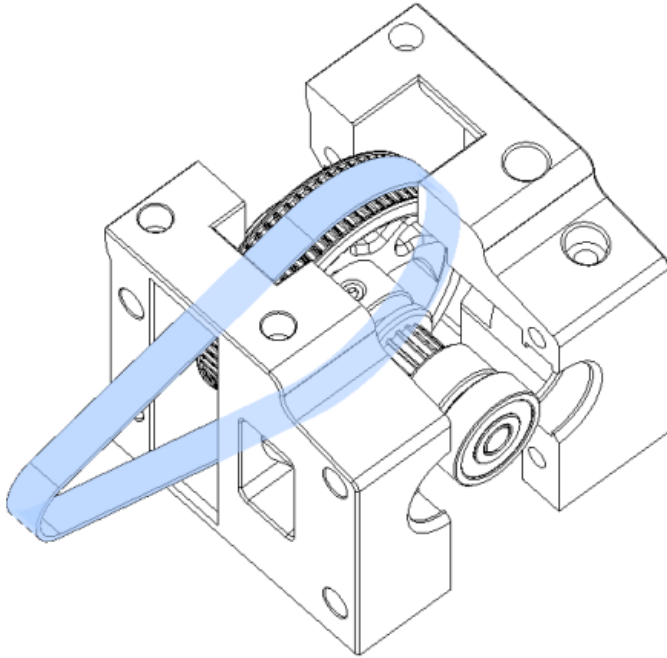

Z DRIVE BELT

Add the GT2-188t belt loop around the 64T pulley before closing it off.

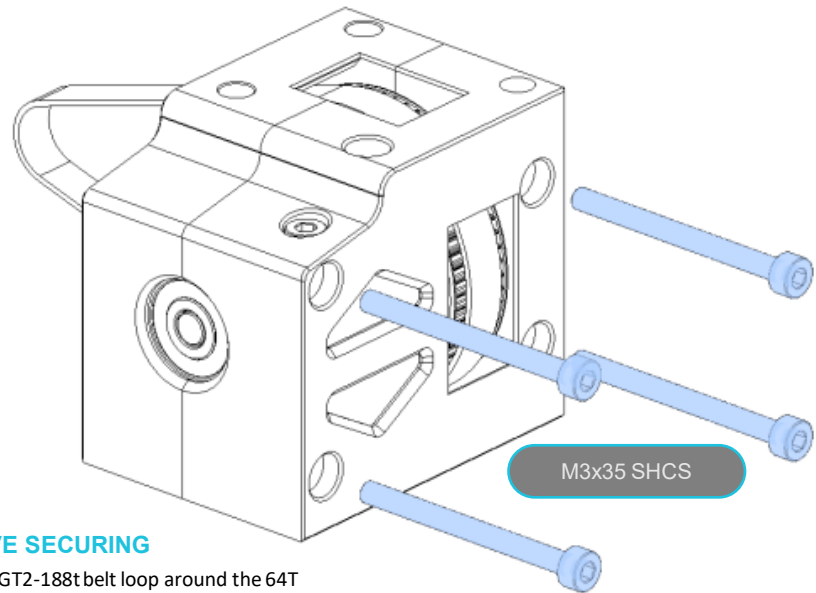


Z DRIVE SECURING

Add the GT2-188t belt loop around the 64T pulley before closing it off.

Z MOTOR MOUNT


MICRON

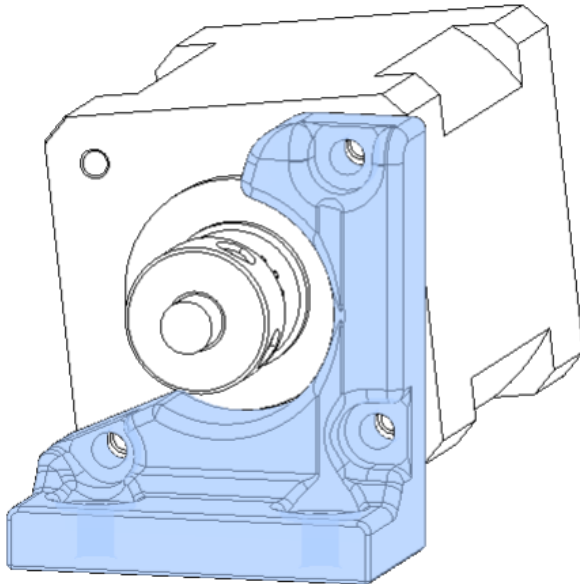


Z MOTOR MOUNT

Z motor mount is best used with the wires for the z to be facing down or towards the inside of the printer

Note: The motor is on a slight angle in relation to the motor mount.

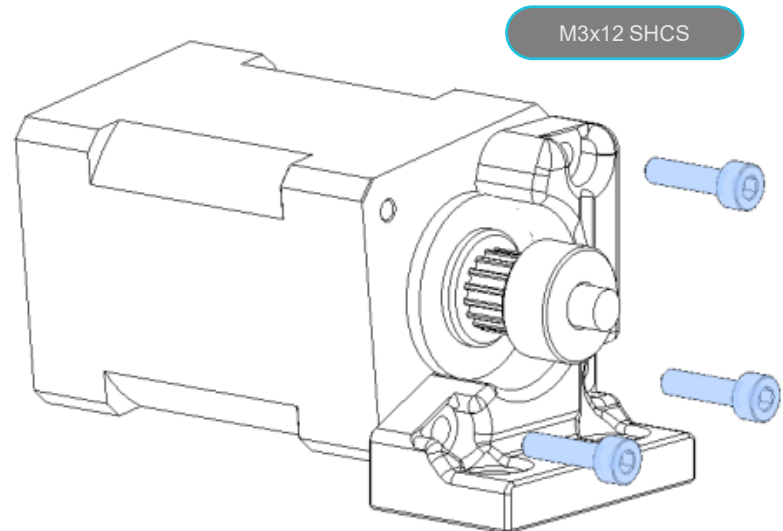


Z DRIVES MOUNTING

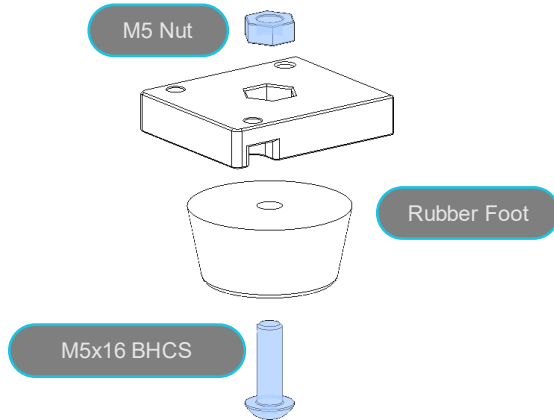

FEET ASSEMBLY

To assembly the Z drive cap / feet, you need to insert an M5 nut into the drive cover

MICRON

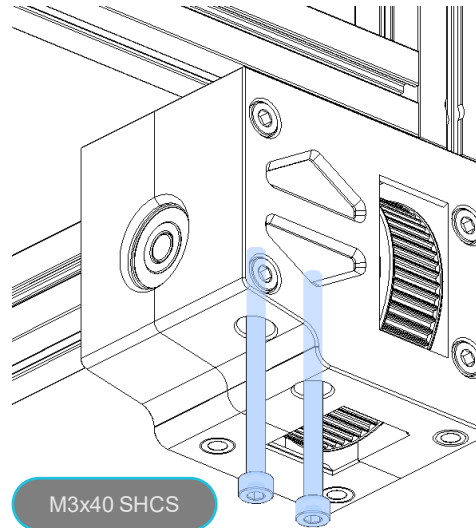



Z DRIVE MOUNT

Z Drive is mounted using the new M3x40 bolts. If you installed the printed NDN nut holder then this is where you will use that to secure the drive housing.

FEET ASSEMBLY

To assembly the Z drive cap / feet, you need to insert an M5 nut into the drive cover

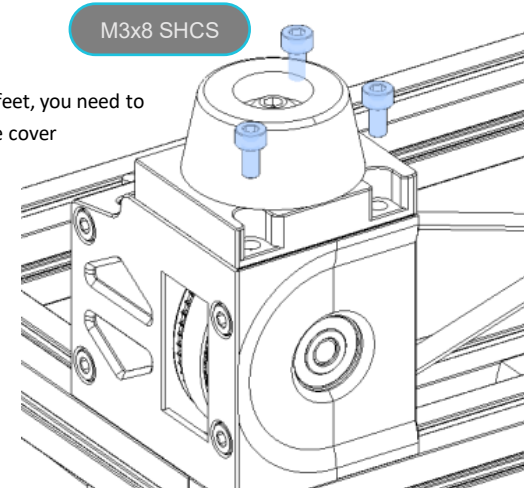

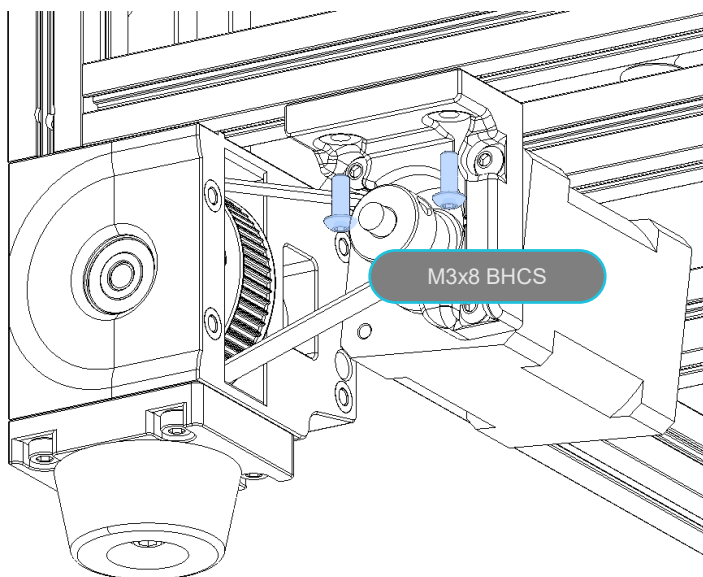

Z MOTOR MOUNTING

Using 2 M3x8 BHCS and the printed nut holder on this side attach the Z motor. This is when you will tension the 188 tooth belt loop. The motor should be


Z IDLERS

MICRON





Z IDLERS

MICRON

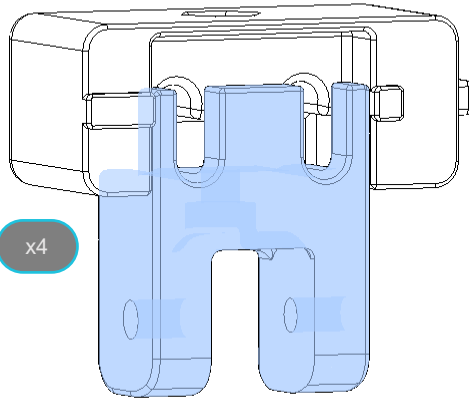


Z TENSIONER

Slide the tensioner into the main body securing them together with an M3x16 BHCS and M3 hex nut.

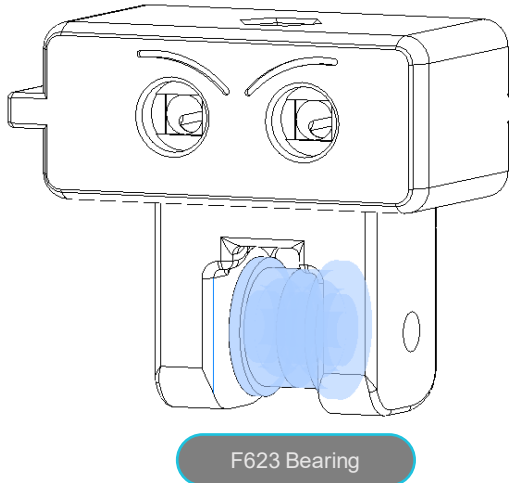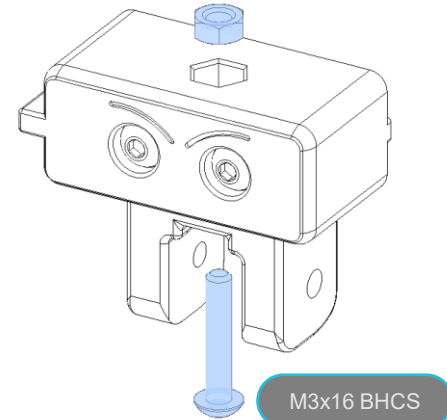


Z TENSIONER PULLEY

Take the F623 bearing stack and place them between the idler securing them using an M3x20. Note the direction the screw is going.

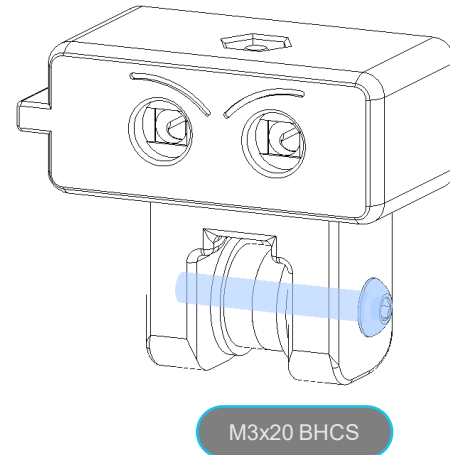

Z IDLERS

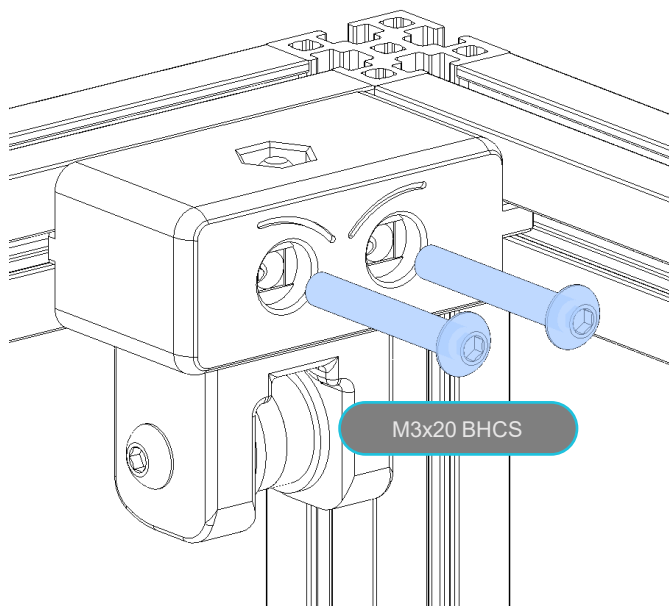


M3x20 BHCS

Z IDLER MOUNTING

mounting the Z idlers on the top of the frame along the side extrusion. These can be mounted using the printed nut holders as well.

MICRON

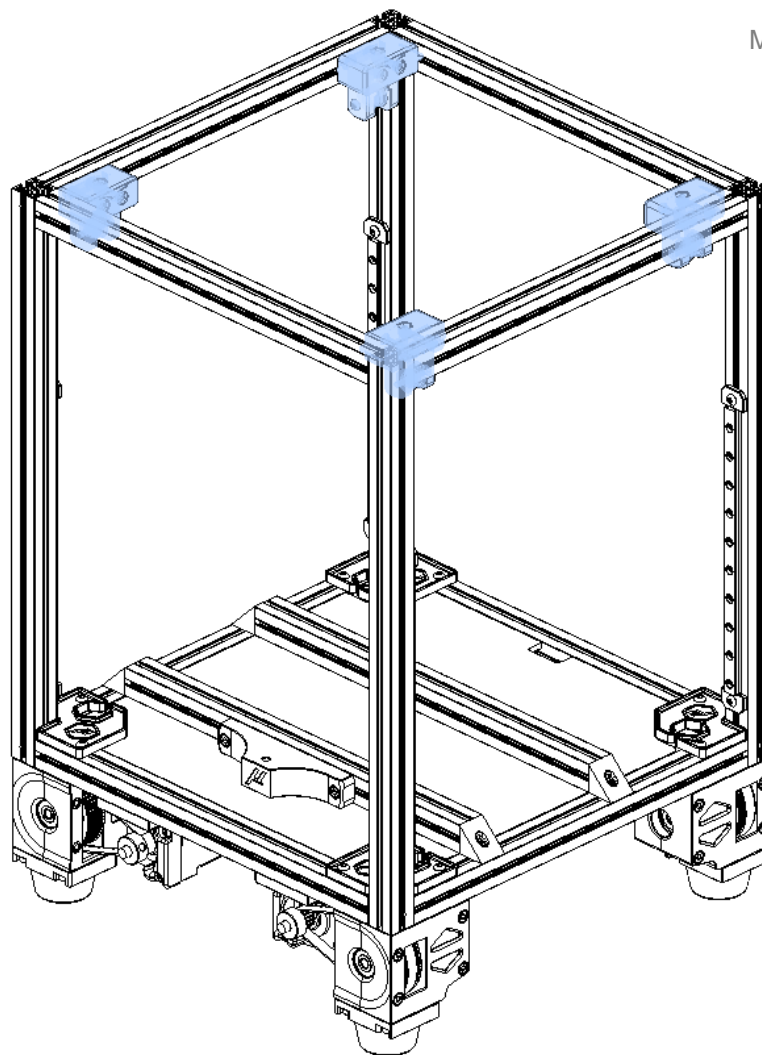



Z ENDSTOP

MICRON




Z ENDSTOP ASSEMBLY

MICRON

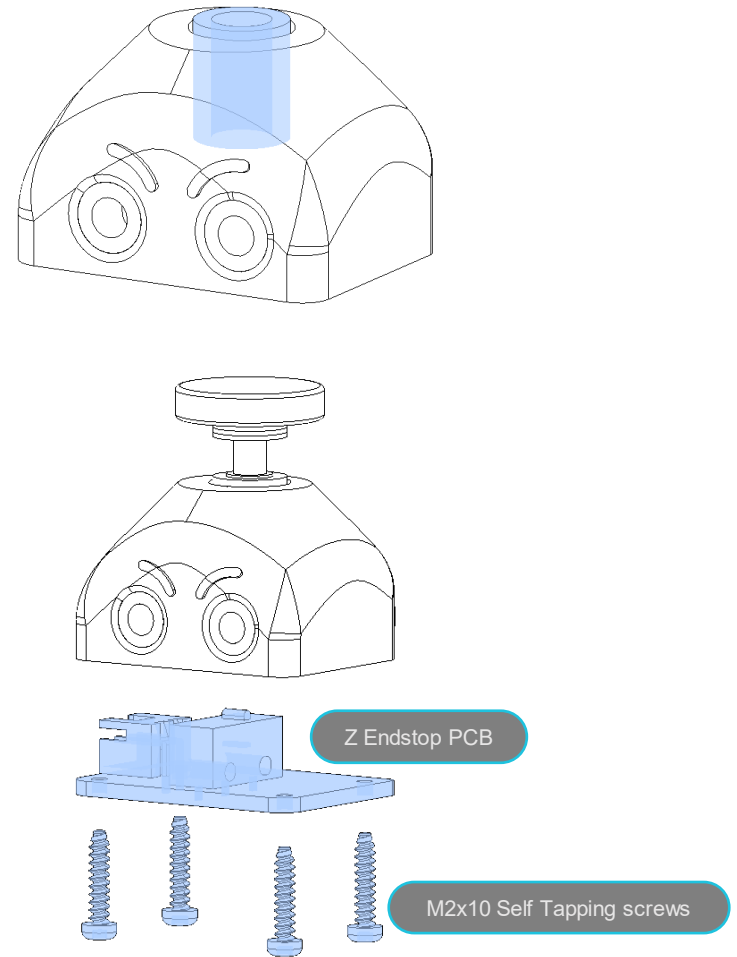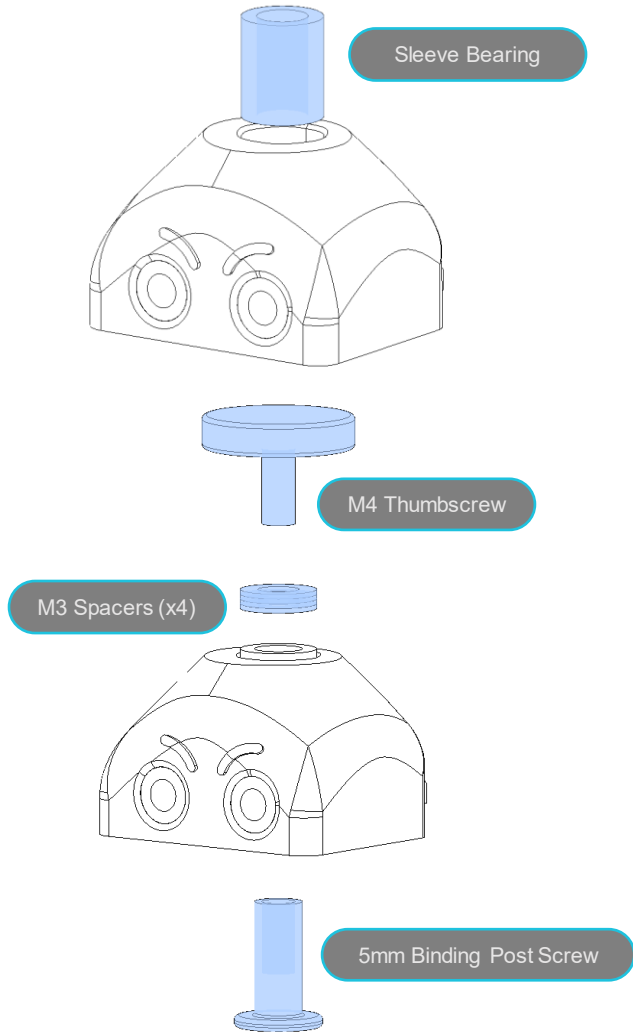

Z ENDSTOP MOUNTING

Mount the Z endstop along the back side of the rear bed extrusion, doesn't really matter exactly where, as you will finalize that later with the firmware.

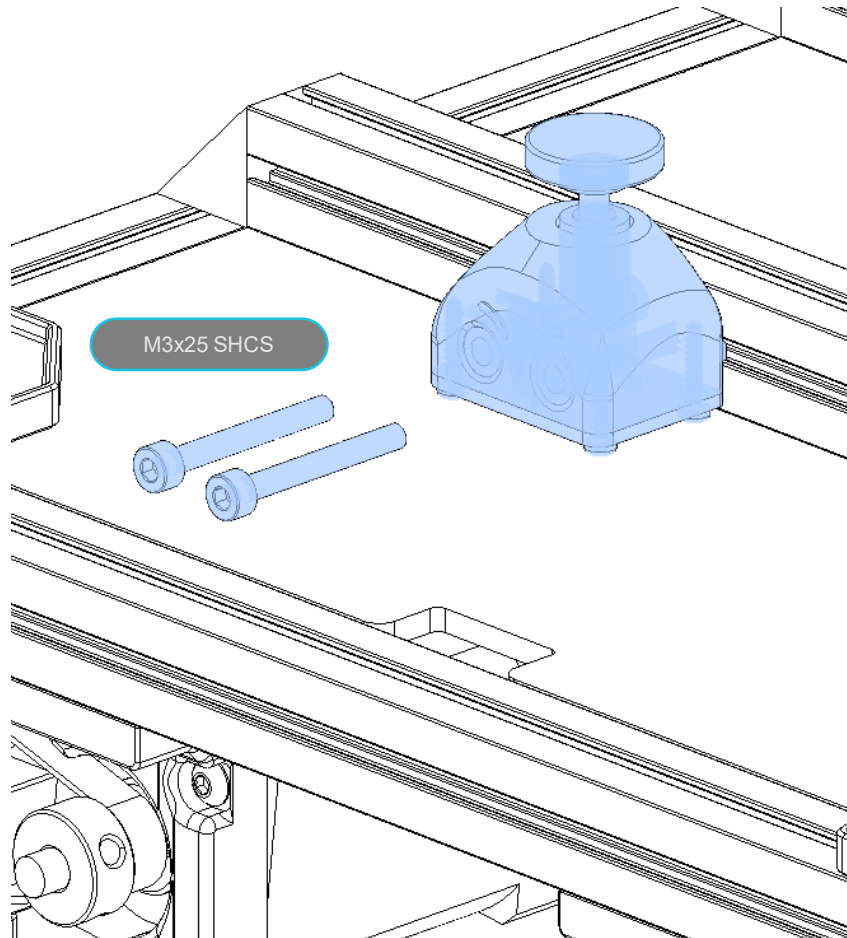

FRAME

MICRON




FRAME

MICRON



GANTRY

MICRON

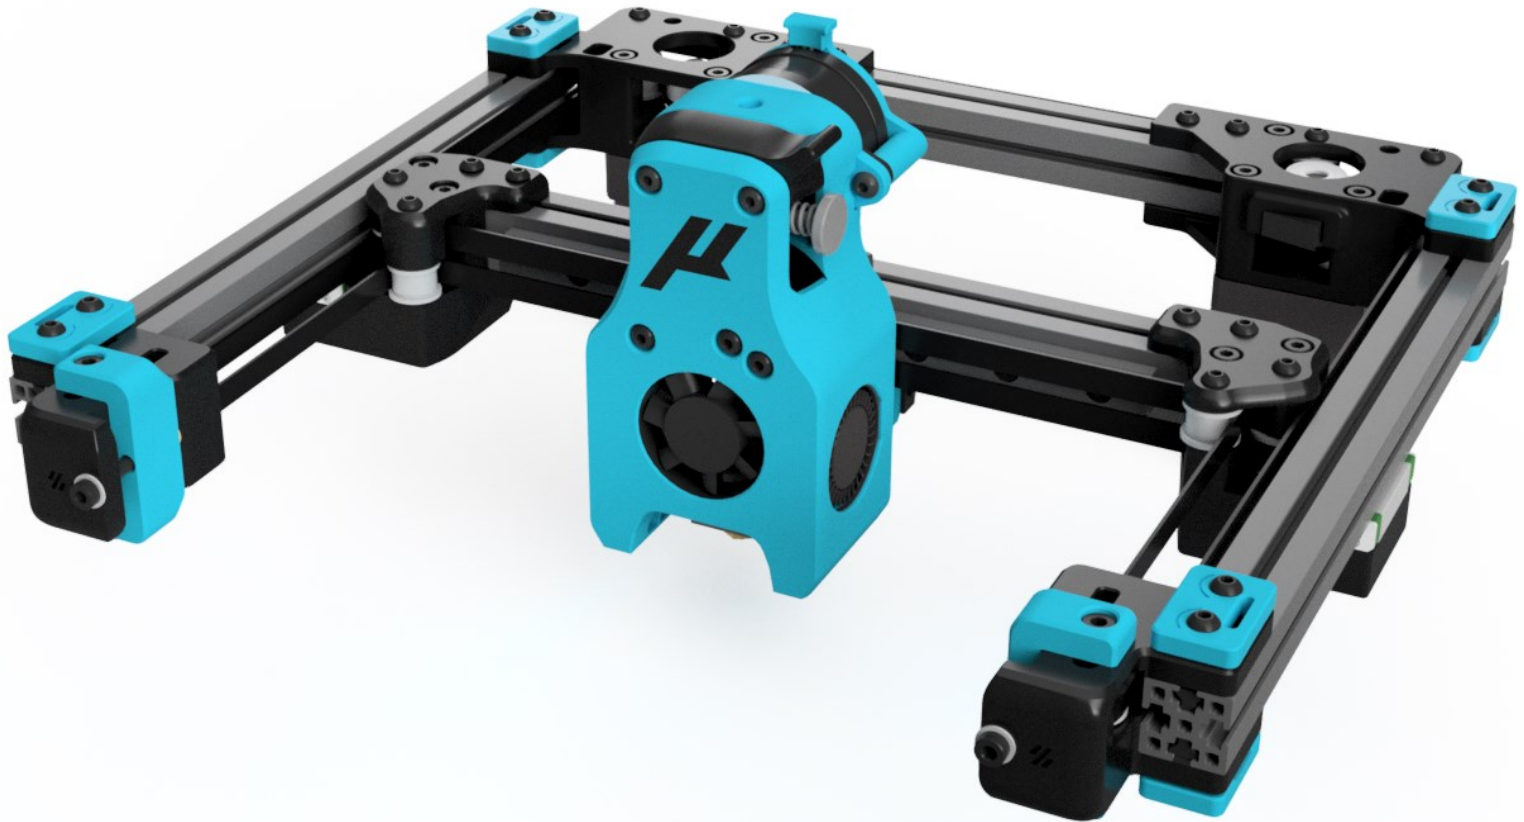


Y AXIS LINEAR RAILS

MICRON

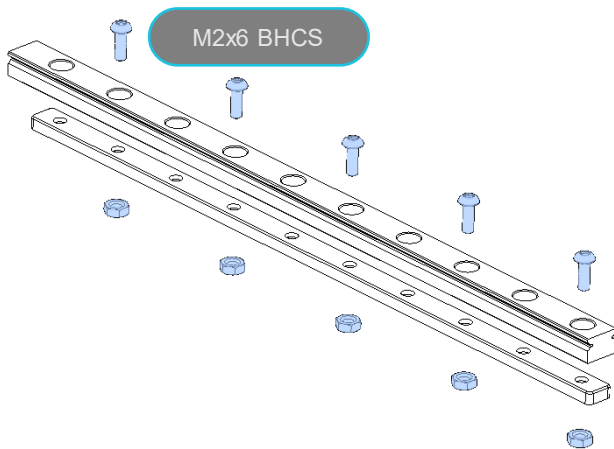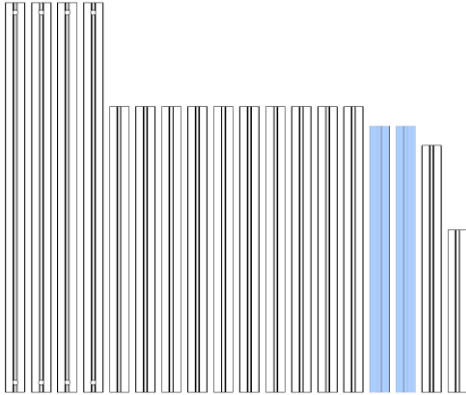



Y AXIS LINEAR RAILS

There are 2 linear rails on the Y-axis and they both need to be exactly in the center of the extrusions. If you measure the rail from the end of the extrusion it should measure ~27.5mm.

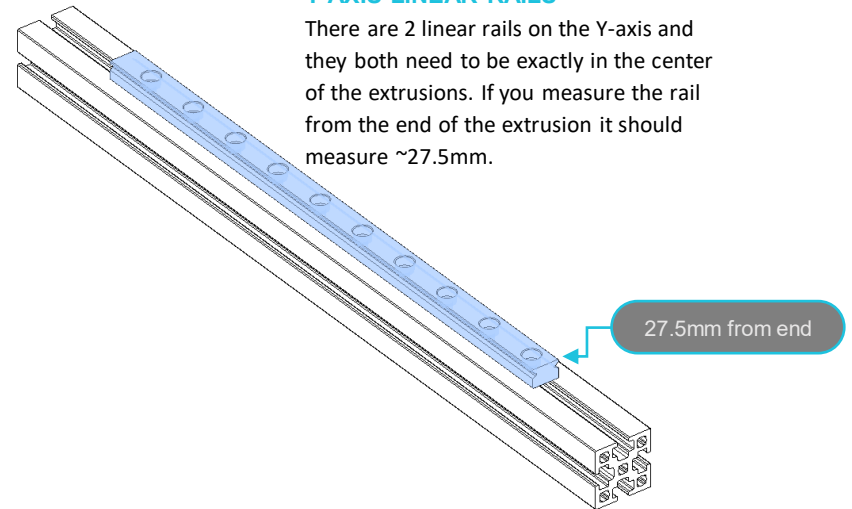

X AXIS LINEAR RAIL

MICRON

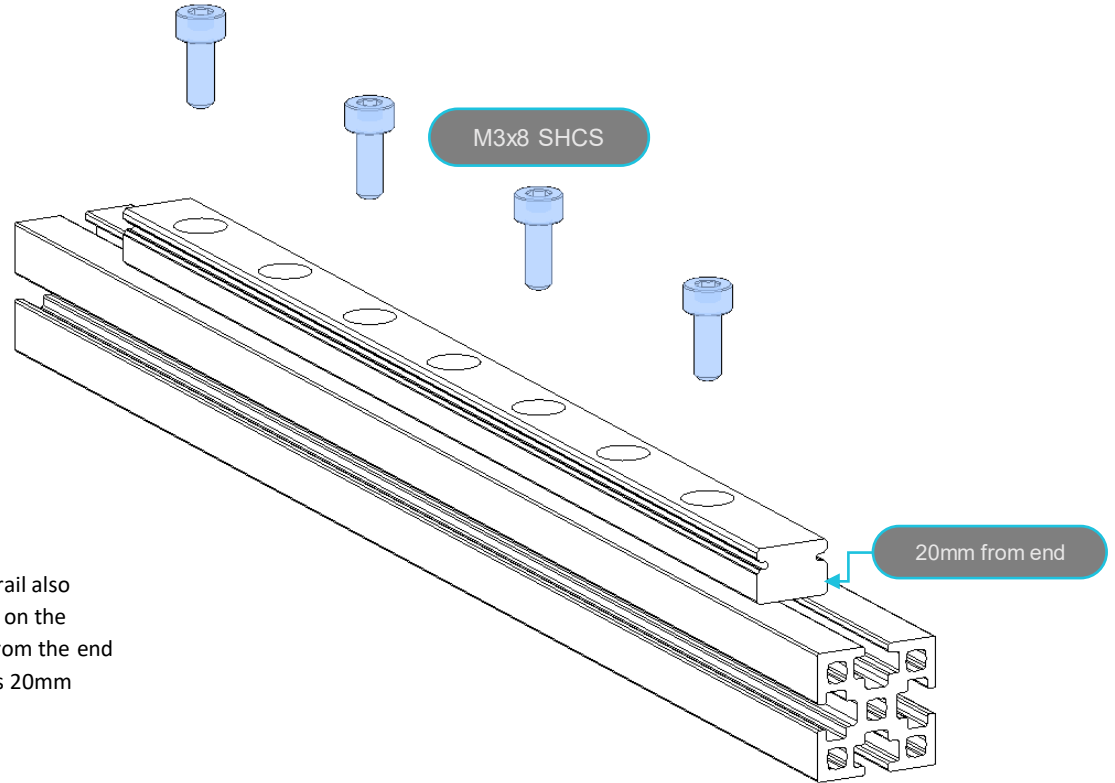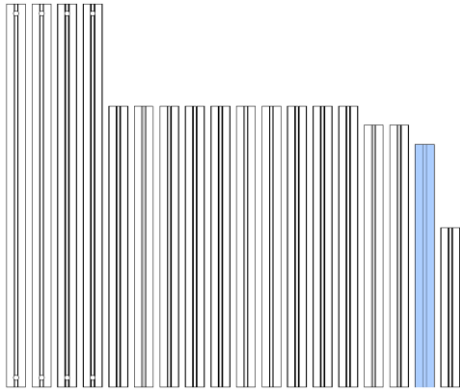



X Axis Linear Rail


As with the Y linear rail , the X rail also needs to be perfectly centered on the extrusion. The measurement from the end of the rail to end of extrusion is 20mm

GANTRY FRAME OVERVIEW

MICRON

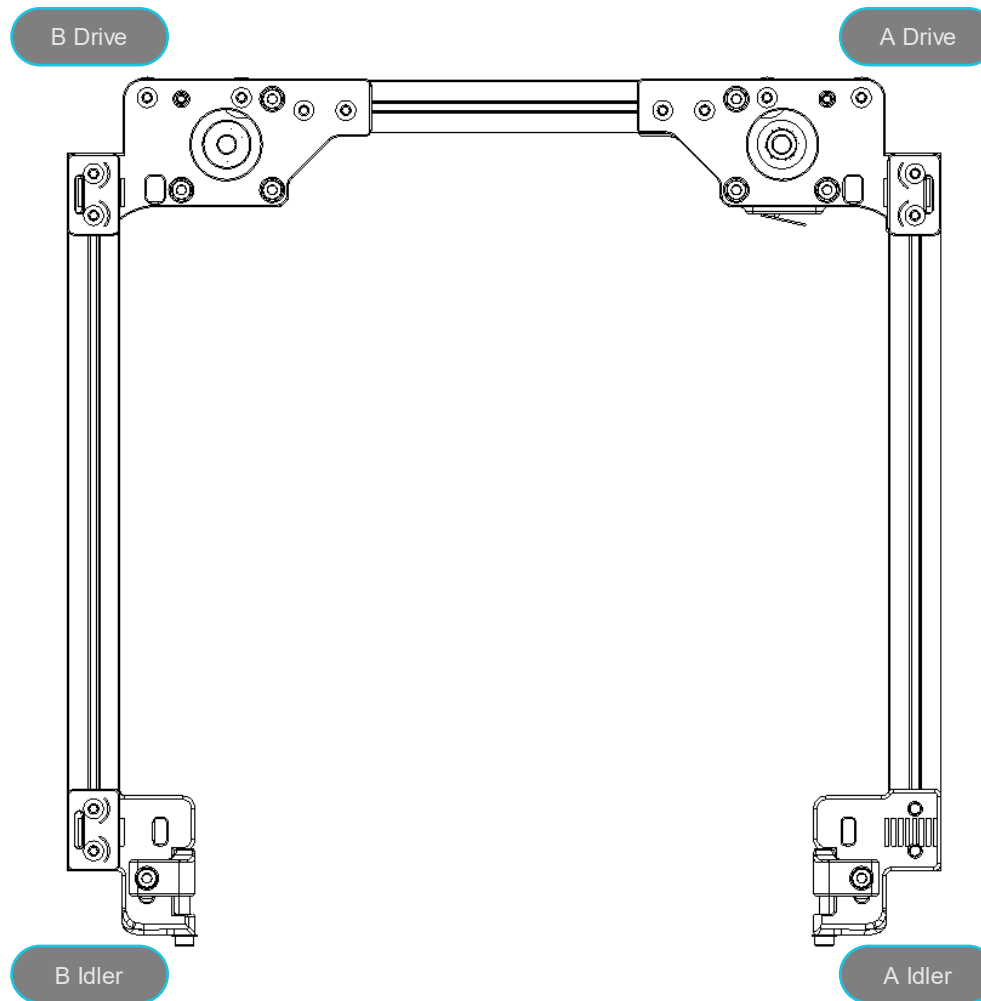

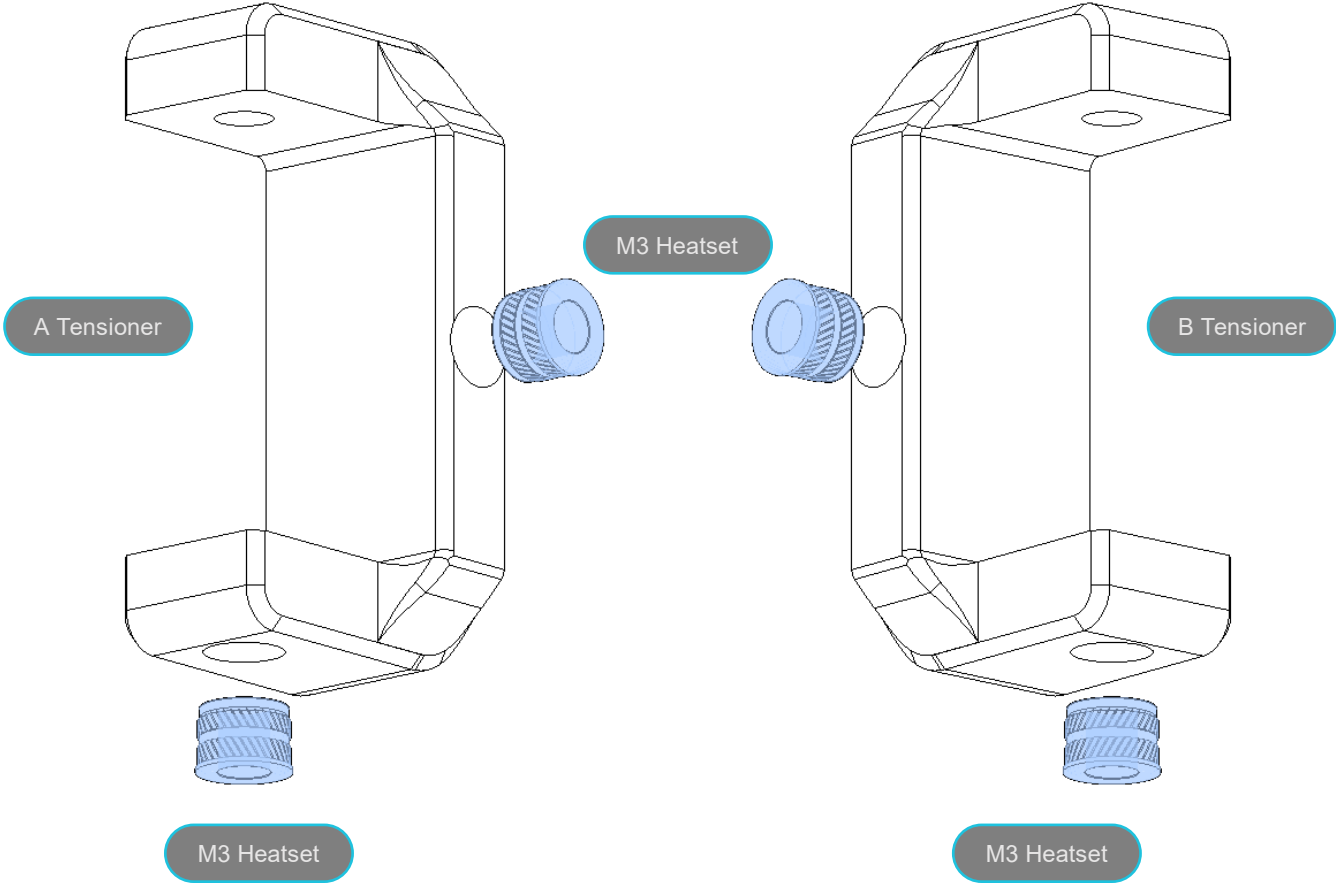


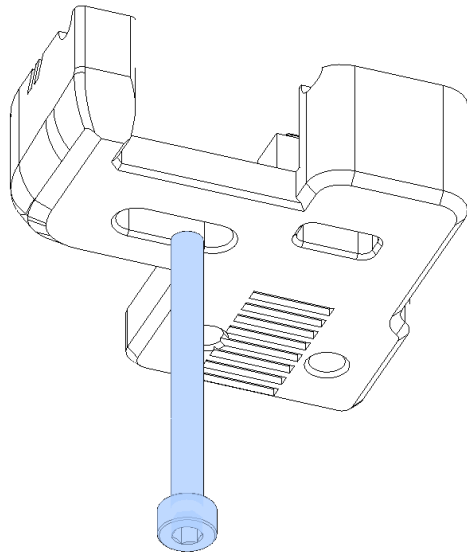

M3x30 SHCS


ASSEMBLY AID


This screw is used to align components and will be removed in a later step

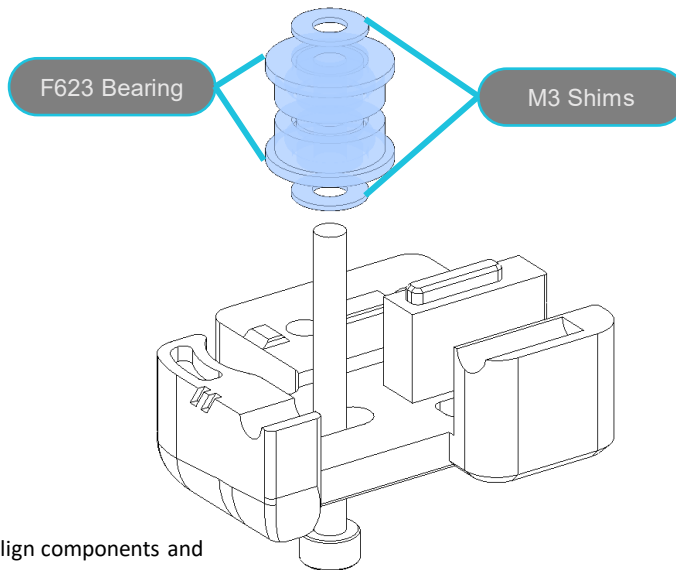


F623 Bearing

M3 Shims

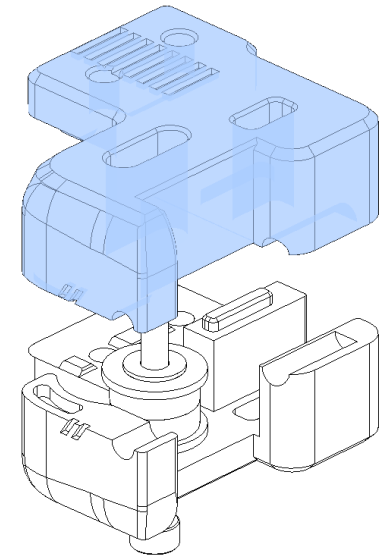


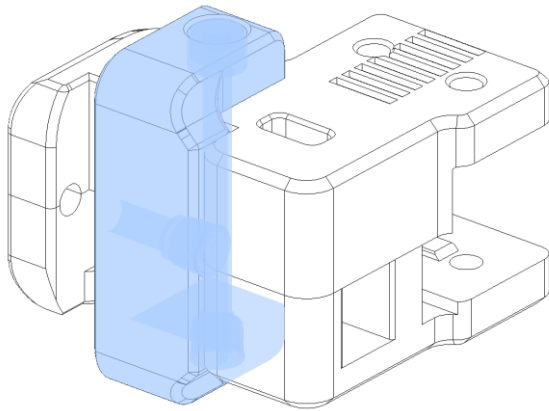

M3x30 SHCS

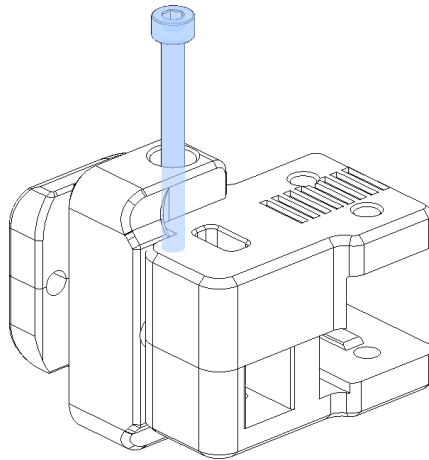**REMOVE ASSEMBLY AID**

Remove the assembly aid screw as you insert the tensioner screw and slide the tension arm into place.


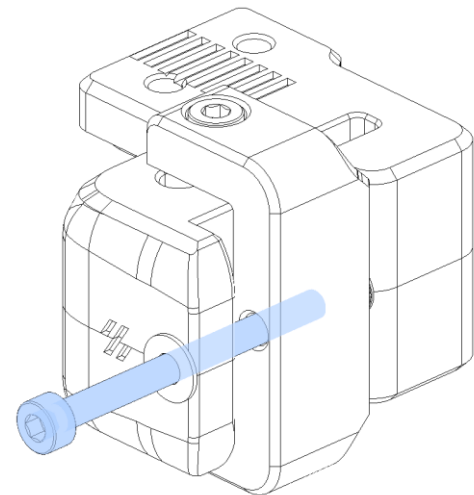


M3x35 SHCS

M3 Washer


A MOTOR PULLEY

To attach the A drive stepper, orient the motor so the wiring is facing in towards the middle of the printer . Using 1 m3x6 BHCS to secure the stepper to the lower half of the A drive. Install a GT2-16 tooth pulley on the stepper as shown. Don't tighten it down just yet until you run the belts later in the assembly.

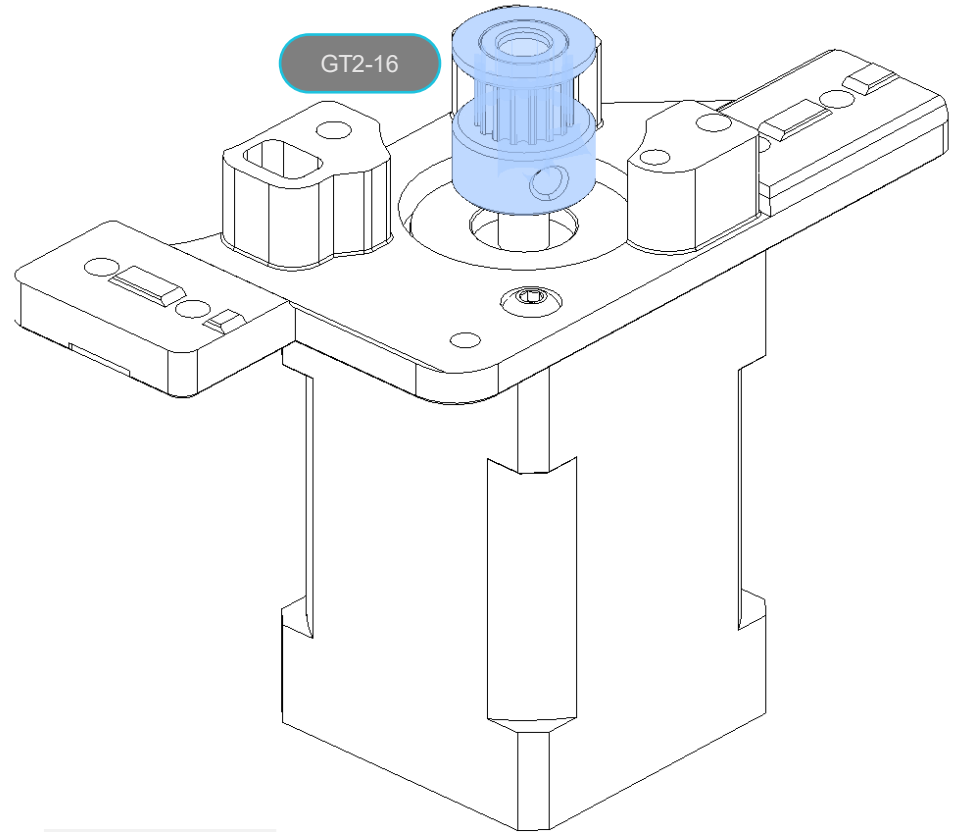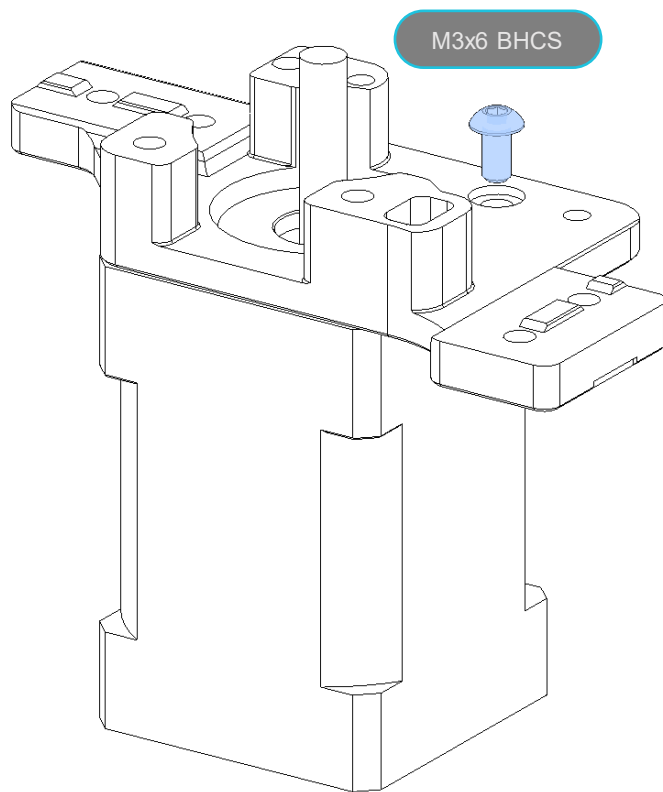


A DRIVE UPPER / Y ENDSTOP


Start by installing the Y endstop switch into the upper A drive, securing it with 2 m2x10 self tapping screws. Insert 2 wires into the hole next to the microswitch and solder them to the 2 outer pins as shown.

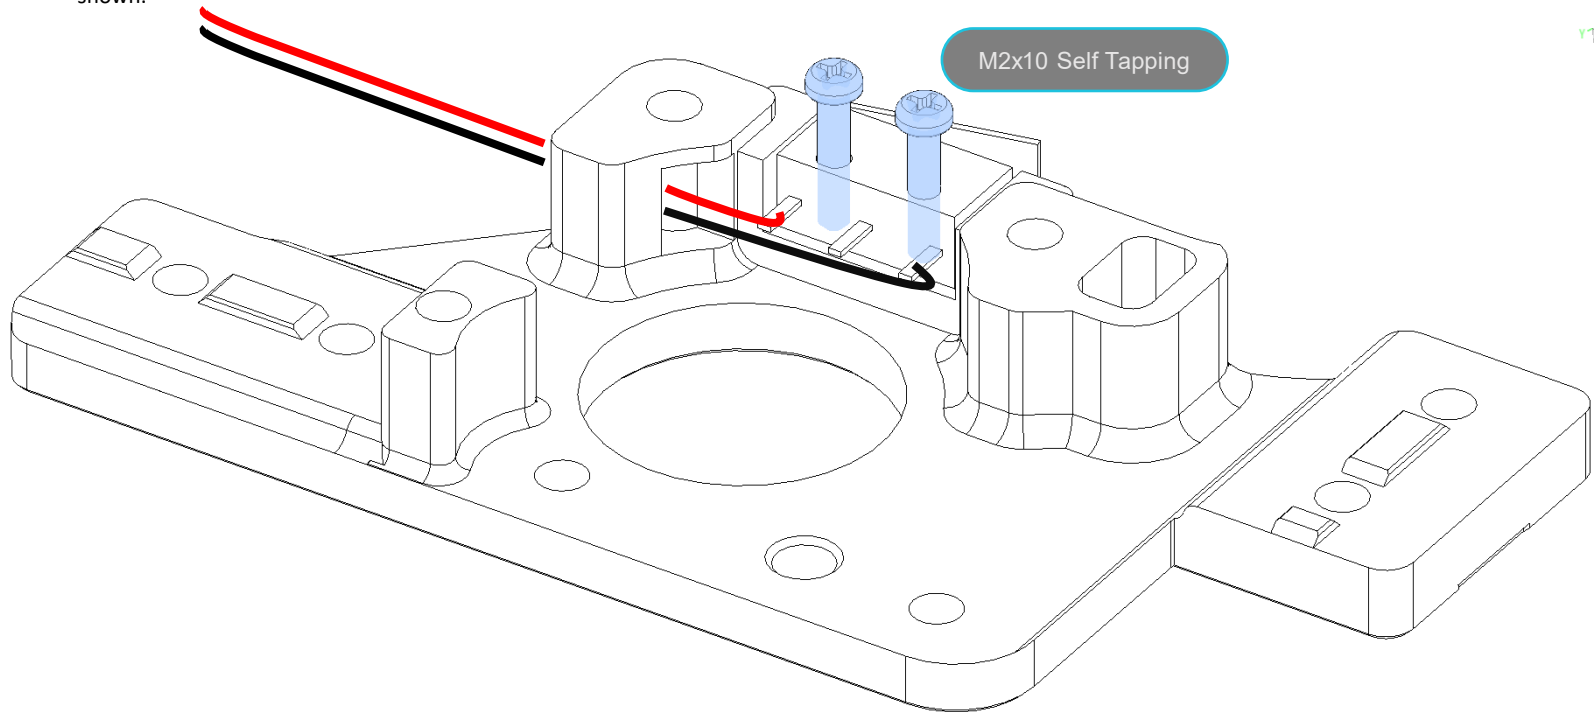

A DRIVE BEARINGS


Assemble the bearing stacks as shown using M3 shims and F623 Bearings

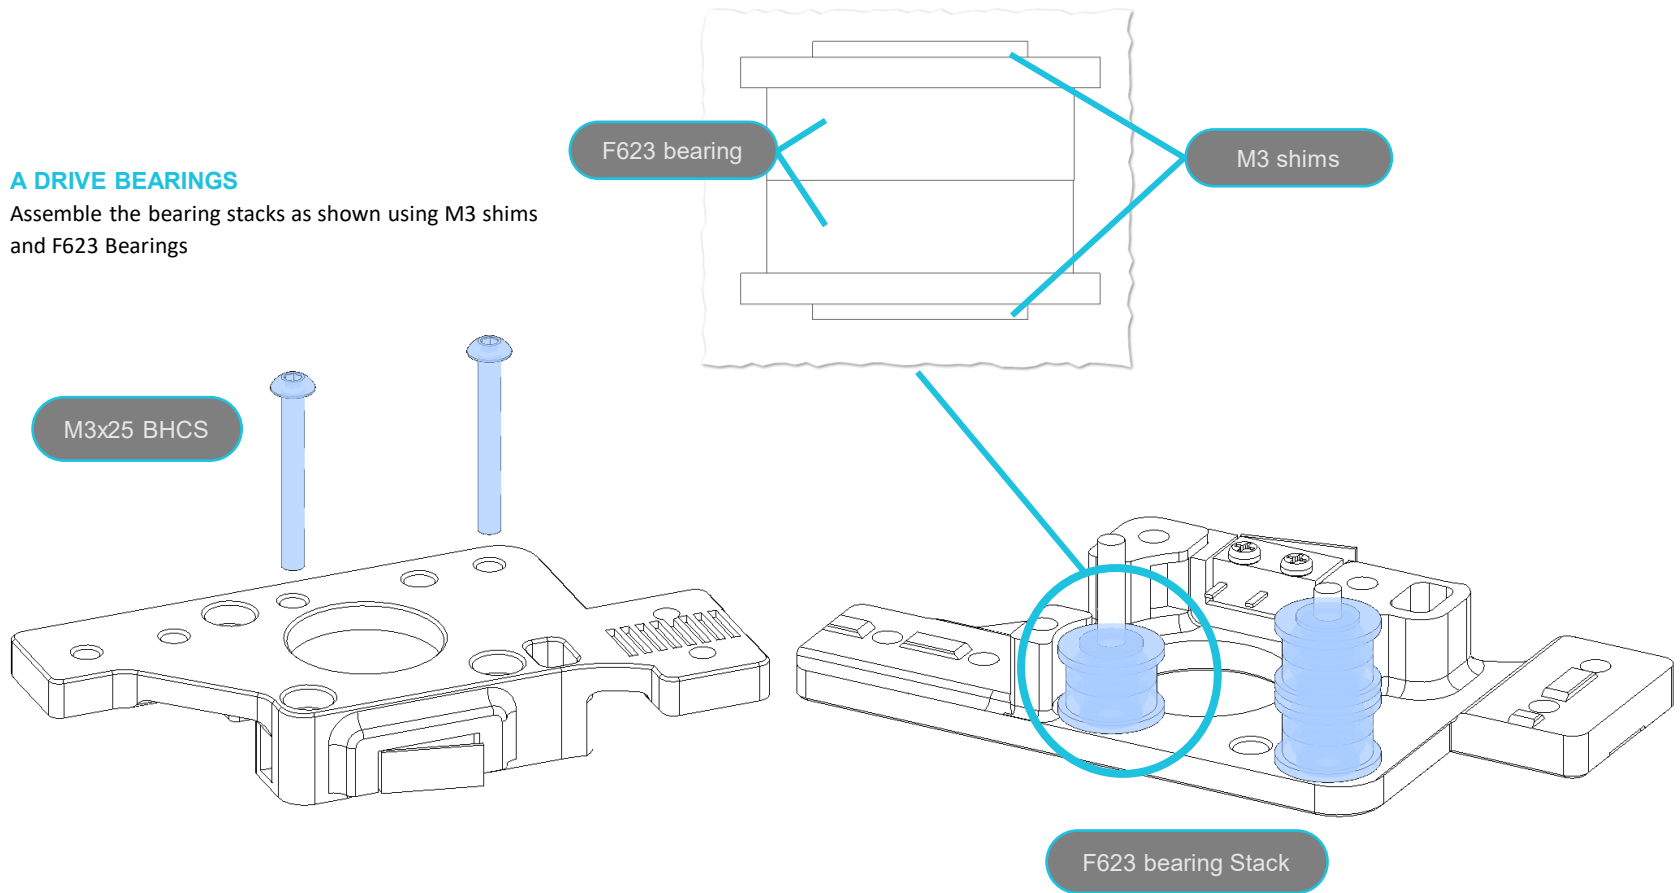

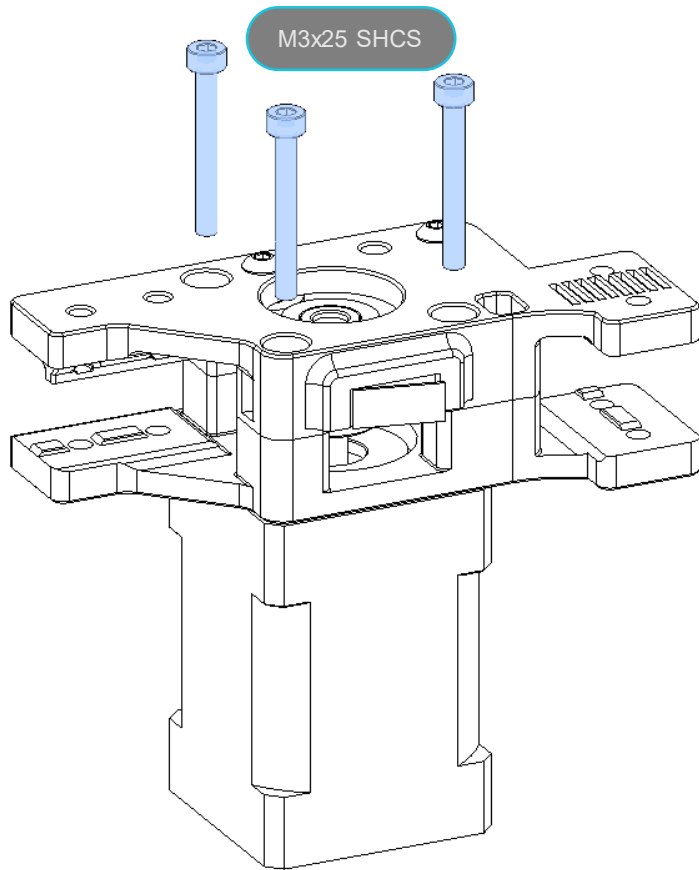

A DRIVE PULLEY

Now is time to align the drive pulley with the top bearings and tighten the grub screw.


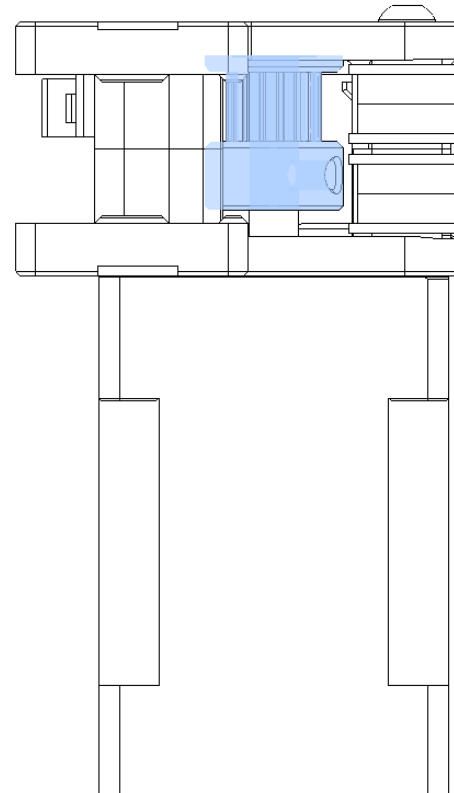


B DRIVE

B MOTOR PULLEY


To attach the B drive stepper, orient the motor so the wiring is facing in towards the middle of the printer . Using 1 m3x6 BHCS to secure the stepper to the lower half of the B drive. Install a GT2-16 tooth pulley on the stepper as shown. Don't tighten it down just yet until you run the belts later in the assembly.


MICRON

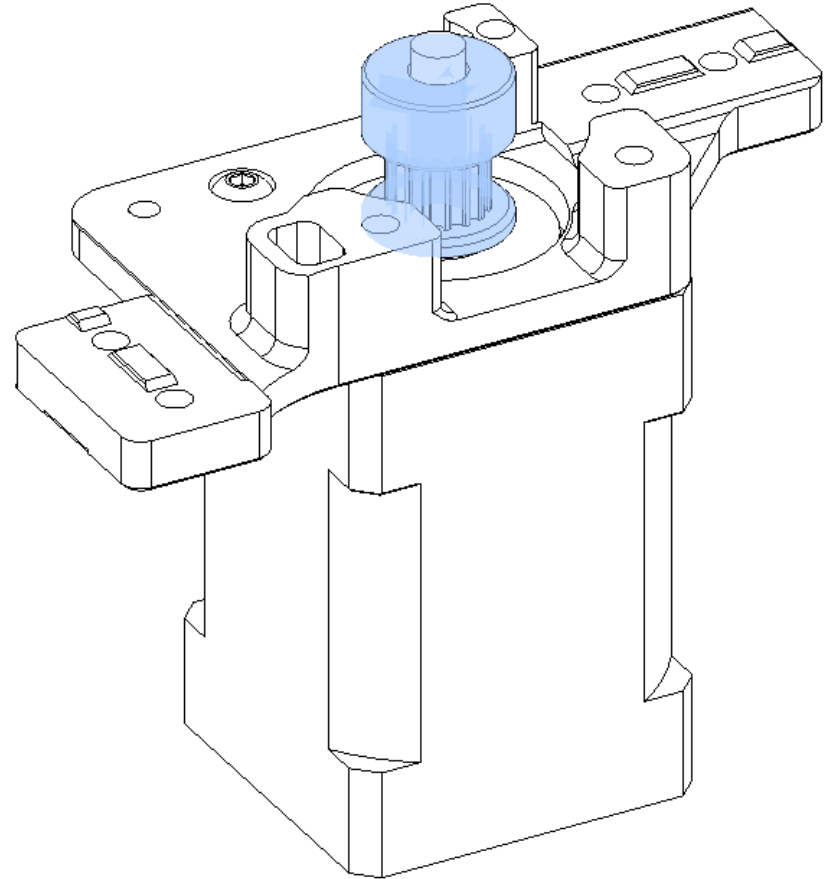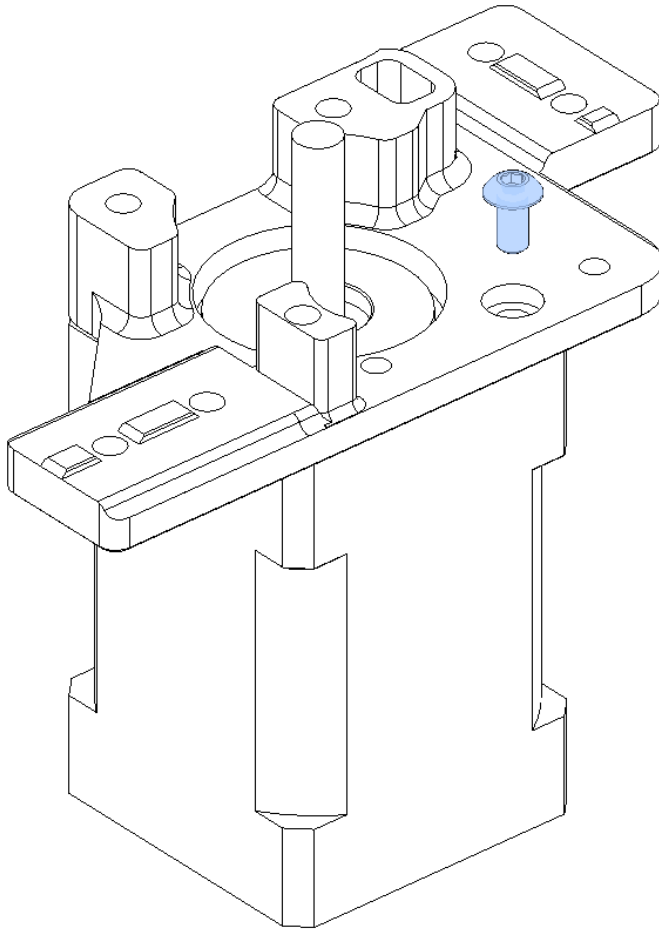


B DRIVE BEARINGS

Assemble the bearing stacks as shown using M3 shims and F623 Bearings


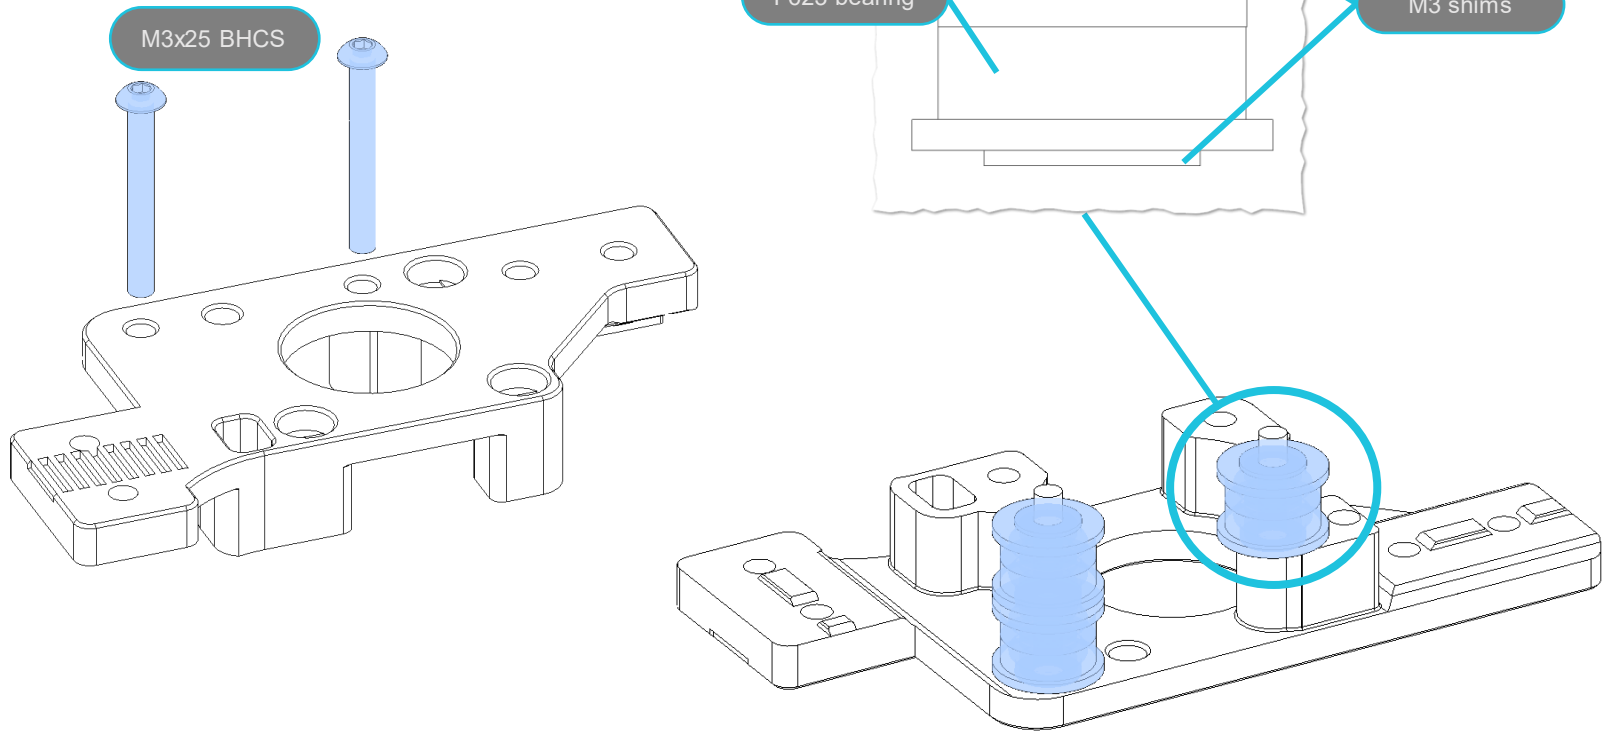


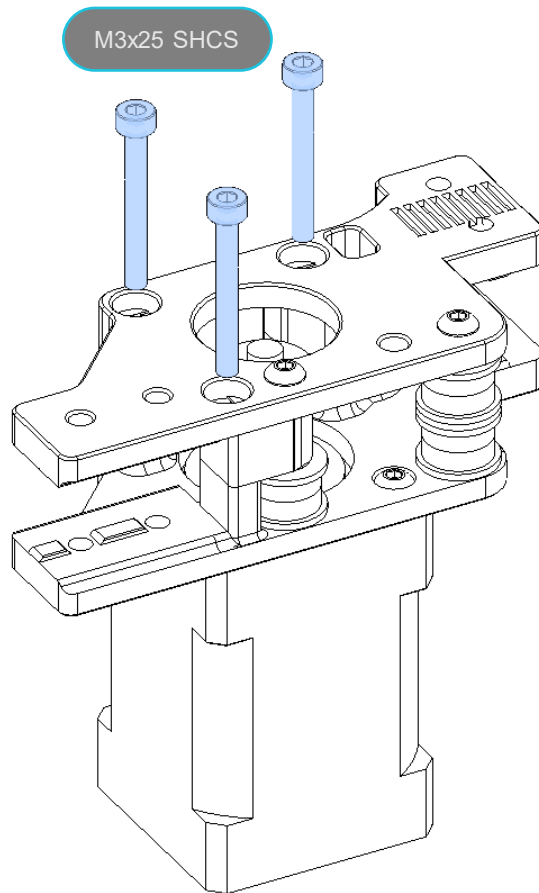**B DRIVE PULLEY**



Now is time to align the drive pulley with the top bearings and tighten the grub screw.

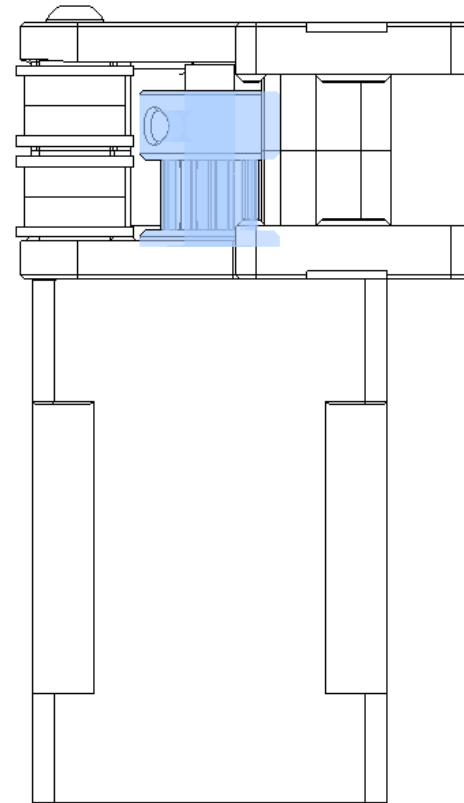



M3x25 BHCS

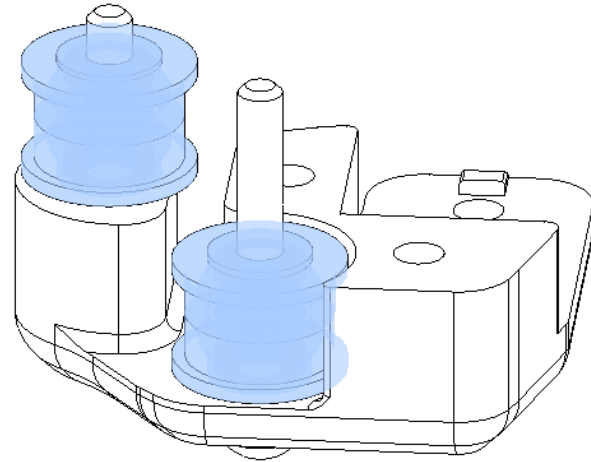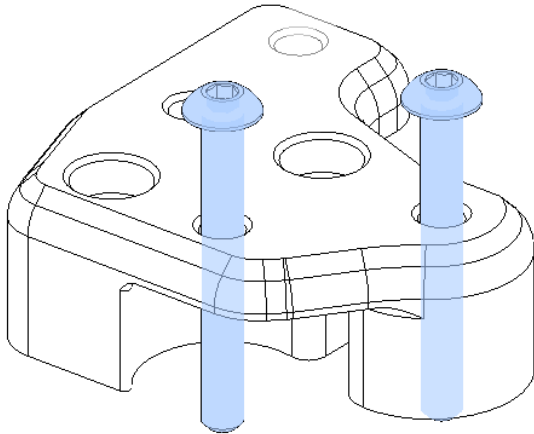**LEFT XY JOINT BEARING STACKS**

See previous examples for how to assemble these. We use the same bearings and fasteners used in other steps.

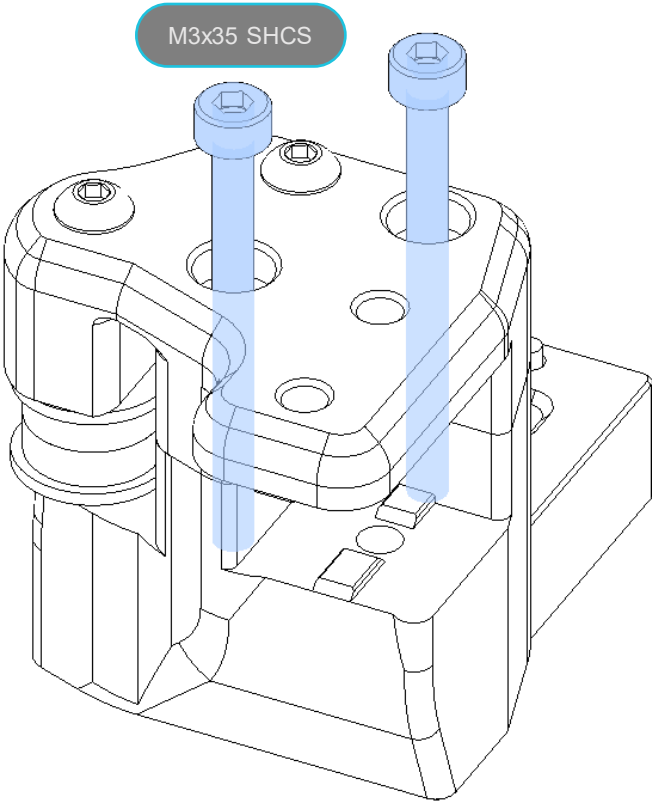
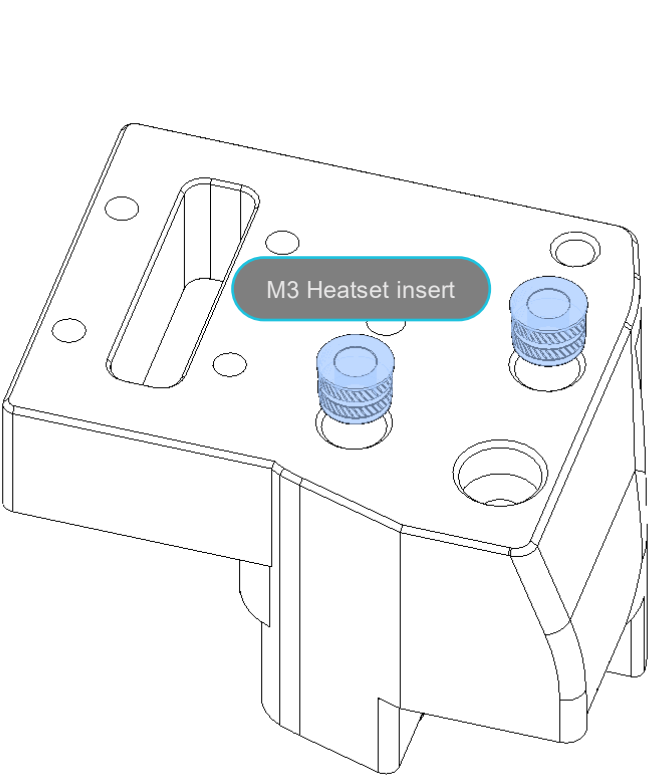



M3x25 BHCS

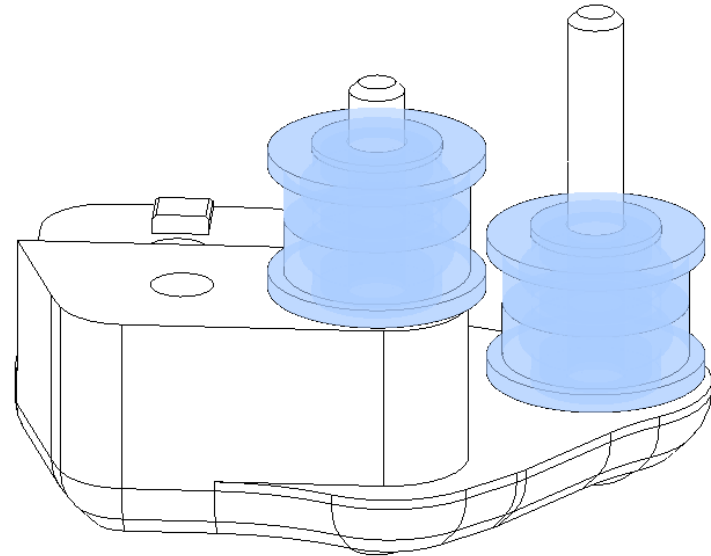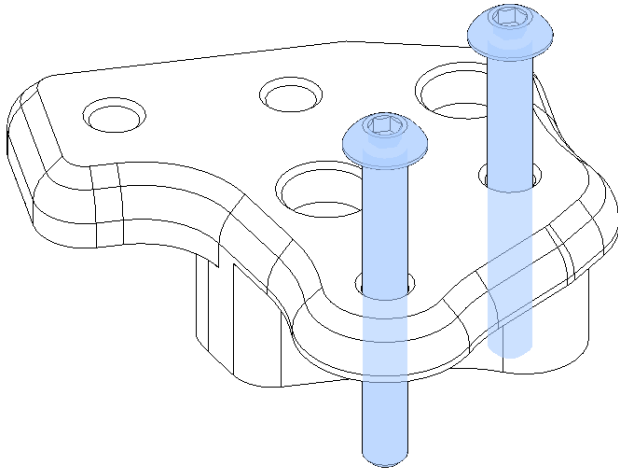

RIGHT XY JOINT BEARING STACKS



See previous examples for how to assemble these. We use the same bearings and fasteners used in other steps.

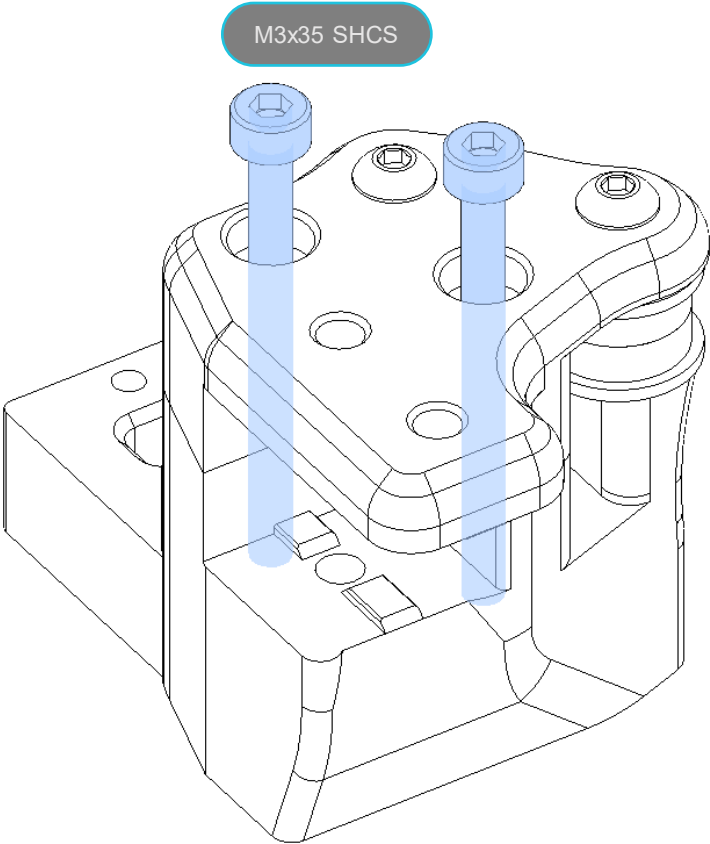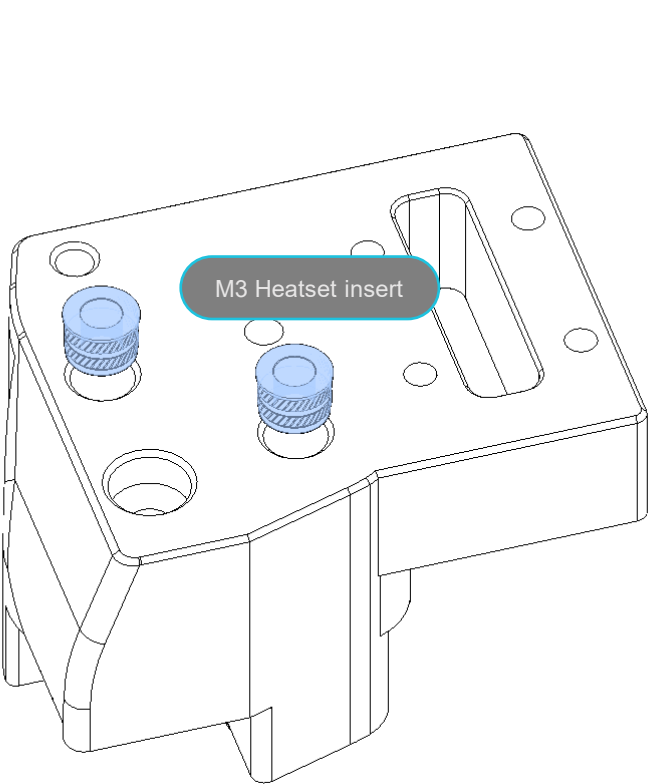


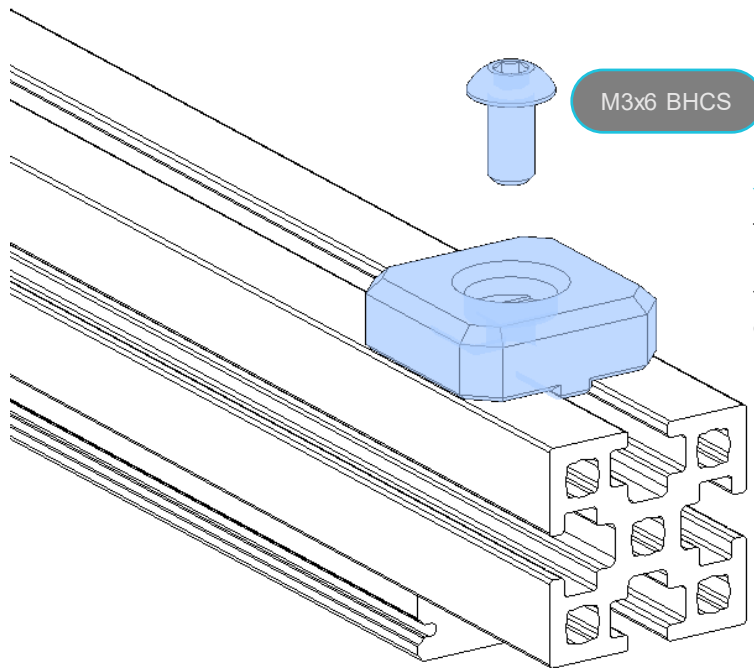

Y Endstop extender


The Y endstop needs this little printed part to make sure it gets hit properly. This should be installed 8mm from the end of the extrusion. This gets installed on the opposite side of the MGN9C x rail.

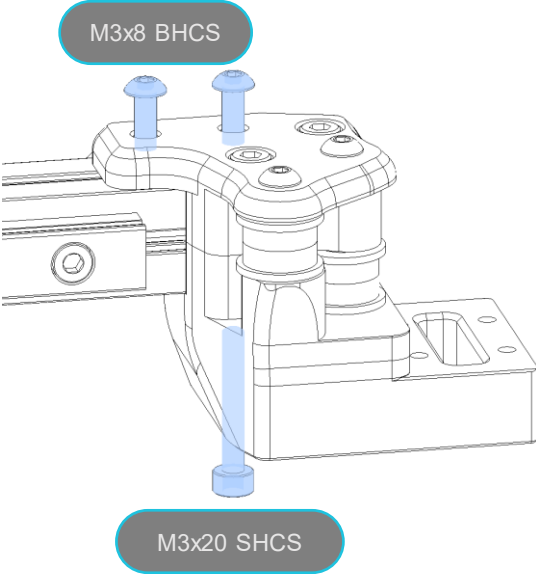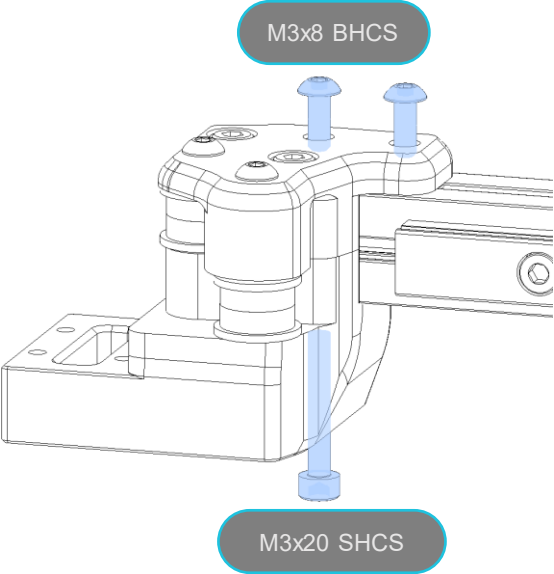

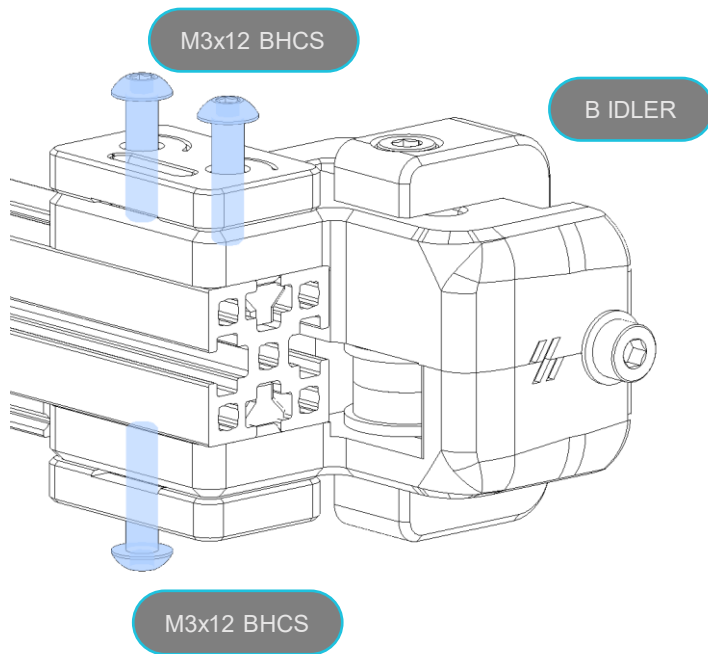

Belt Clamps

The belt clamps can go on now as well even though the z belts are not going in.

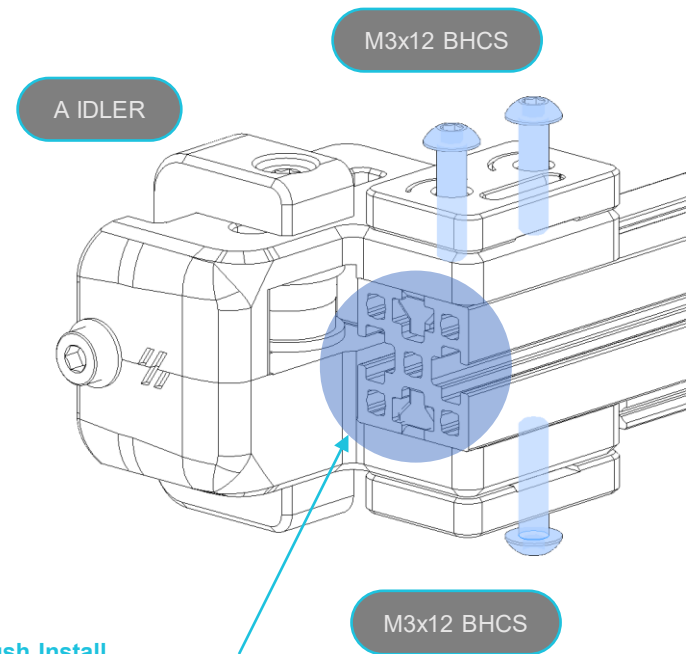


Flush Install

The front idlers need to be installed flush with the end of the Y gantry extrusions. These will also use the optional medium NDN if you are using those (12mm)

Belt Clamps


The belt clamps can go on now as well even though the z belts are not going in.

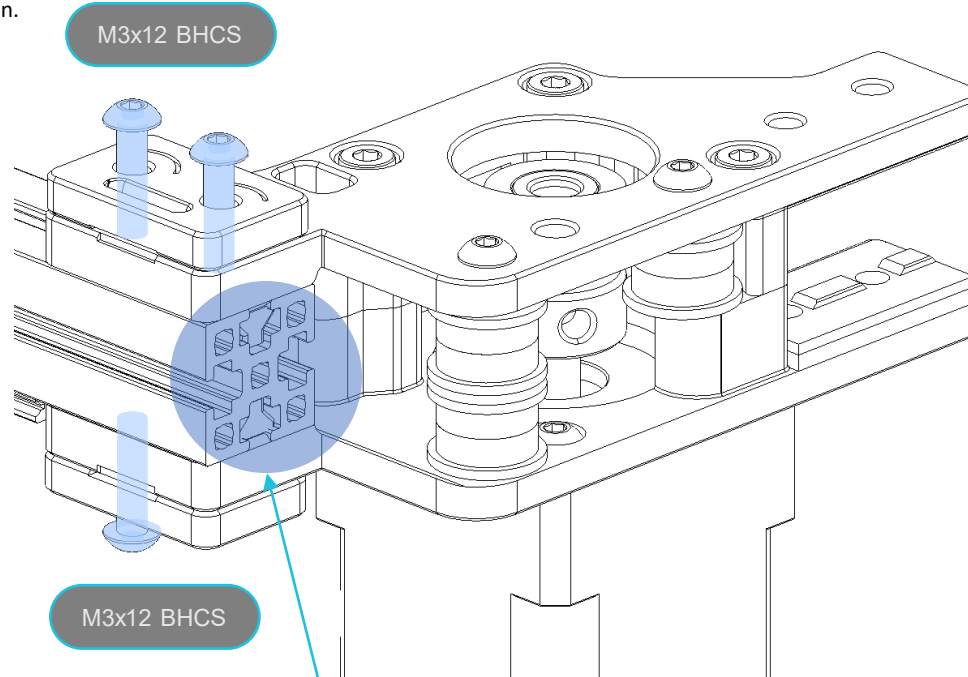**Flush Install**

The rear of the A drive needs to be installed flush with the end of the Y gantry extrusions. These will also use the optional medium NDN if you are using those (12mm)


Belt Clamps

The belt clamps can go on now as well even though the z belts are not going in.

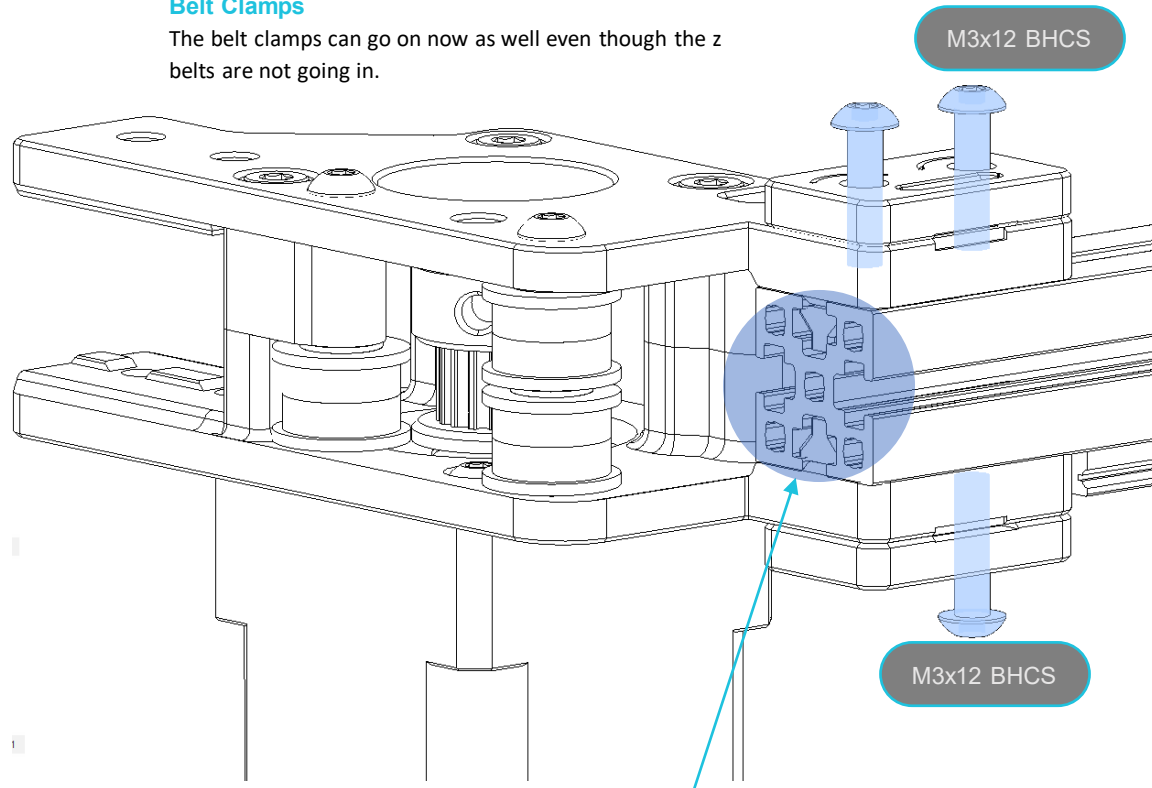
**Flush Install**

The rear of the A drive needs to be installed flush with the end of the Y gantry extrusions. These will also use the optional medium NDN if you are using those (12mm)

KLICKY PROBE DOCK


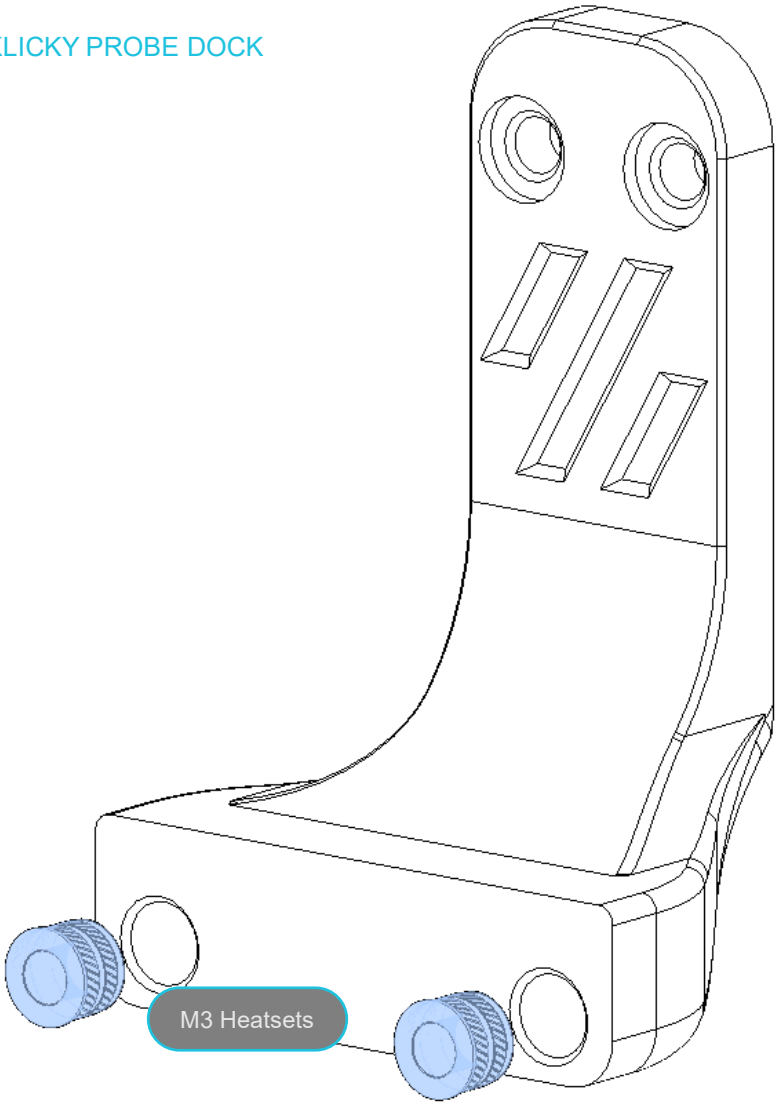



MICRON

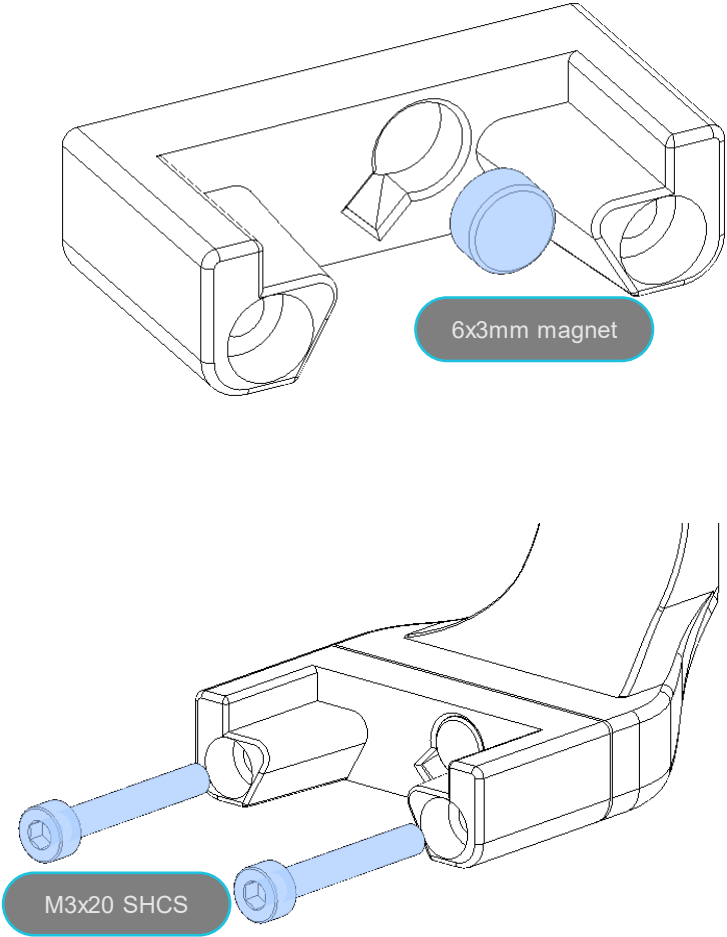




KLICKY PROBE

MICRON

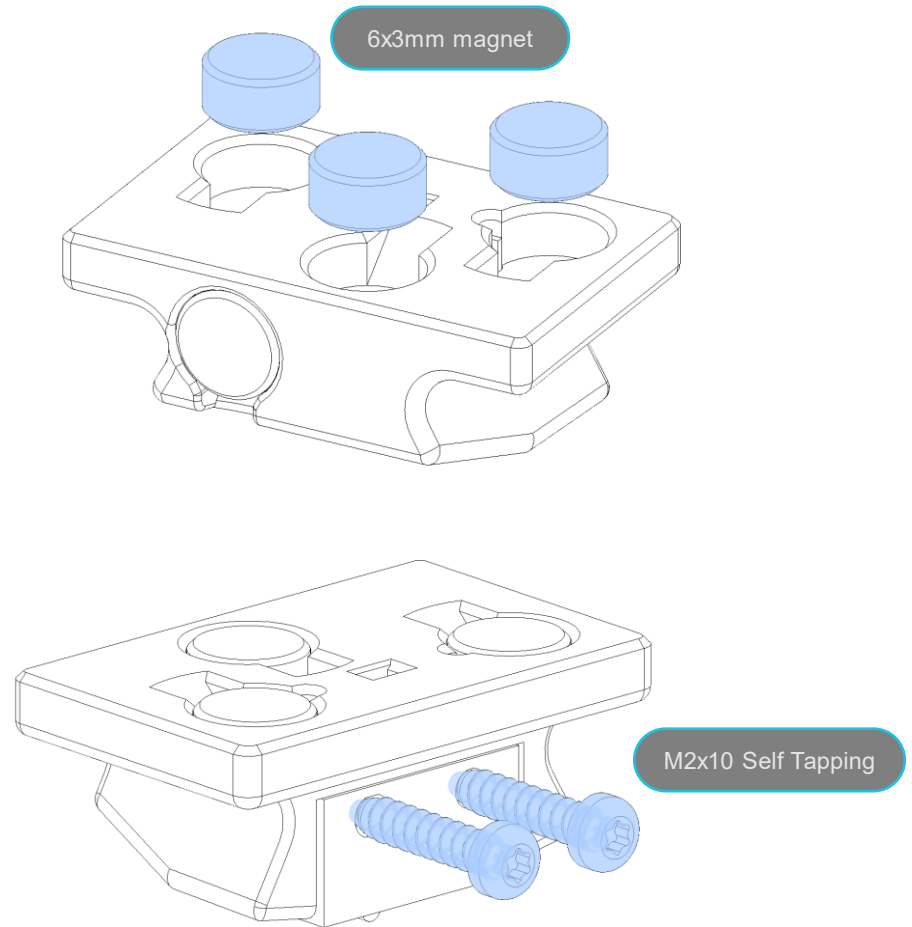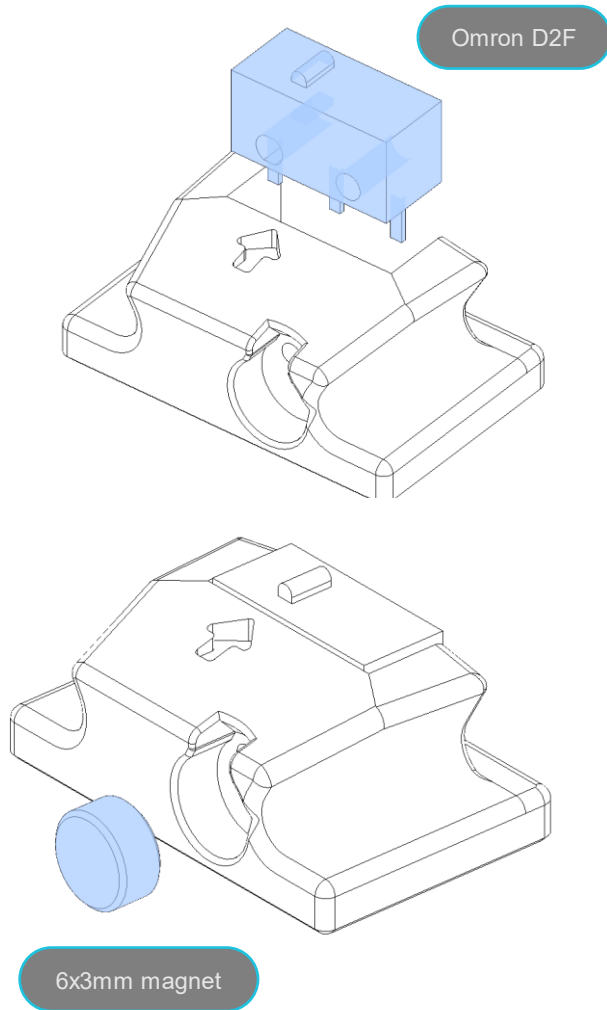

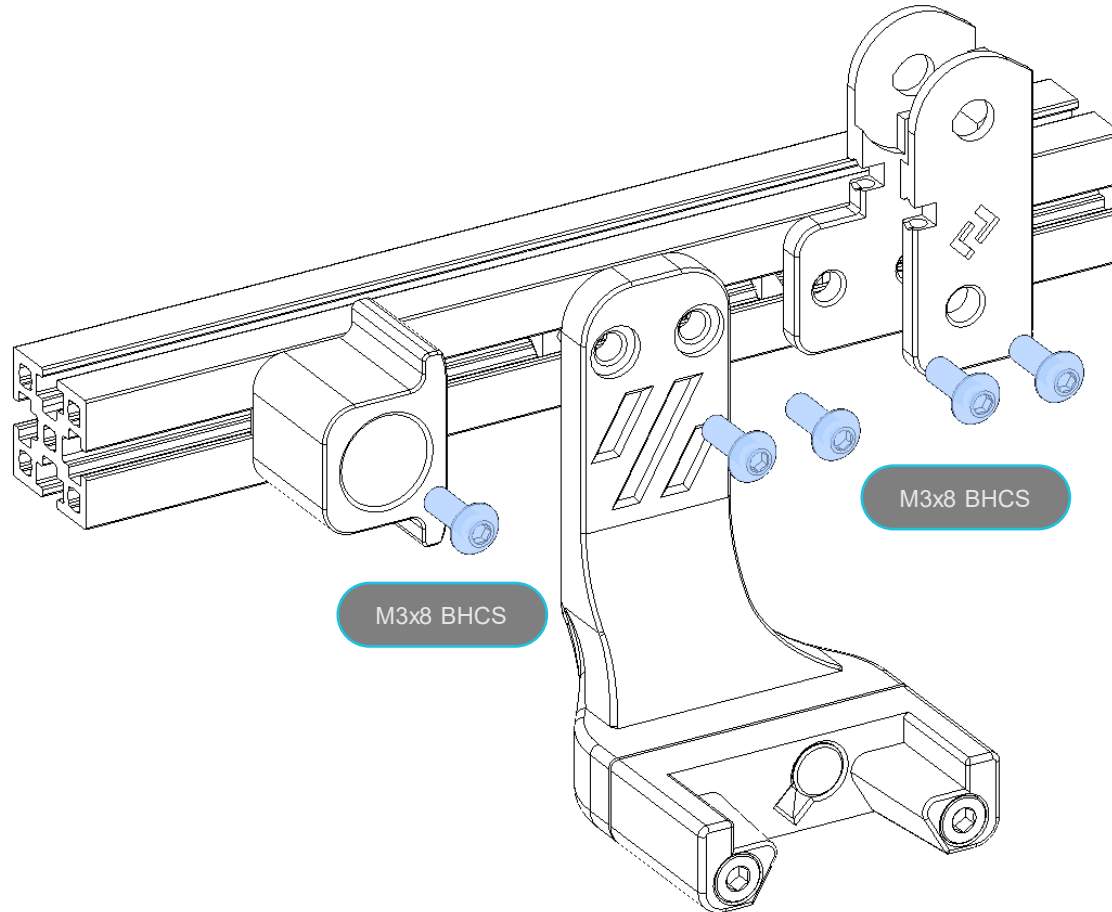

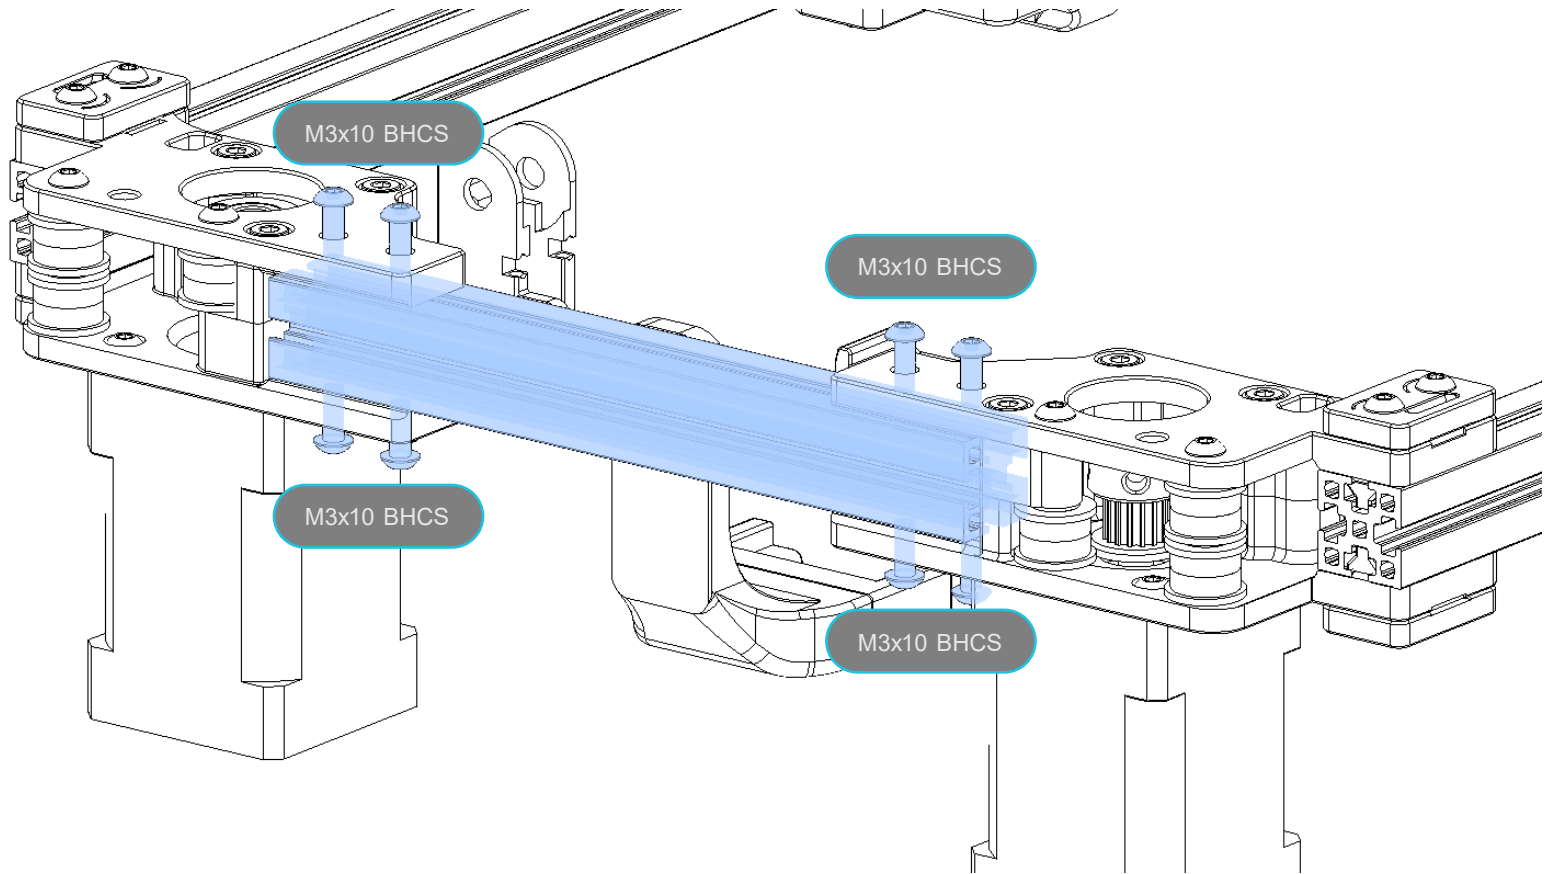

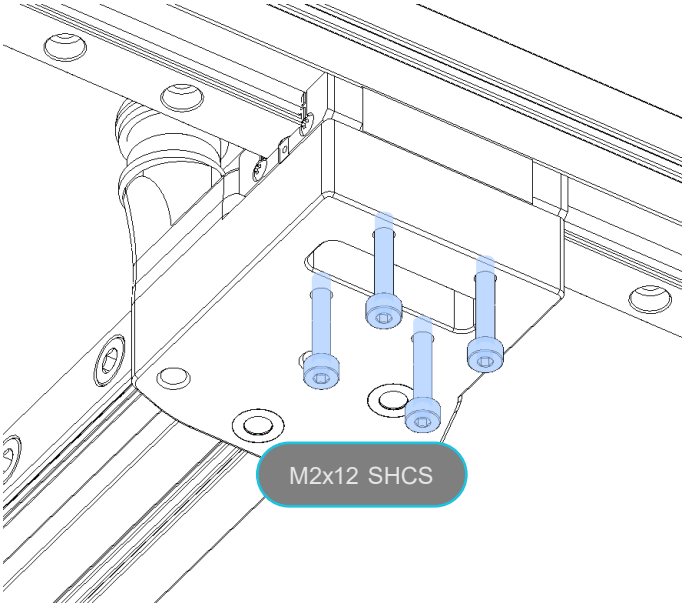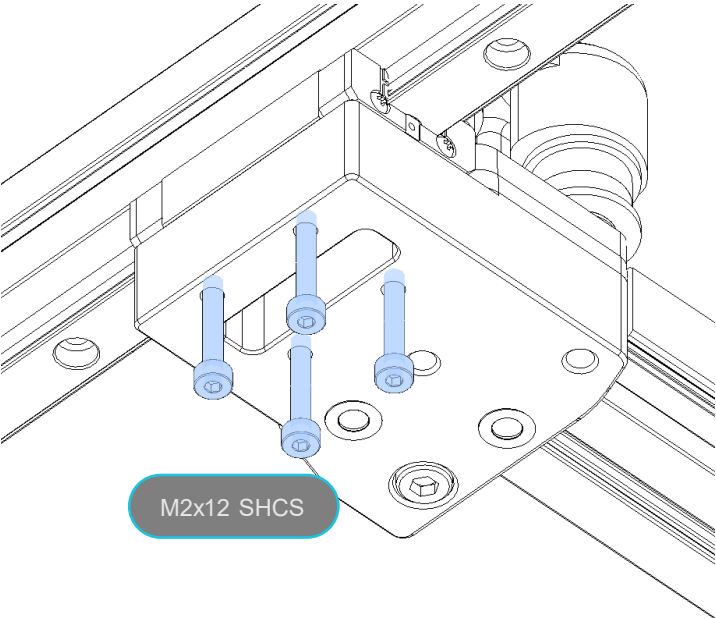

B DRIVE

MICRON

B DRIVE

MICRON

B DRIVE

MICRON

B DRIVE

MICRON

B DRIVE

MICRON

B DRIVE

MICRON

B DRIVE

MICRON

