


## **NTV Series**

## 3kVDC Isolated 1W Dual Output SM DC/DC Converters

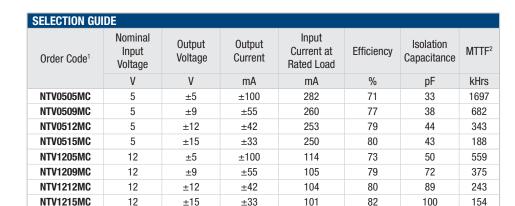

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTIC	CS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Voltago rango	Continuous operation, 5V input types	4.5	5	5.5	W
Voltage range	Continuous operation, 12V input types	10.8	12	13.2	V
Reflected ripple current			41	47	mA p-p

OUTPUT CHARACTERIST	TICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Rated Power	T <sub>A</sub> =-40°C to 85°C			1.0	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>		1.0	1.2	%/%
	10% load to rated load, 5V output types		10	12	
Load Degulation3	10% load to rated load, 9V output types		6.5	8.0	%
Load Regulation <sup>3</sup>	10% load to rated load, 12V output types		6.0	8.5	
	10% load to rated load, 15V output types		6.0	7.0	
	BW=DC to 20MHz, 5V output types		50	75	
Dinnle and Naise	BW=DC to 20MHz, 9V output types		40	65	mV p-p
Ripple and Noise	BW=DC to 20MHz, 12V output types		40	60	
	BW=DC to 20MHz, 15V output types		40	60	

ABSOLUTE MAXIMUM RATINGS	
Short-circuit protection <sup>4</sup>	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	550mW
Input voltage V <sub>IN</sub> , NTV05 types	7V
Input voltage V <sub>IN</sub> , NTV12 types	15V

- 1. If components are required in tape and reel format suffix order code code with -R, e.g. NTV0505MC-R.
- 2. Calculated using MIL-HDBK-217F with nominal input voltage at full load.
- 3. 12V input types have typically 3% less load regulation change.
- 4. Supply voltage must be disconnected at the end of the short circuit duration. All specifications typical at  $T_A=25^{\circ}C$ , nominal input voltage and rated output current unless otherwise specified.



#### **FEATURES**

- RoHS compliant
- Efficiency up to 82%
- Wide temperature performance at full 1 Watt load, −40°C to 85°C
- UL 94V-0 package material
- Footprint over pins 1.64cm<sup>2</sup>
- Lead frame technology
- Dual isolated output
- 5V & 12V input
- 5V, 9V, 12V and 15V output
- Internal SMD construction
- Toroidal magnetics
- Plastic encapsulated
- 3kVDC isolation (1 minute)
- MTTF up to 1.7 million hours
- Power density 1.36W/cm³
- No heatsink required
- Custom solutions available
- Multi layer ceramic capacitors

#### PRODUCT OVERVIEW

The NTV series of 3kV isolation miniature surface mounted DC/DC converters employ leadframe technology and transfer moulding techniques to bring all of the benefits of IC style packaging to hybrid circuitry. The co-planarity of the pin positions is based upon IEC 191-6:1990. The devices are suitable for all applications where high volume production is envisaged.









## 3kVDC Isolated 1W Dual Output SM DC/DC Converters

<b>ISOLATION CHARACTERIST</b>	ics — — — — — — — — — — — — — — — — — — —				
Parameter	Conditions	Min.	Тур.	Max.	Units
Isolation test voltage	Flash tested for 1 minute	3000			VDC
Resistance	Viso= 1000VDC	10			GΩ

GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Cwitching fraguency	5V input types		115		kHz
Switching frequency	12V input types		120		КПZ

TEMPERATURE CHARACTERIS	STICS				
Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	-40		85	
Storage		-55		125	°C
Case temperature above embient	5V output types		33		U
Case temperature above ambient	All other output types		25		
Cooling	Free air convection				

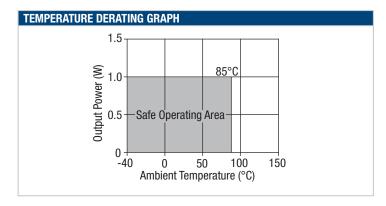

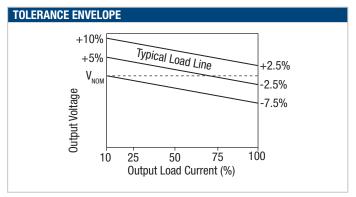

## **TECHNICAL NOTES**

#### ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NTV series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 3kVDC for 1 minute.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NTV series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.


#### REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NTV series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

## 3kVDC Isolated 1W Dual Output SM DC/DC Converters


#### PACKAGE SPECIFICATIONS

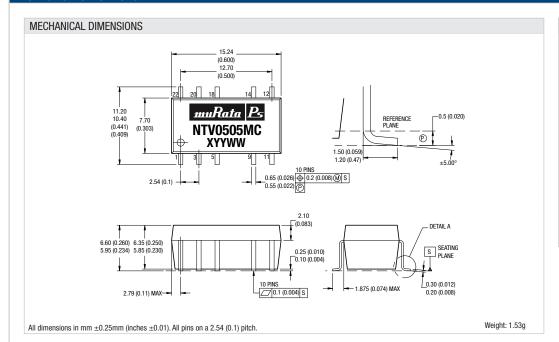


# PIN CONNECTIONS

Pin	Function
1	-V <sub>IN</sub>
3	+Vin
5	NA
9	OV
11	-Vout
12	NA
14	<b>+V</b> out
18	NA
20	NA
22	NA

NA - Not available for electrical connection.



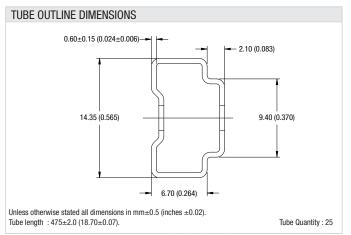

## Rohs Compliance, MSL and PSL Information



This series is compatible with RoHS soldering systems and is also backward compatible with Sn/Pb soldering systems. The NTV series has a process, moisture, and reflow sensitivity classification of MSL1 PSL R7F as defined in J-STD-020 and J-STD-075. This translates to: MSL1 = unlimited floor life, PSL R7F = Peak reflow temperature 245°C with a limitation on the time above liquidus (217°C) which for this series is 60sec max. The pin termination finish on this product series is Gold with a plating thickness of 0.05 microns minimum.

For further information please visit www.murata-ps.com/rohs



3kVDC Isolated 1W Dual Output SM DC/DC Converters

## **TAPE & REEL SPECIFICATIONS** REEL OUTLINE DIMENSIONS TAPE OUTLINE DIMENSIONS -15.75 (0.62) 0.60 (0.02) MAX -Ø<sub>(3.94)</sub> MIN 1.50 (0.06) +0.10 (+0.004) -0.00 (-0.00) DIRECTION OF UNREELING 16.00 (0.63) (AT HUB SECTION) ø 13.00±0.25 (0.51±0.009) 2.00 (0.08) 0.08) 30.40 (1.20) MAX 11.60 (0.46) 24.40 (0.96) 4.00 (0.16) 1.75 (0.07) 11.50 \_\_\_\_ (0.45) 24.00±0.30 (0.94±0.04) REEL PACKAGING DETAILS 000000000000 0 TRAILER SECTION **CARRIER TAPE START GOODS ENCLOSURE** 160 (6.30) MIN **SECTION** 100 (3.94) MIN **Product Orientation** Pin 1 located nearest to LEADER SECTION carrier drive sprocket. 400 (15.75) MIN Reel Quantity: 500

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED



This product is subject to the following <u>operating requirements</u> and the <u>Life and Safety Critical Application Sales Policy</u>:

Refer to: http://www.murata-ps.com/requirements/

Murata Power Solutions, inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.