
Logo construction

The logomark rebuilt on a grid of x. Angles, arcs and proportions are measured from the source artwork and kept exactly as found.

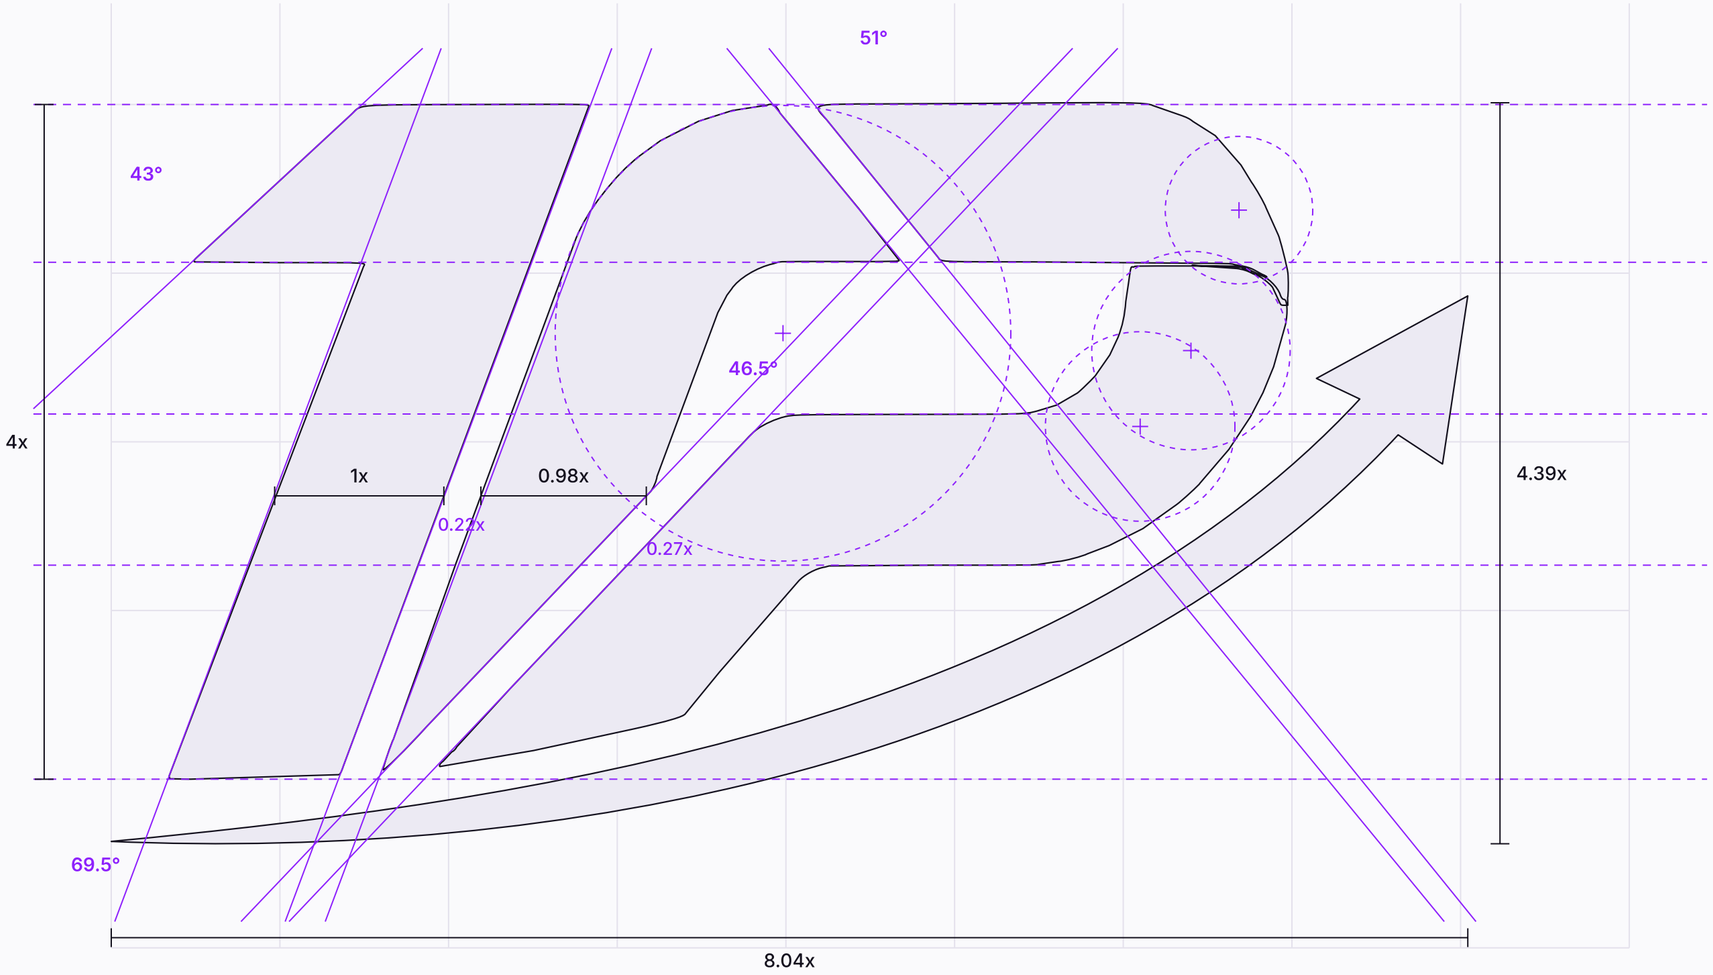

Base unit

x = ¼ of the letter height, which equals the horizontal stem width of the “1” (86.7 px at source size). Every proportion below is expressed in x.

Letter height	**4x**
Mark width × height	**8.04x × 4.39x**
Stem width (1 and P)	**1x**
Channels between letters	**0.22x and 0.27x**
Band depth and flag underside	**0.94x (shared line)**
Lower bar depth	**0.90x**
Italic axis	**69.5° (20.5° from vertical)**
Band and stem cut	**51°**
Leg diagonal	**46.5°**
Flag cut	**43°**
Bowl radius	**0.59x**
Counter radius	**0.56x**
Band end radius	**0.44x**
Shoulder radius	**1.35x**
Arrow path radius (best fit)	**10.1x**

Values are measured from the supplied raster with sub-pixel tracing (tolerance about ±0.5 source px). The source is not perfectly geometric: the two edges of the “1” differ by 0.4°, and these irregularities are preserved for fidelity.