Problem 1

Number of needed subnets 14
Number of needed usable hosts 14
Network Address 192.10.10.0

Show your work for **Problem 1** in the space below.

Add the binary value numbers to the left of the line to create the custom subnet mask. $\begin{array}{r}
128 \\
64 \\
32 \\
+16 \\
\hline
240
\end{array}$

Observe the total number of hosts.
Subtract 2 for the number of usable hosts.

Problem 2

Number of needed subnets 1000

Number of needed usable hosts 60

Network Address 165.100.0.0


Default subnet mask _____255 . 255 . 0 . 0

Custom subnet mask _____255 . 255 . 255 . 192

Total number of host addresses _____64

Number of usable addresses 62

Show your work for Problem 2 in the space below.

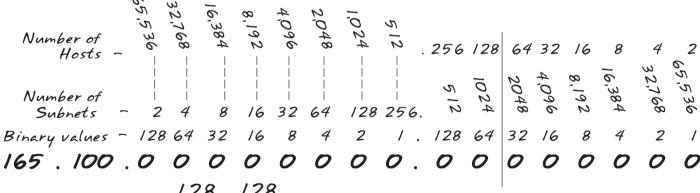

Add the binary value numbers to the left of the line to create the custom subnet mask. $\begin{array}{r}
128 \\
64 \\
792
\end{array}$ Add the binary value numbers to the left of the line to create the custom subnet mask.

Observe the total number of hosts.

Subtract 2 for the number of usable hosts.

Problem 3

Network Address 148.75.0.0 /26

/26 indicates the total number of bits used for the network and subnetwork portion of the address. All bits remaining belong to the host portion of the address.

Default subnet mask _____255 . O . O

Custom subnet mask _____255 . 255 . 255 . 192

Total number of host addresses _____64

Number of usable addresses ______62

Show your work for Problem 3 in the space below.

Number of
$$\frac{8}{6}$$
 $\frac{8}{4}$ $\frac{1}{1}$ $\frac{1}$

subnets.

subnets to get the usable number of

Problem 7

Number of needed subnets 2000

Number of needed usable hosts 15

Network Address 178.100.0.0

Address class ______B

Default subnet mask ______255,255,0,0


Custom subnet mask ______255,255,224

Total number of subnets ______32

Number of usable addresses ______30

Number of bits borrowed ______11

Show your work for Problem 7 in the space below.

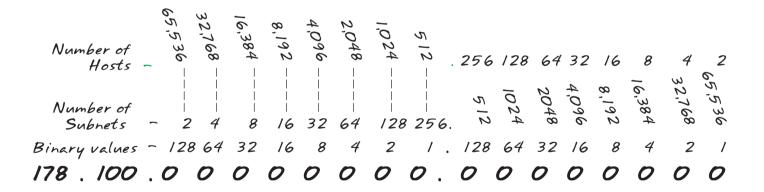

Problem 15

Number of needed usable hosts **50**Network Address **172.59.0.0**

Address class _	B
Default subnet mask _	255,255,0,0
Custom subnet mask _	255,255,255,192
Total number of subnets _	1024
Total number of host addresses _	
Number of usable addresses _	00
	10
Number of bits borrowed _	

Show your work for **Problem 15** in the space below.

Problem 1

Number of needed subnets 14
Number of needed usable hosts 14
Network Address 192.10.10.0

Address class ____C Default subnet mask _____255 . 255 . 255 . 0 Custom subnet mask _____255 . 255 . 255 . 240 16 Total number of subnets _____ 4 Number of bits borrowed _____ What is the 4th subnet range? 192.10.10.48 to 192.10.10.63 What is the subnet number for the 8th subnet? ___ /92 . /0 . /0 . //2 What is the subnet broadcast address for What are the assignable addresses for the 9th subnet? 192.10.10.129 to 192.10.10.142

Show your work for Problem 1 in the space below.

The binary value of the last bit borrowed is the range. In this problem the range is 16.

mask

The first address in each subnet range is the subnet number.

The last address in each subnet range is the subnet broadcast address.

Problem 2

Number of needed subnets 1000
Number of needed usable hosts 60
Network Address 165.100.0.0

what is the subnet number for the 6th subnet?

What is the subnet broadcast address for the 6th subnet?

What are the assignable

What are the assignable addresses for the 9th subnet? 165.100.2.1 to 165.100.0.62

Show your work for <u>Problem 2</u> in the space below.																		
					5.100.0.63	, , , ,	5.100.0.29	5.100.1.6	160	v . / /	5.100.0.6	NO	5.100.0.2	5.100.3.6	165.100.3.191		to	165.100.255.191 165.100.255.255
	7	65,536	_	0	to	40	to	to	40	10	to	40	to	44	440)	OWN	to
	4	32,768	2	0	~ 1	1N	92	A	700	7		40	92		78	•	D	128
	00	16,384	4	0	00	70 i~	Ö		9		N	ング	•	ww	ww.	•		55.
	9/	8,192	00	0) 0 0			000	<u> </u>	001	00 00 00	100		000			100.2
	1 32	4,096	9/	0		00 N			, (O, (60 60			600 000			65.16
_	64	2048	32	0		**						~~	~					99
	128	1024	64	0	0	-0	\	0-	-0-	\	0	-0	<u> </u>	0-	0-	•		0-
	256	512	128	0		<u> </u>	\	00) ~ ·	\	0	0 ~	\	00				\
5	12 -	256.	`	0	•						0	 00		· ~~				
1,02		73	2	0							<u>_</u>	\	<u> </u>	\	. ~ ~			\
20	48 _	4	4	0	,6,	5,0	1,0	0,4,0	0,0	7	$\frac{1}{2}$	9/2	3	<u> </u>	五五			\
4,0	96 ₋	32	80	0	<u> </u>	~ ~			~ \ ~ \		<u> </u>					_		
	_	~ 	9/	0		128	64	32	00 7	<i>- ()</i>	+	255						
8,16		~ ~~~~		0				ı	28	64	192		the	ре				
16,38	34	w	32	0		64	7	62		7		owed is is 64.	ige is	ge is t				
32,7	68 -	4	64	0			ple	hosts	Clistom	masł		it borrd range	net rar	net ran				35
65,5	36 -	N	128	0			Usable	원	Ċ	subnet mask		e last be	ch sub	ch subr ress.				(1022) (1023)
	l	(7	0						SU		e of the s probl	s in ea	s in ea st add				
	Number of Hosts	Number of Subnets	inary values	65'. 100								The binary value of the last bit borrowed is the range. In this problem the range is 64.	The first address in each subnet range is the subnet number.	The last address in each subnet range is the subnet broadcast address.				•

Problem 11

Number of needed usable hosts 8,000 Network Address 135.70.0.0

Address class	B
Default subnet mask .	255,255,0,0
Custom subnet mask	
Total number of subnets	8
Total number of host addresses	
Number of usable addresses	8100
Number of bits borrowed	
Number of bits borrowed.	
What is the 6th subnet range?	
What is the subnet number for the 7th subnet?	
What is the subnet broadcast address for the 3rd subnet?	
What are the assignable addresses for the 5th subnet?	

Show your work for <u>Problem 11</u> in the space below.


Problem 12

Number of needed usable hosts 45 Network Address 198.125.50.0

Address class	S
Default subnet masl	ζ
Custom subnet masl	<
Total number of subnets	S
Total number of host addresses	S
Number of usable addresses	S
Number of bits borrowed	d
What is the 2nd subnet range?	
What is the subnet number for the 2nd subnet?	
What is the subnet broadcast address for the 4th subnet?	
What are the assignable addresses for the 3rd subnet?	

Show your work for <u>Problem 12</u> in the space below.

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 100% growth in both areas. Circle each subnet on the graphic and answer the questions below.

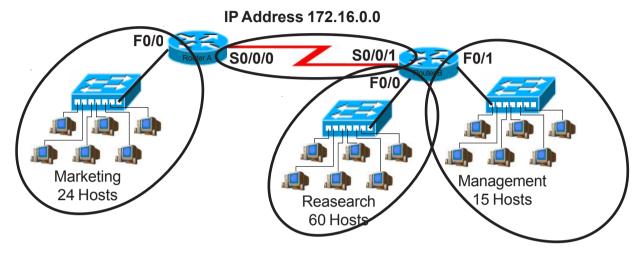

Address class	<i>B</i>					
Custom subnet mask	255.255.224.0					
Minimum number of subnets needed	4					
Extra subnets required for 100% growth (Round up to the next whole number)	+ 4					
Total number of subnets needed	= 8					
Number of host addresses in the largest subnet group	60					
Number of addresses needed for 100% growth in the largest subnet (Round up to the next whole number)	+ 60					

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.


Total number of address needed for the largest subnet = 120

IP address range for Research	172.16.0.0 to 172.31.255
IP address range for Marketing	172.16.32.0 to 172.63.255
IP address range for Management	172.16.64.0 to 172.95.255
IP address range for Router A to Router B serial connection	172.16.96.0 to 172.127.255

Show your work for Practical Subnetting 1 in the space below.

° 65,536 ° 0	
* 32,768 N O	
∞ _{16,384} ₹ 0	2000 2000 2000 2000 2000 2000 2000 200
% 8,192 ° 0	22272927
c 4,096 % 0	0000000
\$ 2048 E O	
87 1024 \$	
256 1	0000000
<i>y</i> - <i>Q</i>	ナナナナナナ
512 85	2220000
224 8	0.04.00.00.00.00.00.00.00.00.00.00.00.00
- 048 7 7	Ow@@```!\
	9999999
4,096 8 8	マンマンマン マンマン マン マン マン マン マン マン マン マン マン マ
8,192 9 9	
16,384 & N	0-0-0-0-
32,768 7 7 0	00
65,536 8 0	
Number of Hosts - Number of Subnets -	0,-,0,6,4,0,9,C,
There How when when y va	
Number of Hosts - Number of Subnets - Binary values - 172 . 16 .	
B	~ ~ ~ 0 0 0
	40 4 0 1 × 00 0
	X

Based on the information in the graphic shown, design a network addressing scheme that will supply the minimum number of hosts per subnet, and allow enough extra subnets and hosts for 30% growth in all areas. Circle each subnet on the graphic and answer the guestions below

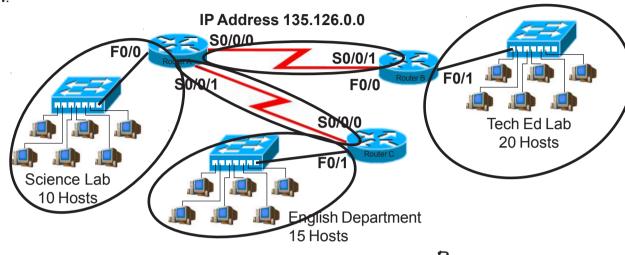

B Address class

255.255.255.224 Custom subnet mask

5 Minimum number of subnets needed

2 Extra subnets required for 30% growth (Round up to the next whole number)

> 7 Total number of subnets needed =

> > Number of host addresses 20 in the largest subnet group

Number of addresses needed for 30% growth in the largest subnet (Round up to the next whole number) 6

Total number of address 26 needed for the largest subnet =

Start with the first subnet and arrange your sub-networks from the largest group to the smallest.

IP address range for Tech Ed /35./26.0.0 to /35./26.0.3/

IP address range for English 135.126.0.32 to 135.126.0.63

IP address range for Science 135.126.0.64 to 135.126.0.95

IP address range for Router A

to Router B serial connection 135.126.0.96 to 135.126.0.127

IP address range for Router A to Router B serial connection /35./26.0./28 to /35./26.0./59

Show your work for **Problem 2** in the space below.


		35 126 0.3 35 126 0.3 35 126 0.6 3
N 65.536 -	0	000000000000000000000000000000000000000
	0	0.25 0.25
∞ _{16,384} ₹	0	0000000000000000
	0	
	0	$\omega \omega \omega \omega \omega \omega \omega \omega \omega \omega $
79 2048 CE	0	0-0-0-0-0-0-
2 1024 \$	0	000000
957 512 821	0	0000
512 8 ·		
1,024 8 2		りこりがもでうとのそりこびですで
1,0	0	22222222222
2,048 \$ \$ 4,096 \$ \$	0	
	0	
8,192 9 9	0	
16.384 & N	0	
32.768 × 59	0	
65,536 88	0	, ml, >
, , , ,		2 × 2 × 0 × 0
osts osts ref	12	2
Number of Hosts – Number of Subnets – inary values –	135.126.	(Round up to 2) X.3 X.3 X.3 X.3
Number of Hosts - Number of Subnets - Binary values -	13	

Based on the information in the graphic shown, design a network addressing scheme that will supply the **minimum number of subnets**, and allow enough extra subnets and hosts for 70% growth in all areas. Circle each subnet on the graphic and answer the questions below.

IP Address	135.126.0.0
	S0/0/1 F0/0 S0/0/0 S0/0/0 New York ashington D.C. 0 Hosts
Address class	
Custom subnet mask	
Minimum number of subnets needed	
Extra subnets required for 70% growth (Round up to the next whole number)	+
Total number of subnets needed	=
Number of host addresses in the largest subnet group	
Number of addresses needed for 70% growth in the largest subnet (Round up to the next whole number)	+
Total number of address needed for the largest subnet	=
Start with the first subnet and arrange your sub-r	networks from the largest group to the smallest.
IP address range for New York	
IP address range for Washington D. C.	
IP address range for Router A to Router B serial connection	
IP address range for Router A to Router C serial connection	

Show your work for **Problem 4** in the space below.

Based on the information in the graphic shown, design a network addressing scheme that will supply the <u>minimum number of subnets</u>, and allow enough extra subnets and hosts for 20% growth in all areas. Circle each subnet on the graphic and answer the questions below.

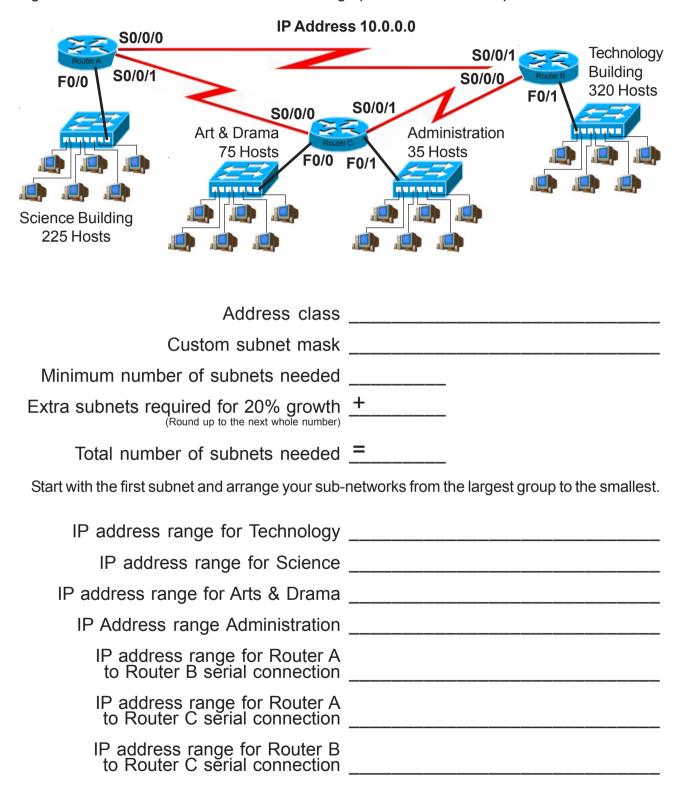

Show your work for **Problem 6** in the space below.