

Final Year Project Report

Development and implementation dynamic balance
algorithms for bipedal robot locomotion.

Usvyatsov Mikhail

Innopolis University

Kazan

Supervisor: Prof. Evgeni Magid

May 28, 2015

Contents

1	Introduction and Overview	3
2	Literature review	6
2.1	Analytical approach	7
2.2	Central Pattern Generator	13
2.2.1	Simple Sinusoidal Oscillator	14
2.2.2	Systems of Differential Equations	14
2.3	Neural Networks	17
2.3.1	Feed-Forward Networks	17
2.3.2	Recurrent Networks	18
2.4	Hidden Markov Model	20
2.5	Rule Based Approach	21
3	Bipedal Locomotion Control	22
3.1	Optimal Control	25
3.1.1	Preview Control	27
4	Implementation	29
5	Evaluation	33
6	Future Work	36
7	Summary	37
	Bibliography	38
	Appendix A Preview control parameters estimation algorithm	43

Chapter 1

Introduction and Overview

Nowadays humanity has invented almost all devices that are needed for modern humans and society in general. Science is now engaged in the improvement and optimization of existing solutions. These solutions can be traced with trends that are repeated and replicated. This approach is quite good: gain experience, accumulate knowledge and apply them to the latest developments. We can find these patterns in such old area as automobile industry for example. In robotics there are no such patterns yet. It means that inventions in robotics can enrich their creator. That is one of the reasons to work in robotics sphere.

Robotics considers hardware agents that are called robots and operated in the environment that is called workspace. According to [1] it is very important to consider the level of uncertainty of the environment where a robot works, because robots will interact with this environment. From this point of we can distinguish robots by their reachable workspace. From this point of view we can distinguish mobile robots which reachable workspace is not constant and also is usually partial observable. On the other hand there are static robots, that can interact with environment only with end-effectors. They usually have fixed and usually fully observable workspace.

It was a common belief before the advent of industrial robots that robots should look like humans. The first use of the word "robot" refers to a humanoid machine that was supposed to serve a human. However, from the very beginning almost every automatic device intended for production and other operations normally performed by the human was called robot. Intensive development of robots started after the Second World War, which was associated with the emergence of the nuclear industry.

The word robot was initially attributed in 1921 to fictional humanoid by Karel Čapek. Nowadays almost every professor teaching robotics can give their own definition of robots and all of them will not be similar. One of robot today's definition is autonomous device that work in automatic mode. It can be attributed to the machine "Lunokhod-1", created in 1966. It was the first machine in the history that worked on the surface of the Moon (1970). Another modern definition is a mechanical or virtual artificial agent, usually an electro-mechanical machine that is guided by a computer program or electronic circuitry.

Lately robots began to replace humans not only in manufacturing but also in the military sphere. Constantly emerging information about the achievements of the leading countries in the development of military land, underwater robots and unmanned aerial vehicles is evidenced for this thesis. Despite of high price robotic products become a part of our usual life, e.g. automatic vacuum cleaners, robotic toys, smart houses, e.t.c. There is a tendency that robots become cheaper with constantly increasing abilities. It means that in not very far future very smart robots will become affordable for our usual life. Such robotic tools will replace human in difficult and dangerous environments. And proposes the task to develop universal robot that can solve wide spectrum of tasks in the same environment as human works in. If we want a mechanism to perform its actions in environment that was developed for people it is obvious solution to make this mechanism similar to human. Robots that have similar to human kinematics and appearance are called anthropomorphic robots. Example of such robots are well known. They appear in films, literature and now they becomes part of our life, e.g. professor Ishiguro developed robot that is similar to him and during his trips this robot conducts professor's lectures while he can be on another part of Earth. Anthropomorphic robots now can be divided into two big groups. Bipedal anthropomorphic robots and other anthropomorphic robots. Bipedal robots are the robots that perform their locomotion by two legs. It is important to contrast bipedal anthropomorphic robotics because of many reasons. One of them is that bipedal humanoid walking robots comprise the area of robotics that is developing most rapidly nowadays. It is reasoned by the following fact: human workspace includes very complex and uneven terrains that is hard to overcome all the other ways except by legs. On the other hand bipedalism allows creatures to inhabit and adopt to very wide range of environments that is our initial wish - to work in the same workspace with people. On the other hand, in the last century robotics is mainly focused on space

and defense areas. It motivates the trend towards automation is a core part of progress. Automation reduces the cost of technical processes and the risk to humans. Therefore, the research and development for this task are on the cutting edge of science and technology and require special attention and investment into its development. There are more and more situations requiring people to perform a wide variety of work in heavy, dangerous, and sometimes incompatible with the life conditions. In response, there are new tools of extreme robotics. However, for the most part they are very similar to each other. Usually, autonomous wheeled or tracked vehicles with manipulators are used to perform tasks on the ground. Mostly these robots are teleoperated. These robots are being produced for more than a dozen years. Engineers have so far accumulated a lot of experience in their development and applications, which are in some cases very efficient. However, it is obvious that this technique has (like any other) a limited scope of application. People still have to work in dangerous conditions such as in chemical, biological, or radioactive hazards, work in extremely hot or cold conditions, fight against criminals and terrorist. Human workspace is very specific due to people's two arms and two legs. Universal robot should operate in the same environment and workspace. For this reason other areas of extreme robotics are developing now.

One of these is a robotic system including an anthropomorphic bipedal walking robot. Such robot's kinematics, size and weight are similar to human's, it is equipped with an energy source, communication channel with the control station, and a powerful autonomous control system, allowing it to perform actions in supervisory or automatic mode. For instance, autonomous actions include independent movement from place to place in absence of communication. Such robots have significant advantages in workspaces initially adapted for humans.

Chapter 2

Literature review

Bipedal locomotion is a very complex task and according to [2] it is described by nontrivial dynamics. It still doesn't have complete general solution however the research of this has a long history. The development of the models starts from the inverted pendulum model of human walking and goes to the complex approach of actuated passive walking with ZMP control.

According to [3], there are 5 groups of approaches to the problem of locomotion control. There are:

1. Analytical.

It uses equations of physical values to generate walking trajectories.

2. Central Pattern Generator (CPG).

When biologically inspired creature walks it has two different mechanisms of motion control. CPG is analog of generator that produces the pattern that doesn't require to be adopted. And also control mechanism applied to generated by CPG pattern with external data from sensors as input make the movement to be adopted to very big variety of disturbances.

3. Neural Networks.

This approach is a try of simulating the control process of biologically inspired creatures.

4. Hidden Markov Model (HMM).

HMM are good for pattern recognition, thus we can use it to recognize patterns in gaits.

5. Rule based.

The main idea behind this approach is to build the rules for all possible variations of configuration.

2.1 Analytical approach

The oldest one and also the most studied group is analytical one. It requires the knowledge of general form that locomotion should take.

For bipedal locomotion it's required to accomplish the following steps [3]:

1. Apply stability constraints
2. Design gait algorithm (including double support, single support and no-support phases).
3. Solve remaining degrees of freedom (DoF) with Inverse Kinematics (IK).

According to [4], the most natural method that represents the human body is inverted pendulum. Inverted pendulum model of human balance problem is one of the most primitive and old example of analytical approach [5]. It stated that control of the balance can be achieved with two components: ankle mechanism (invertors/evertors) and hip load/unloading mechanism. In different positions each of the mechanism plays a different role. Thus in tandem or intermediate position balance is achieved by invertors/evertors mechanism while direction is controlled by hip load/unloading mechanism. It doubts on commonly used condition: reaction force of the floor has to go through center of gravity of the robot. It was stated, that modern bio-mechanical studies show that there are angular moments around center of gravity. Thus this approach is too approximate and it is not very accurate. In [6] passive dynamics architecture was considered. There robot was able to move forward at constant not very high speed and author mentioned that the gait of the robot was human like. Human-like gait is desirable because of its energy effectiveness [7].

Furthermore, [8] summarizes principles that allows to combine passive dynamic control with powered bipeds. The results show that the gait become energy efficient however it implies further work on robustness and flexibility of walking

In 1970 Miomir Vukobratovic proposed Zero Moment Point (ZMP), a theoretical model to explain biped locomotion. Also ZMP is a basic dynamical stability constraint. According to [9] we can divide all the existing humanoid bipedal walking robots into two big groups: ZMP-controlled ones and passive dynamic walkers.

Zero moment point is a concept related with dynamics and control of legged locomotion for humanoid robots. It specifies the point with respect to which dynamic reaction force at the contact of the foot with the ground does not produce any moment in the horizontal direction, i.e. the point where the total of horizontal inertia and gravity forces equals to zero. Miomir Vukobratovic in [10] defines ZMP (Zero Moment Point) as a point in which we can reduce all the forces and moments with one single force F_a and moment M_a respectively fig. 2.1.

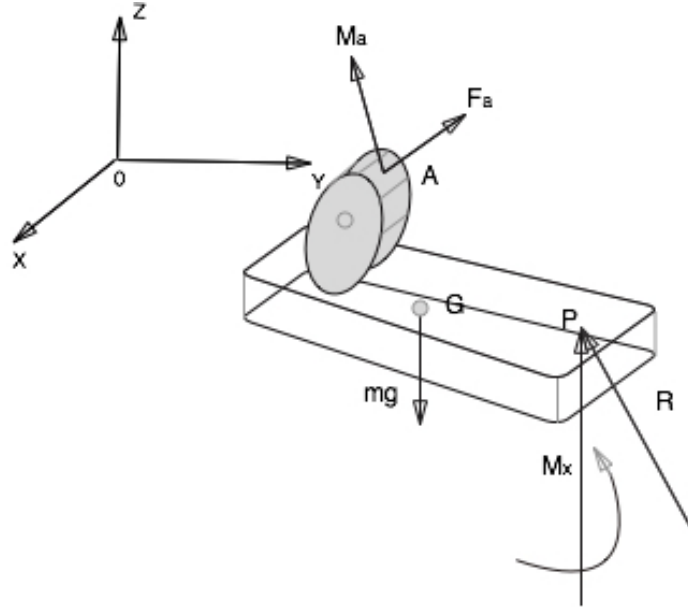


Figure 2.1: The sole with acting forces on it

On the figure above we consider only the sole separately from other parts of the leg. It has its own center of gravity G. At point P there is resulting ground reaction that maintains the construction in the equilibrium. The force of ground reaction R and moment M consists of its three components (R_x, R_y, R_z) and (M_x, M_y, M_z) respectively. Horizontal components of R should compensate friction force in the point of contact. Thus, the horizontal reaction of force (R_x, R_y) represents friction force that compensate horizontal component of F_a . In the same time the moment M_z represents friction reaction forces fig. 2.2 that compensates vertical component of M_a and the moment induced by F_a . [10]

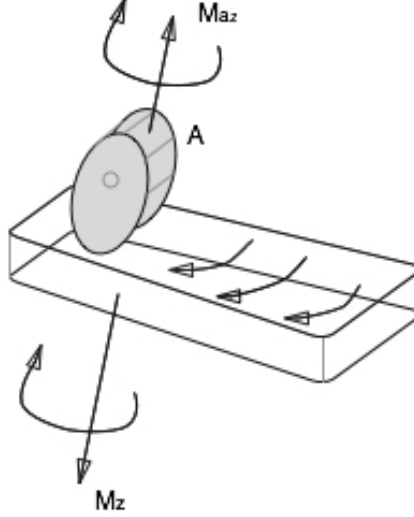


Figure 2.2: Rotational moment in the sole

According to [11], this ZMP should be on the foot. The problem is that we cannot manipulate the foot directly [12]. According to [10] we can do it by ensuring the appropriate dynamics of the mechanism above the foot. If the resulting force in ZMP lies not in vertical direction (conditions from the paragraph above didn't hold thus R and M_z didn't compensate correspondent components of F_a and M_a) than foot will slide. It means that dynamical stability was not achieved due to the fact, that there is a rotational moment that will affect the robot. On the other hand, in [13] it was proven: if ZMP was achieved in the polygon of foot and moreover it coincides with the contact point, than robot is stable, due to the fact, that all the resulting forces lies in vertical direction. During the walk the position of ZMP should be computed simultaneously and the main problem of control is to keep ZMP and contact point to be coincided inside the support polygon of contact foot with the ground. The name zero moment point relates to the fact, that dynamical stability is maintained if horizontal components M_x and M_y are both equal to zero.

$$M_x = M_y = 0 \quad (2.1)$$

In the point P there should exist such equivalent force R and vertical moment M_z that compensate the force reaction of the ground and maintain the stability of the construction.

If we want to achieve the dynamical stability the following equation holds:

$$R + F_a + mg = 0 \quad (2.2)$$

Where m is a foot mass. In [10] there is defined point O - the origin coordinates frame from which we can define radius vectors \vec{OP} , \vec{OG} and \vec{OA} where A is a point of ankle joint.

$$\vec{OP} \times \vec{R} + \vec{OG} \times mg + M_A + M_z + \vec{OA} \times F_a = 0 \quad (2.3)$$

Placing the origin frame into the point P and making a projection on the horizontal plane gives us the following equations:

$$(\vec{OP} \times \vec{R})^H + \vec{OG} \times mg + M_A^H + (\vec{OA} \times F_a)^H = 0 \quad (2.4)$$

According to [10] equation 2.4 represents the foot equilibrium. However it doesn't solve the problem, that it is still unknown whether for the given motion of mechanism it is in the equilibrium. It is only of ZMP lies inside the support polygon.

In [14] it was stated, that we have to make the following assumptions in order to compute the position of ZMP:

1. The bipedal robot consists of n rigid links.
2. All kinematic information, such as position of CoM, link orientation, velocities, etc. are known and calculated by forward kinematics.
3. The floor is rigid and motionless.
4. The feet cannot slide over the floor surface.
5. All joints are actively actuated.

With this constraints we can define the mass of the robot as:

$$m_{robot} = \sum_{i=1}^n m_i \quad (2.5)$$

In [14] it was considered schematic bipedal robot to derive the coordinates of ZMP [Fig. 3]

principle of dynamical stability, however it is not energy efficient. It requires simultaneous control over all the joints of the robot. The method that was described in [15] is called passive-walker dynamics and it uses gravity forces to reduce the amount of necessary energy to control the robot.

It was mentioned earlier that active control of the robot should be performed with applying dynamical stability principle, elsewhere the robot will lose the balance and fall. So, it makes sense to apply passive-walker dynamics with ZMP based control. According to [10] ZMP method is the most well known and so it is necessary to start with it.

According to [10] the most important task in the bipedal locomotion is to maintain dynamical stability. It can be accomplished if the foot has a full contact with the ground, it means, that the contact is not only in the edge or in the point. Moreover it shows that ZMP position depends on the robot dynamics: the resulting force in the contact polygon and total moment there. So, during the motion the position of ZMP changes and there are situations when ZMP reaches the edge of support polygon. In these situations if additional moments appear, robot will rotate around foot edge and collapse. [10] suggests the way to measure the load on the sole via force sensors on it. The algorithm of ZMP control is quite obvious. Compute wanted ZMP coordinates, measure the error and apply correcting signal. Very important notion is about Center of Pressure (CoP). According to [10] the pressure between foot and the ground can be replaced with the force applied in CoP. With this we can define stability condition as ZMP and CoP coincident. Usually ZMP is required to be under the center of the foot during the single support phase, transitioning to the other foot in the double support phase.

ASIMO - bipedal robot of Honda company was built on top of this theory and the history of its evolution is described in [16]. Nowadays ASIMO is one of the most developed robot, it can interact with human and perform different tasks starting with playing football and finishing stair climbing.

In [17] it was mentioned the new approach to solve ZMP control problem. Using neural network trained with back propagation method was used to control the position of the robot given the errors between ZMP position and CoP. In [18] the problem of foot rotation was formulated. The author introduced the Foot-Rotation Indicator (FRI) the point, that can leave the support polygon and describe the impending rotation. When FRI lies outside the support polygon it means that there is rotational moment and acting on

the foot that helps control instability of the gait.

2.2 Central Pattern Generator

Experiment in [19] shown that reflexes are significant for locomotion. During reverse engineering neural network that controls locomotion was found. It was situated in spinal regions that was the reason to name this network Central Pattern Generator (CPG). Another definition of CPG can be found in [20]: CPG is rhythm generating network in the nervous system which create and control the rhythmic motor patterns of animal motions. This approach for gait generation was considered in [21]. Neural oscillator was used for generation biped motions. And it can be described as neural network, produces rhythmic pattern outputs without the need for patterned input [3]. CPG is a group of oscillating neurons with some phase between them which results rhythmic body motion. The pattern is generated not only by internal neural system but also by external sensor information [21]. The key element in CPG is adaptive neural element, that can be described by pair of first order differential equations. Each pair of the following equations from adaptive neuron.

$$\tau_1 \dot{x}_1 = -x_1 - \beta f(\nu_1) - \gamma f(x_2) + u_0 + u_{f_1} \quad (2.11)$$

$$\tau_2 \dot{\nu}_1 = -\nu_1 + f(x_1) \quad (2.12)$$

$$\tau_1 \dot{x}_2 = -x_2 - \beta f(\nu_2) - \gamma f(x_1) + u_0 + u_{f_2} \quad (2.13)$$

$$\tau_2 \dot{\nu}_2 = -\nu_2 + f(x_2) \quad (2.14)$$

Here x_1 is initial state of neuron, excited by the constant input u_0 . When excitation reaches some threshold neuron goes to state ν_1 through equation 2.12. When it exceeds some threshold it starts to suppress to the state x_1 through the 2.11 equation by the factor β . Thus x_1 , x_2 , ν_1 and ν_2 are state variables. β represents the rate of adaptations, u_{f_1} and u_{f_2} are the feedback inputs mainly from sensors, γ is the coefficient between state variables and $f(x)$ is a threshold function. Such element works the following way: when

it takes constant input it reacts, then adapts and stop reacting, generating oscillations. Human like gait was achieved by robot with small Degree of Freedom (DoF) in [21]. The idea of this oscillator was to build robust system that perform simple control with minimum structure of neural architecture that can be interesting for high DoF robot. A detailed examination of a biological CPG from an engineering perspective was conducted in [22] but, for most applications, the neuron pair is approximated with a pair of differential equations [3].

Oscillators can be divided into two types : Simple Sinusoidal Oscillator and Systems of Differential Equations [3]. Each of them is described bellow.

2.2.1 Simple Sinusoidal Oscillator

For sinusoidal signal it is very easy to maintain phase relationships. Human sized biped was considered in [23]. The sinusoidal pattern is used for control of parameters, like phase or joint angle. The equation 2.15 shows the example of hip angle control by phase ϕ and hip amplitude A_{hip} .

$$\theta_{hip}(\phi) = A_{hip}\sin(\phi) \quad (2.15)$$

However it is too simple model and according to [3], is not very appropriate for bipeds, while it is good for systems that are statically stable.

2.2.2 Systems of Differential Equations

Analysis of biological CPGs has identified oscillators made from pairs of mutually inhibiting neurons [24]. These oscillators are able to generate different gaits and produces various solutions from sinusoidal to more complex forms. It can control biped even on the rough ground.

Matsuoka oscillator

Matsuoka oscillator is capable for different gait and is widely used [3]. They are popular because of their dynamics and in particular limit cycle behavior [25].

The model of neuron with adaptation can be represented the following way:

$$\begin{aligned}
\tau \dot{x} + x &= \sum_{j=1}^n c_j s_j - bx' \\
T \dot{x}' + x' &= y \\
y &= g(x - \theta)
\end{aligned} \tag{2.16}$$

Here τ is a time constant, x is membrane potential of the neuron, s_j is impulse rate of input stimuli, θ is threshold value below which neuron doesn't fire, c_j weights of synaptic conjunctions (> 0 for excitatory synapses and < 0 for inhibitory synapses), y is firing rate of the neuron, x' is the variable that represents the degree of the adaptation, T (> 0) and b (≥ 0) are parameters that specify the time course of the adaptation [25].

Matsuoka in [25] discuss oscillations generated by mutual inhibition between n neurons with adaptation:

$$\begin{aligned}
\dot{x}_i + x_i &= - \sum_{j=1}^n a_{ij} y_j - bx' + s_i \\
T \dot{x}'_i + x'_i &= y_i \\
y &= g(x_i) \quad (i = 1, \dots, n)
\end{aligned} \tag{2.17}$$

Here a_{ij} represents the strength of inhibitory connection between the neurons. $a_{ij} > 0$ for $i \neq j$ and $= 0$ for $i = j$. $\sum_{j=1}^n a_{ij} y_j$ is the total input from the neurons inside a neural network and s_i is the total input from the outside the network.

Matsuoka oscillator schematically is represented in 2.4.

Two neurons, a flexor (f) and an extensor (e), reciprocally inhibit each other. External inputs (g_i) such as sensory feedback or inputs for other neurons can be either inhibitory or excitatory, depending on the gain (h_i). Black circles indicate inhibitory inputs. White circles indicate excitatory inputs. Gray circles can be either inhibitory or excitatory.

Van der Pol oscillator

Van der Pol oscillator benefits are stable limit cycles and relatively interpretable coefficients. Frequency, amplitude and shape coefficients can be identified, although they are not completely independent. Transition between gaits is reached with simple change of oscillator parameters.

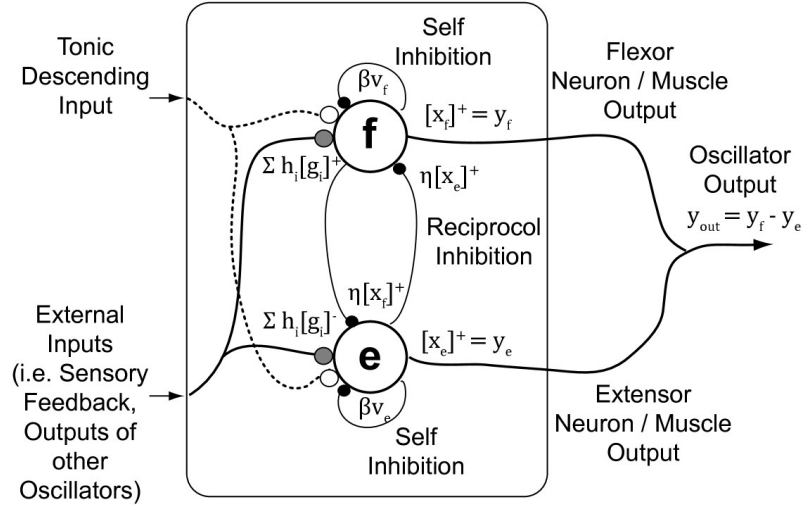


Figure 2.4: Matsuoka oscillator [26]

The equation of van der Pol oscillator is:

$$\ddot{x} - \epsilon(1 - x^2)\dot{x} + x = 0 \quad (2.18)$$

Where x is the dynamical variable and $\epsilon > 0$ a parameter. The van der Pol oscillator has exactly one limit cycle and all other trajectories spiral into it that is proved in [27].

Rayleigh oscillator

Rayleigh oscillator is similar to Van der Pol oscillator but it has reduced sensory requirements, that is an advantage over conventional prosthetic systems.

The equation of Rayleigh oscillator is:

$$\ddot{x} + \epsilon(3x^2 - 1)\dot{x} + (\omega^2 - \epsilon)x = 0 \quad (2.19)$$

Spiking Integrate and Fire with Adaption neurons

Spiking Integrate and Fire with Adaption neurons were used in [28] for biped locomotion. The CPG was a hierarchical structure of hip timing, knee timing and output patterning. This structure allowed to tune parameters of every of three hierarchical part, and so to configure walking frequency, gait and joint angles independently.

2.3 Neural Networks

Despite of the fact that oscillators can be described as a neural network they do not require any input for their work. Canonical Neural Networks (NN) have input data and output. There are several groups of NN.

2.3.1 Feed-Forward Networks

In this networks each neuron has its own connection and transfer function. They are ready for state motion generation. Input data is current kinematics and sensory data. They can generate not state based trajectories only with time input.

Multi-layer perceptron

Multi-layer perceptron (MLP) is one of such models. They have from three (input, output, hidden) layers and can have more hidden ones. According to [29], two MLPs were used to specify parameters of a bipedal ditch crossing gait trained with Genetic Algorithm (GA). It produced the best solution in terms of stability. It was more stable and efficient than one from a fully analytical approach, and slightly better than the result obtained with a fuzzy logic based method. Activation function of perceptron is sigmoid function.

Radial Basis Function Network

Radial Basis Function Network is another example of Feed-Forward Networks (FFN). Activation function is usually Gaussian or Euclidean. Neurons in hidden layers connected only with small part of input neurons. For this reason two types of vectors are necessary: weights vector and centre vector which is the same dimension as input. Each vector responds if it is close to its weight vector. Output neurones are the functions of linear combinations of outputs of network and their weighted connections. It was used for hexapod locomotion [30].

Cerebellar Model Articulation Controller

A Cerebellar Model Articulation Controller (CMAC) is a type of associative memory network based on cerebellum [31]. Input space is continuous and divided into hyper-

rectangles. So input should be located at one rectangle in the moment. Numerous hidden layers are slightly moved rectangles. Hence rectangles will overlap on different layers. The output for each layer is wighted sum of activated rectangles. The CMACs successfully learned the movement patterns and showed resilience to perturbation (including on uneven or slippery floors), thereby translating a rigid analytical solution into an adaptable one [32].

2.3.2 Recurrent Networks

The structure of such networks is more complicated that FFN. Thus we can produce more complex patterns and handle different type input.

For recurrent networks there are different types of input and the difference between FFN is that pattern is not required to be provided as an input but it is generated , tuned or chosen internally by the inputs.

Jordan and Elman Recurrent NN

Jordan recurrent NN is similar to FFN, the difference is that output of the network is recurrently fed to the input.

The example of Elman recurrent NN is shown on 2.5. The difference between Elman recurrent NN and Jordan recurrent NN is that delayed output of hidden layer y_i is connected with input of hidden layer. Delay here is done by u_i nodes from hidden layer. The Elman network was used in [33], the resilient back-propagation training algorithm was used and the system showed an ability to learn supervised trajectories and interpolate between them.

Fully Connected Recurrent NN

In several works [34], [35] a network of several fully connected leaky-integrator neurons were used as a pattern generator.

The network was able to learn multiple sinusoidal patterns, selectable by an input level, but evolution took more generations as the number of patterns required increased. Learned patterns were resilient to noise at the inputs, and even if the input was disrupted by a large amount, the output would quickly return to normal when the input was

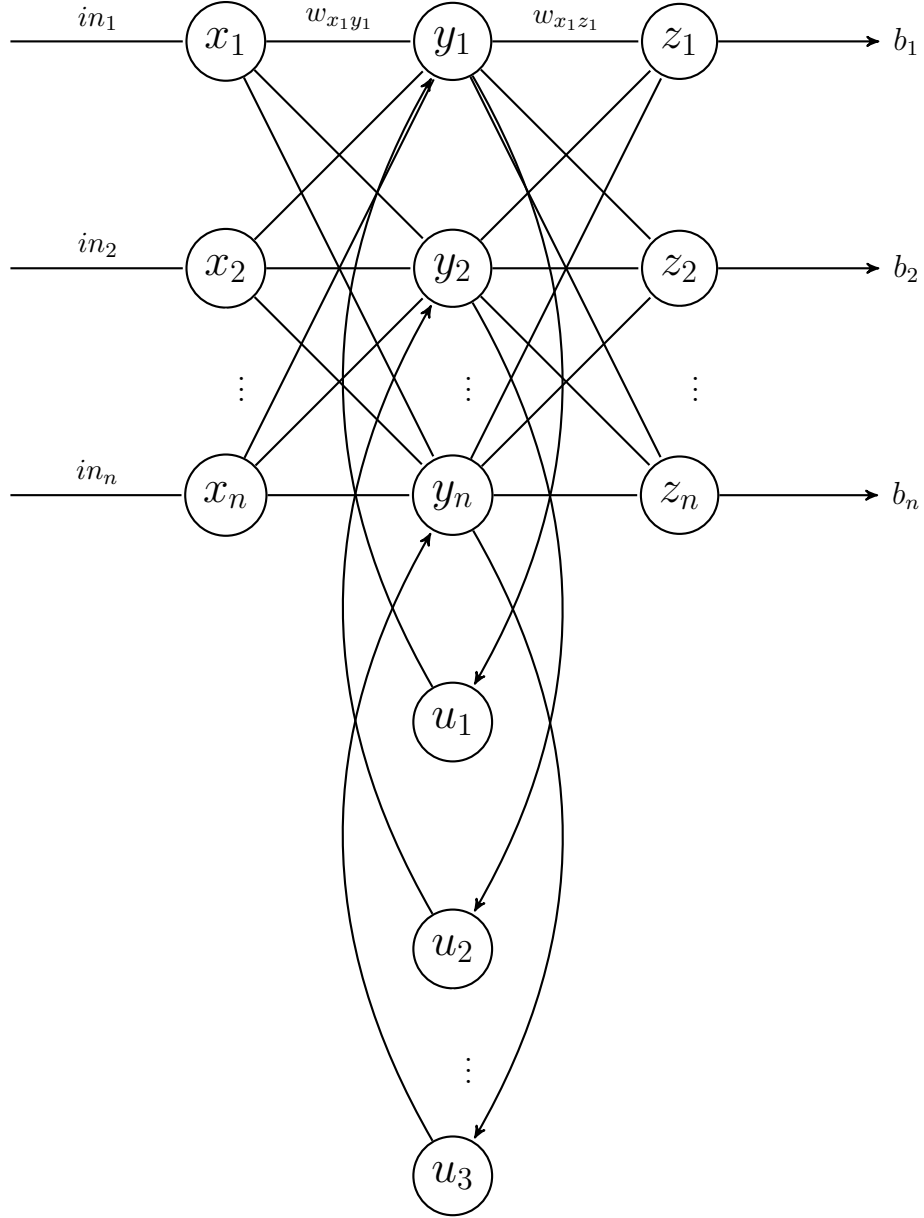


Figure 2.5: Elman recurrent NN. Inputs are X_i , hidden layer contains nodes y_i that delays connected to them outputs of Y_i . Outputs of the network are nodes Z_i

corrected. It was found that a six neuron model was sufficient to store eight different sinusoidal patterns, as long as the form of those patterns was different [3].

The problem of GA parameters optimization is that for complex systems a huge amount of generations will necessary.

Reservoir

Usually recurrent NN should be as small as possible order to simplify parameters tuning. Reservoir network follows different principle. It uses big network with potentially much redundancy. The idea is that during training only output layer is trained and reservoir is

unchanged. It works with the following assumption: system dynamics is already present when the network is constructed randomly and the only necessary thing is to adjust weights for it. Thus the training process is very simple, e.g. linear regression.

There is practice [36] of generating trajectories with reservoir taken the human capture data.

2.4 Hidden Markov Model

Learning by imitation is one of commonly used approach for bipedal locomotion researches. Obviously, direct copying of movements of operator is impossible due to different kinematic and dynamic characteristics. So, from the operator we can take only the pattern and than imitate it on the robot. Observing is estimating the underlying state variables based on the source system through output data. For this task Hidden Markov Models (HMM) can be used [37].

Recognition algorithm is used for identification of movement. If movement was not identified it is added to database as new. Hidden Markov model provides abstraction of the pattern which is used for motion synthesis.

Although typically used for imitation tasks, HMM have also been employed to detect problematic states.

HMM itself is finite state automaton. It is defined by set of states with initial and final states, transition probability matrix where element a_{ij} is probability of transition from state i to state j .

In feedback system that defines controller error signal is the input. Controller based on its input generates output signal that is called control signal. In order to obtain finite set of decision patterns, it is necessary to divide control space into finite number of subspaces. According to [38], the following steps are necessary to define HMM-based controller:

1. Correspondence between control signal and controller input (error signal) can be established because according to definition of HMM control signal depends only on finite number of previous input signals.
2. Define set of patterns. At each time control signal belongs to one of patterns. Also control signal in each moment of time corresponds to one of the set of k previous

input signals.

3. It is necessary to label the data. It means that set of input signals is mapped to the set of possible control signals.
4. Train the model by describing control signals by the data.
5. Collect a set of trained models.

2.5 Rule Based Approach

After the identification of the current state we can find the next one using rule-based method. For bipeds fuzzy-logic systems were used in some researches [39]. Fuzzy logic controller helps to deal with a bit of uncertainty in the environment. And it can be used to vary ZMP position in the support polygon [39]. For proper work it requires optimization of rules, that was basically chosen [29]. The main idea is to divide the set of all possible combinations of system parameters into the area and for each region of this area define the control function that can be used when system is identified to be in the correspondent state.

Chapter 3

Bipedal Locomotion Control

According to literature review there are a lot different approaches for bipedal robot locomotion. In this work several of them would be combined. We can define two support phases of walking: single support phase (during this phase only one foot is on the ground) and double support phase (two feet are on the ground simultaneously). We can break bipedal locomotion in following phases [?]:

1. Initial contact
2. Loading Response
3. Mid stance
4. Terminal Stance
5. Pre swing
6. Initial swing
7. Mid swing
8. Late swing

One of the most simple models of human during single support phase is cart-table model. That is represented on fig. 3.1

When cart is far away from Center of Mass (CoM) that is denoted as X, ZMP point that is denoted as P goes out of support area. When it is happen the system becomes

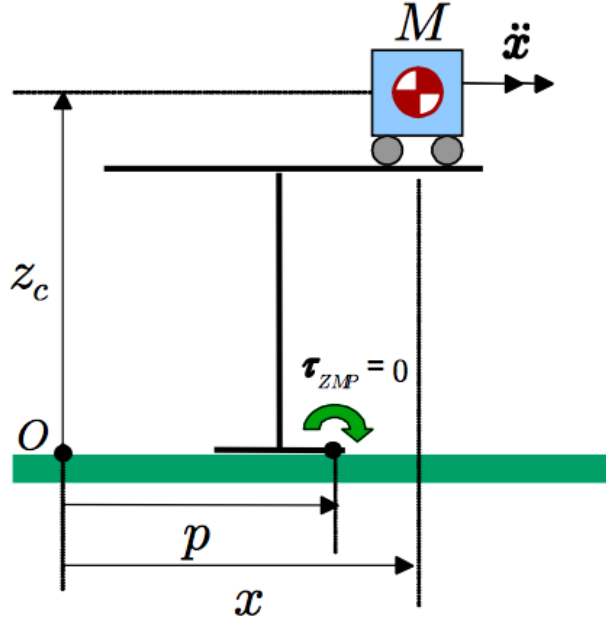


Figure 3.1: Cart-table model [11]

unstable. The equation that describes this process was derived in [11] and is represented bellow:

$$P = X - \frac{Z_c}{g} \ddot{X} \quad (3.1)$$

Z_c here is the height of CoM of the cart, g is gravitational acceleration and \ddot{X} is second time derivative.

In order to prevent system failing we want ot control cart in the way that maintains the trajectory of ZMP of the system inside the support polygon. We want this because as were stated in literature survey when ZMP lies in support polygon it maintains the dynamical stability of the system but when it leaves the region of support polygon we have a risk that system will fall. So we can try to define the desired ZMP trajectory of the system. We can define two planes in which robot can move. They are frontal and sagittal planes. Also there is transverse plane but we now will consider movement only in frontal plane. All the planes are represented on fig. 3.2. Desired trajectory for our system in frontal plane is provided on 3.3.

It represents the movement of ZMP from the region of standing foot to the region of swinging foot in the moment of the end of the step. Here the amplitude of frictions is defined by parameters of robot (step width in frontal plane). Thus we can build simple

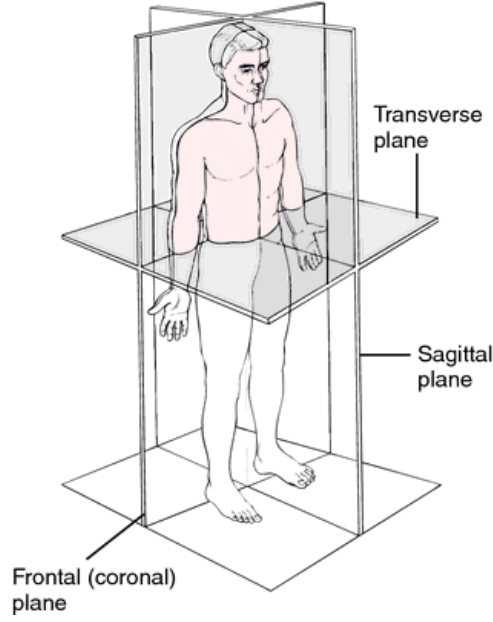


Figure 3.2: Human planes [The American Heritage Medical Dictionary]

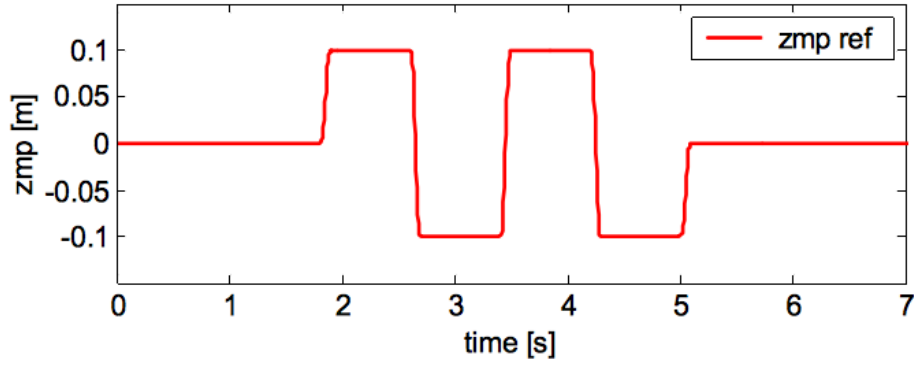


Figure 3.3: Desired ZMP trajectory frontal plane [11]

system represented on fig. 3.4. The input of this system is reference trajectory of ZMP. Controller takes as input error between reference ZMP trajectory and real measured ZMP trajectory and generates control signal that is applied to the cart. Where controller is

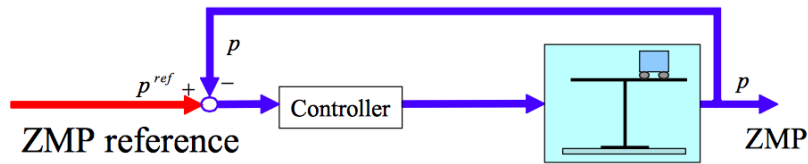


Figure 3.4: PID regulated ZMP control [11]

PID (proportional integral derivative) regulator maintains ZMP trajectory to be closed to desired one. We can see that our real ZMP trajectory is late and so CoM trajectory is late too. The result of such control is represented on fig. 3.5. Kajita et al in [11]

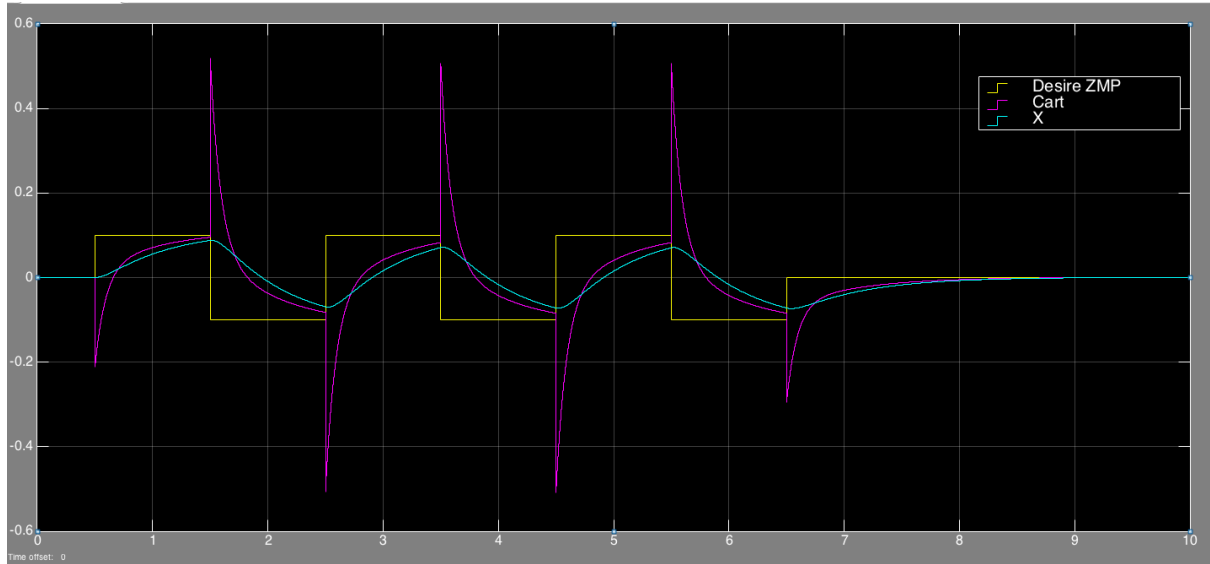


Figure 3.5: PID regulated ZMP trajectories. Due to fast change of desired trajectory in the moment of phase change in real ZMP trajectory fast rising was observed.

introduced simple idea. To look forward to desired ZMP. And try to predict what will happen before it happens. Hence the theory of optimal control matters and it will be described bellow how to make predictive control system for such unstable object as cart of the table model for example. Further in Chapter 4 such controller would be applied to the model of robot and in Chapter 5 the results will be evaluated.

3.1 Optimal Control

According to [40] it is necessary to introduce discrete-time state-space model. On 3.2 this model is introduced. It represents dependency between next state and current state of variable.

$$\begin{aligned} x(k+1) &= Ax(k) + Bu(k) \\ y(k) &= Cx(k) + Du(k) \end{aligned} \tag{3.2}$$

Where k is time index, $x(k)$ is a vector of state values, $u(k)$ is a vector of input values, $y(k)$ is a vector of output values. A , B , C , D are appropriately dimensioned real matrices [40].

We define G - transfer function associated with model 3.2. G is defined as 3.3

$$G(Z) = C(ZI - A)^{-1}B + D \quad (3.3)$$

Where Z is Z -transform variable.

We can estimate the size of transfer function by measures that are known as H_2 and H_∞ . H_2 norm will be denoted as $\|G(Z)\|_2$ and is defined as 3.4.

$$\|G(Z)\|_2 = \text{Tr}\{B'XB + D'D\} \quad (3.4)$$

Where X is defined by 3.5.

$$X = A'XA + C'C \quad (3.5)$$

According to [40] H_2 norm of transfer function is a gain in power from input to output, assuming that the input signal is white and Gaussian.

H_∞ is denoted as $\|G(Z)\|_\infty$ and is defined by 3.6.

$$\|G(Z)\|_\infty = \sup_{\omega} \frac{\|z\|_2}{\|\omega\|_2} \quad (3.6)$$

Here $z = G\omega$, ω is assumed to be a realization of unit power, Gaussian, white-noise process and z is real values vector of input. Hence H_∞ defines maximum possible gain in power from input to output.

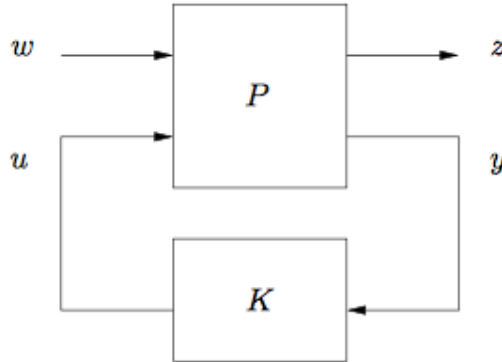


Figure 3.6: Generalized regulator [40]

On fig. 3.6 there is a generalized regulator. The input for the system is ω . The system is controlled by input signal u and returns output signal z , while y is measurements output.

Thus K here is a feedback controller and P represents the controlled system.

The matrix equation 3.7

$$X = A'XA + Q - \bar{L}'\bar{R}^{-1}\bar{L} \quad (3.7)$$

is known as Discrete Algebraic Riccati Equation (DARE). Here $\bar{R} = R + B'XB$ and $\bar{L} = L + B'XA$. The solution of this equation are considered and derived in [40]. Also we can write DARE in a short form: $X = D(A, B, Q, R, L; X)$ and $D(A, B, Q, R, L; X) = A'XA + Q - \bar{L}'\bar{R}^{-1}\bar{L}$.

3.1.1 Preview Control

Katayama et al. in [41] introduced new method of control general regulators with preview control. The key idea was to look forward for N discrete steps and predict desirable value of controlled signal. The form of control signal was derived by [41] as a theorem. The theorem says that optimal control signal have the form that is represented on 3.8.

$$u(k) = -G_I \sum_{i=0}^k e(i) - G_x x(k) - \sum_{l=1}^{N_l} G_d(l) y_d(k+l) \quad (3.8)$$

Where $G_I = [R + \tilde{B}^T \tilde{K} \tilde{B}]^{-1} \tilde{B}^T \tilde{K} \tilde{I}$

$G_x = [R + \tilde{B}^T \tilde{K} \tilde{B}]^{-1} \tilde{B}^T \tilde{K} \tilde{F}$

$G_d(1) = -G_I$ and $G_d(l) = [R + \tilde{B}^T \tilde{K} \tilde{B}]^{-1} \tilde{B}^T \tilde{X}(l-1)$.

Moreover \tilde{K} here is a solution of DARE in the form of 3.9

$$\tilde{K} = \tilde{A}^T \tilde{K} \tilde{A} - \tilde{A}^T \tilde{K} \tilde{B} [R + \tilde{B}^T \tilde{K} \tilde{B}]^{-1} \tilde{B}^T \tilde{K} \tilde{A} + \tilde{Q} \quad (3.9)$$

$$\begin{aligned}
\tilde{B} &= \begin{bmatrix} CB \\ B \end{bmatrix} \\
\tilde{I} &= \begin{bmatrix} I_p \\ 0 \end{bmatrix} \\
\tilde{F} &= \begin{bmatrix} CA \\ A \end{bmatrix} \\
\tilde{Q} &= \begin{bmatrix} Q_e & 0 \\ 0 & Q_x \end{bmatrix} \\
\tilde{A} &= \begin{bmatrix} \tilde{I} & \tilde{F} \end{bmatrix}
\end{aligned} \tag{3.10}$$

And finally I_p is $p * p$ identity matrix.

This theorem was proven in [41]. And Kajita et al. in [11] proved, that the necessary prediction for the system is 1.6 seconds due to the character dependency on this parameter that is shown on fig. 3.7

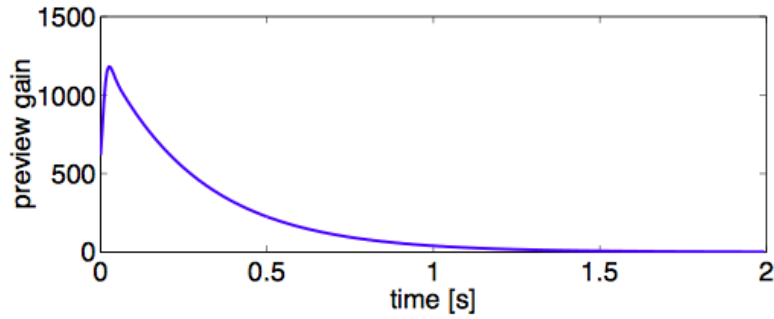


Figure 3.7: Importance of N preview [11]

Chapter 4

Implementation

Initially the cart table model was developed. The design is represented on fig. 4.1

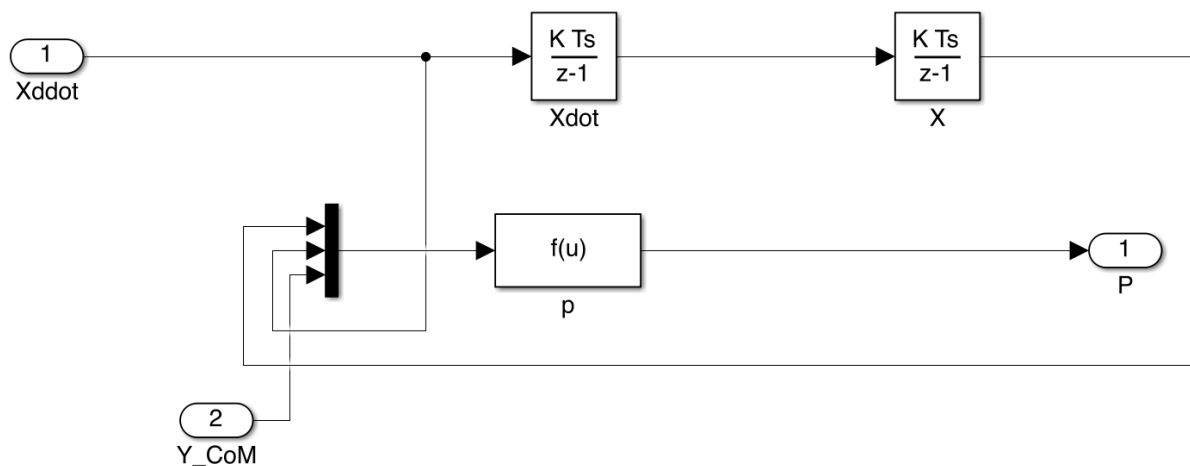


Figure 4.1: Cart-table model

Further it will be represented as block on fig. 4.2.

This system is controlled by second time derivative, that represents speed. To have the initial control model Propotional Integral Derivative (PID) regulator was applied. The system of PID regulated cart-table model is on fig. 4.3.

And the regulator itself looks as on fig. 4.4.

The results of such control are represented on fig. 4.5.

We can see that actual ZMP trajectory lates and due to this fact the CoM trajectory reaches the bound of support polygon and thus it makes the system unstable.




Figure 4.2: Cart-table model block. Xddot is input second time derivative (velocity of CoM). Y_COM is height of CoM that can deviate and thus cannot be constant. P is measured ZMP.

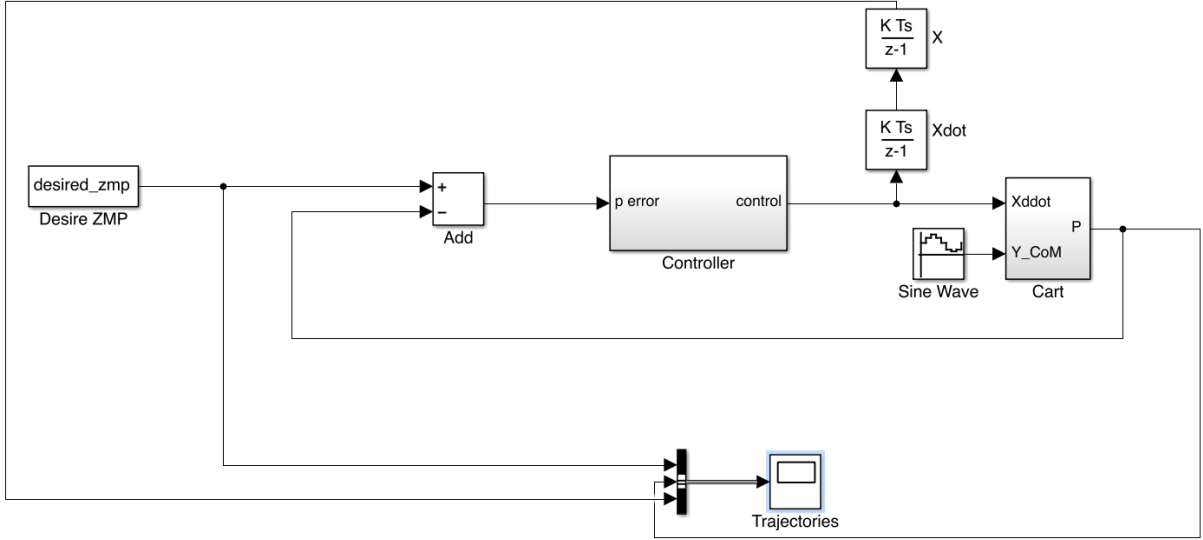


Figure 4.3: PID regulated cart-table. X is trajectory of CoM. Desired ZMP is reference signal of ZMP. P is real computed ZMP.




Figure 4.4: PID controller. P error is error between reference ZMP and measured ZMP. Control is velocity of cart table model that is necessary to compensate error between desired ZMP and measured ZMP.

After that preview control with 1.6 second prediction was applied. The difference between PID controlled model controller model and control signal. The model of preview controller is represented on fig. 4.6.

Control signal for preview controller is the third time derivative of trajectory and due to this fact between controller and cart-table model transition block should be provided. This block is a integrator because integration of control signal gives us exactly the second

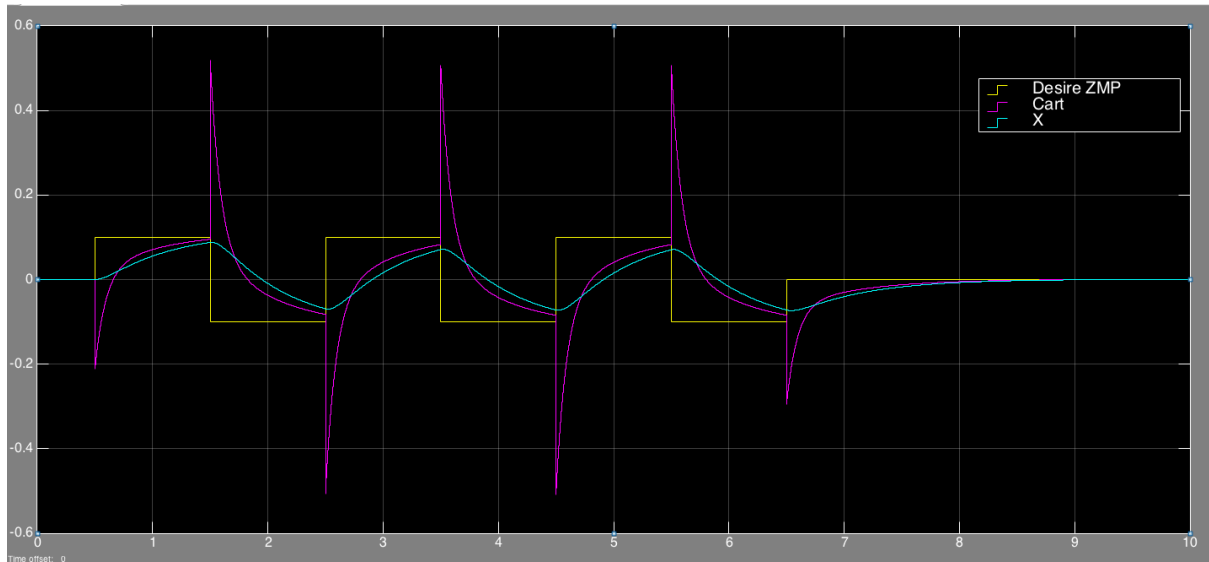


Figure 4.5: PID regulator control results.

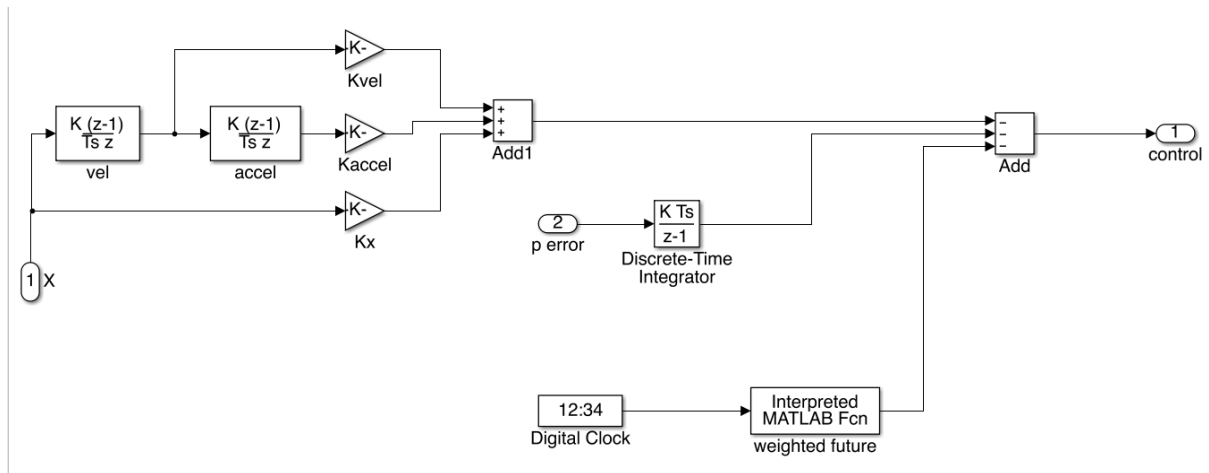


Figure 4.6: Preview controller design. Here X is input of current CoM trajectory, p error is error between reference ZMP and measured ZMP, weighted feature is function that computes weighted sum of 10000 next time samples of desired ZMP. Control is control signal that represents the third time derivative of trajectory of cart.

time derivative (velocity). Preview control of cart table model is represented on fig. 4.7

The results of this controller are represented on fig. 4.8 are much better and we can see only no late response and no overshooting in ZMP trajectory. Thus the system become much more stable than in PID case.

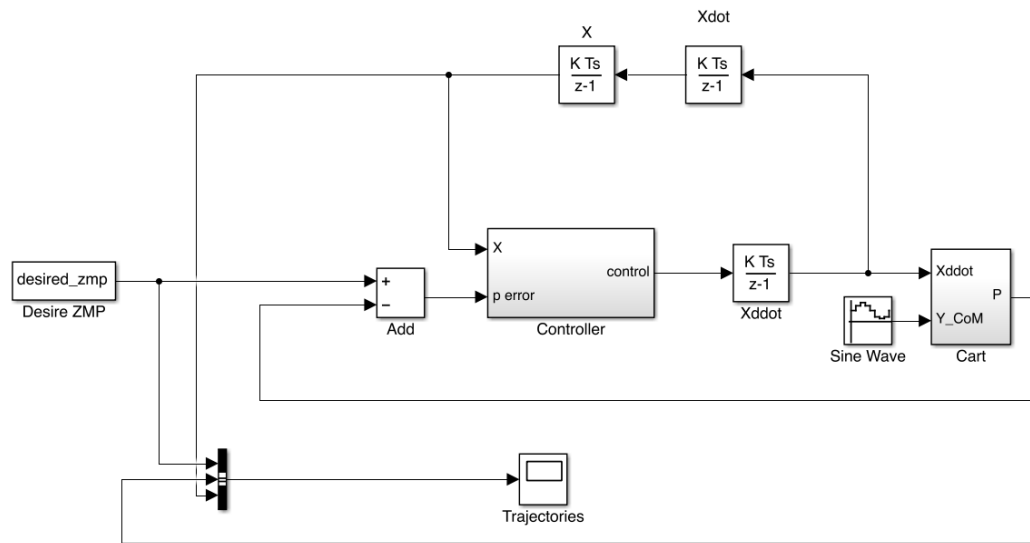


Figure 4.7: Preview control of cart table model.

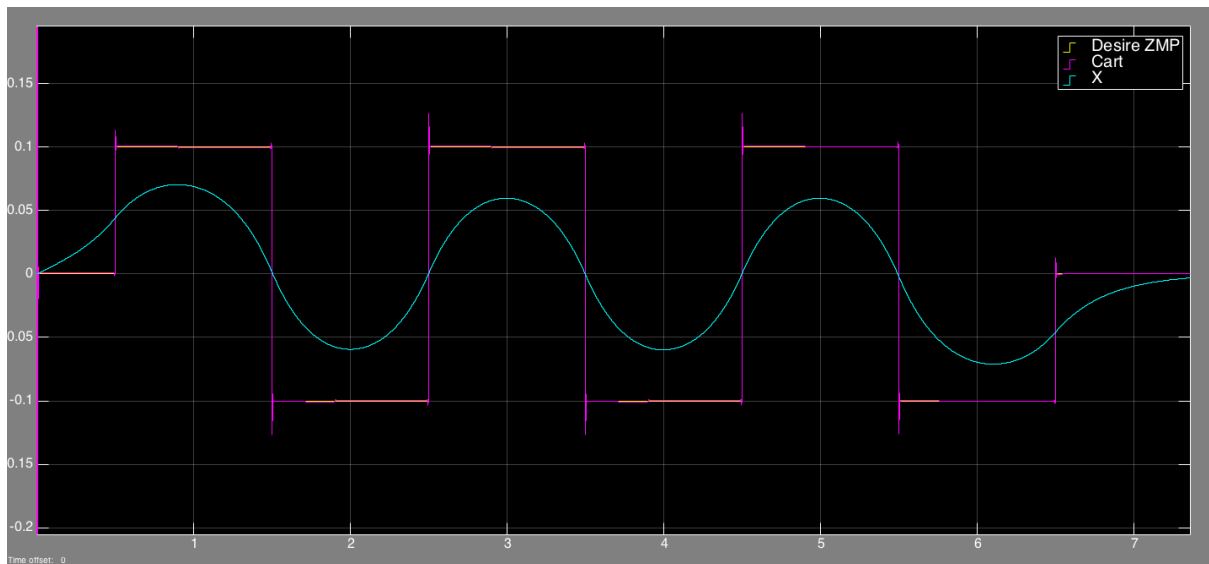


Figure 4.8: Preview controller model

Chapter 5

Evaluation

After tuning of preview controller parameters (N samples look ahead) it was build the simple model of bipedal robot with 12 Degrees of Freedom (DoF). The model is represented on fig. 5.1. In [42] simplification of bipedal model was introduced. According to this simplification we can write ZMP equation in the form of 5.1.

$$\begin{aligned} X_{CoG}(t) &= X_{CoG}(0)\cosh(\sqrt{\frac{g}{\alpha Z_{CoG}}}t) + \sqrt{\frac{\alpha Z_{CoG}}{g}}\dot{X}_{CoG}(0)\sinh(\sqrt{\frac{g}{\alpha Z_{CoG}}}t) \\ Y_{CoG}(t) &= Y_{CoG}(0)\cosh(\sqrt{\frac{g}{\beta Z_{CoG}}}t) + \sqrt{\frac{\beta Z_{CoG}}{g}}\dot{Y}_{CoG}(0)\sinh(\sqrt{\frac{g}{\beta Z_{CoG}}}t) \end{aligned} \quad (5.1)$$

Where X_{CoG} , Y_{CoG} , \dot{X}_{CoG} and \dot{Y}_{CoG} are X coordinate, Y coordinate, X velocity and Y velocity of Center of Gravity (CoG) respectively. Parameters α and β defines robot configuration and the optimal values for model on fig. 5.1 are 0.65 and 0.45 respectively.

Analytical solution of 3.1 applied to bipedal robot with provided α and β under assumptions from [42] can be defined as follows:

$$X_{CoM} = C_1 e^{-\omega t} + C_2 e^{\omega t} \quad (5.2)$$

Where $C_1 = \frac{0.2(1 + e^{0.5\omega})}{(e^{-0.5\omega} - e^{0.5\omega})}$, $C_2 = -0.2 - C_1$, $\omega = \sqrt{\frac{g}{Z_c}}$.

Trajectory of CoM in frontal plane of this analytical solution is represented on fig. 5.2.

Direct application of preview controller shows perfect results, that are represented on fig. 5.3. However this results cannot be used on practice because motors cannot work with given acceleration. Thus preview controller was restricted with some values, that

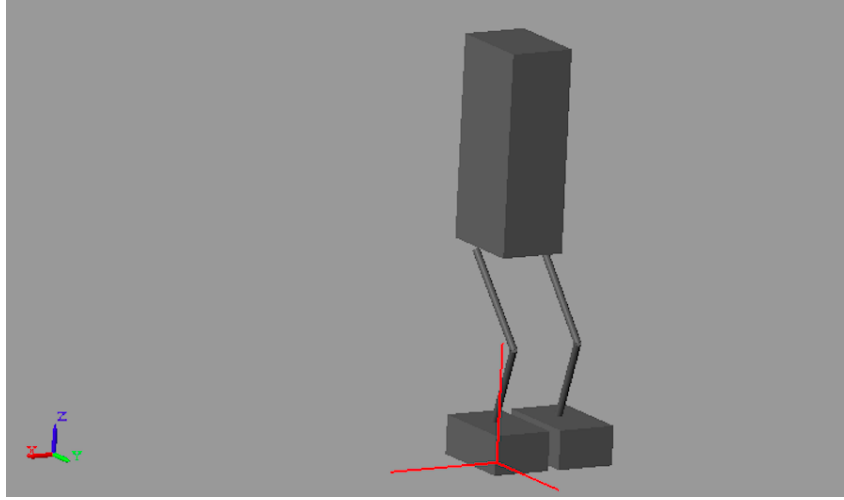


Figure 5.1: 12 DoF bipedal robot model

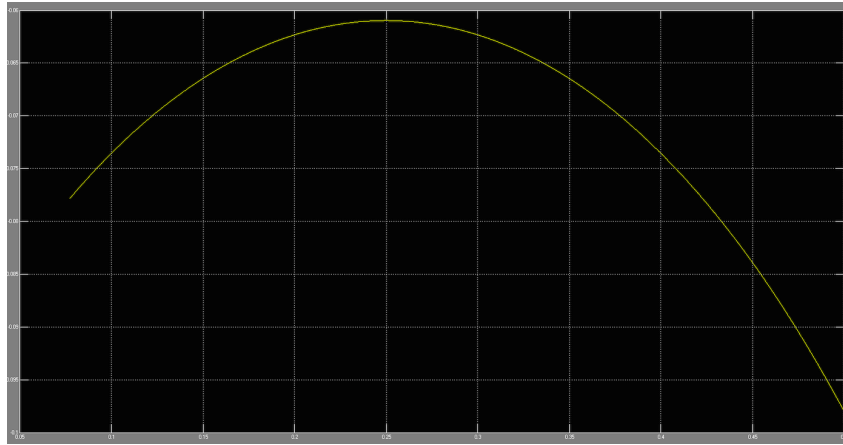


Figure 5.2: Analytically synthesized CoM trajectory.

represents maximum motors acceleration. Considering preview control application for CoM trajectory generation in frontal plane it is necessary to mention that some related works [43] consider control signal not in the form of 3.8 but in the form of 5.3.

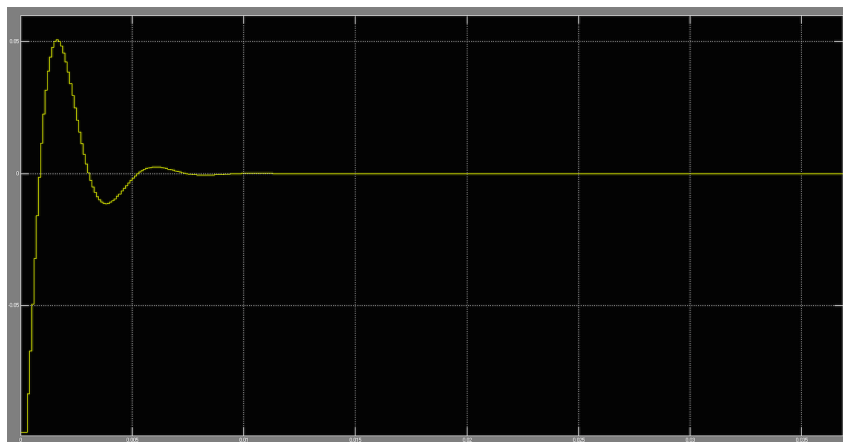


Figure 5.3: Preview control generated CoM trajectory without restriction.

$$u(k) = -G_I e(i) - G_x x(k) - \sum_{l=1}^{N_l} G_d(l) y_d(k+l) \quad (5.3)$$

There was not found motivation for this form, but it is obvious that for small disturbances integrated error and current error are small and close to zero. Preview controllers of two forms 3.8 and 5.3 were applied with restrictions to the robot model to generate CoM trajectory in frontal plane. Results are provided bellow.

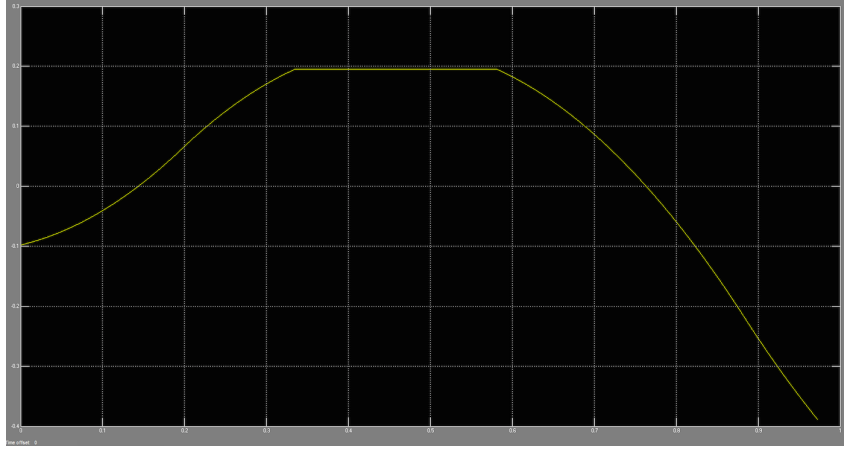


Figure 5.4: CoM Trajectory in frontal plane generated by controller described by 5.3

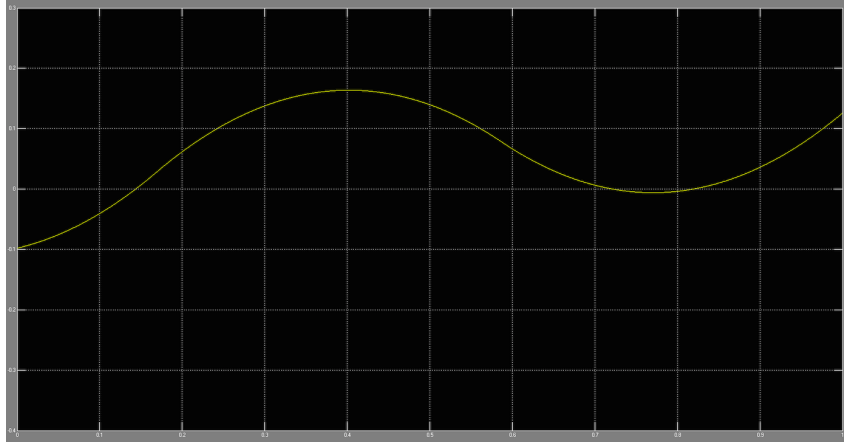


Figure 5.5: CoM Trajectory in frontal plane generated by controller described by 3.8

We can see that trajectory on fig. 5.5 is smoother than trajectory on fig. 5.4. It means that there would be less disturbances provided motors. Thus the form 3.8 is more preferable than form 5.3. Moreover we can see, that trajectory of analytical derivations is close to trajectory of preview controller. It means that preview controller can efficiently solve problem of trajectory generation. This approach seems to be more preferable because it allows robot to operate in environment with uncertainty.

Chapter 6

Future Work

Due to the limitations of the model it is necessary to develop model that is more similar to real robot. Moreover to apply preview controller on a real robot and even on advanced simulator it is still necessary to develop inverse kinematics module that will transform CoM trajectories to trajectories for every joint. Here rule based approaches can be used because the robot is a redundant construction and for every trajectory there will be a lot of configuration and thus it is necessary to choose the best one. Moreover it is necessary to combine two controllers in sagital and frontal planes. The next step after tuning control parameters on the model is to apply it to a real robot.

Chapter 7

Summary

In this work different approaches to bipedal locomotion were considered. Classification of existing methods was also done and it was the basics for development dynamic balance algorithm for bipedal robot locomotion. It was chosen two approaches: analytical one (ZMP criteria for dynamical stability) and CPG (controller output should generate pattern for locomotion). Results of realized preview controller on provided models show stable smooth trajectories and thus it seems reliable to try this approach on the real robot. There are works [11, 44] that already applied preview controller to real robots. However in their works they don't consider application of these technics to simulation of the robot. As were shown in Chapter 5 direct application of preview controller to robot model gives very good but physically unreachable results. Due to the fact that motors have limited acceleration system cannot react as fast as controller try to stabilize the system. However controller was limited by physical constraints and results of control become similar to fully analytical solution during one step period. Thus the developed approach is interesting because it can adopt to disturbances and uneven terrain despite of the fact that it produces only the pattern for the robot.

Bibliography

- [1] Rolf Pfeifer, Max Lungarella, and Fumiya Iida. Self-organization, embodiment, and biologically inspired robotics. *science*, 318(5853):1088–1093, 2007.
- [2] Kemalettin Erbatur, Akihiro Okazaki, Keisuke Obiya, Taro Takahashi, and Atsuo Kawamura. A study on the zero moment point measurement for biped walking robots. In *Advanced Motion Control, 2002. 7th International Workshop on*, pages 431–436. IEEE, 2002.
- [3] Joe Wright and Ivan Jordanov. Intelligent approaches in locomotion-a review. *Journal of Intelligent & Robotic Systems*, pages 1–23, 2014.
- [4] Zhe Tang, Meng Joo Er, and C-J Chien. Analysis of human gait using an inverted pendulum model. In *Fuzzy Systems, 2008. FUZZ-IEEE 2008.(IEEE World Congress on Computational Intelligence). IEEE International Conference on*, pages 1174–1178. IEEE, 2008.
- [5] David A Winter. Human balance and posture control during standing and walking. *Gait & posture*, 3(4):193–214, 1995.
- [6] Steven Hartley Collins and Andy Ruina. A bipedal walking robot with efficient and human-like gait. In *Robotics and Automation, 2005. ICRA 2005. Proceedings of the 2005 IEEE International Conference on*, pages 1983–1988. Ieee, 2005.
- [7] C Golliday Jr and Hooshang Hemami. An approach to analyzing biped locomotion dynamics and designing robot locomotion controls. *Automatic Control, IEEE Transactions on*, 22(6):963–972, 1977.
- [8] Stuart O Anderson, Martijn Wisse, Christopher G Atkeson, Jessica K Hodgins, GJ Zeglin, and Brian Moyer. Powered bipeds based on passive dynamic principles.

- In *Humanoid Robots, 2005 5th IEEE-RAS International Conference on*, pages 110–116. IEEE, 2005.
- [9] Ian R Manchester, Uwe Mettin, Fumiya Iida, and Russ Tedrake. Stable dynamic walking over uneven terrain. *The International Journal of Robotics Research*, page 3, 2011.
 - [10] Miomir Vukobratović and Branislav Borovac. Zero-moment point thirty five years of its life. *International Journal of Humanoid Robotics*, 1(01):157–173, 2004.
 - [11] Shuuji Kajita, Fumio Kanehiro, Kenji Kaneko, Kiyoshi Fujiwara, Kensuke Harada, Kazuhito Yokoi, and Hirohisa Hirukawa. Biped walking pattern generation by using preview control of zero-moment point. In *Robotics and Automation, 2003. Proceedings. ICRA ’03. IEEE International Conference on*, volume 2, pages 1620–1626. IEEE, 2003.
 - [12] Kazuhisa Mitobe, Genci Capi, and Yasuo Nasu. Control of walking robots based on manipulation of the zero moment point. *Robotica*, 18(06):651–657, 2000.
 - [13] Philippe Sardain and Guy Bessonnet. Forces acting on a biped robot. center of pressure-zero moment point. *Systems, Man and Cybernetics, Part A: Systems and Humans, IEEE Transactions on*, 34(5):630–637, 2004.
 - [14] MHP Dekker. Zero-moment point method for stable biped walking. *Eindhoven University of Technology*, 2009.
 - [15] Steven H Collins, Martijn Wisse, and Andy Ruina. A three-dimensional passive-dynamic walking robot with two legs and knees. *The International Journal of Robotics Research*, 20(7):607–615, 2001.
 - [16] Kazuo Hirai, Masato Hirose, Yuji Haikawa, and Toru Takenaka. The development of honda humanoid robot. In *Robotics and Automation, 1998. Proceedings. 1998 IEEE International Conference on*, volume 2, pages 1321–1326. IEEE, 1998.
 - [17] Dong W Kim, Nak-Hyun Kim, and Gwi-Tae Park. Zmp based neural network inspired humanoid robot control. *Nonlinear Dynamics*, 67(1):793–806, 2012.

- [18] Ambarish Goswami. Postural stability of biped robots and the foot-rotation indicator (fri) point. *The International Journal of Robotics Research*, 18(6):523–533, 1999.
- [19] S. Grillner. Locomotion in vertebrates: central mechanisms and reflex interaction. *Physiological reviews*, 55(2):247–304, 1975.
- [20] Wai Man Lee and Yeung Yam. Construction of central pattern generator using piecewise affine systems. In *Control and Automation, 2007. ICCA 2007. IEEE International Conference on*, pages 1729–1734. IEEE, 2007.
- [21] Seiichi Miyakoshi, Gentaro Taga, Yasuo Kuniyoshi, and Akihiko Nagakubo. Three dimensional bipedal stepping motion using neural oscillators-towards humanoid motion in the real world. In *Intelligent Robots and Systems, 1998. Proceedings., 1998 IEEE/RSJ International Conference on*, volume 1, pages 84–89. IEEE, 1998.
- [22] Kuanyi Zhu, Dingguo Zhang, and Li Lan. On central pattern generator of biological motor system. In *Control, Automation, Robotics and Vision, 2006. ICARCV'06. 9th International Conference on*, pages 1–5. IEEE, 2006.
- [23] Jun Morimoto, Gen Endo, Jun Nakanishi, and Gordon Cheng. A biologically inspired biped locomotion strategy for humanoid robots: Modulation of sinusoidal patterns by a coupled oscillator model. *Robotics, IEEE Transactions on*, 24(1):185–191, 2008.
- [24] Sten Grillner, Tanja Deliagina, A El Manira, RH Hill, GN Orlovsky, P Wallén, Ö Ekeberg, and A Lansner. Neural networks that co-ordinate locomotion and body orientation in lamprey. *Trends in neurosciences*, 18(6):270–279, 1995.
- [25] Kiyotoshi Matsuoka. Sustained oscillations generated by mutually inhibiting neurons with adaptation. *Biological cybernetics*, 52(6):367–376, 1985.
- [26] Guang Lei Liu, Maki K Habib, Keigo Watanabe, and Kiyotaka Izumi. Central pattern generators based on matsuoka oscillators for the locomotion of biped robots. *Artificial Life and Robotics*, 12(1-2):264–269, 2008.
- [27] Takashi Kanamaru. Van der pol oscillator. *Scholarpedia*, 2(1):2202, 2007.
- [28] Alexander Russell, Garrick Orchard, and Ralph Etienne-Cummings. Configuring of spiking central pattern generator networks for bipedal walking using genetic algo-

- rthms. In *Circuits and Systems, 2007. ISCAS 2007. IEEE International Symposium on*, pages 1525–1528. IEEE, 2007.
- [29] Pandu Ranga Vundavilli and Dilip Kumar Pratihari. Dynamically balanced optimal gaits of a ditch-crossing biped robot. *Robotics and Autonomous Systems*, 58(4):349–361, 2010.
 - [30] Winfried Ilg and Karsten Berns. A learning architecture based on reinforcement learning for adaptive control of the walking machine lauron. *Robotics and Autonomous Systems*, 15(4):321–334, 1995.
 - [31] JS Albus. A new approach to manipulator control: The cerebellar model articulation controller. *Transaction of the ASME Journal of Dynamic Systems*, 97(3):270–277, 1975.
 - [32] Christophe Sabourin and Olivier Bruneau. Robustness of the dynamic walk of a biped robot subjected to disturbing external forces by using cmac neural networks. *Robotics and Autonomous Systems*, 51(2):81–99, 2005.
 - [33] Karsten Berns, Rüdiger Dillmann, and Stefan Piekenbrock. Neural networks for the control of a six-legged walking machine. *Robotics and autonomous systems*, 14(2):233–244, 1995.
 - [34] Torsten Reil and Phil Husbands. Evolution of central pattern generators for bipedal walking in a real-time physics environment. *Evolutionary Computation, IEEE Transactions on*, 6(2):159–168, 2002.
 - [35] V Petridis and A Papaikonomou. Recurrent neural networks as pattern generators. In *Proc IEEE International Conference on Neural Networks*, pages 872–875. Citeseer, 1994.
 - [36] Francis Wyffels and Benjamin Schrauwen. Design of a central pattern generator using reservoir computing for learning human motion. In *Advanced Technologies for Enhanced Quality of Life, 2009. AT-EQUAL’09.*, pages 118–122. IEEE, 2009.
 - [37] Tetsunari Inamura, Iwaki Toshima, Hiroaki Tanie, and Yoshihiko Nakamura. Embodied symbol emergence based on mimesis theory. *The International Journal of Robotics Research*, 23(4-5):363–377, 2004.

- [38] Jie Yang and Yangsheng Xu. Hidden markov model for control strategy learning. Technical report, DTIC Document, 1994.
- [39] Jong Hyeon Park. Fuzzy-logic zero-moment-point trajectory generation for reduced trunk motions of biped robots. *Fuzzy sets and systems*, 134(1):189–203, 2003.
- [40] Andrew Hazell. Discrete-time optimal preview control. 2008.
- [41] Tohru Katayama, Takahira Ohki, Toshio Inoue, and Tomoyuki Kato. Design of an optimal controller for a discrete-time system subject to previewable demand. *International Journal of Control*, 41(3):677–699, 1985.
- [42] Taesin Ha and Chong-Ho Choi. An effective trajectory generation method for bipedal walking. *Robotics and Autonomous Systems*, 55(10):795–810, 2007.
- [43] Kyu-Cheon Choi and Hyun-Jeong Lee. Fuzzy posture control for biped walking robot based on force sensor for zmp. In *SICE-ICASE, 2006. International Joint Conference*, pages 1185–1189. IEEE, 2006.
- [44] Hervé Audren, Joris Vaillant, Abderrahmane Kheddar, Adrien Escande, Kenji Kaneko, and Eiichi Yoshida. Model preview control in multi-contact motion-application to a humanoid robot. In *Intelligent Robots and Systems (IROS 2014), 2014 IEEE/RSJ International Conference on*, pages 4030–4035. IEEE, 2014.

Appendix A

Preview control parameters estimation algorithm

```
function [Ke, Kx, G] = preview_control_params(T, Zh, N)

    R = 1e-6;
    Qe = 1;
    Qdpos = 0;
    Qdvel = 0;
    Qdaccel = 0;
    g = 9.8;

    % derivative state coefficient matrix
    A = [1 T T^2/2; 0 1 T; 0 0 1];
    B = [T^3/6; T^2/2; T];
    % coefficient matrix of state space model
    C = [1 0 -Zh/g];

    % constructing matrices for DARE
    AA = vertcat(horzcat([1], C*A), horzcat(zeros(3,1), A));
    BB = vertcat([C*B], [B]);
    RR = R;
    QQ = diag([Qe, Qdpos, Qdvel, Qdaccel]);
```

```

% DARE equation solving
PP = dare(AA,BB,QQ,RR);

SS = 1.0/(RR + BB'*PP*BB);
KK = SS*BB'*PP*AA;

% coefficients for regulator
Ke = KK(1,1);
Kx = KK(1,2:4);

Ac = AA - BB*KK;
XX = -Ac' * PP * [1,0,0,0]';

% first preview coefficient should be equal -Ke
G = [-Ke];

% compute preview coefficients
for i=2:1:N
    G = [G SS * BB' * XX];
    XX = Ac' * XX;
end
end

```

Appendix B

Robot constants and desired ZMP generation algorithm

```
g = 9.8;
Zc = 0.85; % height of CoM
T = 1e-4; % discretisation step
N = 16000; % preview steps
sim_time = 10; % simulation time

% compute control coefficients
[Ke, Kx, G] = preview_control_params(T, Zc, N);

D_o = [1 3 5]'; % delays
D_e = [2 4 6]'; % delays
t = 0 : T : sim_time + N * T; % signal evaluation time
width = 1; % width of each pulse

% desired ZMP signal construction
desired_zmp = 0.1 * pulstran(t, D_o, 'rectpuls', width) \
- 0.1 * pulstran(t, D_e, 'rectpuls', width);
% convert desired ZMP to simulink signal format
desired_zmp = [t' desired_zmp'];
```