Ansys
2025 R2

Ansys Fluent Simulation Report

Analyst	Aditya
Date	1/15/2026 12:26 PM

Table of Contents

System Information

Application	Fluent
Settings	2d, double precision, pressure-based, SST k-omega
Version	25.2.0-10204
Source Revision	5eecd5d865
Build Time	Jun 16 2025 10:44:41 EDT
CPU	Intel(R) Core(TM) i5-1035G1
OS	Windows

Geometry and Mesh

Mesh Size

Cells	Faces	Nodes
18111	36400	18289

Mesh Quality

Name	Type	Min Orthogonal Quality	Max Aspect Ratio
surface_body	Mixed Cell	0.03842482	37.591127

Orthogonal Quality

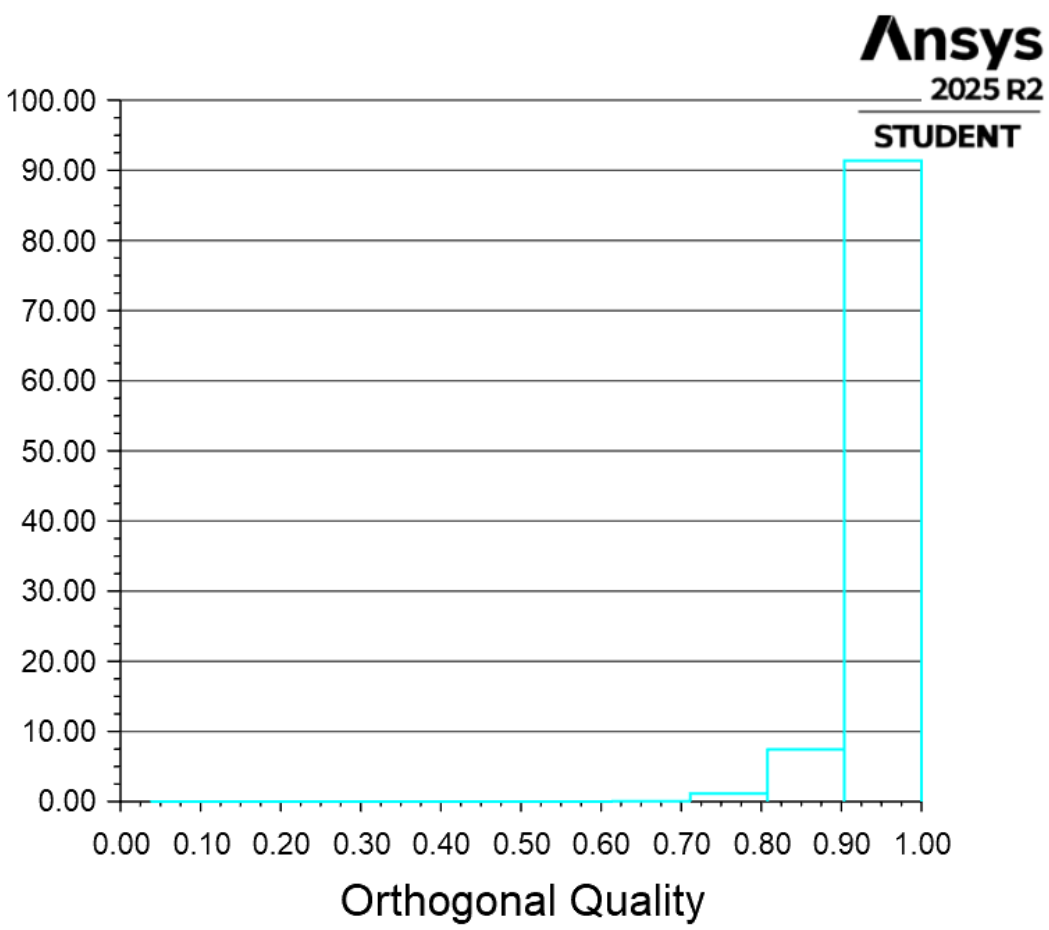

Simulation Setup

Physics

Models

Model	Settings
Space	2D
Time	Steady
Viscous	SST k-omega turbulence model

Material Properties

– Fluid	
– air	
Density	1.225 kg/m^3
Viscosity	1.7894e-05 kg/(m s)
– Solid	
– aluminum	
Density	2719 kg/m^3

Cell Zone Conditions

– Fluid	
– surface_body	
Material Name	air
Specify source terms?	no
Specify fixed values?	no
Frame Motion?	no
Laminar zone?	no
Porous zone?	no

Boundary Conditions

– Inlet	
– inlet	
Velocity Specification Method	Components
Reference Frame	Absolute
Supersonic/Initial Gauge Pressure [Pa]	0
X-Velocity [m/s]	14.56
Y-Velocity [m/s]	1.02
Turbulence Specification Method	Intensity and Viscosity Ratio
Turbulent Intensity [%]	5
Turbulent Viscosity Ratio	10
– Outlet	
– outlet	
Backflow Reference Frame	Absolute
Gauge Pressure [Pa]	0
Pressure Profile Multiplier	1
Backflow Direction Specification Method	Normal to Boundary
Turbulence Specification Method	Intensity and Viscosity Ratio
Backflow Turbulent Intensity [%]	5
Backflow Turbulent Viscosity Ratio	10
Backflow Pressure Specification	Total Pressure
Build artificial walls to prevent reverse flow?	no
Average Pressure Specification?	no
Specify targeted mass flow rate	no
– Wall	
– airfoil	
Wall Motion	Stationary Wall
Shear Boundary Condition	No Slip
Wall Surface Roughness	Standard
Wall Roughness Height [m]	0

Wall Roughness Constant	0.5

Reference Values

Area	1 m^2
Density	1.225 kg/m^3
Depth	1 m
Enthalpy	0 J/kg
Length	1 m
Pressure	0 Pa
Temperature	288.16 K
Velocity	14.59568 m/s
Viscosity	1.7894e-05 kg/(m s)
Ratio of Specific Heats	1.4
Yplus for Heat Tran. Coef.	300

Solver Settings

– Equations	
Flow	True
Turbulence	True
– Numerics	
Absolute Velocity Formulation	True
– Under-Relaxation Factors	
Pressure	0.3
Density	1
Body Forces	1
Momentum	0.7
Turbulent Kinetic Energy	0.8
Specific Dissipation Rate	0.8
Turbulent Viscosity	1
– Pressure-Velocity Coupling	
Type	SIMPLE
– Discretization Scheme	

Pressure	Second Order
Momentum	Second Order Upwind
Turbulent Kinetic Energy	Second Order Upwind
Specific Dissipation Rate	Second Order Upwind
– Solution Limits	
Minimum Absolute Pressure [Pa]	1
Maximum Absolute Pressure [Pa]	5e+10
Minimum Static Temperature [K]	1
Maximum Static Temperature [K]	5000
Minimum Turb. Kinetic Energy [m^2/s^2]	1e-14
Minimum Spec. Dissipation Rate [s^-1]	1e-20
Maximum Turb. Viscosity Ratio	100000

Run Information

Number of Machines	1
Number of Cores	1
Case Read	26.924 seconds
Data Read	0.962 seconds
Virtual Current Memory	2.86536 GB
Virtual Peak Memory	2.87244 GB
Memory Per M Cell	122.859

Solution Status

Iterations: 3000

	Value	Absolute Criteria	Convergence Status
continuity	1.413882e-06	1e-06	Not Converged
x-velocity	1.262721e-10	1e-06	Converged
y-velocity	6.561542e-11	1e-06	Converged
k	5.133287e-06	1e-06	Not Converged
omega	2.238476e-07	1e-06	Converged

Report Definitions

cl	0.4041338	
cd	0.01820036	

Plots

Residuals

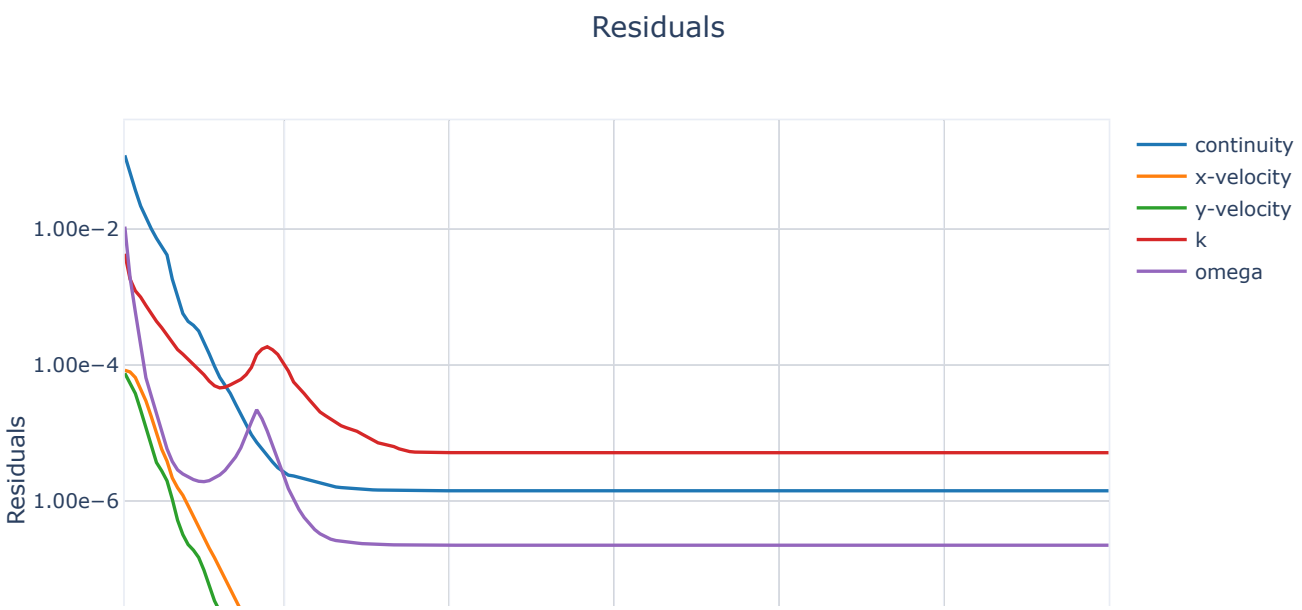

cd-rplot

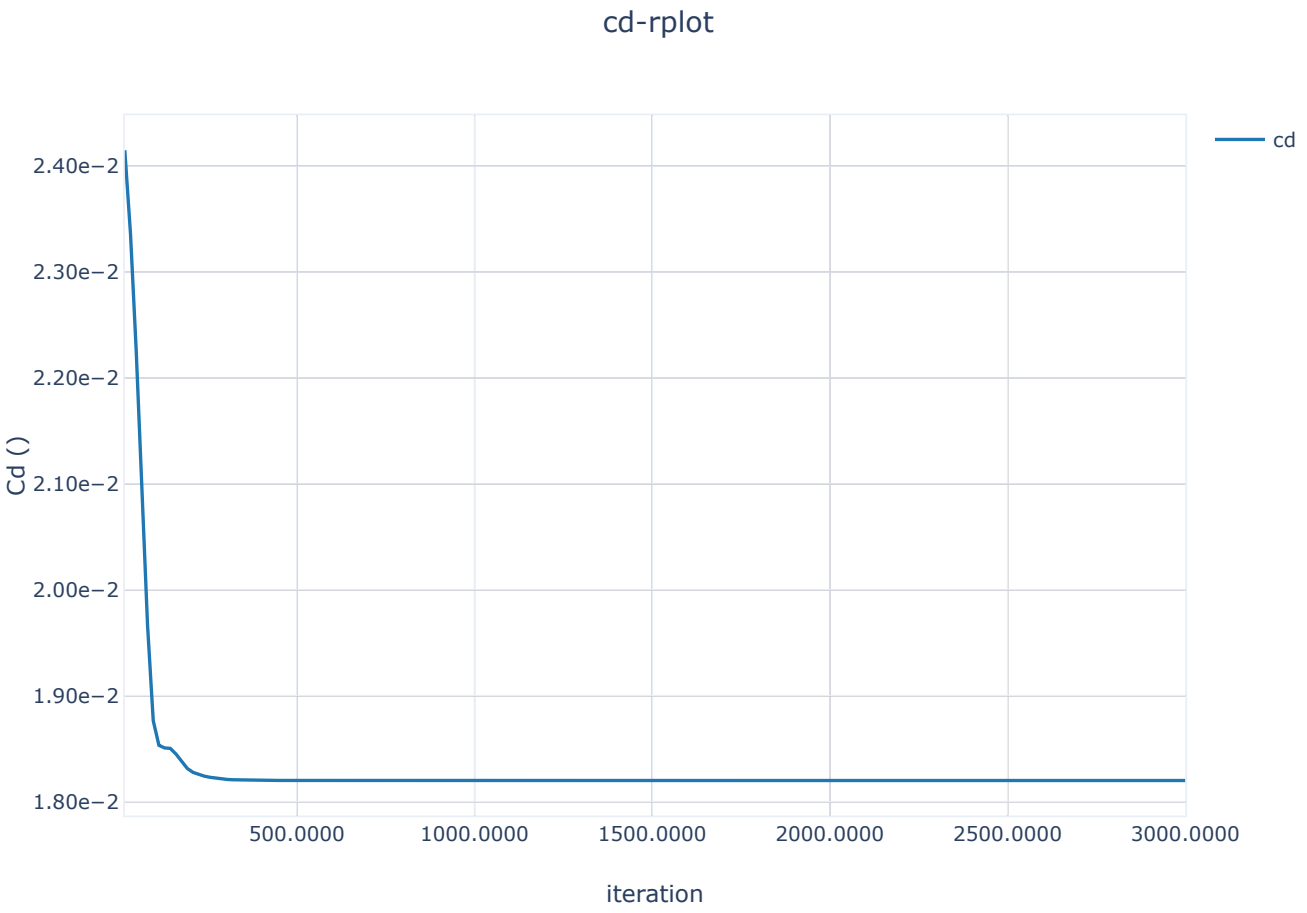

cl-rplot

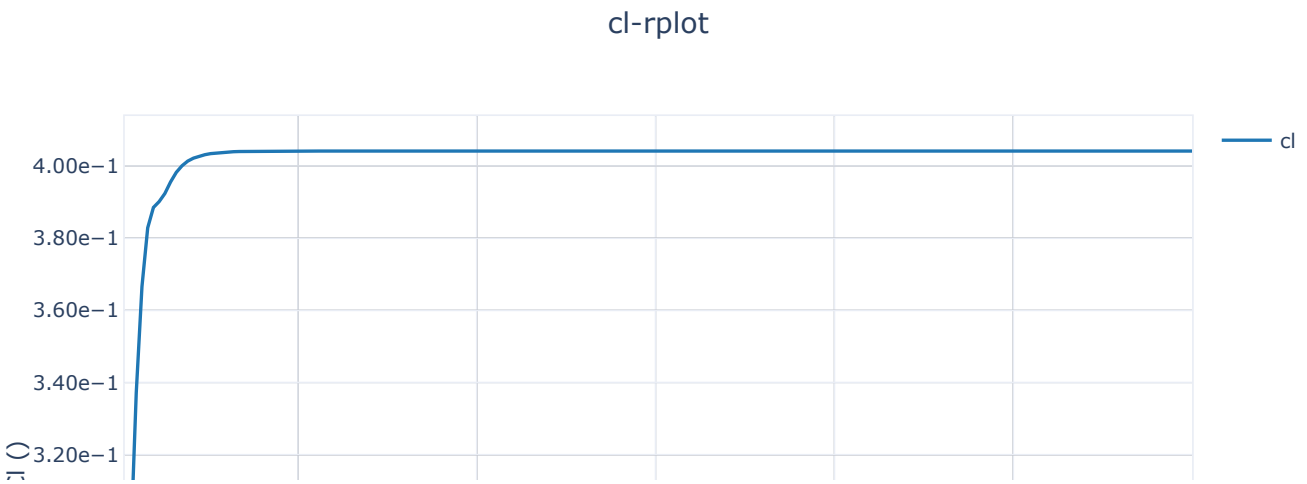

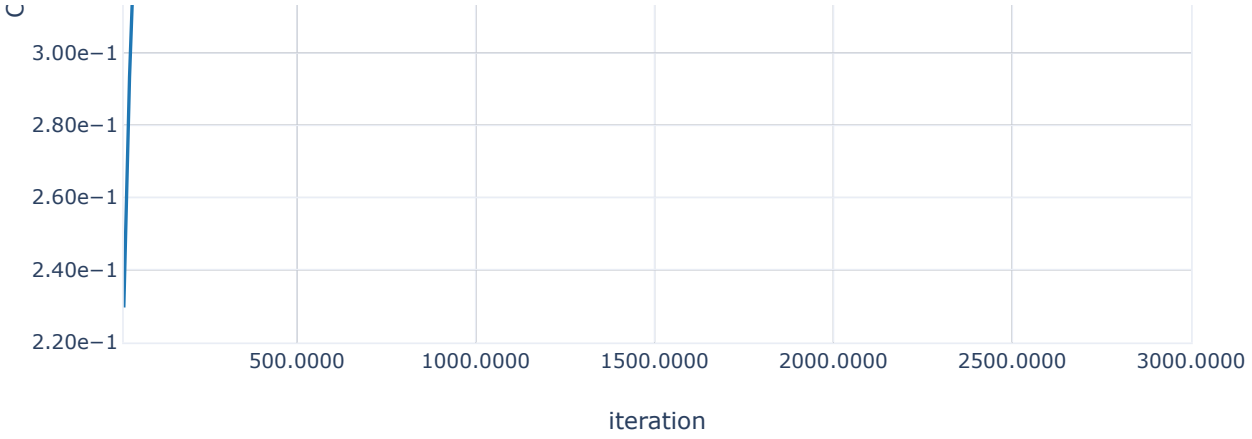

Scenes

Ansys
2025 R2

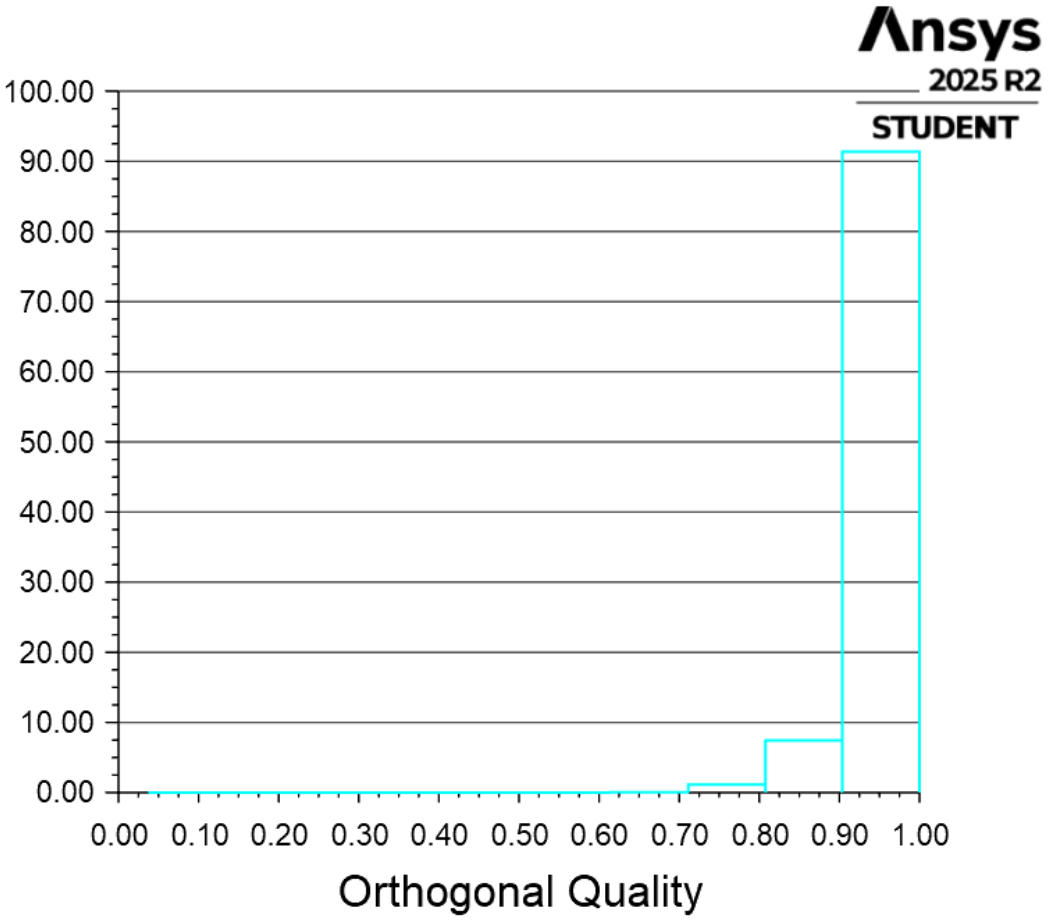
Ansys
2025 R2
STUDENT
100.00
90.00
80.00
70.00
60.00
50.00
40.00
30.00
20.00
10.00
0.00
0.00 0.10 0.20 0.30 0.40 0.50 0.60 0.70 0.80 0.90 1.00
Orthogonal Quality