


# Top View of Assembly 66.30 [2.610] A 38.50 [1.516] B 38.50 [1.516]

### SECTION B-B Side View of Assembly








# SECTION A-A End View of Assembly




# **Top View Looking Inside Box**



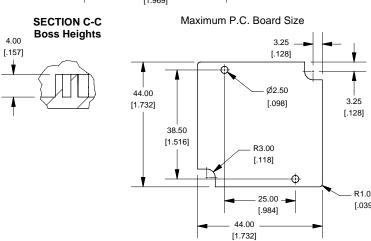





### NOTE

Purchased assembly includes lid and box made from GP ABS material and cover screws.

1551RFL			
	1551RFL Enclosure		
	Black Enclosure - RAL 9011 - UL94 - HB	1551RFLBK	
	Gray Enclosure - RAL 7035 - UL94 - HB	1551RFLGY	
	Translucent Blue - UL94 - HB	1551RFLTBU	
	ACCESSORIES		
	Recommended Screw Torque: 15-20 ozf.in (10-	10-15 cN.m)	
	Black Enclosure Cover Screws (Pkg 100) [#4	1591TS100BK	
	X 1/2" Self Tapping]		
	Grey Enclosure Cover Screws (Pkg 100) [#4	1591TS100	
	X 1/2" Self Tapping]		
	P.C. Board Screws (Pkg 100)	1551ATS100	
	[#2 x 3/16" Self Tapping]		
	HAMMONE		
00	✓ I MANUFACTURING ™		
9]	■ <b>I</b> / 1551RFL		

www.hammondmfg.com

4