

## AVR UC3

### *EVK1100 Control Panel Tutorial*



## Agenda

- **What is the Control Panel?**
- **Control Panel Interfaces Description.**
- **Control Panel Use Case**
  - Ethernet
  - Shell through RS232
  - USB Device
  - USB Host



# AVR<sup>®</sup>32

June 10

2



### Demo is a Control Panel... 1/4

#### ■ Control Panel

- Is an example of implementation of a real-time application that controls and monitors the EVK1100 sensors and actuators.



## Demo is a control panel... 2/4

- **The control panel is based on the freeRTOS operating system.**



- **FreeRTOS is a light Real Time Operating System.**
- **Support AVR UC3 microcontrollers.**
- **Multitasking:** allows you to manage several programs or tasks on a single MCU.
- **Real-Time Control:** complex timing becomes the responsibility of the RTOS.
- **Inter-Task Communication:** allows tasks in your system to communicate between each other.



## Demo is a control panel... 3/4

- It is based on freeRTOS.org OS and use most of the AVR UC3 Software Framework:
  - USART
  - SPI (Dataflash, LCD)
  - MACB (Ethernet)
  - Timer / Counter
  - Interrupt controller
  - PWM
  - ADC
  - Flash
  - Power Manager
  - GPIO
  - USB: mass storage class with device and host
  - MAC (Ethernet): TCP/IP Stack with HTTP protocol
  - File system FAT12/16/32

### Demo is a control panel... 4/4

#### ■ On going sensors data logging

- Temperature, potentiometers, keys...
- Log data in Data-Flash (SPI) or MMC/SD (SPI) if present.

#### ■ Web server

- Check data log, remote configuration through HTTP!

#### ■ USB Host Mass Storage

- Plug your USB key to download the data log.


#### ■ USB Device Mass Storage

- Plug the control panel to your PC to access the data log.





## Control Panel Interfaces

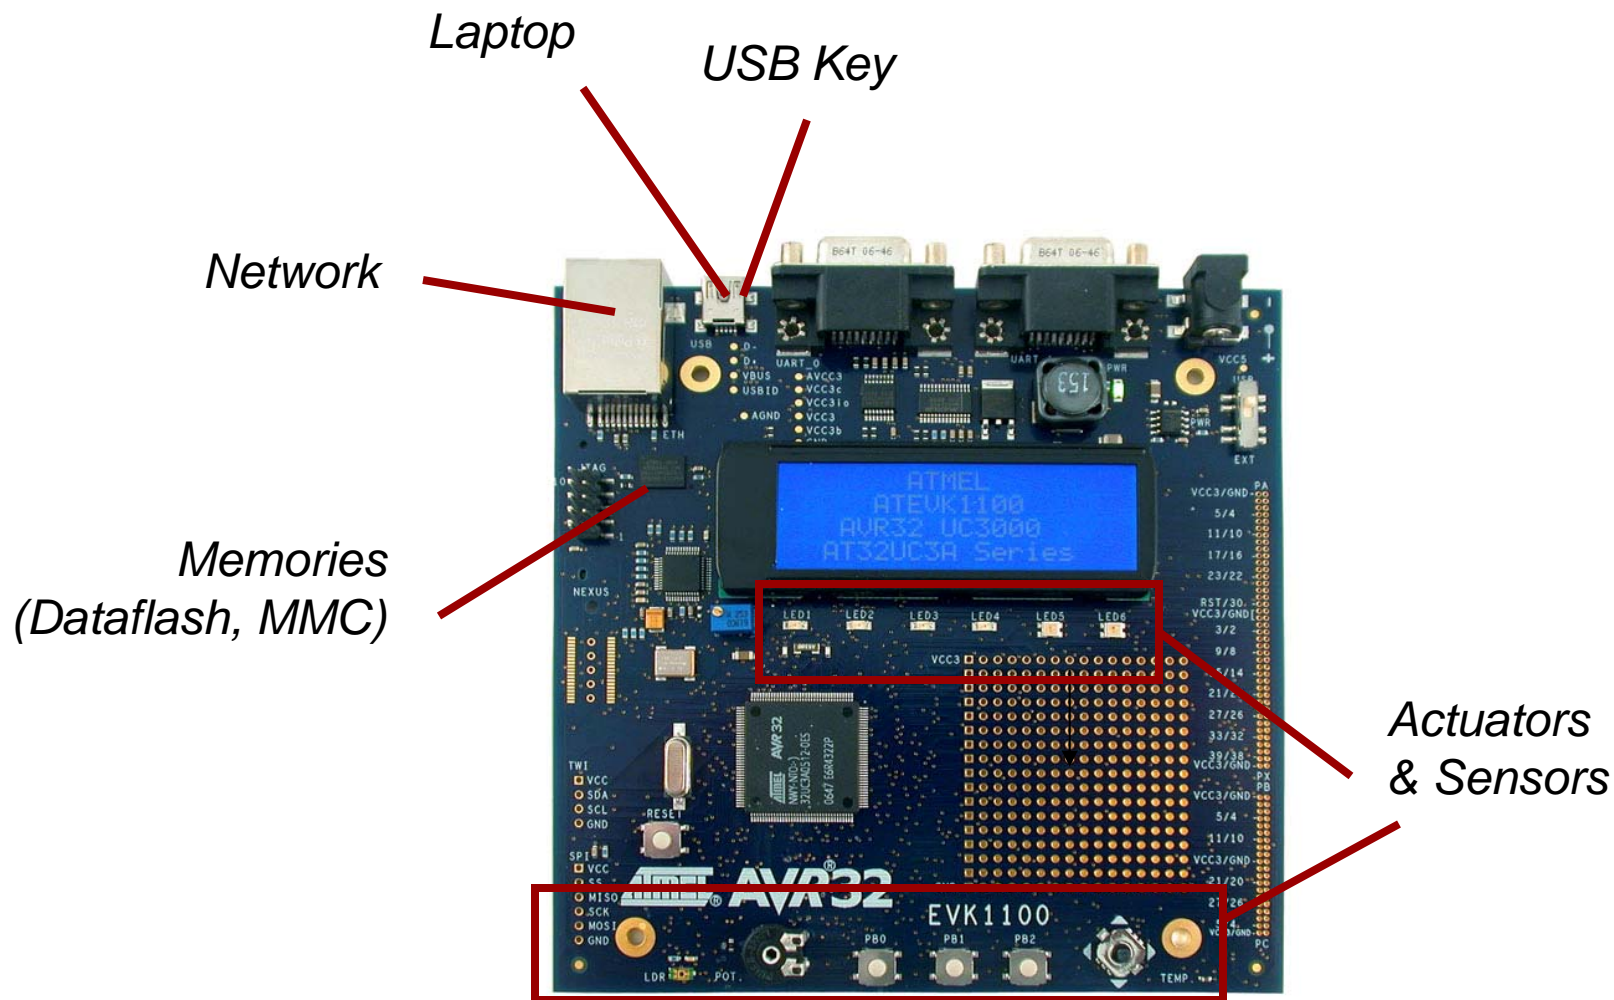

# Hardware Requirements

### ■ For this tutorial, you will need:

- EVK1100 evaluation kit loaded with the control panel firmware.
  - The control panel firmware can be found in the UC3 Software Framework:
    - \applications\evk1100-control-panel\at32uc3a0512\gcc\uc3a0512-ctrlpanel.elf
    - Or
    - applications\evk1100-control-panel\at32uc3a0512\iar
- Power supply (8 to 20V)
- A JTAGICE mkII emulator
- A Ethernet cable
- A miniB plug to STD-A plug USB cable
- A miniA plug to STD-A Receptacle OTG cable
- A RS232 null-modem serial cable






## Power Up

### ■ Power up the EVK1100 with an external power supply

- Configure your AC adaptor polarity switch to match the board's.
- Set it to provide from 8 to 20V.
- Plug it to the board's power supply jack.
- Set the board's POWER switch to EXT.

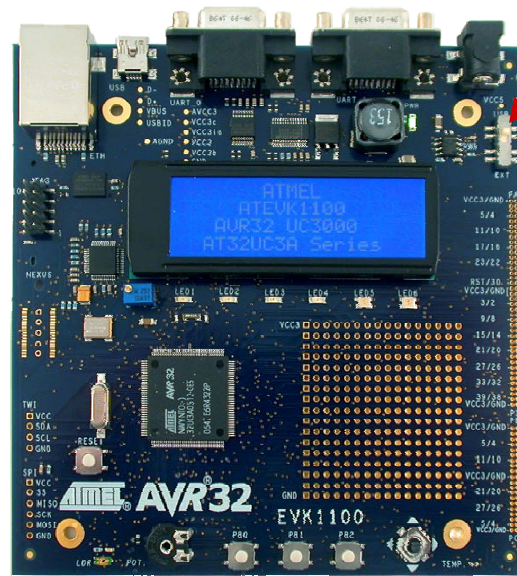

*Power Supply  
Selector*



## Board MMI description 1/2

- The board MMI of the Control Panel is made with the LCD and the joystick. The joystick is dedicated to act on the menu line .
- The first line of the LCD is an arbitrary date in the format: month/day/year hour:min:sec.
- The second line is the connectivity information line: when the Control Panel is plugged to an Ethernet network, its IP address is displayed on this line.
- When the Control Panel is acting as a USB Mass Storage device or host, a sort of a USB sign is displayed on the last column of this second line.

```
02/13/2007  00:50:21  
192.168.0.2  Ψ  
USB Mass Storage  
ATMEL AVR32 UC3
```



## Board MMI description 2/2

- The third line is the menu line : the default “Set as USB key” menu message means "press the joystick to set the Control Panel as a USB Mass Storage device".
- The fourth line is the user message zone.




## USE CASE 1

***Accessing the Control Panel  
acting as a Web server***

## USE CASE 1

- In this scenario, you are a local user who wishes to access the Control Panel through its Web-server interface.
- Take the getting started sheet in the EVK1100 box and follow the instructions.
- At the end, the Web-server entry page should appear:

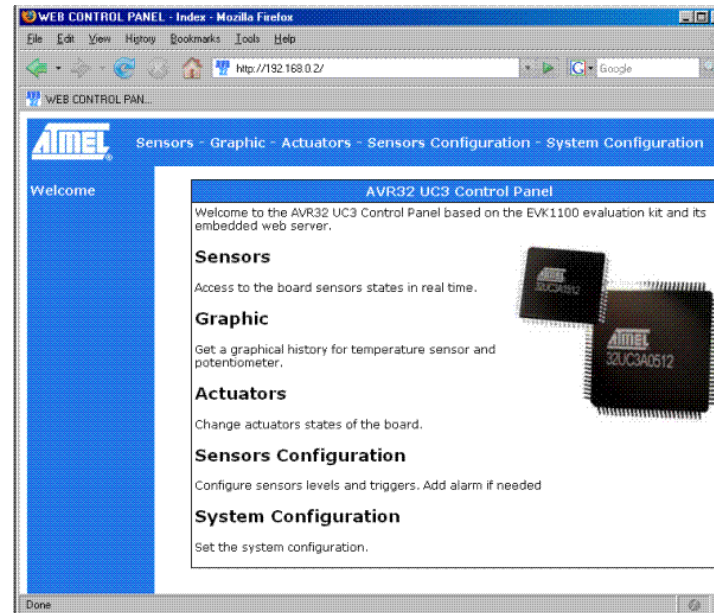



## USE CASE 2

***Accessing the Control Panel  
acting as a USB Mass Storage device***



### USE CASE 2

#### ■ *Accessing the Control Panel acting as a USB Mass Storage device*

- Press the joystick to switch the Control Panel to USB device mode.

```
02/13/2007  10:23:54  
Set as USB key ▶  
ATMEL  AVR32  UC3
```


- As mentioned on the LCD on line 3 "Press -> Mass Storage", press the joystick to switch to Mass Storage device mode.

```
02/13/2007  10:25:52  
Waiting for Host  
ATMEL  AVR32  UC3
```

- Once the joystick has been pressed, you may plug a USB host to the EVK1100 board : note that the message on the LCD on line 3 has changed to "Waiting for Host".

### USE CASE 2

- *Accessing the Control Panel acting as a USB Mass Storage device*
  - **Note that while the Control Panel is in USB device mode, the Web server is considered to be in maintenance mode. An access to the web server while the Control Panel is acting as a USB device will return the following web page.**

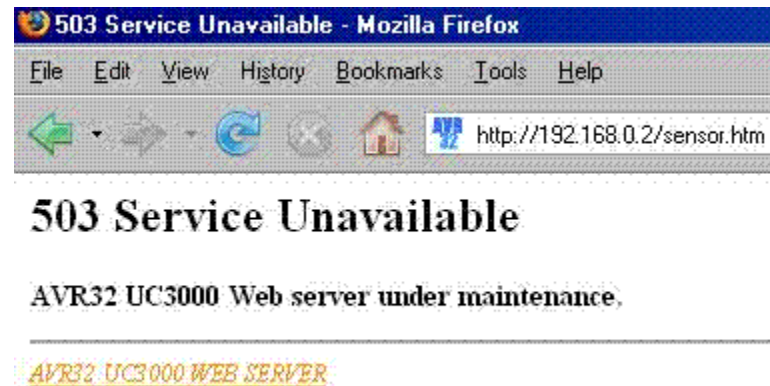




### USE CASE 2

- Connect the PC to the EVK1100 board USB plug.
  - Use the miniB-plug-to-STD-A-plug USB cable to connect the EVK1100 board and the PC.
  - The LCD screen line 2 and 3 should change.
    - Line 2 of the screen(the status line) should display the USB icon meaning that a USB connection is up and running.
    - Line 3 of the screen(the menu line) should display the information string "USB Mass Storage" meaning that the Control Panel is acting as a USB Mass Storage device.
- Access the Control Panel Mass Storage memory.
  - There is no menu on the EVK1100 board in this mode. The Control Panel acts as a regular USB Mass Storage key in this mode. The PC sees the Control Panel as a removable disk: it has full access to the Control Panel file system.

## USE CASE 2

### ■ Assignment

- **Open the index.htm file with a text editor (Notepad) and change the text below the section:**
  - `<h2>Description</h2>`
- **Change the text by adding the date of today.**
- **Save the file.**

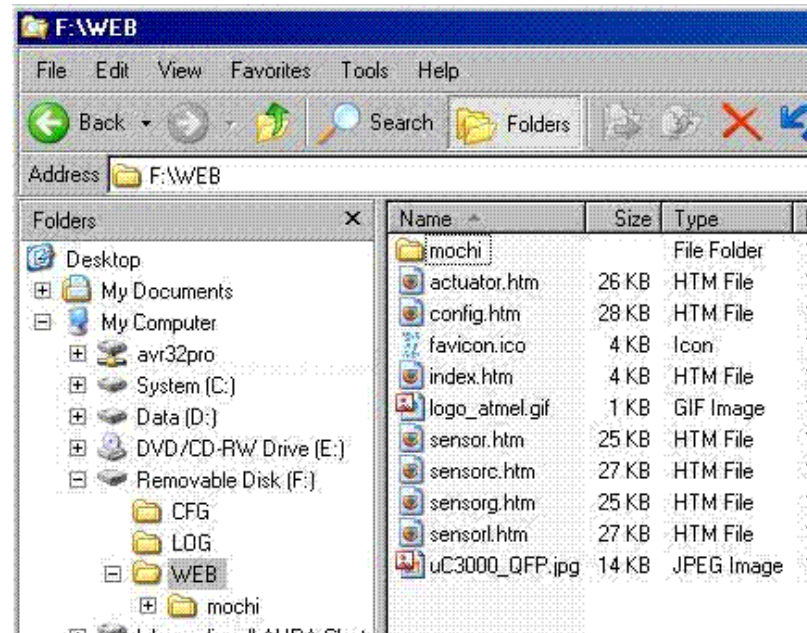

## USE CASE 2

- Unplug the USB disk from Windows.
- Reload the web server page from your internet browser.

**AVR32 UC3 Control Panel**

Welcome to the **AVR32 UC3 Control Panel** based on the EVK1100 evaluation kit and its embedded web server.

**Description**

The Control Panel application is a demonstration application running on top of the freeRTOS.org operating system. Its purpose is to log local sensors and actuators data and events(data acquisition) and make these available through the various connectivity channels supported by the AVR32 UC3A microcontroller.

**Web Server Features**

[Sensors](#)

Access to the board sensors (Temperature, light...) states in real time.

[Graphic](#)

Get a graphical history for temperature sensor and potentiometer.

[Actuators](#)

Change actuators (LEDs) states of the board.

[Sensors Configuration](#)

Configure sensors levels and triggers. Add alarm if needed

[System Configuration](#)

Set the system configuration (network...).

*Your text  
here!*



## USE CASE 3


***Accessing the Control Panel through its shell  
interface on USART\_0***



## USE CASE 3

### ■ *Accessing the Control Panel through its shell interface on UART\_0*

- Connecting to the shell.
  - With a male-female serial cable, join your laptop COM port to the Control Panel's UART\_0 COM port.
  - On your laptop, launch hyperterminal,
  - Fill-in the following properties to match the Control Panel's UART\_0 settings (Bits per second=57600, Data bits=8, Parity=None, Stop bits=1, Flow control=None):

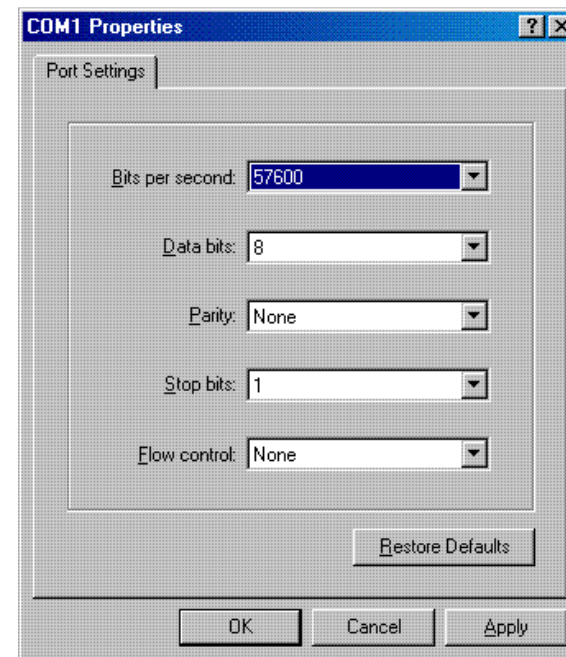



### USE CASE 3

- List of all available command
  - **Type help followed by enter: this will execute the help command that lists all available commands and a short description for each.**
  
- **Assignment 1:**
  - **Type on the shell:**  
*set\_actuator\_value actuator=lcd usrmsg="Hello Goodbye!"  
time=10*  
**This command writes the string "Hello Goodbye!" to the LCD user message zone (i.e. the 4th line) in 10 seconds from the moment you hit enter. The "time=10" argument is optional.**

## USE CASE 3


- Examples of file system commands.
  - Suppose we want to see the content of the /WEB directory(i.e. the Web server files):
  - The Control Panel supports multiple drives. By default, there is only one available drive, that is the dataflash. Let's display the available drives.

```
$>df
"AT45DBX Data Flash" (a:) Free Space: 7586816 Bytes / 8341504 Bytes
$>_
```



- We see that we currently have only one drive, the drive a.
- Mount the a drive:

```
$>df
"AT45DBX Data Flash" (a:) Free Space: 7586816 Bytes / 8341504 Bytes
$>
$>mount a
$>_
```

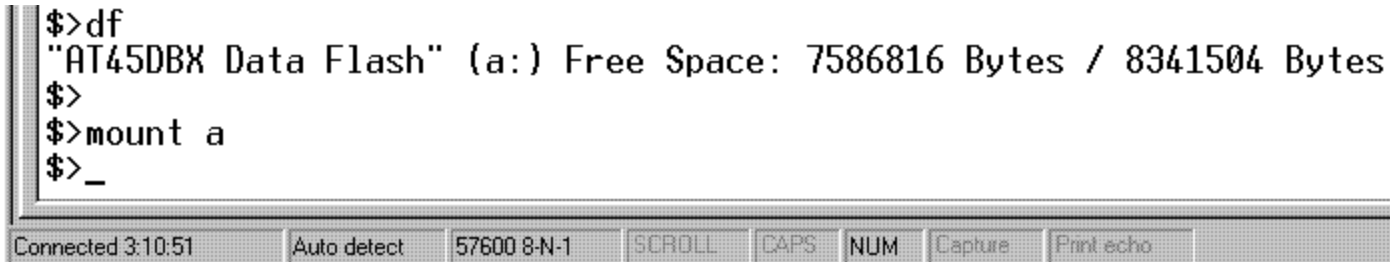



## USE CASE 3

- Display the current content of the top / directory on the a drive:

```
$>df
"AT45DBX Data Flash" (a:) Free Space: 7586816 Bytes / 8341504 Bytes
$>
$>mount a
$>ls

Volume is a: ("AT45DBX Data Flash")
Dir name is a:
      Size (Bytes)   Name
Dir      0           CFG
Dir      0           WEB
0 Files
2 Dir
$>_
```

Connected 3:15:31   Auto detect   57600 8-N-1   SCROLL   CAPS   NUM   Capture   Print echo

- Go to the WEB directory: type `cd WEB` then enter. Then display the content of the WEB directory.

```
Dir      0           CFG
Dir      0           WEB
0 Files
2 Dir
$>cd WEB
$>ls

Volume is a: ("AT45DBX Data Flash")
Dir name is WEB
      Size (Bytes)   Name
Dir      0           MOCHI
          32920       ACTUATOR.HTM
          34929       CONFIG.HTM
          3262        FAVICON.ICO
          4619        INDEX.HTM
          946         logo_atmel.gif
          32485       SENSOR.HTM
          34218       SENSORC.HTM
          32299       SENSORG.HTM
          34012       SENSORL.HTM
          14044       uC3000_QFP.jpg
10 Files
1 Dir
$>
```

connected 3:16:55   Auto detect   57600 8-N-1   SCROLL   CAPS   NUM



## USE CASE 4

***Accessing the Control Panel acting as a USB  
Mass Storage host***



### USE CASE 4

- In this scenario, you are a local user who wishes to access the Control Panel through its USB interface. You are equipped with a USB key.
- The Control Panel will behave as a USB Mass Storage host while the USB key will be a USB Mass Storage device. Since the Control Panel behaves as a host in this mode, it has full control over its own memory and over the memory of the attached USB device.
- Do it by yourself and find how to copy ADC logs to your USB key.



### Summary

#### ■ You've learned:

- How to use the EVK1100 kit!
- How to use the control panel interface
  - HTTP
  - RS232 Shell
  - USB device and host
  - User interface (LCD, buttons, sensors....)

- ***You can find the user's guide in the AVR Software Framework:***  
`applications\evk1100-control-panel\readme.html`