

U | Contact

Data sheet

SR99S01VBNN00G7 black

Page 1/3

P/N

SR99S01VBNN00G7

xx=number of poles


2020/02/20

Version: Z


Illustrations



Dimensional drawing

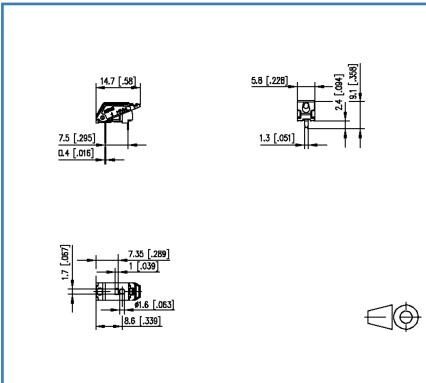

Drill pattern

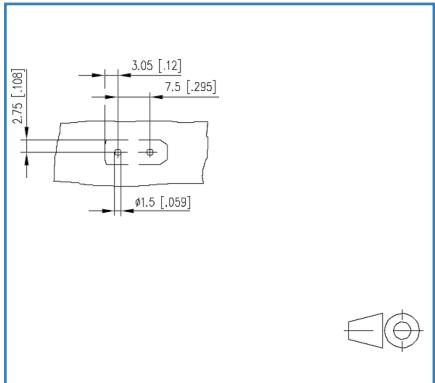

See enlarged drawings at the end of document

Product specification

- spring clamp terminal block, THR solderable, double solder pins
- direction of connection 90°
- fittable without loss of poles
- color black
- Tape & Reel packaging
- finger push-button
- test point and wire connection indicator
- Variants: black, creme white, yellow, green, red, blue, orange



U | Contact

Data sheet

Page 2/3

SR99S01VBNN00G7 black

P/N

SR99S01VBNN00G7
xx=number of poles

2020/02/20

Version: Z

Technical Data

General Data

Solder pin length	2.4 mm
min. number of poles	1
max. number of poles	1
Insulating material class	CTI 600
protection category	IP20
Min. insul. strip length	7 mm
Rated current	9 A

Connection Data

rat.wiring solid AWGmax	0.2 mm ² - 1.5 mm ² / AWG 24 - AWG 16
rat.wiring strand.AWGmax	0.2 mm ² - 1.5 mm ² / AWG 24 - AWG 16

Approvals

 V / A / AWG	300 / 9 / 24 - 16
 0.75 mm ²	9A / T60

Material

insulating material	PA66/6T
Flammability class	V0
spring material	Spring steel
contact material	CuSn
contact surface	Sn
Glow-Wire Flammability GWFI	960 °C acc. to IEC 60695-2-12
Glow-Wire Flammability GWIT	775 °C acc. to IEC 60695-2-13

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

General

Tolerance	ISO 2768 -mH
Solderability	Acc. to IPC/JEDEC J-STD-020D-MSL 1



METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany

Phone +49 7702 533-0 | Fax +49 7702 533-433

 Weitere Dokumentation siehe / additional documentation see /
 documentation supplémentaire voir www.metz-connect.com


U | Contact

Data sheet

SR99S01VBNN00G7 black

Page 3/3

P/N


SR99S01VBNN00G7**xx=number of poles**

2020/02/20


Version: Z

Illustrations

Dimensional drawing

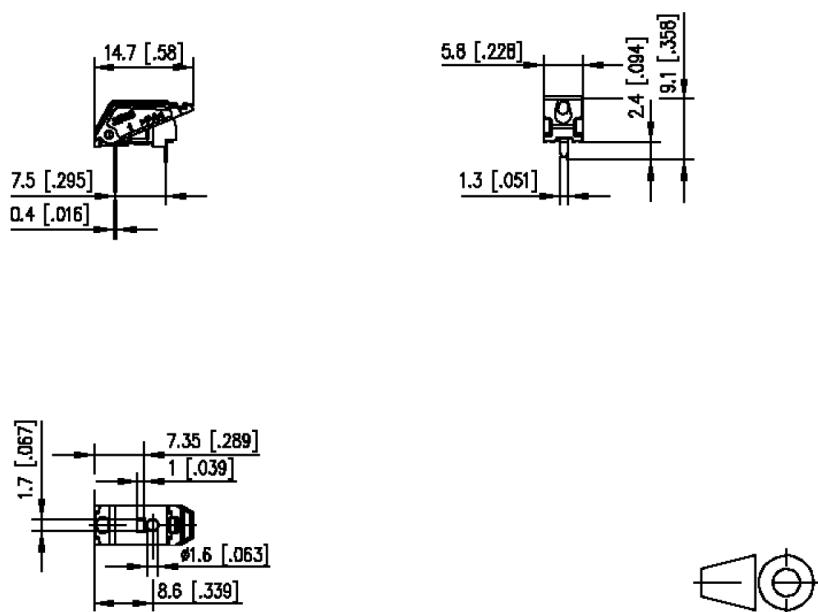

Drill pattern

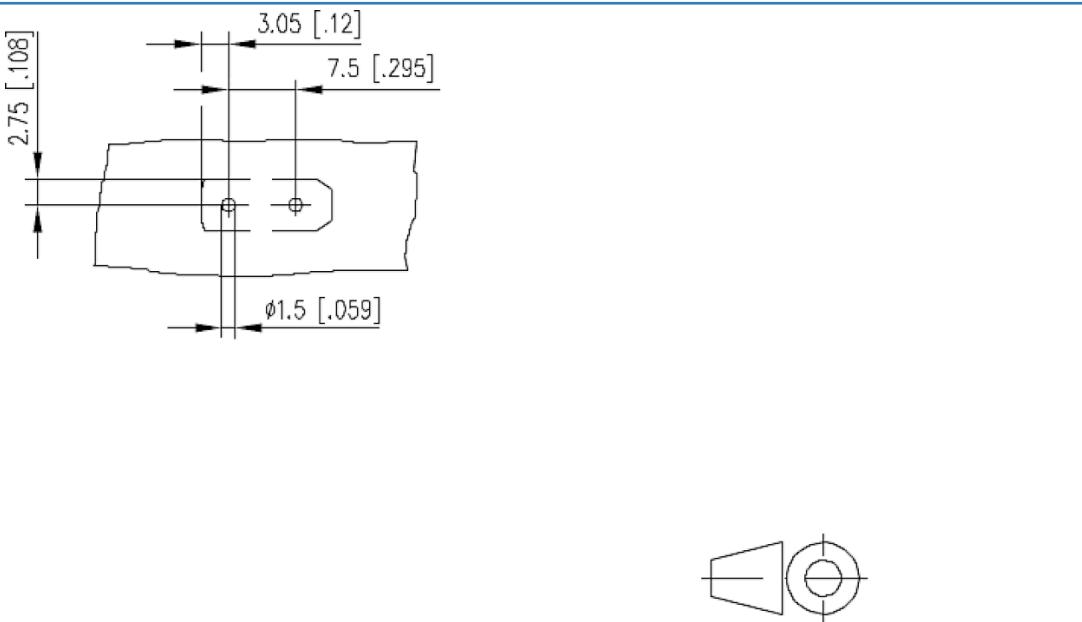

METZ CONNECT GmbH | Im Tal 2 | 78176 Blumberg | Germany

Phone +49 7702 533-0 | Fax +49 7702 533-433

Weitere Dokumentation siehe / additional documentation see /
documentation supplémentaire voir www.metz-connect.com