

Siemens S7 (old) Backup Procedures


First way with ethernet

- Step 1. Plug the Ethernet cable in the port.
- Step 2. Set the computer IP address in control panel. After this, try to ping IP address of PLC in CMD.
- Step 3. Open Simatic Manager.
- Step 4. Create a new project.
- Step 5. Click option in the toolbar, then click Set PG/PC interface.
- Step 6. Make sure TCP/IP-> Intel(R)PRO/100 VE Ne... is no problem.
- Step 7. Click PLC in the toolbar, then click Upload station to PG.
- Step 8. In the frame-select node address, click View.
- Step 9. You will see the IP address of PLC, just make sure it is correct, then click OK.


- Step 10. Open the list on the left-hand side. Open Blocks, you will see the program in it.
- Step 11. Click online in the toolbar.
- Step 12. Save the file to where you want to put, then don't forget to go Offline and exist the project.




Picture 1.

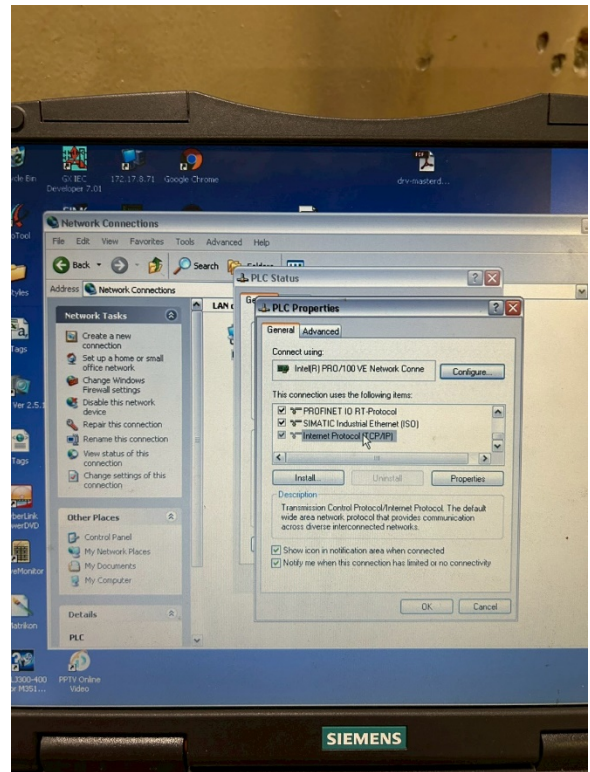


Picture 2.

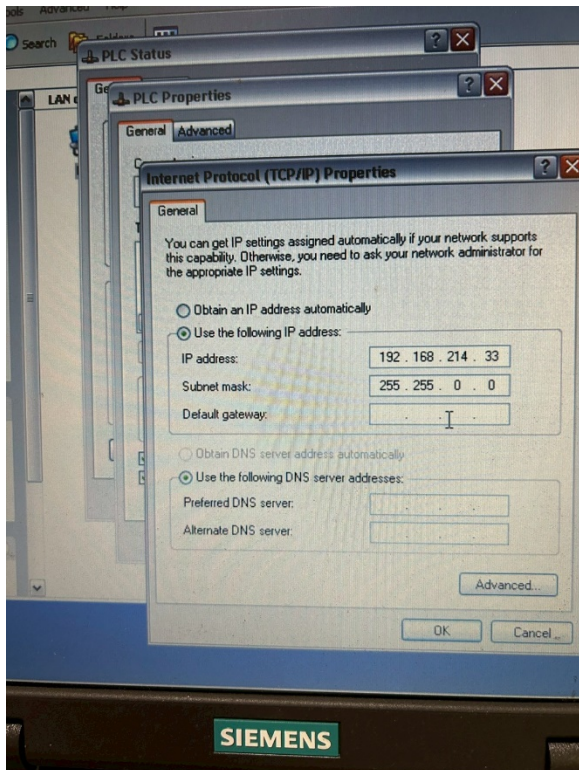


Picture 3.

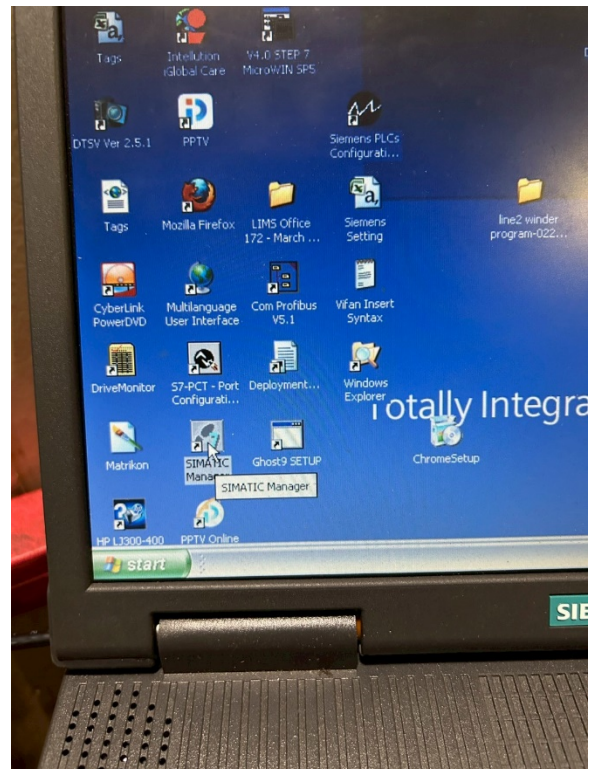


Picture 4.

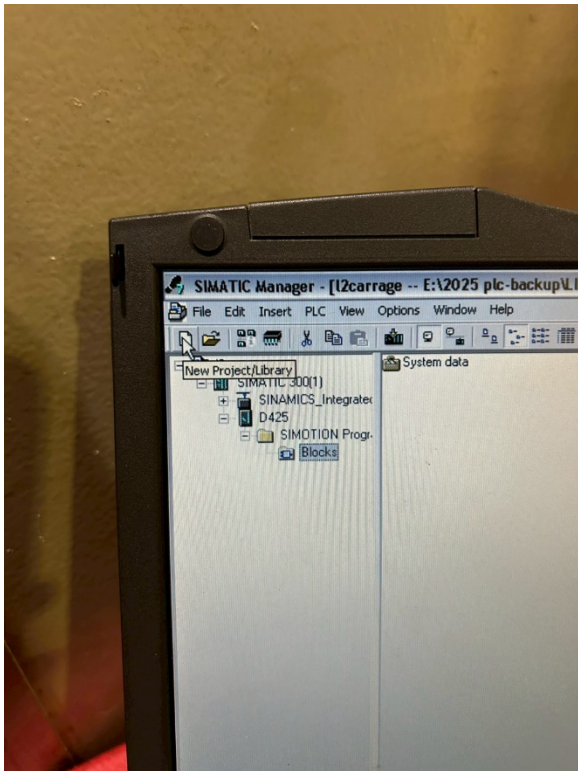


Picture 5.

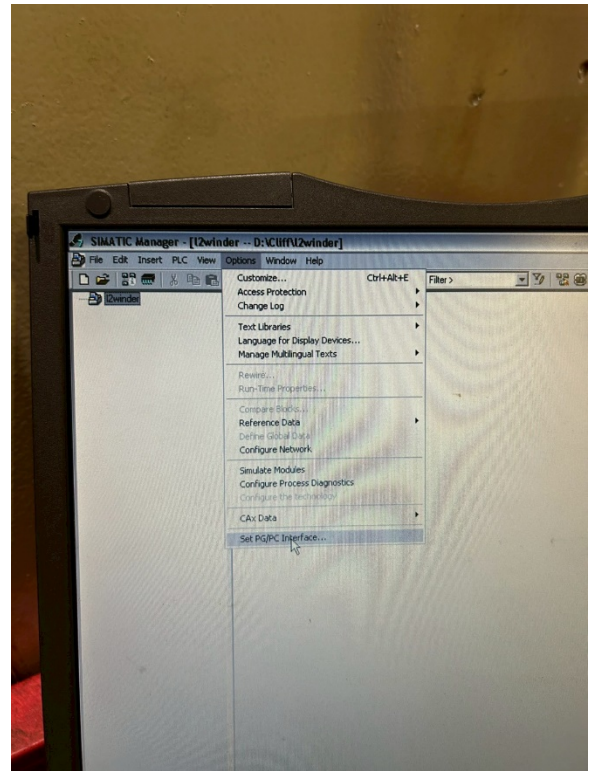


Picture 6.

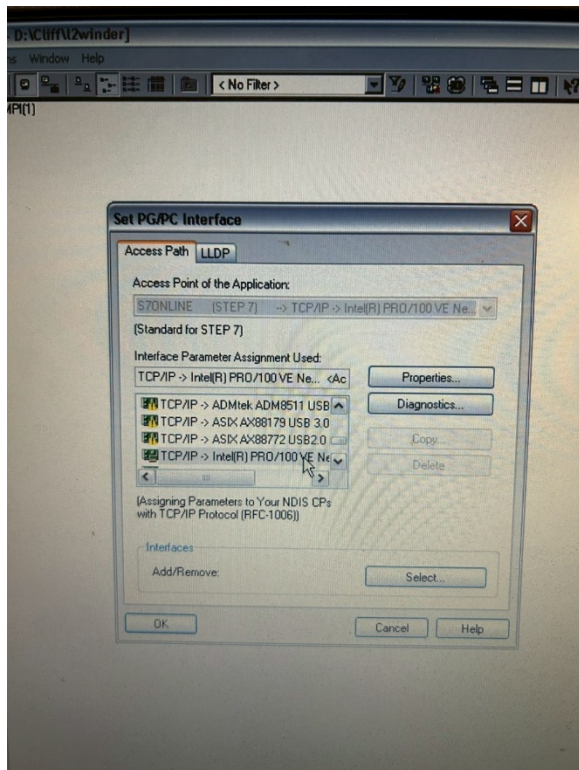


Picture 7.

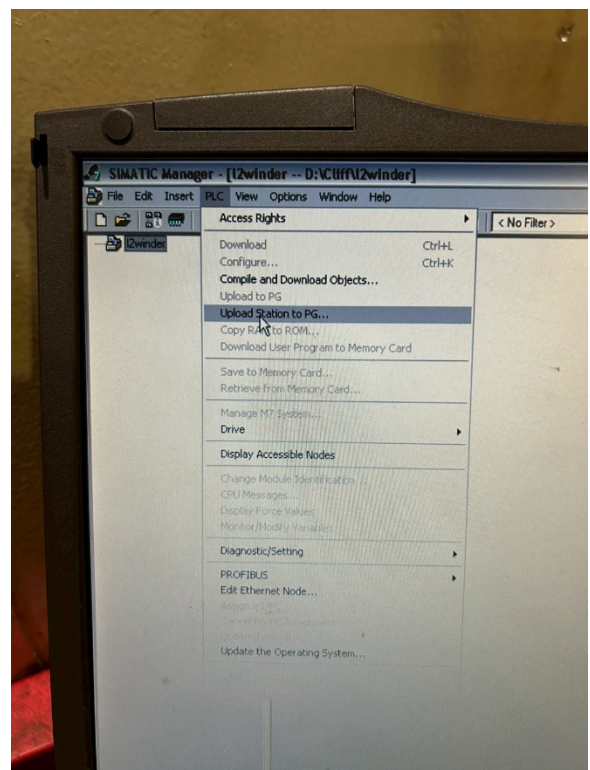


Picture 8.

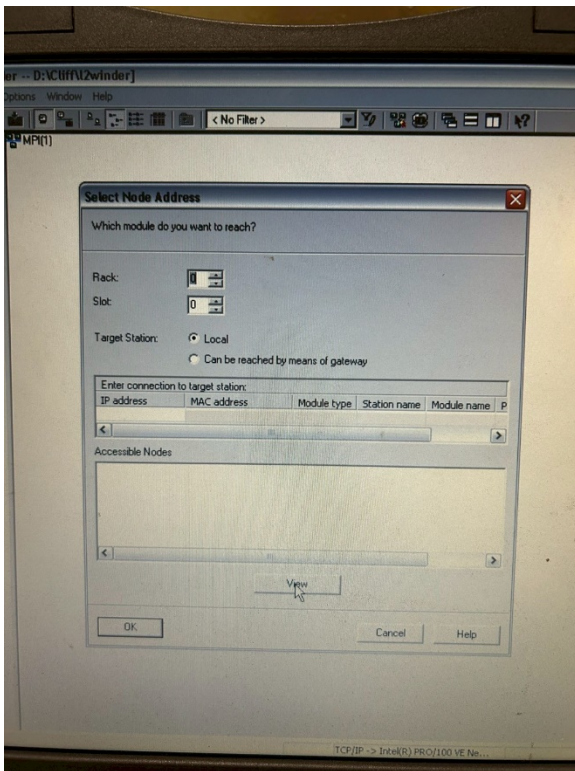


Picture 9.

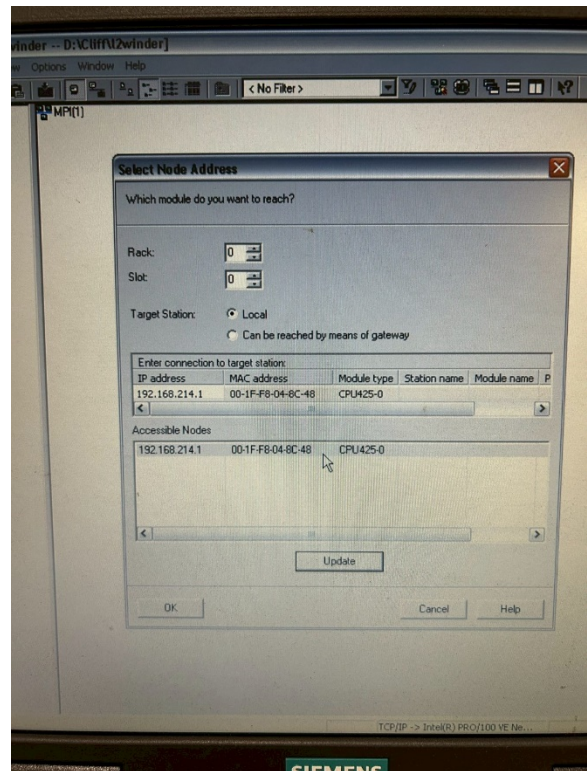

Picture 10.

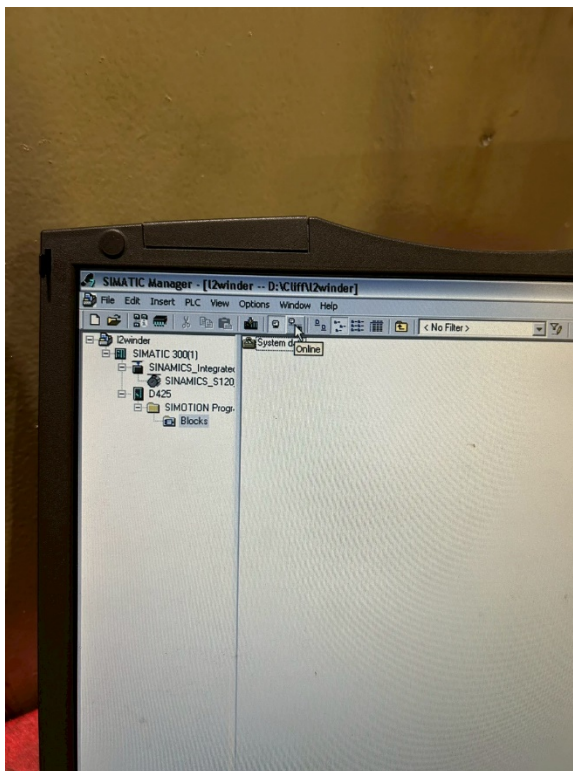

Picture 11.



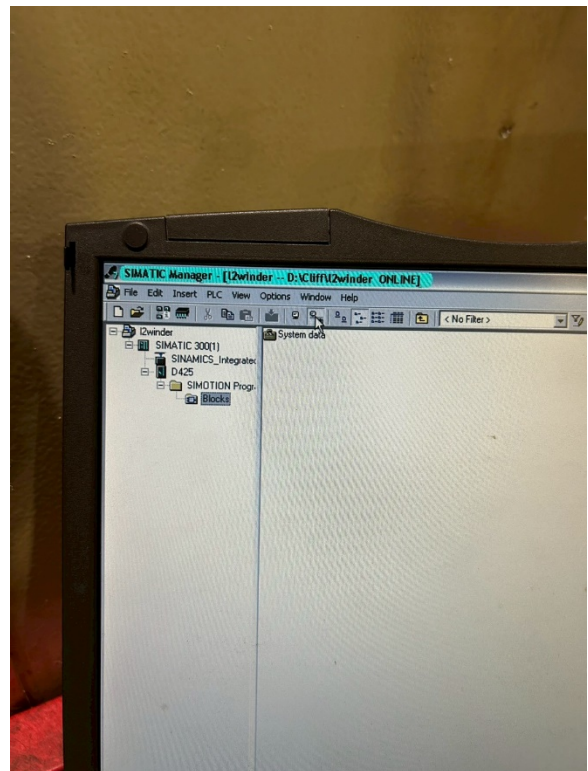



Picture 12.

Second way specified cable


- Step 1. Plug the cable in the port to connect PLC and PC.
- Step 2. Open Simatic Manager
- Step 3. Create a new project.
- Step 4. Enter the project name ,and select the file where we want to put.
- Step 5. Click option in the toolbar, then click Set PG/PC interface.
- Step 6. Make sure **PC Adapter[MPI]** is no problem.
- Step 7. Click **PLC** in the toolbar, then click **Upload station to PG**.
- Step 8. In the frame-**select node address**, click **View**.
- Step 9. You will see the option, just make sure it is correct, then click **OK**.
- Step 10. Open the list on the left-hand side. Open Blocks, you will see the program in it.

- Step 11. Click online in the toolbar.
- Step 12. Save the file to where you want to put, then don't forget to go Offline and exist the project.

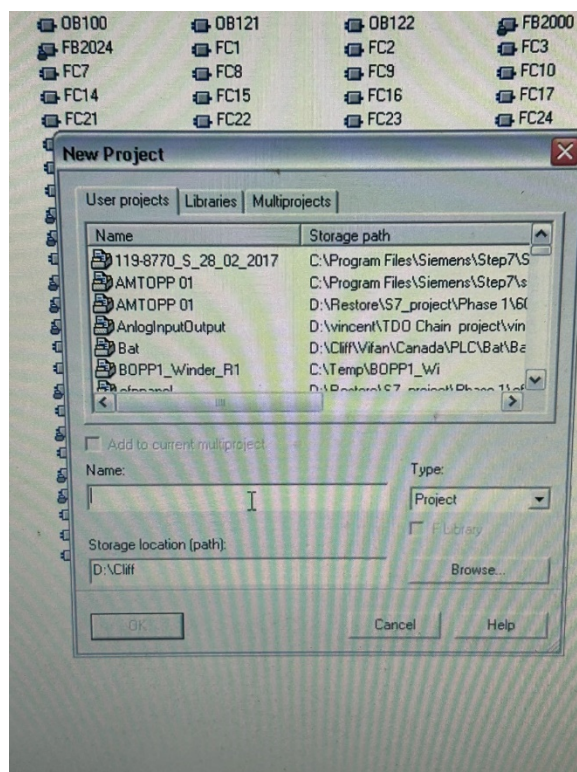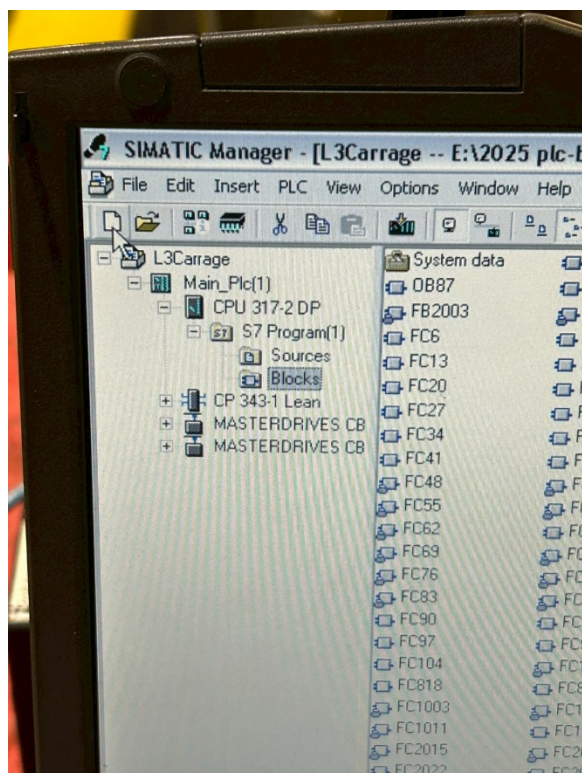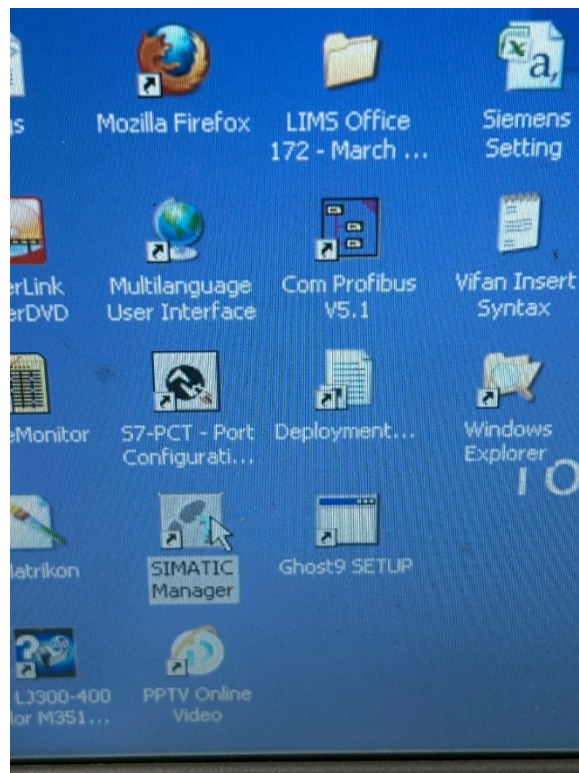


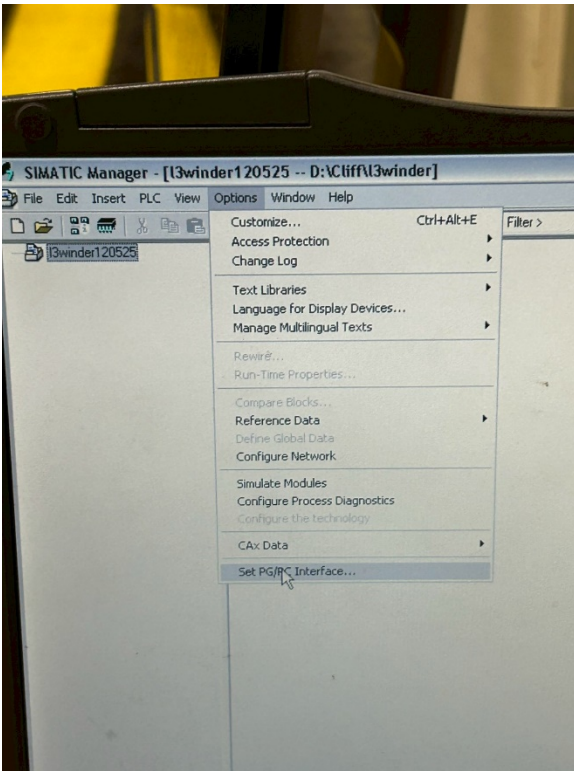


Picture 5.

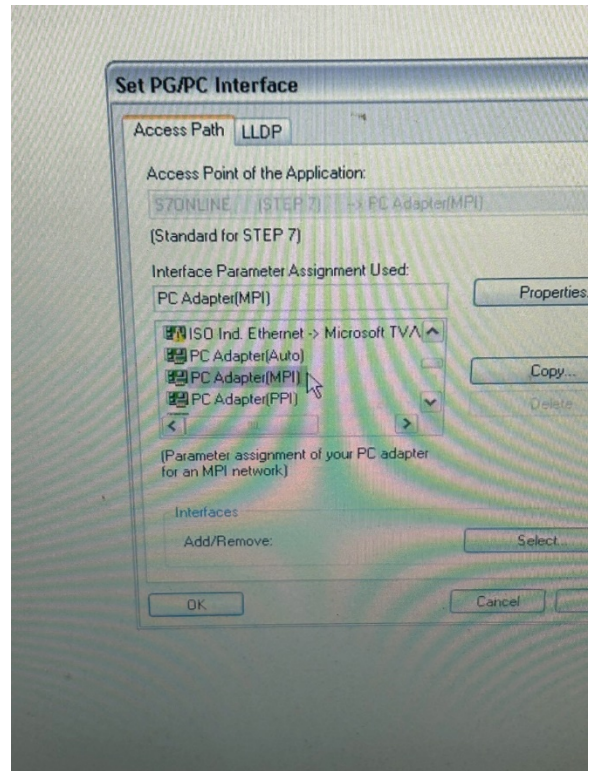


Picture 6.

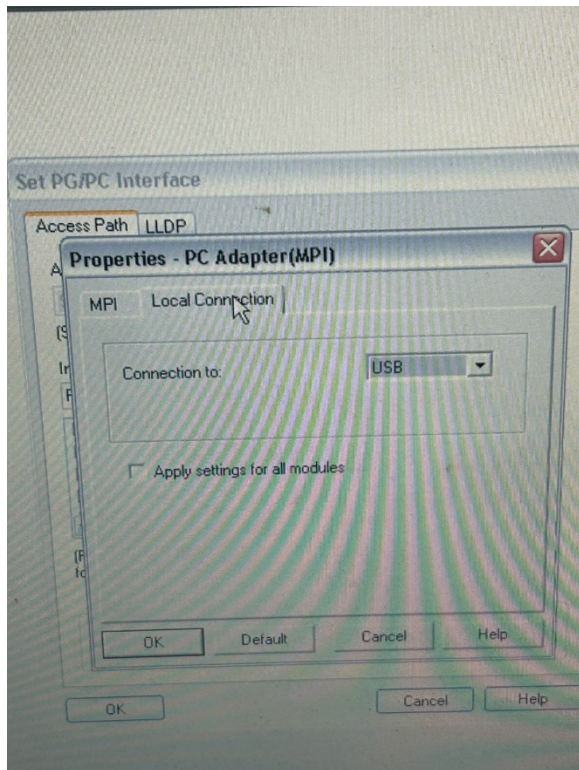


Picture 7.

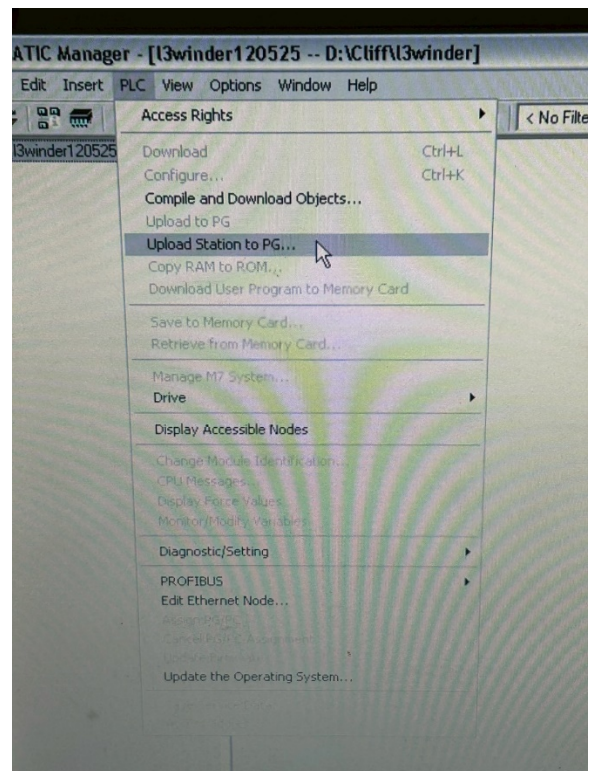


Picture 8.

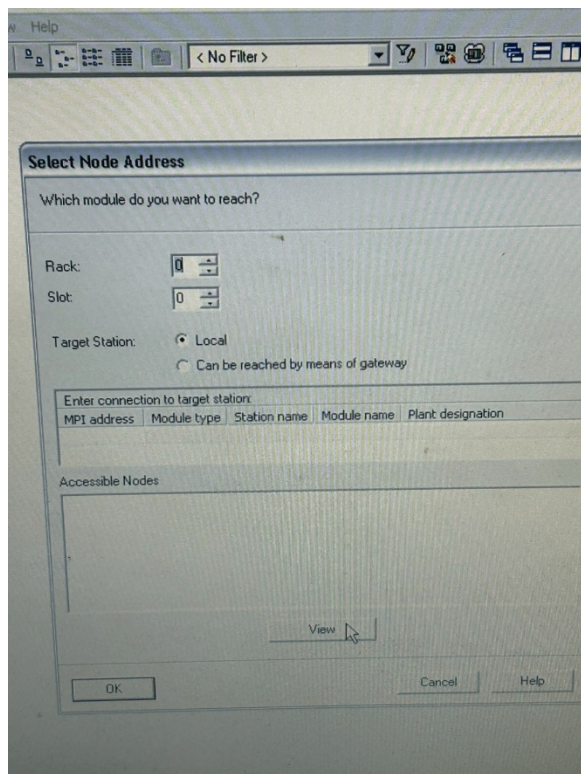


Picture 9.

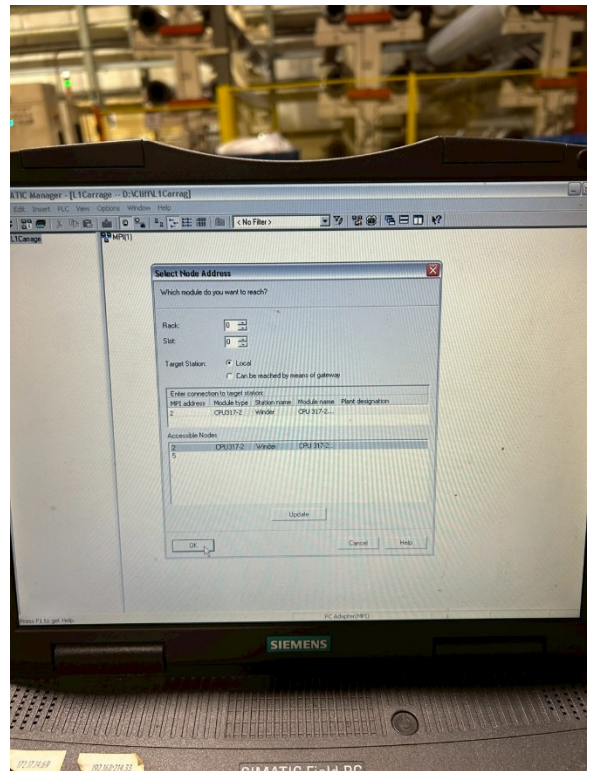

Picture 10.

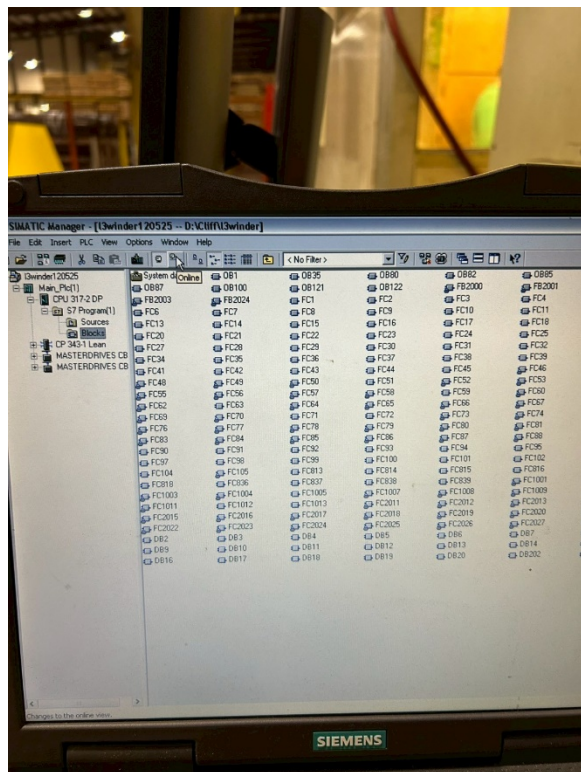

Picture 11.

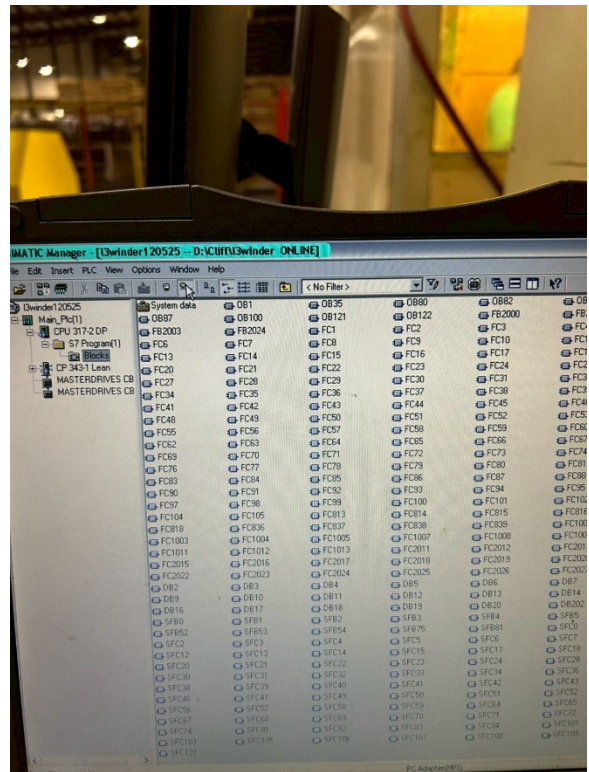

Picture 12.