



PRODUCT DEFINITION

This Advertisim product includes in one device the screen and all the electronic components. It is mounted with a semi-embedded bracket, but we can add ADV MI 15 (15" stainless steel frame) product to easily convert it in a surface screen.

The surface mount allows you to do the less modification possible in the lift cabin where the screen will be installed. For more information see the installation manual.

This model includes in a native way connectivity to controllers with connection type CAN, 485 and binary.



DATASHEET (TECHNICAL CHARACTERISTICS)

Screen size: 15.6"
 Active area 344.16 x 198.59mm
 16.2M colors
 Brightness: 300 Cd/m2
 Cortex A7 Dual Core processor
 3G miniPCle modem (according to model)
 HD 1920 x 1080 px
 HDMI output
 VGA output
 USB port x 2
 Ethernet connector x1
 DDR3 RAM 1Gb
 8Gb internal storage
 Audio out
 WIFI IEEE802.11fgn
 Ethernet CAT5e, CAT6, CAT7
 CAN L / H inputs
 Binary inputs x 14
 Pull-up and pull-down selectors
 485 bus final resistance
 CAN bus final resistance x2
 RS485 A / B inputs
 Power consumption: 12W
 Temperature range: 0° – 40°

COMPONENTS LIST

- 15E All in one device
- 12V 2A Power supply
- WIFI antenna
- 3G antenna and SIM card (according to model)
- Installation die
- Installation manual

RELATED PRODUCTS

Models with 220V 2A AC/DC
external power adapter

Add-ons

AIO 15E 3G WIFI
AIO 15E WIFI

ADV MI 15

SERVICES AND APPLICATIONS



Connection to
controller



High Definition



Video player



Customizable



Voice synthesis for
floor info



15" screen




Easy installation

INSTALLATION DIAGRAM


1. Place and mark the
edges and drills of the die.




2. Cut on the marks.

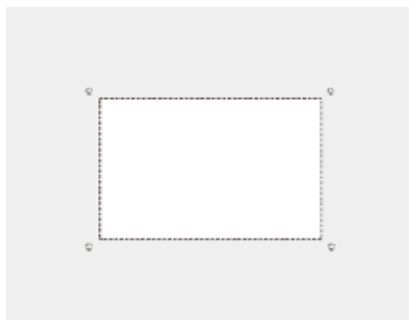

3. Place in the top of the car the
3G antenna and the power supply
and pass the cables .

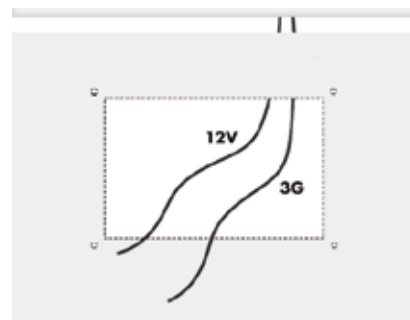


4. Connect to the controller.

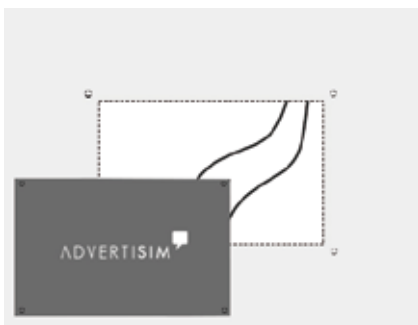


5. Place the screen and
screw the bolts.



6. Connect the power
supply or the 12V cable.

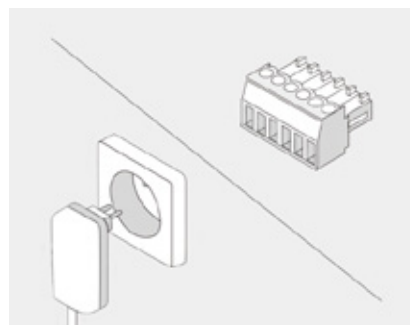

DRAWINGS AND DIMENSIONS

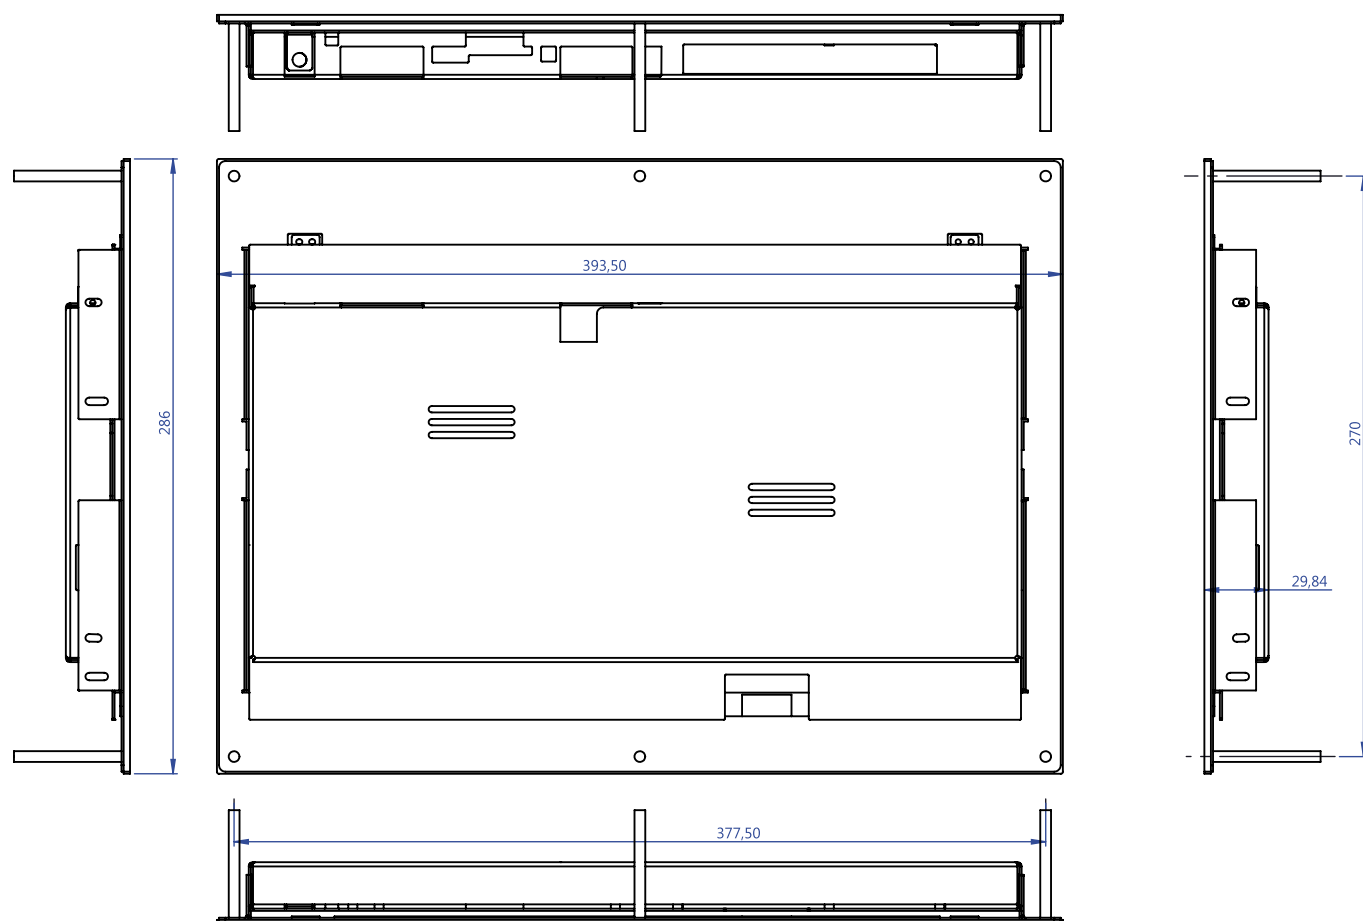

CONNECTORS

