

Lab 1: Packet analysis at application layer using Wireshark

SCSR1213 Network Communications

Universiti Teknologi Malaysia

Objective:

1. Understanding of network protocols by observing the sequence of messages exchanged between two protocol entities, delving down into the details of protocol operation, and causing protocols to perform certain actions and then observing these actions and their consequences.
2. To introduce student with Wireshark software tool for packet analyzer.
3. To analyze protocol used in application layer such as http and dns.

Reference material: Computer Networking: A Top-Down Approach, 7th ed., J.F. Kurose and K.W. Ross.

Name : MUHAMMAD AFIQ DANIAL BIN ROZAIDIE

Metric No : A23CS0117

Section : 12

Name : _____

Metric No : _____

Section : _____



Mark

PART A: Wireshark Getting Started

1.0 Introduction

The basic tool for observing the messages exchanged between executing protocol entities is called a **packet sniffer**. As the name suggests, a packet sniffer captures (“sniffs”) messages being sent/received from/by your computer; it will also typically store and/or display the contents of the various protocol fields in these captured messages. A packet sniffer itself is passive. It observes messages being sent and received by applications and protocols running on your computer, but never sends packets itself. Similarly, received packets are never explicitly addressed to the packet sniffer. Instead, a packet sniffer receives a *copy* of packets that are sent/received from/by application and protocols executing on your machine.

Figure A.1 shows the structure of a packet sniffer. At the right of Figure 1 are the protocols (in this case, Internet protocols) and applications (such as a web browser or ftp client) that normally run on your computer. The packet sniffer, shown within the dashed rectangle in Figure A.1 is an addition to the usual software in your computer, and consists of two parts. The **packet capture library** receives a copy of every link-layer frame that is sent from or received by your computer. In Figure A.1, the assumed physical media is an Ethernet, and so all upper-layer protocols are eventually encapsulated within an Ethernet frame. Capturing all link-layer frames thus gives you all messages sent/received from/by all protocols and applications executing in your computer.

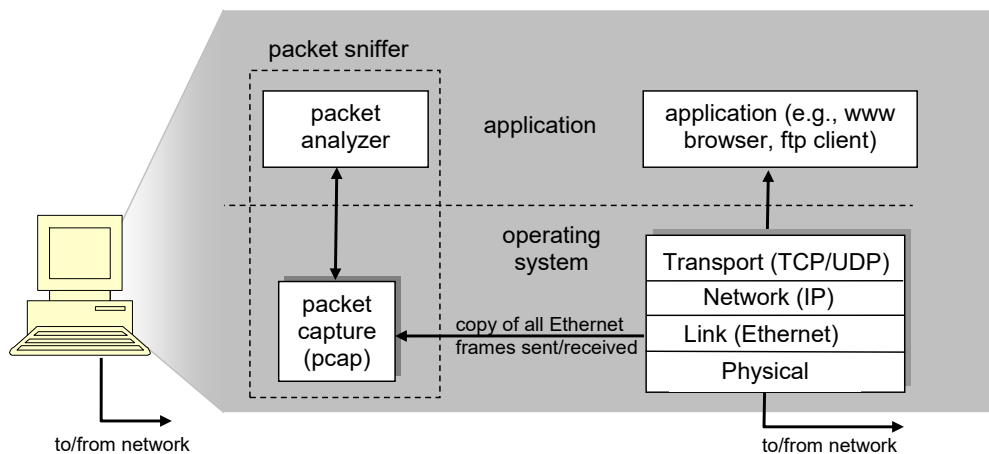


Figure A.1: Packet sniffer structure

The second component of a packet sniffer is the **packet analyzer**, which displays the contents of all fields within a protocol message. In order to do so, the packet analyzer must “understand” the structure of all messages exchanged by protocols. The packet analyzer understands the format of Ethernet frames, and so can identify the IP datagram within an Ethernet frame. It also understands the IP datagram format, so that it can extract the TCP segment within the IP datagram. Finally, it understands the TCP segment structure, so it can extract the HTTP message contained in the TCP segment. Finally, it understands the HTTP protocol and so, for example, knows that the first bytes of an HTTP message will contain the string “GET,” “POST,” or “HEAD”.

2.0 Getting Wireshark Ready

- Download and install the Wireshark software
- Run Wireshark. Wireshark startup screen shown in Figure A.2.

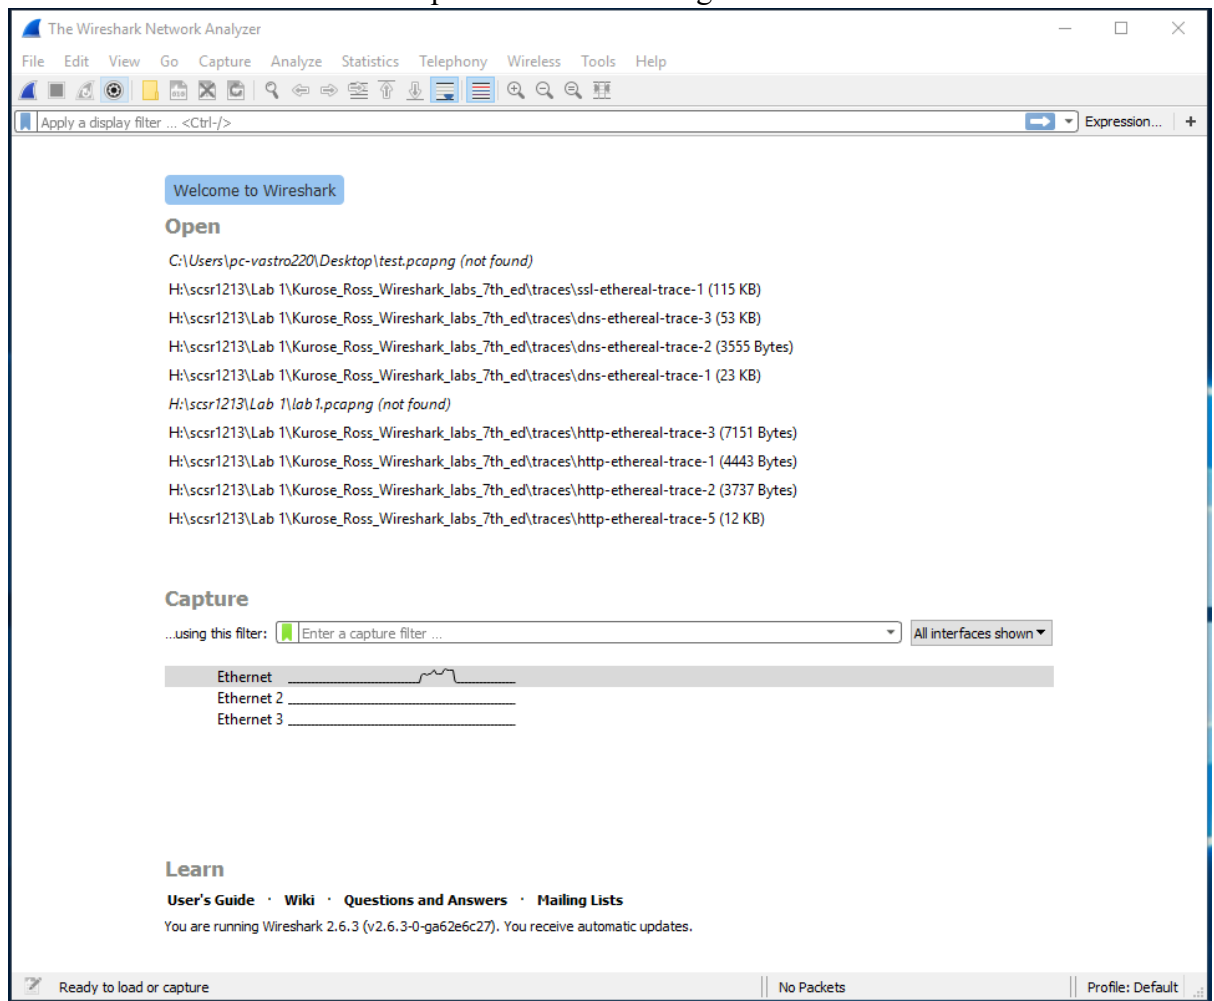


Figure A.2: Initial Wireshark startup screen

- The Wireshark interface has five major components as shown in Figure A.3.

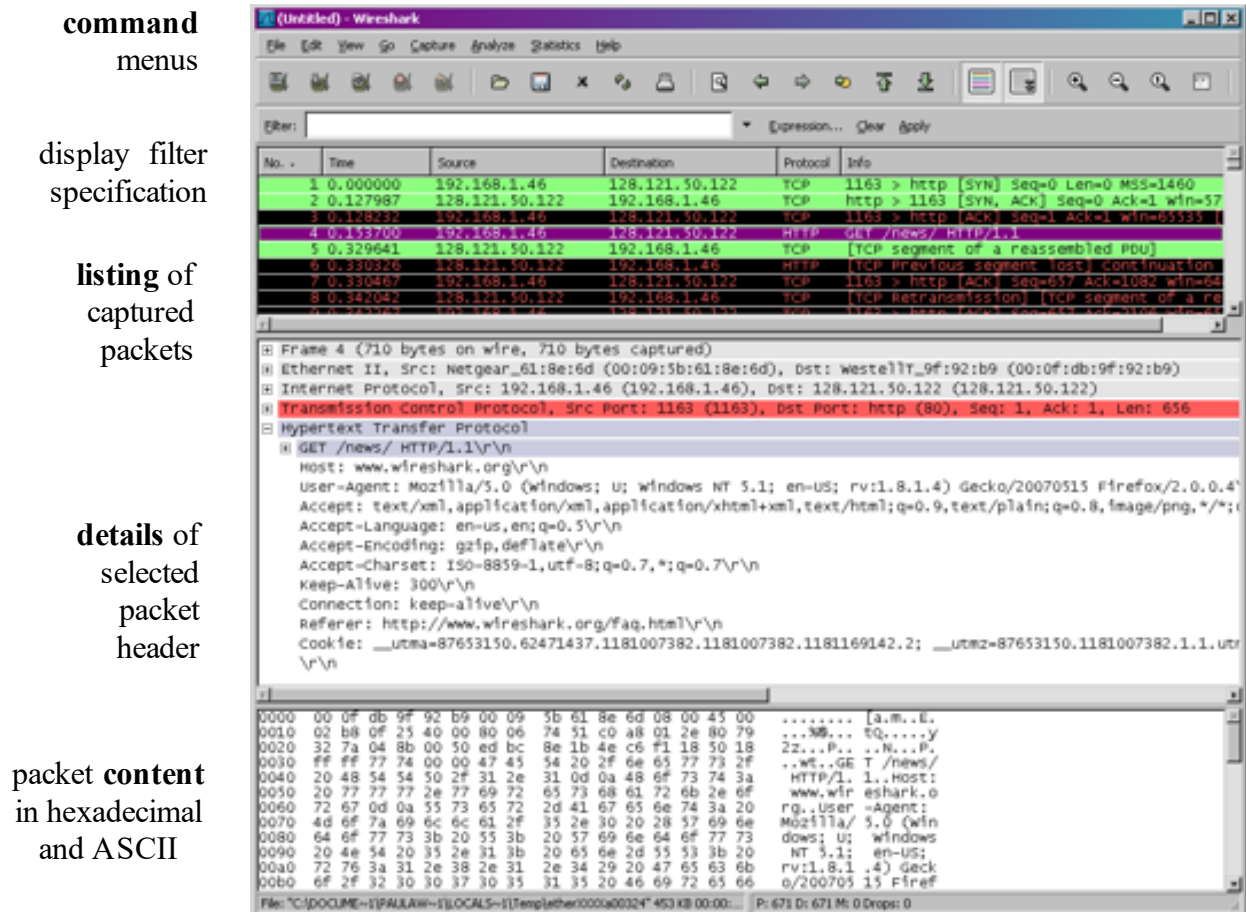


Figure A.3: Wireshark Graphical User Interface, during packet capture and

- The **command menus** are standard pulldown menus located at the top of the window.
- The **packet display filter field**, into which a protocol name or other information can be entered in order to filter the information displayed in the packet-listing window.
- The **packet-listing window** displays a one-line summary for each packet captured, including the packet number, the time at which the packet was captured, the packet's source and destination addresses, the protocol type, and protocol-specific information contained in the packet.
- The **packet-header details window** provides details about the packet selected (highlighted) in the packet-listing window. These details include information about the Ethernet frame and IP datagram that contains this packet. The amount of Ethernet and IP-layer detail displayed can be expanded or minimized by clicking on the plus minus boxes to the left of the Ethernet frame or IP datagram line in the packet details window. If the packet has been carried over TCP or UDP, TCP or UDP details will also be displayed, which can similarly be expanded or minimized. Finally, details about the highest-level protocol that sent or received this packet are also provided.
- The **packet-contents window** displays the entire contents of the captured frame, in both ASCII and hexadecimal format.

3.0 Test Run Wireshark

- Start up the Wireshark software.
- To begin packet capture, select the Capture pull down menu and pick Options menu. Select appropriate interfaces on your compute and click Start button to begin packet capture. Refer to Figure A.4

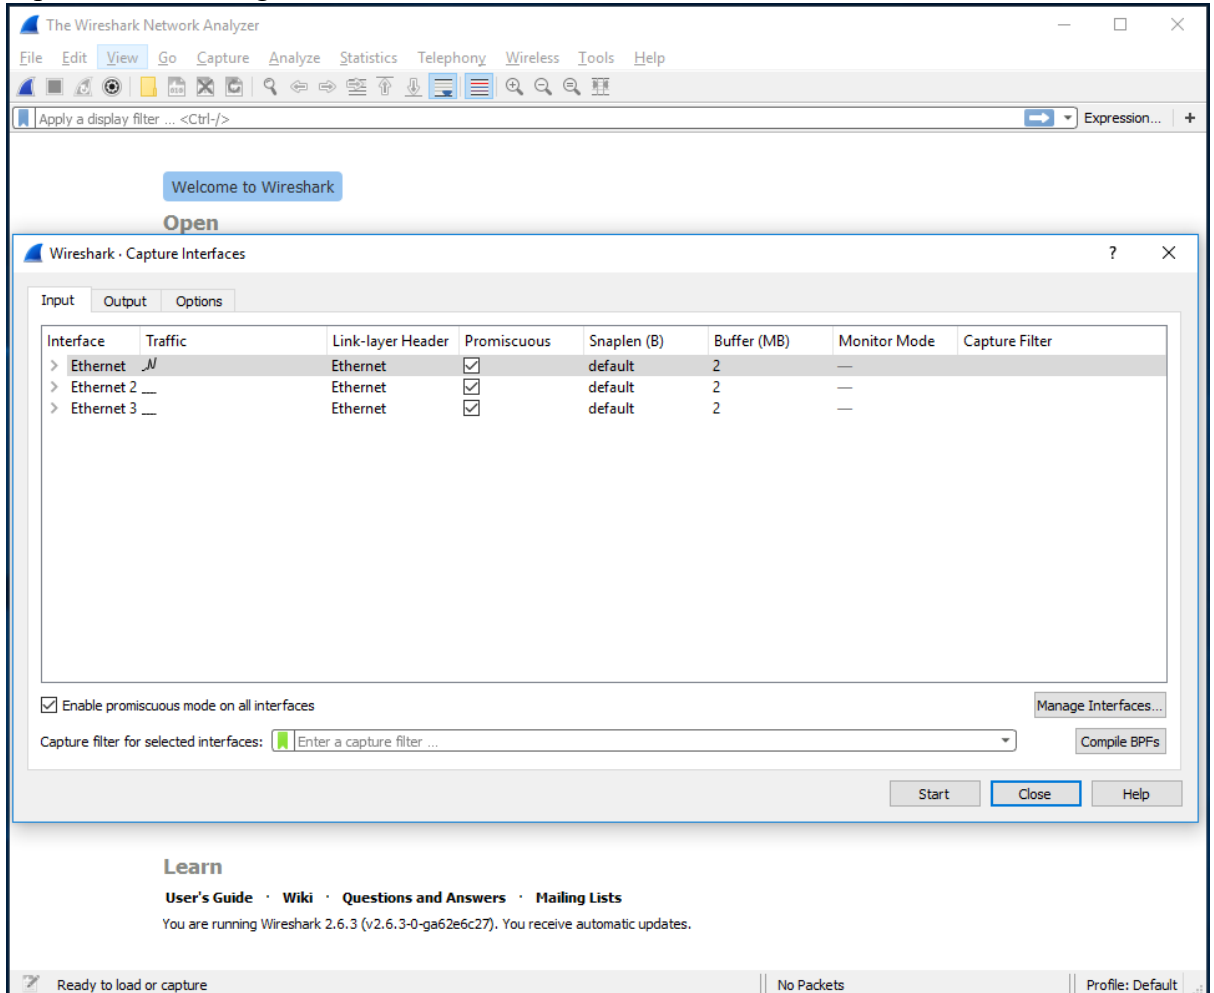


Figure A.4: Capture and Options Menu

- Once you begin packet capture, result will be shown as in Figure A.5.

The image shows the Wireshark interface with a packet capture in progress. The top pane displays a list of 90 captured packets. The bottom pane shows the details of the selected packet (No. 90), which is an ARP request from 10.60.80.78 to 255.255.255.255.

No.	Time	Source	Destination	Protocol	Length	Info
80	4.169920	Dell_87:3b:e4	Broadcast	ARP	60	Who has 10.60.83.65? Tell 10.60.80.70
81	4.344789	10.60.82.204	255.255.255.255	DB-LSP...	255	Dropbox LAN sync Discovery Protocol
82	4.346792	10.60.82.204	255.255.255.255	DB-LSP...	255	Dropbox LAN sync Discovery Protocol
83	4.347075	10.60.82.204	10.60.83.255	DB-LSP...	255	Dropbox LAN sync Discovery Protocol
84	4.351986	HewlettP_15:15:2b	Broadcast	ARP	60	Who has 10.60.80.15? Tell 10.60.80.167
85	4.479278	Cisco_0d:7b:04	Spanning-tree-(for-...	STP	119	MST. Root = 0/10/00:23:04:ee:be:03 Cost = 20004 Port
86	4.530418	10.60.83.171	239.255.255.250	SSDP	216	M-SEARCH * HTTP/1.1
87	4.530808	10.60.83.171	239.255.255.250	SSDP	216	M-SEARCH * HTTP/1.1
88	4.700996	Dell_75:07:b3	Broadcast	ARP	60	Who has 10.60.80.162? Tell 10.60.80.64
89	4.767952	10.60.82.204	10.60.83.255	NBNS	92	Name query NB MSI-PC<1c>
90	4.995012	10.60.80.78	255.255.255.255	DB-LSP...	176	Dropbox LAN sync Discovery Protocol

Frame 1: 107 bytes on wire (856 bits), 107 bytes captured (856 bits) on interface 0
 Ethernet II, Src: Dell_23:e3:3a (00:24:e8:23:e3:3a), Dst: Cisco_d5:79:ff (00:14:6a:d5:79:ff)
 Internet Protocol Version 4, Src: 10.60.82.216, Dst: 52.230.84.0
 Transmission Control Protocol, Src Port: 49724, Dst Port: 443, Seq: 1, Ack: 1, Len: 53
 Secure Sockets Layer

0000 00 14 6a d5 79 ff 00 24 e8 23 e3 3a 08 00 45 00 ..j.y..\$ #:..E.
 0010 00 5d 64 e9 40 00 80 06 00 00 0a 3c 52 d8 34 e6 ..]d.@...<R.4.
 0020 54 00 c2 3c 01 bb 11 3f 6d 43 3e d4 b9 24 50 18 T...<...? mC>..\$P.
 0030 01 01 e6 49 00 00 17 03 01 00 30 07 75 ee af 3c ...I.....0-u...<
 0040 42 81 47 9e 52 29 c3 be ea 2e 88 ac 28 ed bf e6 B.G.R)...((...
 0050 20 36 00 a7 ad f6 ff 8a b0 6d 63 a3 c7 a4 68 ca 6.....mc...h.
 0060 fd 6d b3 05 36 73 0e 3c 54 bc 07 ..m...6s.<T..

Figure A.5: Wireshark packet capture result

- By selecting Capture pulldown menu and selecting Stop, you can stop packet capture.

- Type “arp” in packet display filter field and press Enter key. This will cause only ARP message to be displayed in the packet-listing window as shown in Figure A.6.

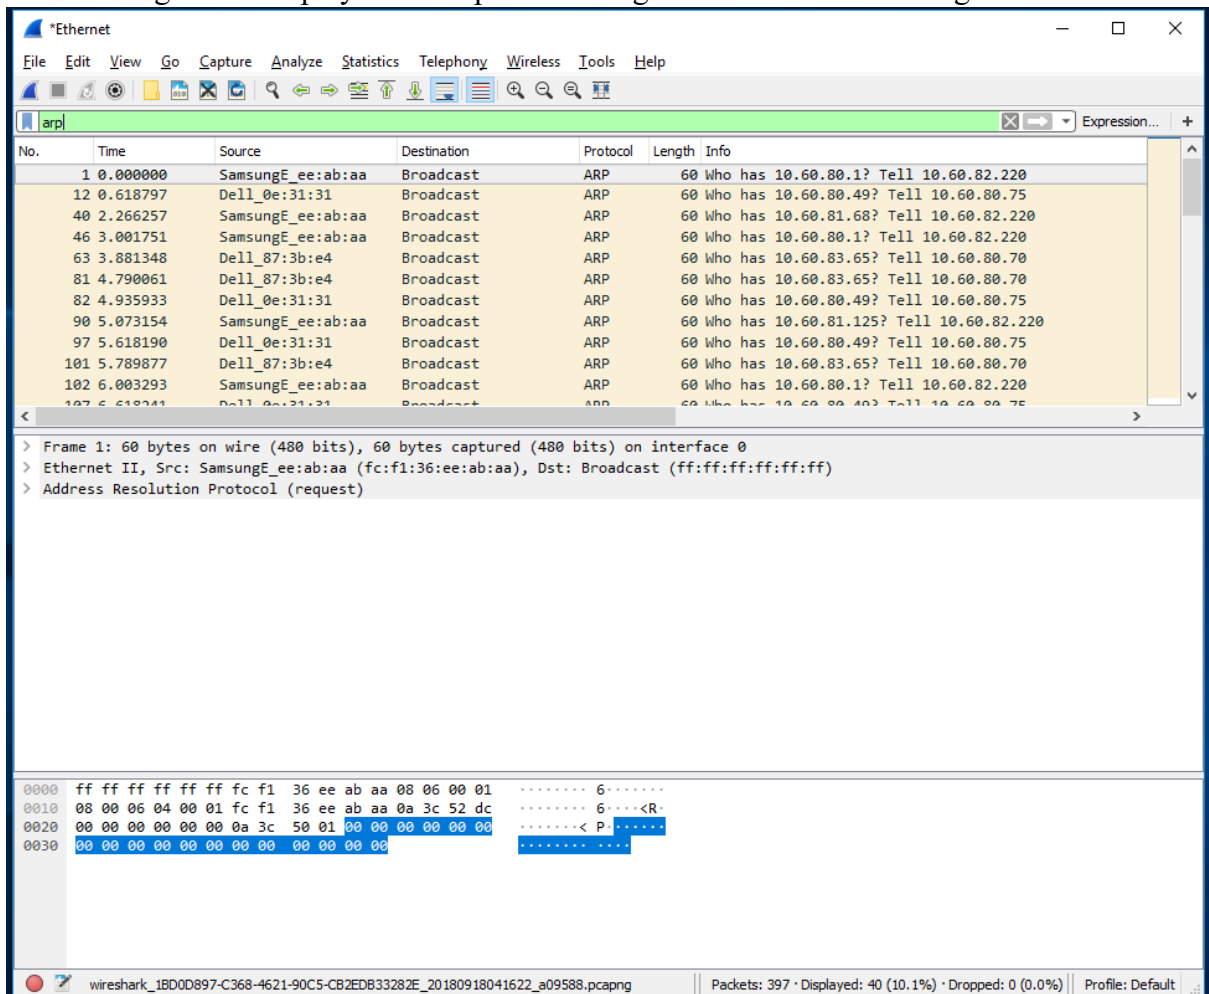


Figure A.6: ARP packet capture

- To save the trace result, use File pulldown menu and select Save function as shown in Figure A.7.

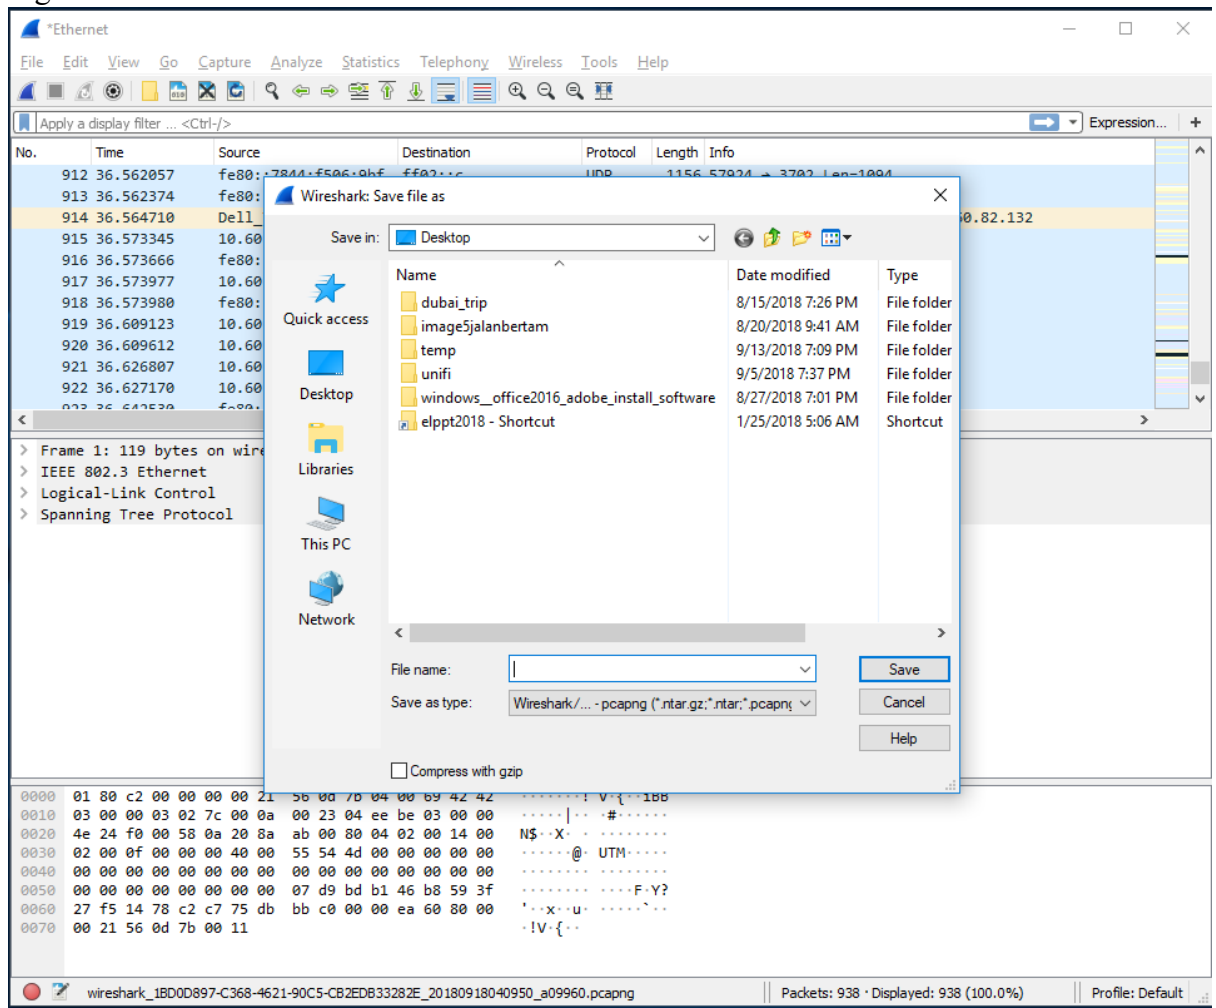



Figure A.7: Save Wireshark trace result

PART B: HTTP Trace

In this part, we'll explore several aspects of the HTTP protocol: the basic GET/response interaction, HTTP message formats and retrieving HTML files with embedded objects. Before beginning these labs, you might want to review Section 2.2 of the textbook.

B.1 The Basic HTTP GET/response interaction

- Open packet trace file **lab1-http-B01.pcapng**.
- Enter “**http**” (just the letters, not the quotation marks) in the **packet display filter field**, so that only captured HTTP messages will be displayed later in the packet-listing window. Refer to figure below:

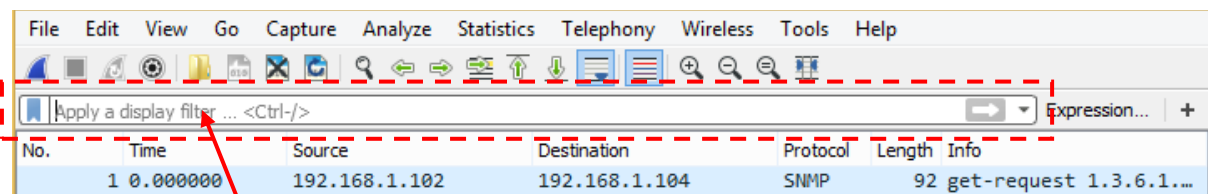

packet display filter

- By looking at the information in the HTTP GET and response messages, answer the following questions:
 1. What version of HTTP is the server running?
 - HTTP/1.1
 2. What is the IP address of the client computer?
 - 192.168.1.102
 3. What is the IP address of the server?
 - 192.168.1.104
 4. How many bytes of content are being returned to client browser?
 - 439 bytes
 5. What is the status code returned from the server to client browser?
 - 200 OK

B.2 The HTTP CONDITIONAL GET/response interaction

- Open packet trace file **lab1-http-B02.pcapng**.
- By looking at the information in the HTTP GET and response messages, answer the following questions:
 1. Inspect the contents of the first HTTP GET request from your browser to the server. Do you see an “IF-MODIFIED-SINCE” line in the HTTP GET?
 - No
 2. Inspect the contents of the server response after the first GET request from client. Did the server explicitly return the contents of the file? How can you tell?
 - Yes, because the server uses a 200 OK status code to return a file.
 3. Now inspect the contents of the second HTTP GET request from your browser to the server. Do you see an “IF-MODIFIED-SINCE:” line in the HTTP GET? If so, what information follows the “IF-MODIFIED-SINCE:” header?
 - IF-MODIFIED-SINCE: Tue, 23 Sep 2003 05:35:00 GMT
 4. What is the HTTP status code and phrase returned from the server in response to this second HTTP GET? Did the server explicitly return the contents of the file? Explain.
 - 304 Not Modified. The server did not return the contents of the file because the requested file has not been modified since the last time it was loaded, and there's no need to transfer it again.

B.3 HTML Documents with Embedded Objects


- Open packet trace file **lab1-http-B03.pcapng**.
- By looking at the information in the HTTP GET and response messages, answer the following questions:
 1. How many HTTP GET request messages did client browser send?
 - 3 HTTP GET request
 2. To which Internet addresses were these GET requests sent?
 - 128.119.245.12
 - 165.193.123.218
 - 134.241.6.82
 3. How many bytes of content are being returned to client browser for the **pearson-logo-footer.gif** image file?
 - 625 bytes
 4. How many bytes of content are being returned to client browser for the **cover.jpg** image file?
 - 609 bytes

PART C: DNS Trace

1.0 nslookup

nslookup tool allows the host running the tool to query any specified DNS server for a DNS record. The queried DNS server can be a root DNS server, a top-level-domain DNS server, an authoritative DNS server, or an intermediate DNS server. To accomplish this task, nslookup sends a DNS query to the specified DNS server, receives a DNS reply from that same DNS server, and displays the result.

- To run it in Windows, open the Command Prompt (cmd) and run nslookup on the command line as shown in Figure C.1 and Figure C.2
nslookup -type=any www.microsoft.com nslookup -type=any www.microsoft.com

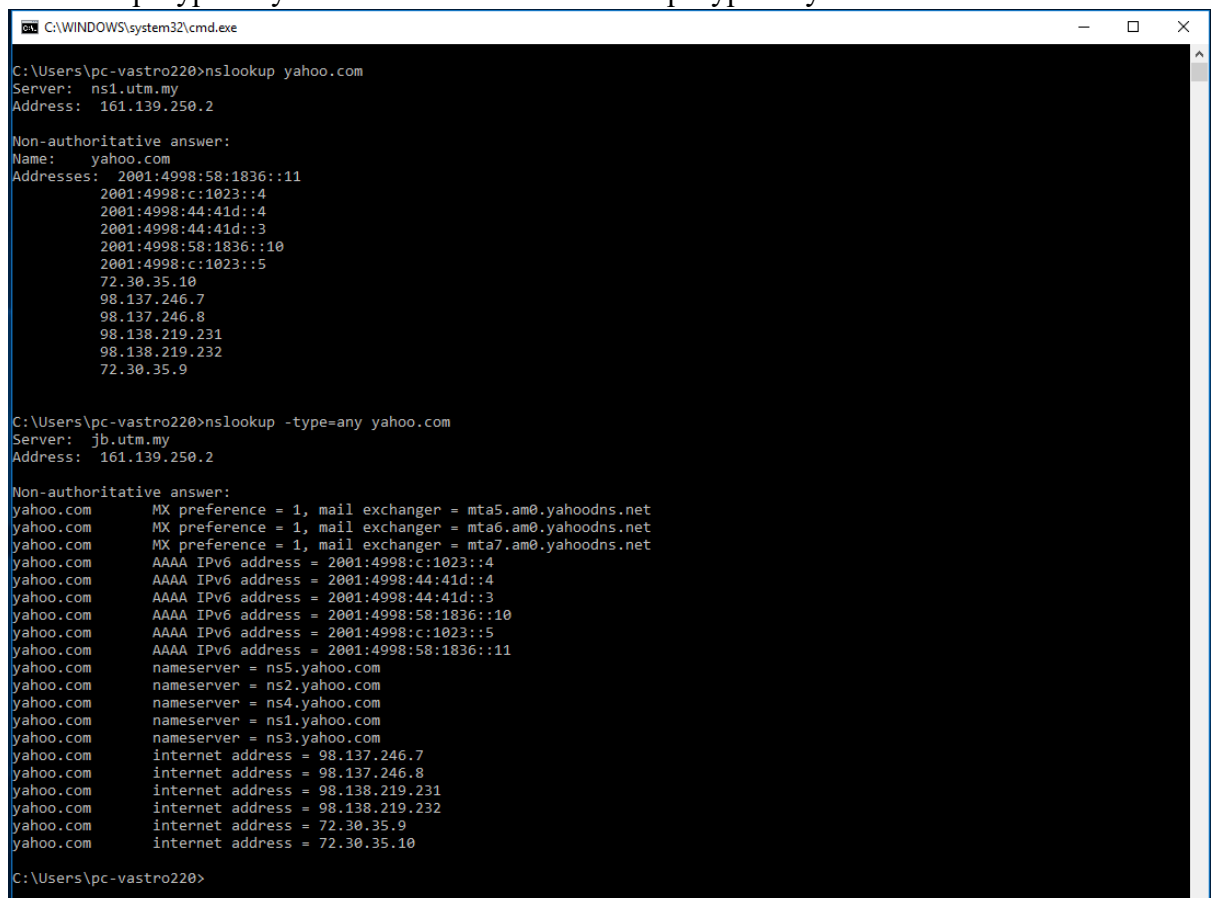

```
C:\WINDOWS\system32\cmd.exe
C:\Users\pc-vastro220>nslookup yahoo.com
Server: ns1.utm.my
Address: 161.139.250.2


Non-authoritative answer:
Name: yahoo.com
Addresses: 2001:4998:58:1836::11
           2001:4998:c:1023::4
           2001:4998:44:41d::4
           2001:4998:44:41d::3
           2001:4998:58:1836::10
           2001:4998:c:1023::5
           72.30.35.10
           98.137.246.7
           98.137.246.8
           98.138.219.231
           98.138.219.232
           72.30.35.9

C:\Users\pc-vastro220>nslookup -type=any yahoo.com
Server: jlb.utm.my
Address: 161.139.250.2

Non-authoritative answer:
yahoo.com      MX preference = 1, mail exchanger = mta5.am0.yahoodns.net
yahoo.com      MX preference = 1, mail exchanger = mta6.am0.yahoodns.net
yahoo.com      MX preference = 1, mail exchanger = mta7.am0.yahoodns.net
yahoo.com      AAAA IPv6 address = 2001:4998:c:1023::4
yahoo.com      AAAA IPv6 address = 2001:4998:44:41d::4
yahoo.com      AAAA IPv6 address = 2001:4998:44:41d::3
yahoo.com      AAAA IPv6 address = 2001:4998:58:1836::10
yahoo.com      AAAA IPv6 address = 2001:4998:c:1023::5
yahoo.com      AAAA IPv6 address = 2001:4998:58:1836::11
yahoo.com      nameserver = ns5.yahoo.com
yahoo.com      nameserver = ns2.yahoo.com
yahoo.com      nameserver = ns4.yahoo.com
yahoo.com      nameserver = ns1.yahoo.com
yahoo.com      nameserver = ns3.yahoo.com
yahoo.com      internet address = 98.137.246.7
yahoo.com      internet address = 98.137.246.8
yahoo.com      internet address = 98.138.219.231
yahoo.com      internet address = 98.138.219.232
yahoo.com      internet address = 72.30.35.9
yahoo.com      internet address = 72.30.35.10

C:\Users\pc-vastro220>
```

Figure C.1: nslookup result

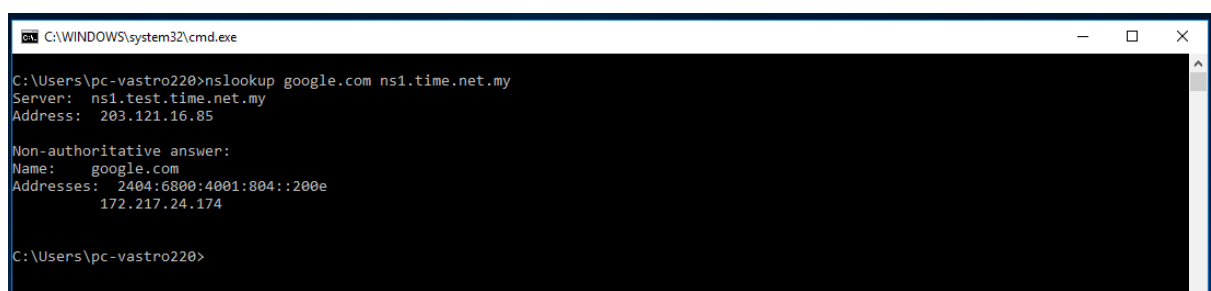


```
C:\WINDOWS\system32\cmd.exe
C:\Users\pc-vastro220>nslookup google.com ns1.time.net.my
Server: ns1.test.time.net.my
Address: 203.121.16.85

Non-authoritative answer:
Name: google.com
Addresses: 2404:6800:4001:804::200e
           172.217.24.174

C:\Users\pc-vastro220>
```

Figure C.2: nslookup result


1. Run nslookup to obtain the IP address of a www.microsoft.com server. What is the IP address of that server? Add screenshot to your answer.
 - 1.1.1.1

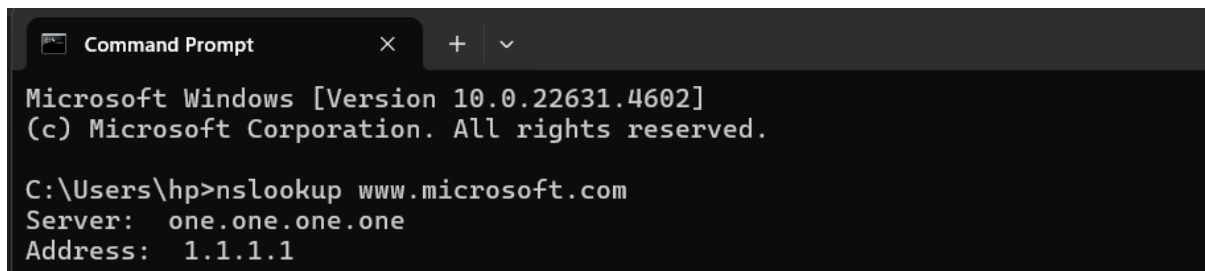

```
Command Prompt
Microsoft Windows [Version 10.0.22631.4602]
(c) Microsoft Corporation. All rights reserved.

C:\Users\hp>nslookup www.microsoft.com
Server:    one.one.one.one
Address:   1.1.1.1
```

2. Run nslookup to determine the non-authoritative DNS servers for domain microsoft.com. Add screenshot to your answer.

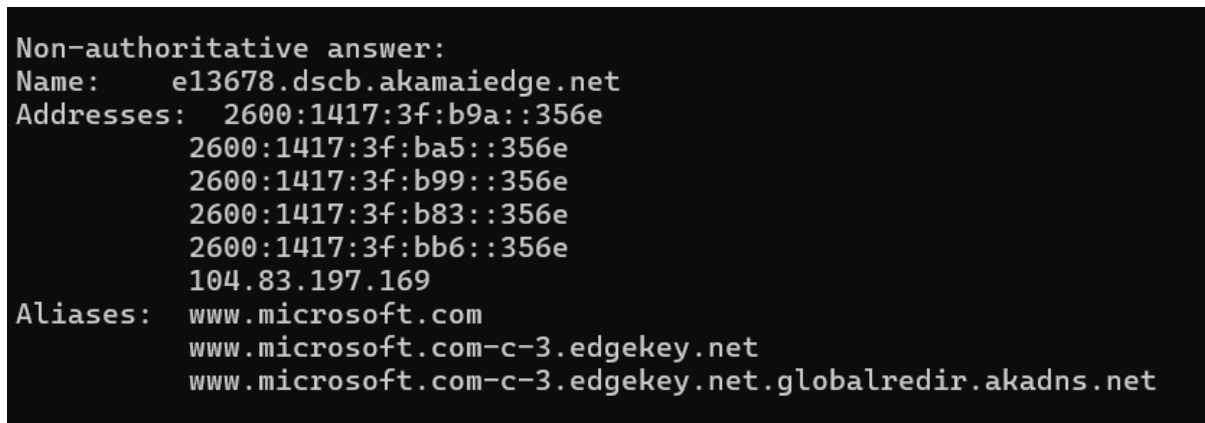


```
Non-authoritative answer:
Name:      e13678.dscb.akamaiedge.net
Addresses: 2600:1417:3f:b9a::356e
           2600:1417:3f:ba5::356e
           2600:1417:3f:b99::356e
           2600:1417:3f:b83::356e
           2600:1417:3f:bb6::356e
           104.83.197.169
Aliases:   www.microsoft.com
           www.microsoft.com-c-3.edgekey.net
           www.microsoft.com-c-3.edgekey.net.globalredir.akadns.net
```

2.0 ipconfig

ipconfig can be used to show your current TCP/IP information, including your address, DNS server addresses, adapter type and so on.

- Information about host, use the following command: ipconfig /all

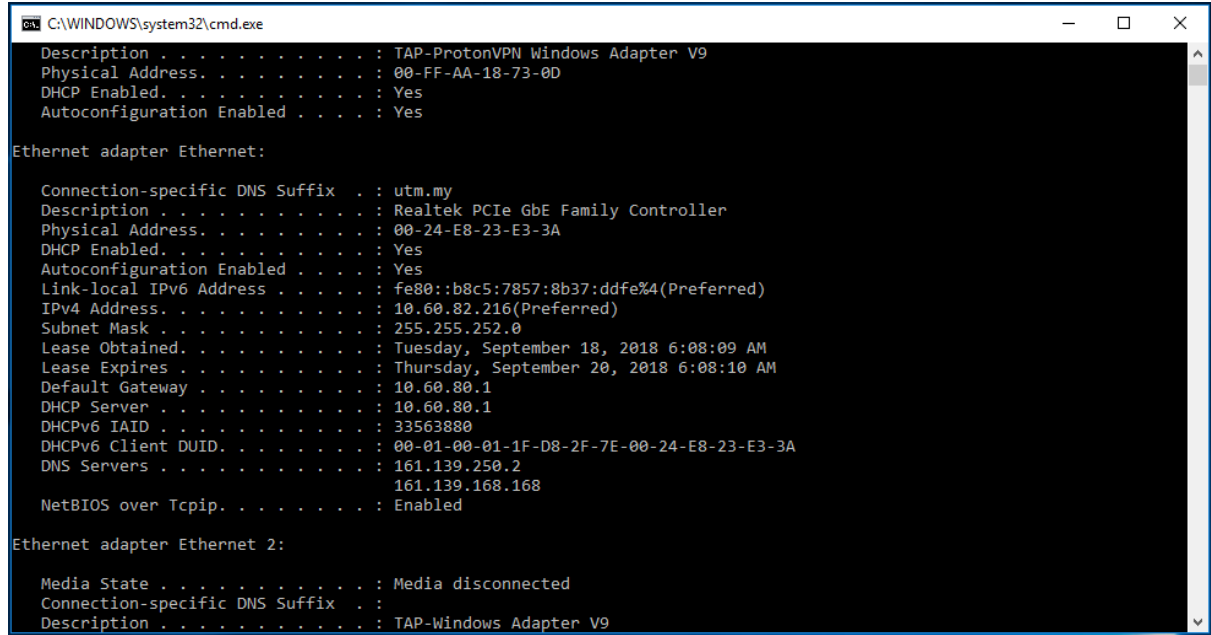

```
C:\WINDOWS\system32\cmd.exe
Description . . . . . : TAP-ProtonVPN Windows Adapter V9
Physical Address. . . . . : 00-FF-AA-18-73-0D
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes

Ethernet adapter Ethernet:


    Connection-specific DNS Suffix  . : utm.my
    Description . . . . . : Realtek PCIe GbE Family Controller
    Physical Address. . . . . : 00-24-E8-23-E3-3A
    DHCP Enabled. . . . . : Yes
    Autoconfiguration Enabled . . . . : Yes
    Link-local IPv6 Address . . . . . : fe80::b8c5:7857:8b37:ddfe%4(Preferred)
    IPv4 Address. . . . . : 10.60.82.216(Preferred)
    Subnet Mask . . . . . : 255.255.252.0
    Lease Obtained. . . . . : Tuesday, September 18, 2018 6:08:09 AM
    Lease Expires . . . . . : Thursday, September 20, 2018 6:08:10 AM
    Default Gateway . . . . . : 10.60.80.1
    DHCP Server . . . . . : 10.60.80.1
    DHCPv6 IAID . . . . . : 33563880
    DHCPv6 Client DUID. . . . . : 00-01-00-01-1F-D8-2F-7E-00-24-E8-23-E3-3A
    DNS Servers . . . . . : 161.139.250.2
                           161.139.168.168
    NetBIOS over Tcpip. . . . . : Enabled

Ethernet adapter Ethernet 2:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :
    Description . . . . . : TAP-Windows Adapter V9
```

Figure C.3: ipconfig /all result

- ipconfig is also very useful for managing the DNS information stored in your host. Each entry shows the remaining Time to Live (TTL) in seconds.
Command: ipconfig /displaydns

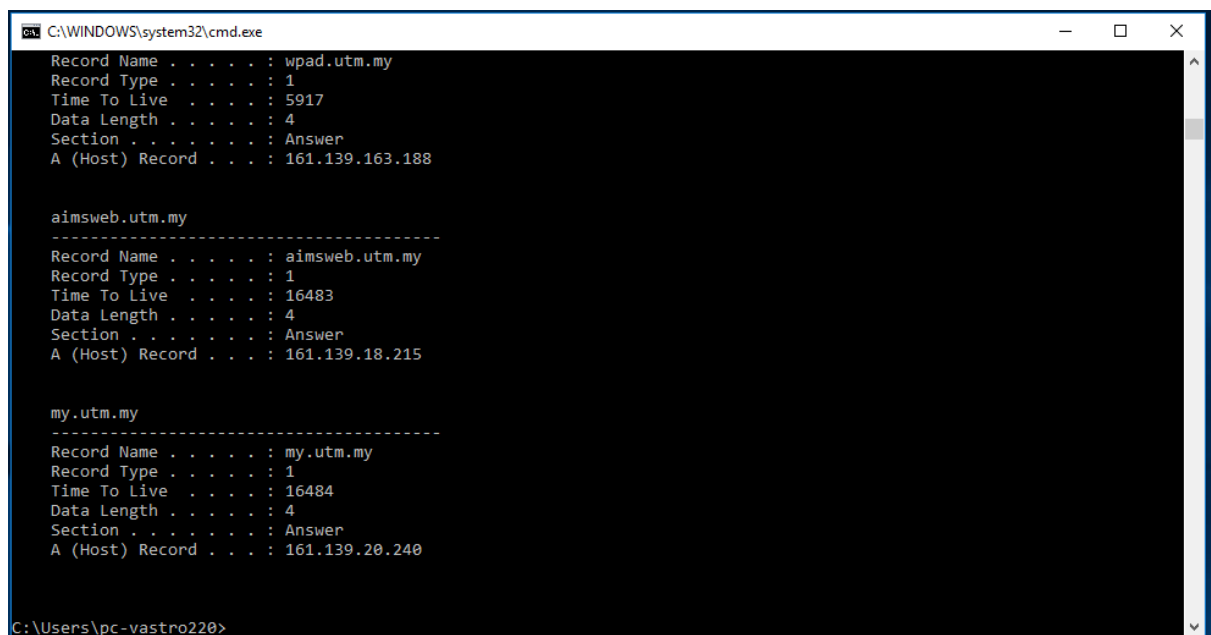

```
C:\WINDOWS\system32\cmd.exe
Record Name . . . . . : wpad.utm.my
Record Type . . . . . : 1
Time To Live . . . . . : 5917
Data Length . . . . . : 4
Section . . . . . : Answer
A (Host) Record . . . : 161.139.163.188

-----
aimsweb.utm.my
Record Name . . . . . : aimsweb.utm.my
Record Type . . . . . : 1
Time To Live . . . . . : 16483
Data Length . . . . . : 4
Section . . . . . : Answer
A (Host) Record . . . : 161.139.18.215

-----
my.utm.my
Record Name . . . . . : my.utm.my
Record Type . . . . . : 1
Time To Live . . . . . : 16484
Data Length . . . . . : 4
Section . . . . . : Answer
A (Host) Record . . . : 161.139.20.240

C:\Users\pc-vastro220>
```

Figure C.4: ipconfig /displaydns result

- Flushing the DNS cache clears all entries and reloads the entries from the hosts file.

Command: ipconfig /flushdns

```
C:\WINDOWS\system32\cmd.exe
C:\Users\pc-vastro220>ipconfig /flushdns

Windows IP Configuration

Successfully flushed the DNS Resolver Cache.

C:\Users\pc-vastro220>
```

Figure C.5: ipconfig /flushdns result

3.0 Tracing DNS with Wireshark

- Open packet trace file dns-trace-1. Answer the following questions.
- 1. Locate the DNS query and response messages. Are then sent over UDP or TCP? Add screenshots in your answer.
 - Sent over UDP

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	Cisco_fc:f0:de	Spanning-tree...	STP	60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
2	0.148791	00000004.0001...	00000004.ffff...	IPX SAP	113	General Response
3	0.374081	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.248? Tell 128.238.38.2
4	1.981736	00000004.0001...	00000004.ffff...	IPX SAP	113	General Response
5	1.999786	Cisco_fc:f0:de	Spanning-tree...	STP	60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
6	2.031956	128.238.38.2	224.0.0.2	HSRP	62	Hello (state Active)
7	2.527474	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.38? Tell 128.238.38.2
8	3.075845	128.238.38.160	128.238.29.23	DNS	72	Standard query 0x006e A www.ietf.org
9	3.076689	128.238.29.23	128.238.38.160	DNS	104	Standard query response 0x006e A www.ietf.org A 132.151.6.75 A 65.246.255.51
10	3.078479	128.238.38.160	132.151.6.75	TCP	62	3369 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM
11	3.096413	132.151.6.75	128.238.38.160	TCP	62	80 → 3369 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1380 SACK_PERM
12	3.096463	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=1 Ack=1 Win=64860 Len=0
13	3.096708	128.238.38.160	132.151.6.75	HTTP	429	GET / HTTP/1.1
14	3.111678	132.151.6.75	128.238.38.160	TCP	60	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=0
15	3.120640	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
16	3.128093	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1381 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
17	3.128148	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=2761 Win=64860 Len=0
18	3.148016	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=2761 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
19	3.148069	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=4141 Win=64860 Len=0
20	3.153211	132.151.6.75	128.238.38.160	HTTP	1055	HTTP/1.1 200 OK (text/html)
21	3.153293	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=5143 Win=63859 Len=0

Frame 9: 104 bytes on wire (832 bits), 104 bytes captured (832 bits)
Ethernet II, Src: Cisco_83:e4:54 (00:b0:8e:83:e4:54), Dst: IBM_10:60:99 (00:09:6b:10:60:99)
Internet Protocol Version 4, Src: 128.238.29.23, Dst: 128.238.38.160
0100 = Version: 4
... 0101 = Header Length: 20 bytes (5)
► Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
Total Length: 90
Identification: 0xd595 (54677)
► 000. = Flags: 0x0
...0 0000 0000 0000 = Fragment Offset: 0
Time to Live: 126
Protocol: UDP (17)
Header Checksum: 0x216a [validation disabled]
[Header checksum status: Unverified]
Source Address: 128.238.29.23
Destination Address: 128.238.38.160
[Stream index: 1]
► User Datagram Protocol, Src Port: 53, Dst Port: 3163
Domain Name System (response)

Apply a display filter ... <Ctrl-/>						
No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	Cisco_fc:f0:de	Spanning-tree...	STP	60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
2	0.148791	00000004.0001...	00000004.ffff...	IPX SAP	113	General Response
3	0.374081	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.248? Tell 128.238.38.2
4	1.981736	00000004.0001...	00000004.ffff...	IPX SAP	113	General Response
5	1.999786	Cisco_fc:f0:de	Spanning-tree...	STP	60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
6	2.031956	128.238.38.2	224.0.0.2	HSRP	62	Hello (state Active)
7	2.527474	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.38? Tell 128.238.38.2
8	3.075845	128.238.38.160	128.238.29.23	DNS	72	Standard query 0x006e A www.ietf.org
9	3.076689	128.238.29.23	128.238.38.160	DNS	104	Standard query response 0x006e A www.ietf.org A 132.151.6.75 A 65.246.255.51
10	3.078479	128.238.38.160	132.151.6.75	TCP	62	3369 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM
11	3.096413	132.151.6.75	128.238.38.160	TCP	62	80 → 3369 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1380 SACK_PERM
12	3.096463	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=1 Ack=1 Win=64860 Len=0
13	3.096708	128.238.38.160	132.151.6.75	HTTP	429	GET / HTTP/1.1
14	3.111678	132.151.6.75	128.238.38.160	TCP	60	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=0
15	3.120640	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
16	3.128093	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1381 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
17	3.128148	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=2761 Win=64860 Len=0
18	3.148016	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=2761 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
19	3.148069	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=4141 Win=64860 Len=0
20	3.153211	132.151.6.75	128.238.38.160	HTTP	1055	HTTP/1.1 200 OK (text/html)
21	3.153293	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=5143 Win=63859 Len=0
▶ Frame 8: 72 bytes on wire (576 bits), 72 bytes captured (576 bits) ▶ Ethernet II, Src: IBM_10:60:99 (00:09:6b:10:60:99), Dst: All-MSRP-routers_00 (00:00:0c:07:ac:00) ▶ Internet Protocol Version 4, Src: 128.238.38.160, Dst: 128.238.29.23 0100 = Version: 4 0101 = Header Length: 20 bytes (5) ▶ Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT) Total Length: 58 Identification: 0x229e (8862) ▶ 000. = Flags: 0x0 ...0 0000 0000 0000 = Fragment Offset: 0 Time to Live: 128 Protocol: UDP (17) Header Checksum: 0xd281 [validation disabled] [Header checksum status: Unverified] Source Address: 128.238.38.160 Destination Address: 128.238.29.23 [Stream index: 1] ▶ User Datagram Protocol, Src Port: 3163, Dst Port: 53 Domain Name System (query)						

2. What is the destination port for the DNS query message? What is the source port of DNS response message? Add screenshots in your answer.
 - Source Port: 3163
 - Destination Port: 53

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	Cisco_fc:f0:de	Spanning-tree...	STP	60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
2	0.148791	00000004.0001...	00000004.ffff...	IPX SAP	113	General Response
3	0.374081	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.248? Tell 128.238.38.2
4	1.981736	00000004.0001...	00000004.ffff...	IPX SAP	113	General Response
5	1.999786	Cisco_fc:f0:de	Spanning-tree...	STP	60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
6	2.031956	128.238.38.2	224.0.0.2	HSRP	62	Hello (state Active)
7	2.527474	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.38? Tell 128.238.38.2
8	3.075845	128.238.38.160	128.238.29.23	DNS	72	Standard query 0x006e A www.ietf.org
9	3.076689	128.238.29.23	128.238.38.160	DNS	104	Standard query response 0x006e A www.ietf.org A 132.151.6.75 A 65.246.255.51
10	3.078479	128.238.38.160	132.151.6.75	TCP	62	3369 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM
11	3.096413	132.151.6.75	128.238.38.160	TCP	62	80 → 3369 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1380 SACK_PERM
12	3.096463	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=1 Ack=1 Win=64860 Len=0
13	3.096708	128.238.38.160	132.151.6.75	HTTP	429	GET / HTTP/1.1
14	3.111678	132.151.6.75	128.238.38.160	TCP	60	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=0
15	3.120640	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
16	3.128093	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1381 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
17	3.128148	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=2761 Win=64860 Len=0
18	3.148016	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=2761 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
19	3.148069	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=4141 Win=64860 Len=0
20	3.153211	132.151.6.75	128.238.38.160	HTTP	1055	HTTP/1.1 200 OK (text/html)
21	3.153293	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=5143 Win=63859 Len=0

▶ Frame 8: 72 bytes on wire (576 bits), 72 bytes captured (576 bits) ▶ Ethernet II, Src: IBM_10:60:99 (00:09:6b:10:60:99), Dst: All-MSRP-routers_00 (00:00:0c:07:ac:00) ▶ Internet Protocol Version 4, Src: 128.238.38.160, Dst: 128.238.29.23 ▶ User Datagram Protocol, Src Port: 3163, Dst Port: 53	Source Port: 3163 Destination Port: 53 Length: 38 Checksum: 0x8acb [unverified] [Checksum Status: Unverified] [Stream index: 1] [Stream Packet Number: 1] [Timestamps] UDP payload (30 bytes)
--	---

3. To what IP address is the DNS query message sent? Add screenshots in your answer.
- 128.238.29.23

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	Cisco_fc:f0:de	Spanning-tree...	STP	60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
2	0.148791	00000004.0001...	00000004.ffff...	IPX SAP	113	General Response
3	0.374081	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.248? Tell 128.238.38.2
4	1.981736	00000004.0001...	00000004.ffff...	IPX SAP	113	General Response
5	1.999786	Cisco_fc:f0:de	Spanning-tree...	STP	60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
6	2.031956	128.238.38.2	224.0.0.2	HSRP	62	Hello (state Active)
7	2.527474	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.38? Tell 128.238.38.2
8	3.075845	128.238.38.160	128.238.29.23	DNS	72	Standard query 0x006e A www.ietf.org
9	3.076689	128.238.29.23	128.238.38.160	DNS	104	Standard query response 0x006e A www.ietf.org A 132.151.6.75 A 65.246.255.51
10	3.078479	128.238.38.160	132.151.6.75	TCP	62	3369 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM
11	3.096413	132.151.6.75	128.238.38.160	TCP	62	80 → 3369 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1380 SACK_PERM
12	3.096463	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=1 Ack=1 Win=64860 Len=0
13	3.096708	128.238.38.160	132.151.6.75	HTTP	429	GET / HTTP/1.1
14	3.111678	132.151.6.75	128.238.38.160	TCP	60	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=0
15	3.120640	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
16	3.128093	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1381 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
17	3.128148	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=2761 Win=64860 Len=0
18	3.148016	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=2761 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
19	3.148069	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=4141 Win=64860 Len=0
20	3.153211	132.151.6.75	128.238.38.160	HTTP	1055	HTTP/1.1 200 OK (text/html)
21	3.153293	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=5143 Win=63859 Len=0


```

Frame 9: 104 bytes on wire (832 bits), 104 bytes captured (832 bits)
Ethernet II, Src: Cisco_83:e4:54 (00:b0:8e:83:e4:54), Dst: IBM_10:60:99 (00:09:6b:10:60:99)
Internet Protocol Version 4, Src: 128.238.29.23, Dst: 128.238.38.160
0100 .... = Version: 4
... 0101 = Header Length: 20 bytes (5)
Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
Total Length: 90
Identification: 0xd595 (54677)
000. .... = Flags: 0x0
...0 0000 0000 0000 = Fragment Offset: 0
Time to Live: 126
Protocol: UDP (17)
Header Checksum: 0x216a [validation disabled]
[Header checksum status: Unverified]
Source Address: 128.238.29.23
Destination Address: 128.238.38.160
[Stream index: 1]
User Datagram Protocol, Src Port: 53, Dst Port: 3163
Domain Name System (response)

```

4. Examine the DNS query message. What “Type” of DNS query is it? Does the query message contain any “answers”? Add screenshots in your answer.
- Type A
 - Query message does not contain any “answer”

```

Frame 8: 72 bytes on wire (576 bits), 72 bytes captured (576 bits)
Ethernet II, Src: IBM_10:60:99 (00:09:6b:10:60:99), Dst: All-HSRP-routers_00 (00:00:0c:07:ac:00)
Internet Protocol Version 4, Src: 128.238.38.160, Dst: 128.238.29.23
User Datagram Protocol, Src Port: 3163, Dst Port: 53
Domain Name System (query)
  Transaction ID: 0x006e
  Flags: 0x0100 Standard query
  Questions: 1
  Answer RRs: 0
  Authority RRs: 0
  Additional RRs: 0
  Queries
    www.ietf.org: type A, class IN
    [Response In: 9]

```

5. Examine the DNS response message. How many “answers” are provided? What do each of these answers contain? Add screenshots in your answer.
- 2 “answer”

```
▶ Frame 9: 104 bytes on wire (832 bits), 104 bytes captured (832 bits)
▶ Ethernet II, Src: Cisco_83:e4:54 (00:b0:8e:83:e4:54), Dst: IBM_10:60:99 (00:09:6b:10:60:99)
▶ Internet Protocol Version 4, Src: 128.238.29.23, Dst: 128.238.38.160
▶ User Datagram Protocol, Src Port: 53, Dst Port: 3163
▼ Domain Name System (response)
  Transaction ID: 0x006e
  ▶ Flags: 0x8180 Standard query response, No error
    Questions: 1
    Answer RRs: 2
    Authority RRs: 0
    Additional RRs: 0
  ▼ Queries
    ▶ www.ietf.org: type A, class IN
  ▼ Answers
    ▶ www.ietf.org: type A, class IN, addr 132.151.6.75
    ▶ www.ietf.org: type A, class IN, addr 65.246.255.51
    \[Request In: 8\]
    [Time: 0.000844000 seconds]
```

6. Consider the subsequent TCP SYN packet sent by your host. Does the destination IP address of the SYN packet correspond to any of the IP addresses provided in the DNS response message? Add screenshots in your answer.

- Yes

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	Cisco_fc:f0:de	Spanning-tree.. STP		60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
2	0.148791	00000004.0001_	00000004.ffff_ IPX SAP		113	General Response
3	0.374081	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.248? Tell 128.238.38.2
4	1.981736	00000004.0001_	00000004.ffff_ IPX SAP		113	General Response
5	1.999786	Cisco_fc:f0:de	Spanning-tree.. STP		60	Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
6	2.031956	128.238.38.2	224.0.0.2	HSRP	62	Hello (state Active)
7	2.527474	Cisco_83:e4:54	Broadcast	ARP	60	Who has 128.238.38.38? Tell 128.238.38.2
8	3.075845	128.238.38.160	128.238.29.23	DNS	72	Standard query 0x006e A www.ietf.org
9	3.076689	128.238.29.23	128.238.38.160	DNS	104	Standard query response 0x006e A www.ietf.org A 132.151.6.75 A 65.246.255.51
10	3.078479	128.238.38.160	132.151.6.75	TCP	62	3369 → 80 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PERM
11	3.096413	132.151.6.75	128.238.38.160	TCP	62	80 → 3369 [SYN, ACK] Seq=0 Ack=1 Win=5840 Len=0 MSS=1380 SACK_PERM
12	3.096463	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=1 Ack=1 Win=64860 Len=0
13	3.096708	128.238.38.160	132.151.6.75	HTTP	429	GET / HTTP/1.1
14	3.111678	132.151.6.75	128.238.38.160	TCP	60	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=0
15	3.120640	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
16	3.128093	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=1381 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
17	3.128148	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=2761 Win=64860 Len=0
18	3.148016	132.151.6.75	128.238.38.160	TCP	1434	80 → 3369 [ACK] Seq=2761 Ack=376 Win=6432 Len=1380 [TCP PDU reassembled in 20]
19	3.148069	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=4141 Win=64860 Len=0
20	3.153211	132.151.6.75	128.238.38.160	HTTP	1055	HTTP/1.1 200 OK (text/html)
21	3.153293	128.238.38.160	132.151.6.75	TCP	54	3369 → 80 [ACK] Seq=376 Ack=5143 Win=63859 Len=0


```

Frame 10: 62 bytes on wire (496 bits), 62 bytes captured (496 bits)
on Ethernet II, Src: IBM_10:60:99 (00:09:6b:10:60:99), Dst: All-HSRP-routers_00 (00:00:0c:07:ac:00)
Internet Protocol Version 4, Src: 128.238.38.160, Dst: 132.151.6.75
  0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
  Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
  Total Length: 48
  Identification: 0x229f (8863)
  010. .... = Flags: 0x2, Don't fragment
    ...0 0000 0000 0000 = Fragment Offset: 0
  Time to Live: 128
  Protocol: TCP (6)
  Header Checksum: 0xa5b8 [validation disabled]
    [Header checksum status: Unverified]
  Source Address: 128.238.38.160
  Destination Address: 132.151.6.75
  [Stream index: 2]

```

7. This web page contains images. Before retrieving each image, does your host issue new DNS queries?

- No

- Open packet trace file dns-trace-2 for nslookup.
- We see from Wireshark that nslookup actually sent three DNS queries and received three DNS responses. For the purpose of this lab, ignore the first two sets of queries/responses, as they are specific to nslookup and are not normally generated by standard Internet applications. You should instead focus on the last query and response messages.
- Answer the following questions.

8. What is the destination port for the DNS query message? What is the source port of DNS response message? Add screenshots in your answer.

- 53

```

19 4.953172 128.238.38.160 128.238.29.22 DNS 71 Standard query 0x0003 A www.mit.edu
20 4.969929 128.238.29.22 128.238.38.160 DNS 196 Standard query response 0x0003 A www.mit.edu A 18.7.22.83 NS BITSY.mit.edu NS STRAWB.mit.edu
21 4.979464 128.238.38.2 224.0.0.2 HSRP 62 Hello (state Active)
22 4.985417 Cisco_83:e4:54 Broadcast ARP 60 Who has 128.238.38.74? Tell 128.238.38.2
23 5.684266 3Com_96:03:80 NETBIOS- SMB_NETLO.. 214 SAM LOGON request from client
24 5.694889 128.238.38.194 128.238.38.255 NBNS 92 Name query NB WORKGROUP<1c>
25 6.019442 Cisco_fc:f0:de Spanning-tree.. STP 60 Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
26 6.221840 Cisco_83:e4:54 Broadcast ARP 60 Who has 128.238.38.123? Tell 128.238.38.2

Frame 19: 71 bytes on wire (568 bits), 71 bytes captured (568 bits)
Ethernet II, Src: IBM_10:60:99 (00:09:6b:10:60:99), Dst: All-MSRP-routers_00 (00:00:0c:07:ac:00)
Internet Protocol Version 4, Src: 128.238.38.160, Dst: 128.238.29.22
User Datagram Protocol, Src Port: 3742, Dst Port: 53
Source Port: 3742
Destination Port: 53
Length: 37
Checksum: 0x5890 [unverified]
[Checksum Status: Unverified]
[Stream index: 3]
[Stream Packet Number: 1]
[Timestamps]
UDP payload (29 bytes)
Domain Name System (query)

```

```

18 4.952953 128.238.29.22 128.238.38.160 DNS 139 Standard query response 0x0002 No such name A www.mit.edu.poly.edu SQA dns-prime.poly.edu
19 4.953172 128.238.38.160 128.238.29.22 DNS 71 Standard query 0x0003 A www.mit.edu
20 4.969929 128.238.29.22 128.238.38.160 DNS 196 Standard query response 0x0003 A www.mit.edu A 18.7.22.83 NS BITSY.mit.edu NS STRAWB.mit.edu NS W20NS.mit.edu A 18
21 4.979464 128.238.38.2 224.0.0.2 HSRP 62 Hello (state Active)
22 4.985417 Cisco_83:e4:54 Broadcast ARP 60 Who has 128.238.38.74? Tell 128.238.38.2
23 5.684266 3Com_96:03:80 NETBIOS- SMB_NETLO.. 214 SAM LOGON request from client
24 5.694889 128.238.38.194 128.238.38.255 NBNS 92 Name query NB WORKGROUP<1c>
25 6.019442 Cisco_fc:f0:de Spanning-tree.. STP 60 Conf. Root = 32768/0/00:01:96:45:05:9a Cost = 12 Port = 0x802d
26 6.221840 Cisco_83:e4:54 Broadcast ARP 60 Who has 128.238.38.123? Tell 128.238.38.2

Frame 20: 196 bytes on wire (1568 bits), 196 bytes captured (1568 bits)
Ethernet II, Src: Cisco_83:e4:54 (00:b0:8e:83:e4:54), Dst: IBM_10:60:99 (00:09:6b:10:60:99)
Internet Protocol Version 4, Src: 128.238.29.22, Dst: 128.238.38.160
User Datagram Protocol, Src Port: 53, Dst Port: 3742
Source Port: 53
Destination Port: 3742
Length: 162
Checksum: 0xa318 [unverified]
[Checksum Status: Unverified]
[Stream index: 3]
[Stream Packet Number: 2]
[Timestamps]
UDP payload (154 bytes)
Domain Name System (response)

```

9. To what IP address is the DNS query message sent? Is this the IP address of your default local DNS server? Add screenshots in your answer.

- 128.238.28.160


```

Frame 20: 196 bytes on wire (1568 bits), 196 bytes captured (1568 bits)
Ethernet II, Src: Cisco_83:e4:54 (00:b0:8e:83:e4:54), Dst: IBM_10:60:99 (00:09:6b:10:60:99)
Internet Protocol Version 4, Src: 128.238.29.22, Dst: 128.238.38.160
0100 .... = Version: 4
... 0101 = Header Length: 20 bytes (5)
Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
Total Length: 182
Identification: 0xb50e (46350)
000. .... = Flags: 0x0
...0 0000 0000 0000 = Fragment Offset: 0
Time to Live: 126
Protocol: UDP (17)
Header Checksum: 0x4196 [validation disabled]
[Header checksum status: Unverified]
Source Address: 128.238.29.22
Destination Address: 128.238.38.160
[Stream index: 1]
User Datagram Protocol, Src Port: 53, Dst Port: 3742
Domain Name System (response)

```

10. Examine the DNS query message. What “Type” of DNS query is it? Does the query message contain any “answers”? Add screenshots in your answer.

- Type A
- Query message does not contain any “answer”

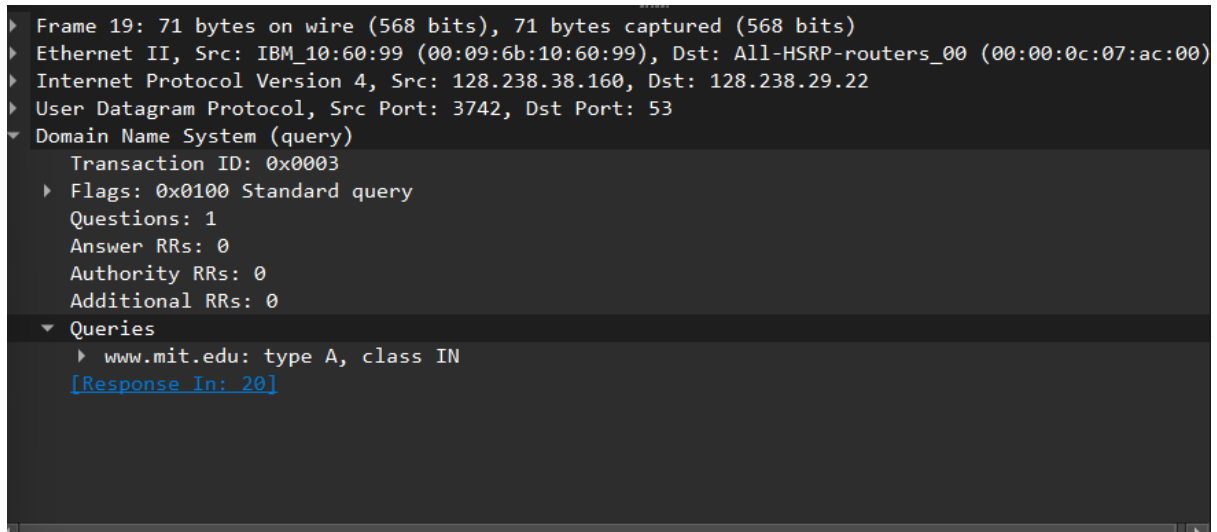


The screenshot shows a Wireshark packet capture of a DNS query message (Frame 19). The packet details pane is expanded to show the Domain Name System (query) section. The transaction ID is 0x0003. The flags are 0x0100, indicating a standard query. There is 1 question, 0 answer RRs, 0 authority RRs, and 0 additional RRs. The query is for www.mit.edu: type A, class IN. A link to the response is provided: [Response In: 20].

```
Frame 19: 71 bytes on wire (568 bits), 71 bytes captured (568 bits) on interface 0
Ethernet II, Src: IBM_10:60:99 (00:09:6b:10:60:99), Dst: All-HSRP-routers_00 (00:00:0c:07:ac:00)
Internet Protocol Version 4, Src: 128.238.38.160, Dst: 128.238.29.22
User Datagram Protocol, Src Port: 3742, Dst Port: 53
Domain Name System (query)
  Transaction ID: 0x0003
  Flags: 0x0100 Standard query
  Questions: 1
  Answer RRs: 0
  Authority RRs: 0
  Additional RRs: 0
  Queries
    www.mit.edu: type A, class IN
    [Response In: 20]
```

11. Examine the DNS response message. How many “answers” are provided? What do each of these answers contain? Add screenshots in your answer.

- Only 1 “answer”

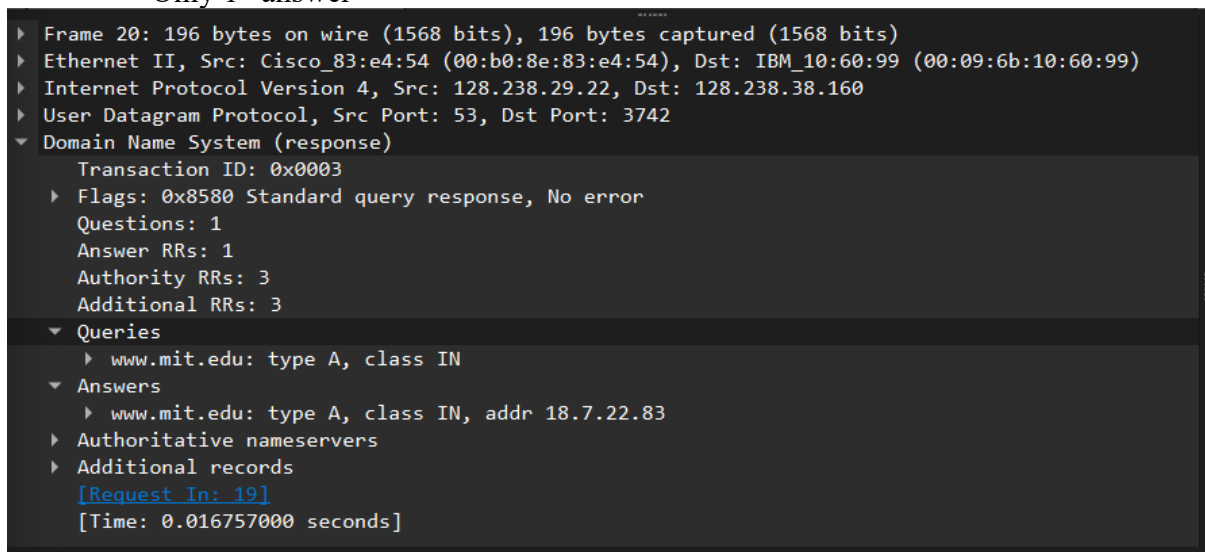

The screenshot shows a Wireshark packet capture of a DNS response message (Frame 20). The packet details pane is expanded to show the Domain Name System (response) section. The transaction ID is 0x0003. The flags are 0x8580, indicating a standard query response with no error. There is 1 question, 1 answer RR, 3 authority RRs, and 3 additional RRs. The query is for www.mit.edu: type A, class IN. The answer is for www.mit.edu: type A, class IN, address 18.7.22.83. There are also authoritative nameservers and additional records. A link to the request is provided: [Request In: 19]. The time taken for the response is 0.016757000 seconds.

```
Frame 20: 196 bytes on wire (1568 bits), 196 bytes captured (1568 bits) on interface 0
Ethernet II, Src: Cisco_83:e4:54 (00:b0:8e:83:e4:54), Dst: IBM_10:60:99 (00:09:6b:10:60:99)
Internet Protocol Version 4, Src: 128.238.29.22, Dst: 128.238.38.160
User Datagram Protocol, Src Port: 53, Dst Port: 3742
Domain Name System (response)
  Transaction ID: 0x0003
  Flags: 0x8580 Standard query response, No error
  Questions: 1
  Answer RRs: 1
  Authority RRs: 3
  Additional RRs: 3
  Queries
    www.mit.edu: type A, class IN
  Answers
    www.mit.edu: type A, class IN, addr 18.7.22.83
  Authoritative nameservers
  Additional records
  [Request In: 19]
  [Time: 0.016757000 seconds]
```