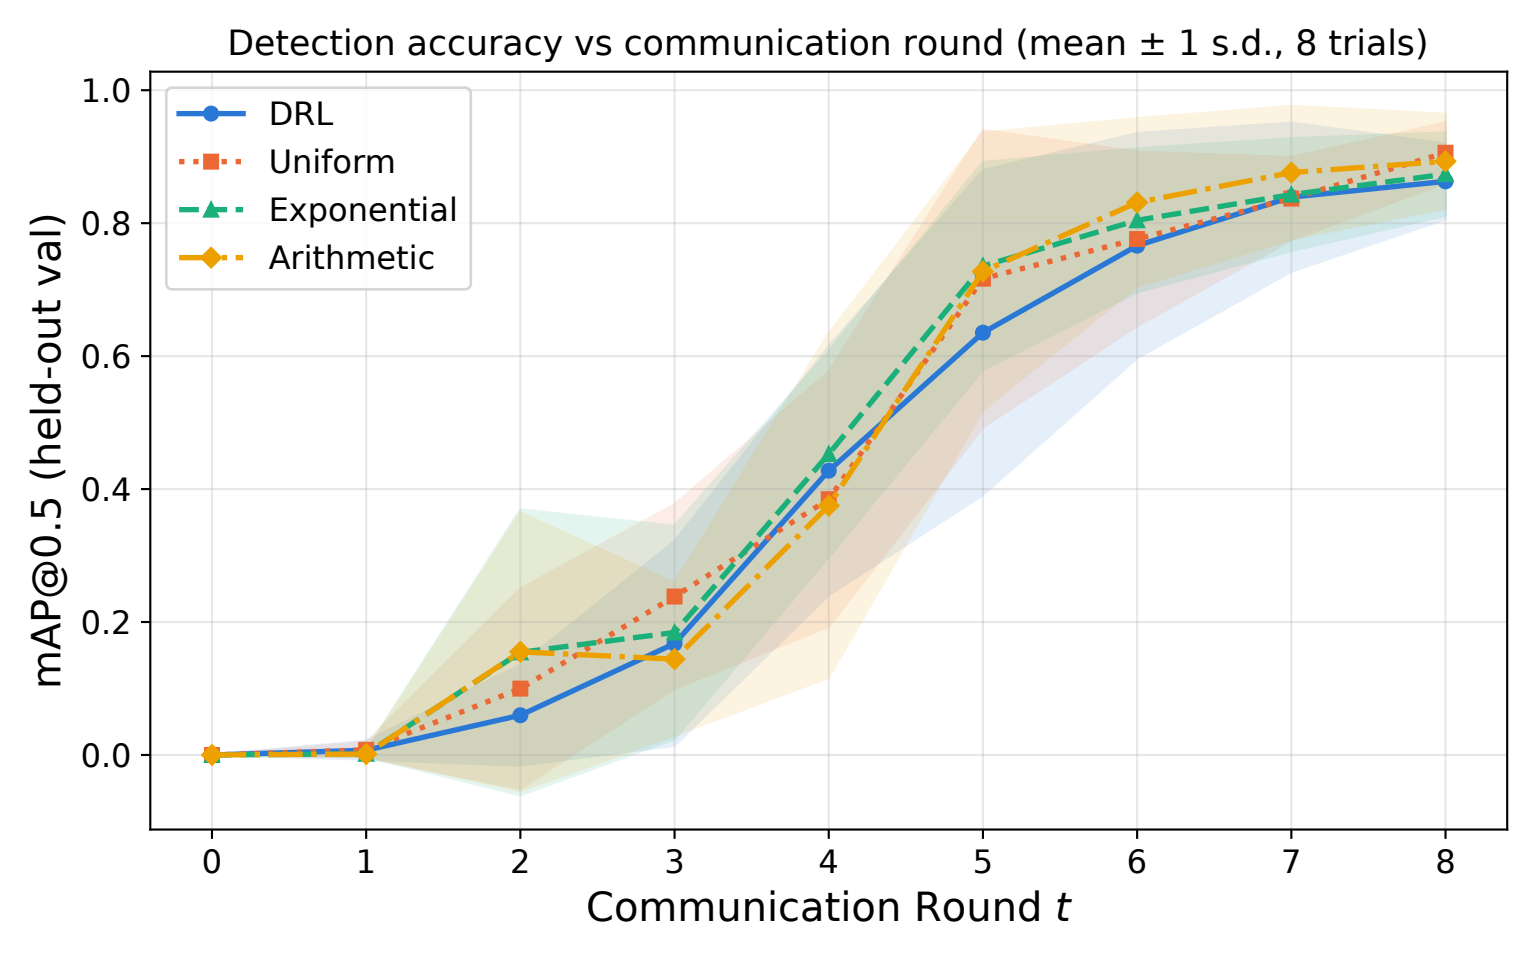
Detection accuracy vs communication round (mean ± 1 s.d., 8 trials)
DRL
Uniform
Exponential
Arithmetic
mAP@0.5 (held-out val)
1.0
0.8
0.6
0.4
0.2
0.0
0
1
2
3
4
5
6
7
8
Communication Round t