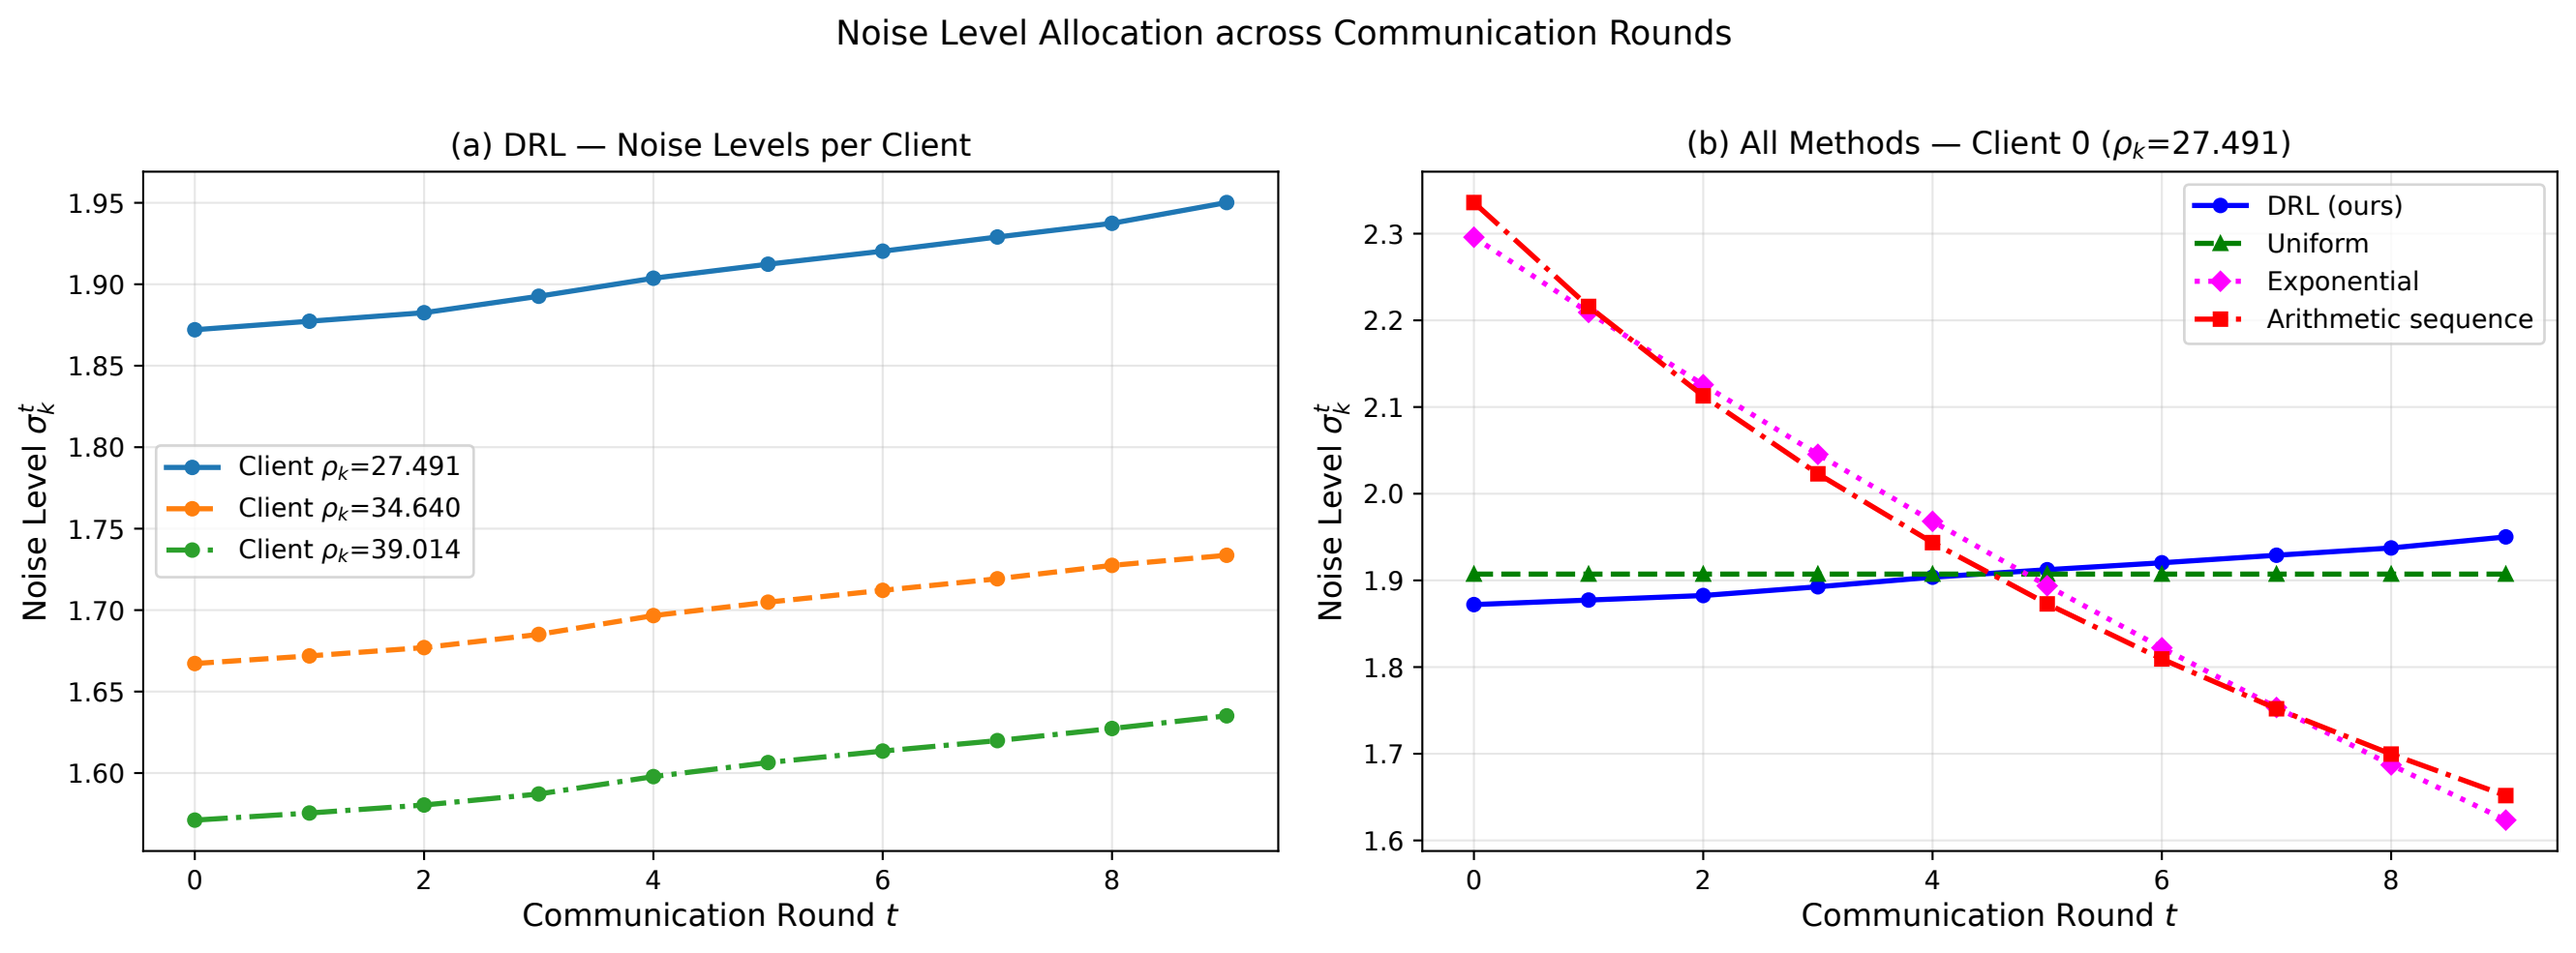
Noise Level Allocation across Communication Rounds
(a) DRL — Noise Levels per Client
Noise Level σ_k^t
Communication Round t
Client ρ_k=27.491
Client ρ_k=34.640
Client ρ_k=39.014
(b) All Methods — Client 0 (ρ_k=27.491)
Noise Level σ_k^t
Communication Round t
DRL (ours)
Uniform
Exponential
Arithmetic sequence