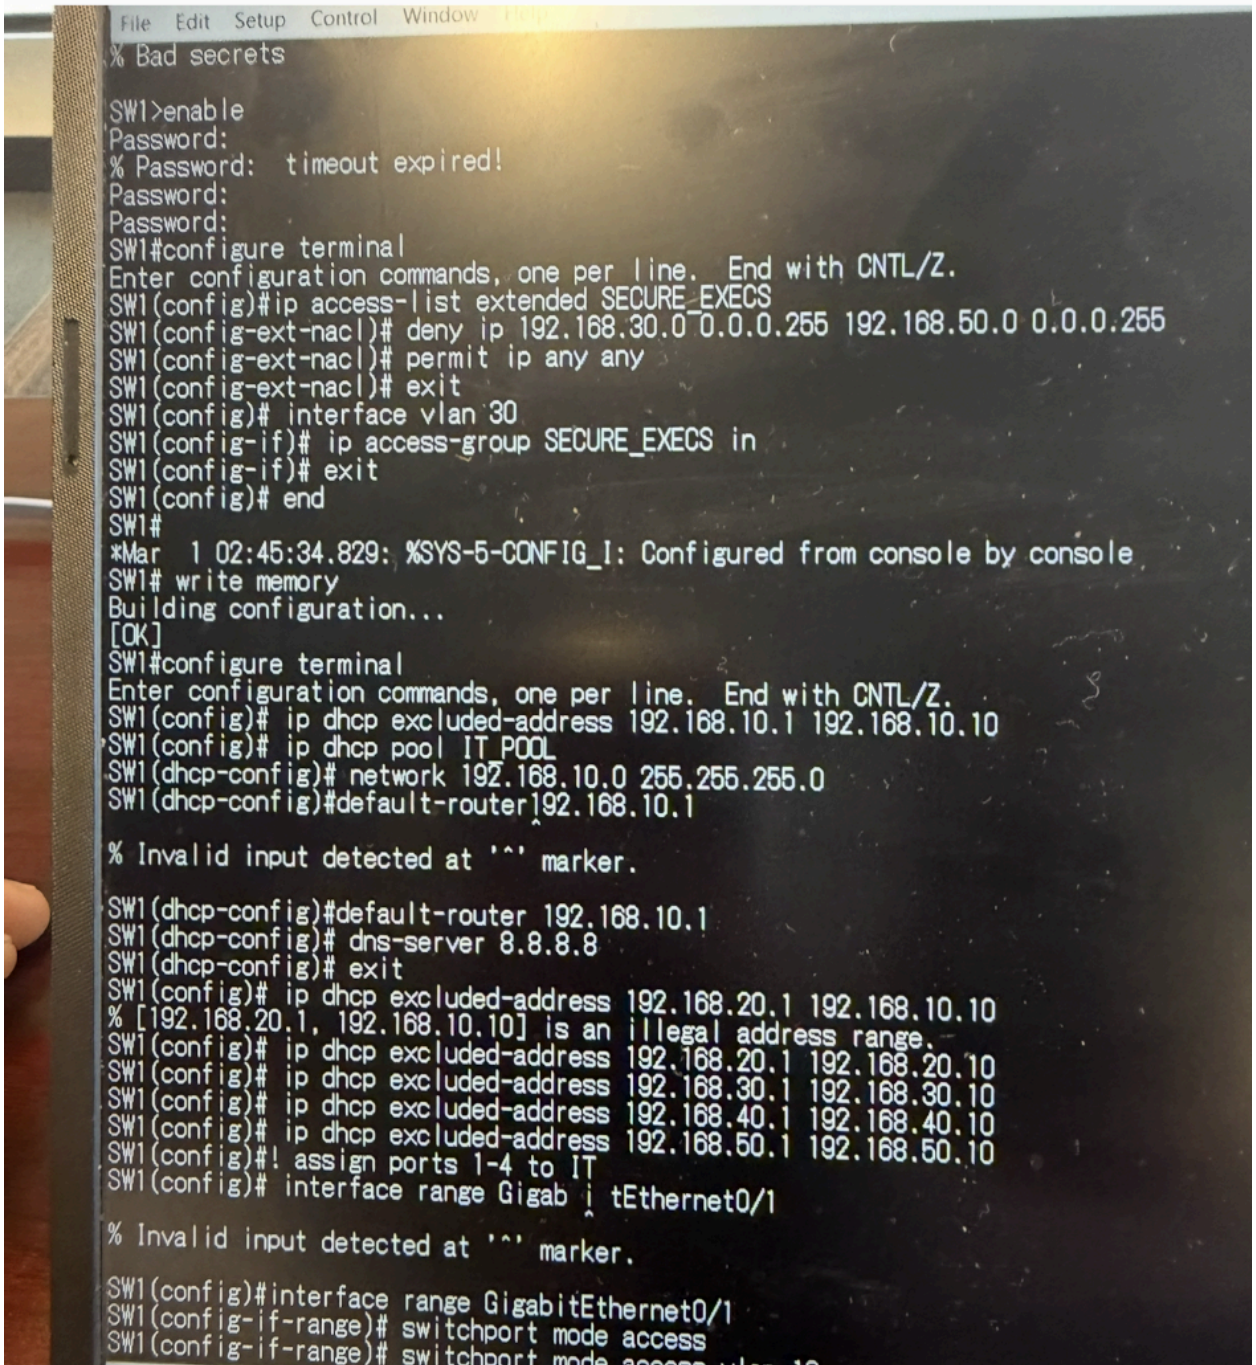

File Edit Setup Control Window
% Bad secrets
SW1>enable
Password:
% Password: timeout expired!
Password:
Password:
SW1#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
SW1(config)#ip access-list extended SECURE_EXECS
SW1(config-ext-nacl)# deny ip 192.168.30.0 0.0.0.255 192.168.50.0 0.0.0.255
SW1(config-ext-nacl)# permit ip any any
SW1(config-ext-nacl)# exit
SW1(config)# interface vlan 30
SW1(config-if)# ip access-group SECURE_EXECS in
SW1(config-if)# exit
SW1(config)# end
SW1#
*Mar 1 02:45:34.829: %SYS-5-CONFIG_I: Configured from console by console
SW1# write memory
Building configuration...
[OK]
SW1#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
SW1(config)# ip dhcp excluded-address 192.168.10.1 192.168.10.10
SW1(config)# ip dhcp pool IT_POOL
SW1(dhcp-config)# network 192.168.10.0 255.255.255.0
SW1(dhcp-config)#default-router 192.168.10.1
% Invalid input detected at '^' marker.
SW1(dhcp-config)#default-router 192.168.10.1
SW1(dhcp-config)# dns-server 8.8.8.8
SW1(dhcp-config)# exit
SW1(config)# ip dhcp excluded-address 192.168.20.1 192.168.10.10
% [192.168.20.1, 192.168.10.10] is an illegal address range.
SW1(config)# ip dhcp excluded-address 192.168.20.1 192.168.20.10
SW1(config)# ip dhcp excluded-address 192.168.30.1 192.168.30.10
SW1(config)# ip dhcp excluded-address 192.168.40.1 192.168.40.10
SW1(config)# ip dhcp excluded-address 192.168.50.1 192.168.50.10
SW1(config)#! assign ports 1-4 to IT
SW1(config)# interface range Gigab tEthernet0/1
% Invalid input detected at '^' marker.
SW1(config)#interface range GigabitEthernet0/1
SW1(config-if-range)# switchport mode access
SW1(config-if-range)# switchport mode access

Setting Up A LAN

A LAN, which stands for Local Area Network, allows computers and other devices in the same place to connect and communicate with one another. For example, computers in an office can use a LAN to share information and resources.

To set up a LAN, devices need to be connected through a network switch using Ethernet cables or through Wi-Fi. The devices also need the correct IP address settings so they can communicate properly. A router can be used to connect the local network to the internet or other networks.

After connecting the devices, it is important to check that they can communicate with one another. If a connection does not work, we can check the cables, IP addresses, and network settings to find the problem. Learning about LANs helped me understand how devices connect and share information within a network.