## Specifications

| | |
|---|---|
| Input Voltage | 4 - 40V |
| Output Voltage | 3.3 - 24V |
| Output Current | 2A (max. 3A with enhanced cooling) |
| Switching frequency | 150 kHz |
| Output Voltage present resolution | 0.1V |
| Voltage testing accuracy | ±(1% +2 Digits) |
| Dimensions | 66x36x13mm |
| Weight | 22g |

The module has a 3-digit voltmeter display, with the S1 button you can switch between the IN and OUT display:


If the LED is set to IN, the input voltage is displayed.

If the LED is set to OUT, the output voltage is displayed and can be adjusted via the trimmer.

It has an onboard measurement error correction function.

**Important**: The input voltage must always be at least 1.5 volts higher than the output voltage.

## Schematic

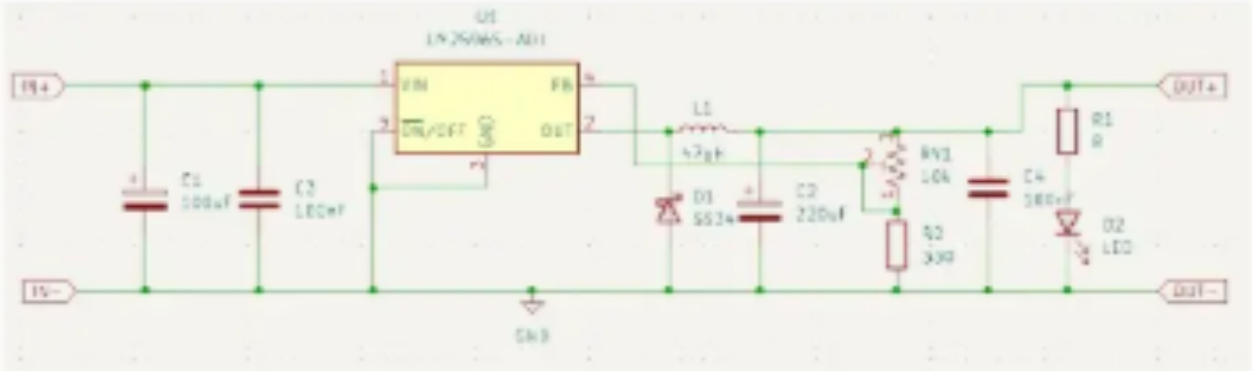

Function Block Diagram:

