Firmware upgrade instruction for ThiEYE T5 Pro

Note : This instruction is only available on PC with Windows OS

Step 1:

Install the Driver at first time , if you had install before ,please skip this step.

icatch_v20
00.exe

Step 2:

Firstly , Take out the Micro SD card and Battery .
Secondly, Long press the "Shutter" button and connect the camera to Windows OS computer by USB cable , then release the "Shutter" Button until the "Power" button is Click.
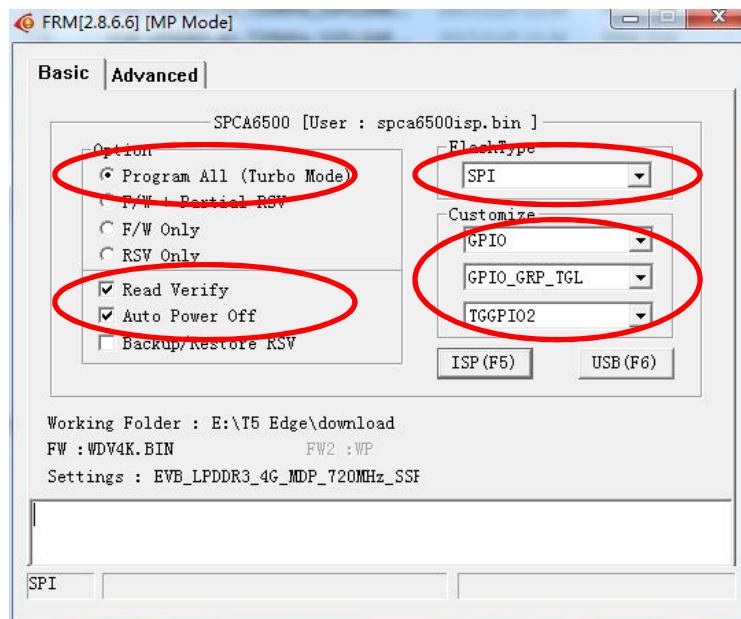
Step 3:

Execute the "FRM.exe" program in the "download" folder .

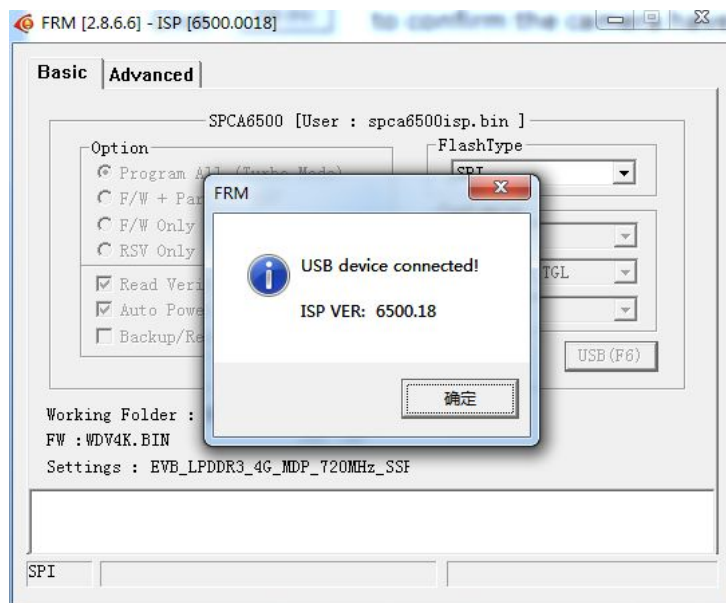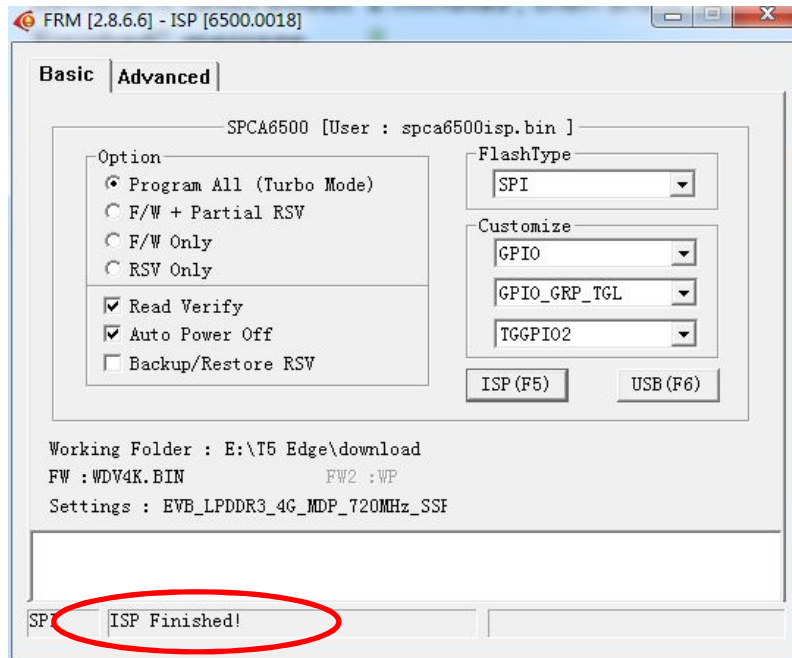| Temp | 2019/6/28 16:38 | 文件夹 | |
AIMG	2019/6/28 16:37	文件	4,096 KB
AIMG_ImgLog.txt	2019/6/28 16:37	文本文档	15 KB
BIMG	2019/6/28 16:37	文件	512 KB
BIMG_ImgLog.txt	2019/6/28 16:37	文本文档	1 KB
config.xml	2019/6/28 16:33	XML 文档	2 KB
DefFile	2019/6/28 16:33	文件	1 KB
DirDiffShow.exe	2019/6/28 16:33	应用程序	364 KB
Error.wav	2019/6/28 16:33	WAV 文件	36 KB
EVB_LPDDR3_4G_MDP_720MHz_SSPL...	2019/6/28 16:33	PRM 文件	6 KB
EVB_LPDDR3_4G_MDP_723MHz_SSPL...	2019/6/28 16:33	PRM 文件	5 KB
FIC.BIN	2019/6/28 16:31	BIN 文件	36 KB
FRM.exe	2019/6/28 16:33	应用程序	548 KB
frm_base.ini	2019/6/28 16:33	配置设置	3 KB
frm_user.ini	2019/7/16 16:53	配置设置	10 KB
log.txt	2019/7/16 16:53	文本文档	0 KB
Readme.txt	2019/6/28 16:33	文本文档	30 KB
reslist.exe	2019/6/28 16:33	应用程序	3 KB
reslist.linux	2019/6/28 16:33	LINUX 文件	9 KB
SetPara.exe	2019/6/28 16:33	应用程序	14 KB
SetReg.exe	2019/6/28 16:33	应用程序	15 KB
SetReg.ini	2019/6/28 16:33	配置设置	1 KB
spca6500isp.bin	2019/6/28 16:33	BIN 文件	580 KB

Step 4:

Check the option before update

Step 5:

Click [USB(F6)] to confirm the camera have connected to computer successfully

Step 6:

Click ISP(F5) to start upgrading the firmware of the camera, It takes about 2 minutes , then show up "ISP Finished" message

Update Success, then you can disconnect the camera from PC。