


This is the multiple choice part of Test A.
Test B will be only multiple choice.

PART A: Multiple Choice Questions

1. Which of the following physical layer transmission methods doubles the number of bits?
 - (a) NRZ-I
 - (b) Manchester
 - (c) Bipolar
 - (d) 4B/5B
2. The lowest frequency of a signal is 1,200 Hz and the highest 6,800 Hz . What is the bandwidth?
 - (a) 8,000 Hz
 - (b) 2,800 Hz
 - (c) 5,600 Hz
 - (d) 4,000 Hz
3. What is the period of a signal with frequency 0.05?
 - (a) 20
 - (b) 40
 - (c) 10
 - (d) .95
4. A sinusoid wave is given as a function $w(t)$ of time t by the formula: $w(t) = 6 \sin\left(\frac{\pi}{4} + 40\pi t\right)$. What is the frequency, phase, and amplitude in this order?
 - (a) frequency 40, phase $\pi/8$, and amplitude 6
 - (b) frequency 20, phase $\pi/4$, and amplitude 6
 - (c) frequency 20, phase $\pi/4$, and amplitude 3
 - (d) frequency 40, phase $\pi/4$, and amplitude 6

5. What is the redundancy of the 2 dimensional parity check algorithm on $m \times n$ bit words as a function of m and n ?
- (a) $\frac{1}{m} + \frac{1}{n}$
 - (b) $\frac{1}{mn}$
 - (c) $1 + \frac{m}{n}$
 - (d) $1 + \frac{1}{m} + \frac{1}{n}$
6. Why is frequent bit alternation important in physical layer bit streams?
- (a) To avoid signal collisions.
 - (b) To improve quality of signal.
 - (c) To prevent baseline wander.
 - (d) To prevent bit collisions.
7. An adversary is cutting wires (links) to disconnect the nodes of the network depicted below

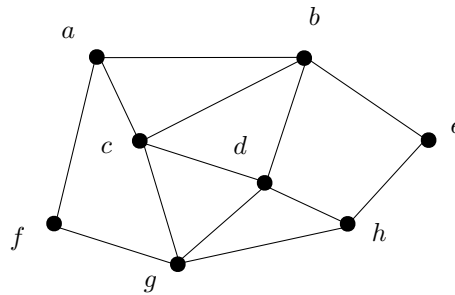

What is the minimum number of links required to be cut so as to partition the network into two connected subnets of size 4 nodes each?

- (a) 4
- (b) 2
- (c) 1
- (d) 5

-
8. The bandwidth of a channel is 200 *Mbps*. What is the transmission delay (in seconds) for a 10 *Kb* packet?
- (a) $2 \cdot 10^3 \text{ s}$
 - (b) 10^{-3} s
 - (c) $\frac{1}{2} \cdot 10^5 \text{ s}$
 - (d) $\frac{1}{2} \cdot 10^{-4} \text{ s}$
9. What is the propagation delay on a 6 *km* long coaxial cable having speed $3 \times 10^8 \text{ m/s}$?
- (a) $2 \cdot 10^{-5} \text{ s}$
 - (b) $18 \cdot 10^{-11} \text{ s}$
 - (c) $\frac{1}{2} \cdot 10^{-5} \text{ s}$
 - (d) $18 \cdot 10^{-5} \text{ s}$
10. How many bits can a transcontinental channel hold if it has one-way latency of 100 *ms* and bandwidth of 40 *Mbps*? Express your answer in *Mb*.
- (a) 40 *Mb*
 - (b) 2 *Mb*
 - (c) 4 *Mb*
 - (d) 10 *Mb*
11. What's the max number of errors that the $n \times n$ LRC (Longitudinal Redundancy Check) code can detect?
- (a) One
 - (b) Two
 - (c) $2n$
 - (d) $\frac{n}{2}$

12. What's the max number of errors that the LRC (Longitudinal Redundancy Check) code can correct?

- (a) n
- (b) $\frac{1}{n}$
- (c) Two
- (d) One

13. Give the Hamming distance between the bit strings

0111111011
1110000010

- (a) 7
- (b) 10
- (c) 6
- (d) 8


14. In the CRC code a polynomial is converted to a bit sequence. To what bit sequence is the polynomial $x^7 + x^5 + x^2 + x + 1$ converted to?

- (a) 10100101
- (b) 11100011
- (c) 10100111
- (d) 10100010

15. In the selective reject ARQ protocol SREJ

- (a) the receiver may reject a packet sent by the sender.
- (b) both sender and receiver may reject a packet.
- (c) the sender may reject a packet acknowledged by the receiver.
- (d) the receiver rejects packets sent twice by the sender.

16. In the Stop-and-Wait protocol
- (a) the receiver must stop and wait after receiving a packet.
 - (b) the sender must stop and wait after sending a packet.
 - (c) the receiver must stop and wait after receiving a packet in error.
 - (d) the sender must stop and wait after sending a packet in error.
17. Four packets enter from each of inputs in_0, in_1, in_2, in_3 at the same time and exit from outputs $out_0, out_1, out_2, out_3$ (denoted \square) following shortest paths. The transmission delay at all the nodes (denoted \circ) is 1 time unit regardless of the number of packets being processed and there is no processing delay. Propagation delay of all horizontal links is 1 time unit, and of all vertical links 2 time units.

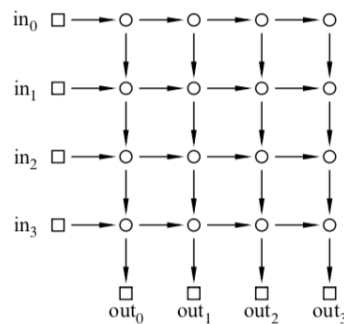

How long (in time units) does it take a packet entering in_1 to exit at out_2

- (a) 12
 - (b) 14
 - (c) 13
 - (d) 15
18. A transmission line has bandwidth 1,200 Hz and signal to noise ratio 15. The (Shannon) capacity of the channel is
- (a) 2,400
 - (b) 3,600
 - (c) 9,600
 - (d) 4,800