



# Pixhawk Payload Bus Standard

Revision: 0.3.0

Revision date: Jan 29, 2021

## Abstract

This document is the formal version of the Pixhawk Payload Bus industry standard that includes all aspects of the hardware standard required to build compatible products.

# Table of contents

<b>Table of contents</b>	<b>2</b>
<b>Document Revisions</b>	<b>3</b>
<b>Contact and Public Developer Call</b>	<b>3</b>
<b>Trademark Guideline</b>	<b>3</b>
<b>License and Disclaimer</b>	<b>3</b>
<b>Design Considerations</b>	<b>4</b>
<b>Software Interface</b>	<b>4</b>
<b>Pixhawk Payload Bus (PX-PB)</b>	<b>5</b>
Connector PPB-40-100W-D	5
Quick Release Mechanism	7
Scenarios	7
Requirements	7
Dovetail Design/CAD	8
Electrical Considerations	<b>10</b>
Hot-Swap Protection Mechanism	10
Options	10

## Document Revisions

Revision	Editor	Reviewer	Comments
0.1.0	Lorenz Meier	David Sidrane	Initial specification
0.2.0	Cory Schwarzmiller, Raul Ramos	Arnaud Thiercelin	Addition of payload bus
0.3.0	Cory Schwarzmiller	Lorenz Meier	Final version, design intent description

## Contact and Public Developer Call

This standard is being developed on a [public developer call](#).

For further questions, please contact the maintainer of the standard, [lorenz@px4.io](mailto:lorenz@px4.io).

## Trademark Guideline

[Trademark Guideline](#)

## License and Disclaimer

Copyright (c) 2020, Pixhawk Special Interests Group (SIG) of Dronecode Foundation. All rights reserved.

Redistribution and use in products, without modification, are permitted provided that the following conditions are met:

- The trademark shall only be used for compliant products and in combination with a signed adopter agreement.
- Implementations of the standard must be compliant with the full specification.
- A royalty-free, non-exclusive license is provided to adopters with a valid adopter agreement for schematics and drawings based on the standard documentation.

THIS SPECIFICATION IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE.

## Design Considerations

This bus is a mechanical and electrical system intended to be used either as a custom bus or, when using ethernet, with the [MAVLink camera protocol](#), providing full interoperability between different camera models. The mechanical and electrical design is intended to be used with mid-sized payloads like full-frame DSLR cameras, medium sized LIDAR scanners or other custom sensors.

## Software Interface

The Pixhawk Payload Bus is supporting the software interfaces in the table below. Any other interface protocols are non-standard and should not be used.

Payload Type	Protocol	References
<b>Cameras</b>	MAVLink Camera Protocol	<a href="#">Camera specification v1</a>
<b>Gimbals</b>	MAVLink Gimbal Protocol	<a href="#">Gimbal specification v2</a>
<b>General Payload</b>	MAVLink Protocol	
<b>Actuators</b>	CAN + DS-015 proto	DS-015 specification

## Pixhawk Payload Bus (PX-PB)

**Connector A1:** 40-pin connector, matching to the medium-size payload connector

It has these main interfaces:

- 100 base-T Ethernet (connected to mission computer)
- USB 2.0 (connected to mission computer)
- CAN FD (connected to onboard secondary CAN network)
- UART (connected to mission computer)
- TRIG (to camera, connected to flight controller via isolator)
- CAPTURE (capture pulse from camera / hot shoe)
- GNSS\_PPS (e.g. GPS PPS signal)
- VCC\_BAT needs to be between 12V (4S empty) and 26V (6S HV full)

Power:

- Voltage: 12V-30V, 25V nominal
- Max power rating: 25V / 6A burst (100 ms), 25V / 4A continuous (100W)

Expected standard use cases

- Ethernet + UART camera / gimbal payloads (ETH + VBAT + UART)
- USB + UART camera / gimbal payloads (USB + VBUS + UART)
- USB + VBUS + TRIG + CAPTURE (hot shoe) camera payloads
- UAVCAN sensor payload (CAN + VCC\_BAT)
- MAVLink-UART camera / gimbal payloads


### Signal Conventions

All pin definitions are listed as from the perspective of the aircraft side. For example, UART\_TX is from the aircraft, to the payload.

## Connector PPB-40-100W-D

The 40-pin connector is automotive grade, low-cost, vibration resilient and allows very high density assemblies.

- KEL DY Series: [Product page](#)

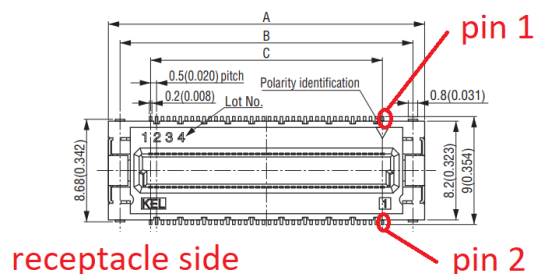

GND	1	2	GND
ETH_TXP	3	4	GND
ETH_TXN	5	6	GND
GND	7	8	GND

ETH_RXP	9	10	GND
ETH_RXN	11	12	GND
GND	13	14	VCC_BAT
RES1 (USB DP)	15	16	VCC_BAT
RES2 (USB DM)	17	18	VCC_BAT
USB_VBUS	19	20	VCC_BAT
TRIG	21	22	VCC_BAT
GND	23	24	VCC_BAT
UART_TX	25	26	VCC_BAT
GND	27	28	VCC_BAT
UART_RX	29	30	VCC_BAT
GND	31	32	VCC_BAT
CAN_H	33	34	VCC_BAT
CAN_L	35	36	VCC_BAT
GPS_PPS	37	38	VCC_BAT
CAPTURE	39	40	VCC_BAT

[Reference Document for this table: Official Pixhawk Standard Pinout](#)

Side	Vehicle side (bottom)	Payload side (top)
Part Number	DY01-040S (Receptacle)	DY11-040S (Plug)
Product Page	<a href="#">KEL DY Series</a>	<a href="#">KEL DY Series</a>

## Quick Release Mechanism

### Scenarios

A quick release mechanism provides dynamism in the loading/unloading of the payload during operation and maintenance.

In the field, this is essential if changing the payload for the task at hand is necessary or if the payload requires replacement after damage and/or malfunction.

In maintenance, this lowers the technical barrier of entry, allowing more individuals to service the aircraft. This provides an easier entry to deploy the solution in an enterprise environment.

The ease of use of the mechanism is essential. It lowers the barrier of entry of deploying the drone on the field. A good metric to identify the ease of assembly is simply the time it takes to attach and detach the payload under normal circumstances (no rushing, no racing). This ease of use must not be at the expense of the safety of the payload as we must make sure it remains secure during the flight. A safety mechanism that's easy to trigger is necessary to ensure this.


The payload may be exposed to the elements. From dust at take off/landing to rain. The payload itself should observe solid weather proofing but we also need to make sure the electronic connector and quick release mechanism are weather resistant.

The weight capacity of the payload quick release mechanism opens the door to more application and unforeseen ones as well but being an aerial vehicle, we can't just simply carry any weight. A hard max line at 5 Kg would provide ample room for advanced sensor and even actuator payloads while keeping the size and weight of the quick release mechanism manageable.


### Requirements

	Minimum	Ideal
<b>Weather Proofing</b> Protection of connector during operation	None	IP56
<b>Weight Capacity (grams)</b>	N/A	5000
<b>Time to assemble</b>	2 min	Sub 30s
<b>Mechanical Safety</b>	Lock to prevent accidental drop	

## Dovetail Design/CAD

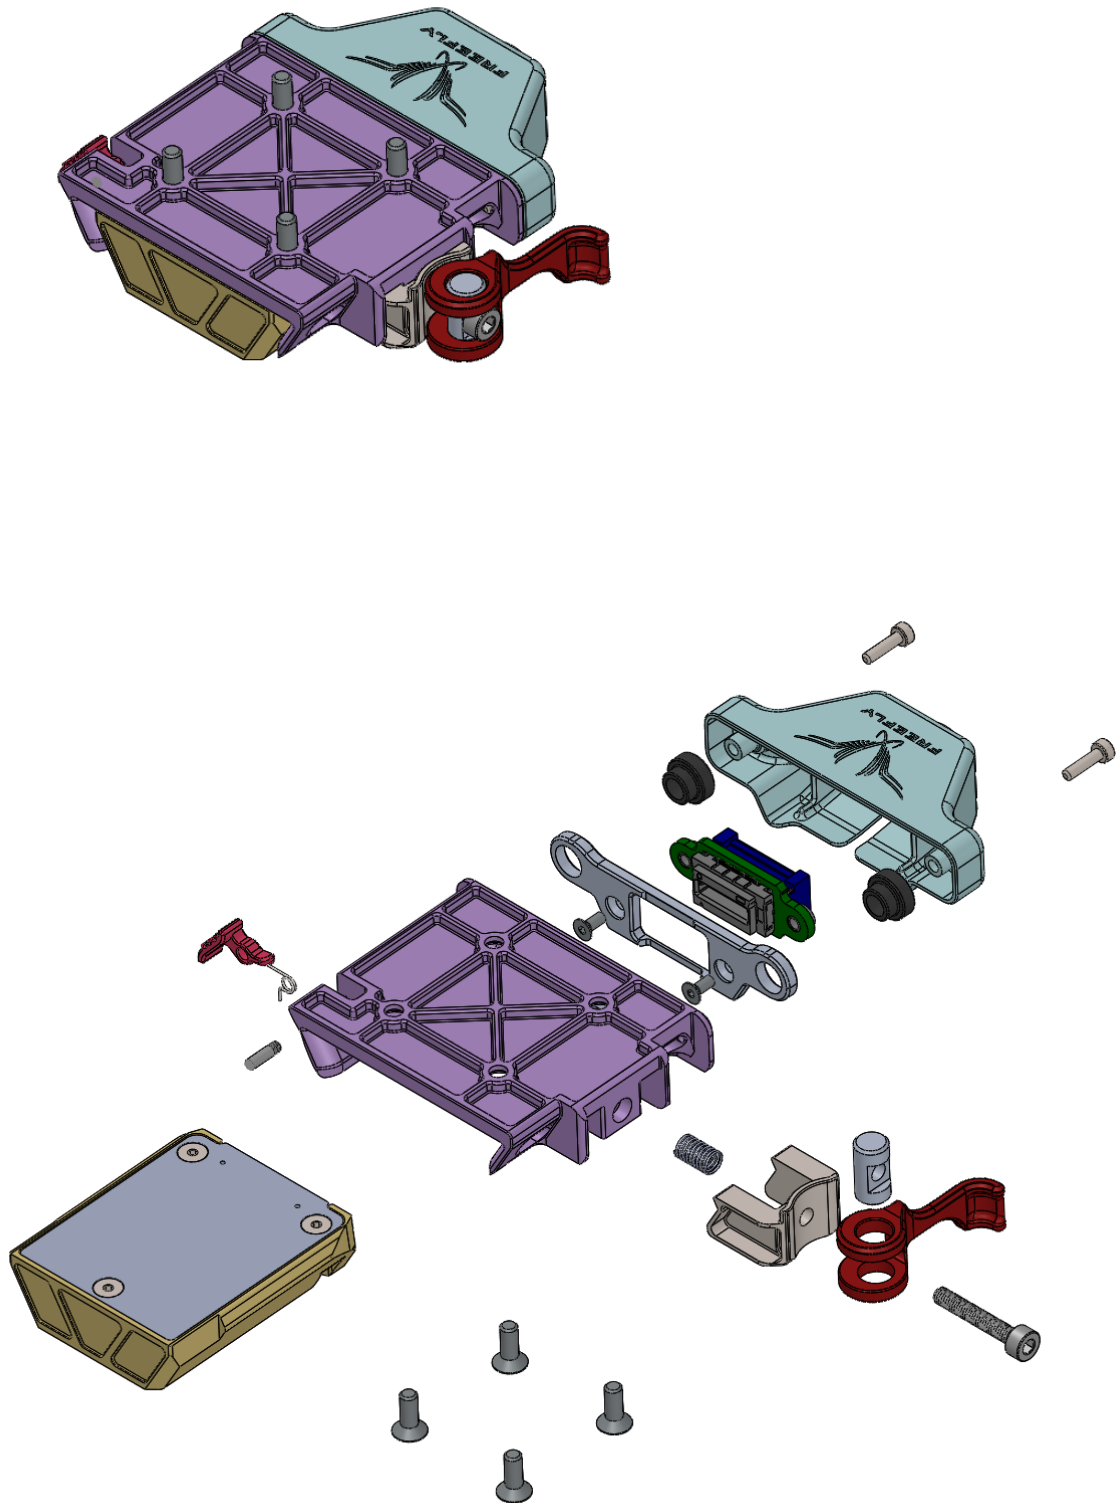



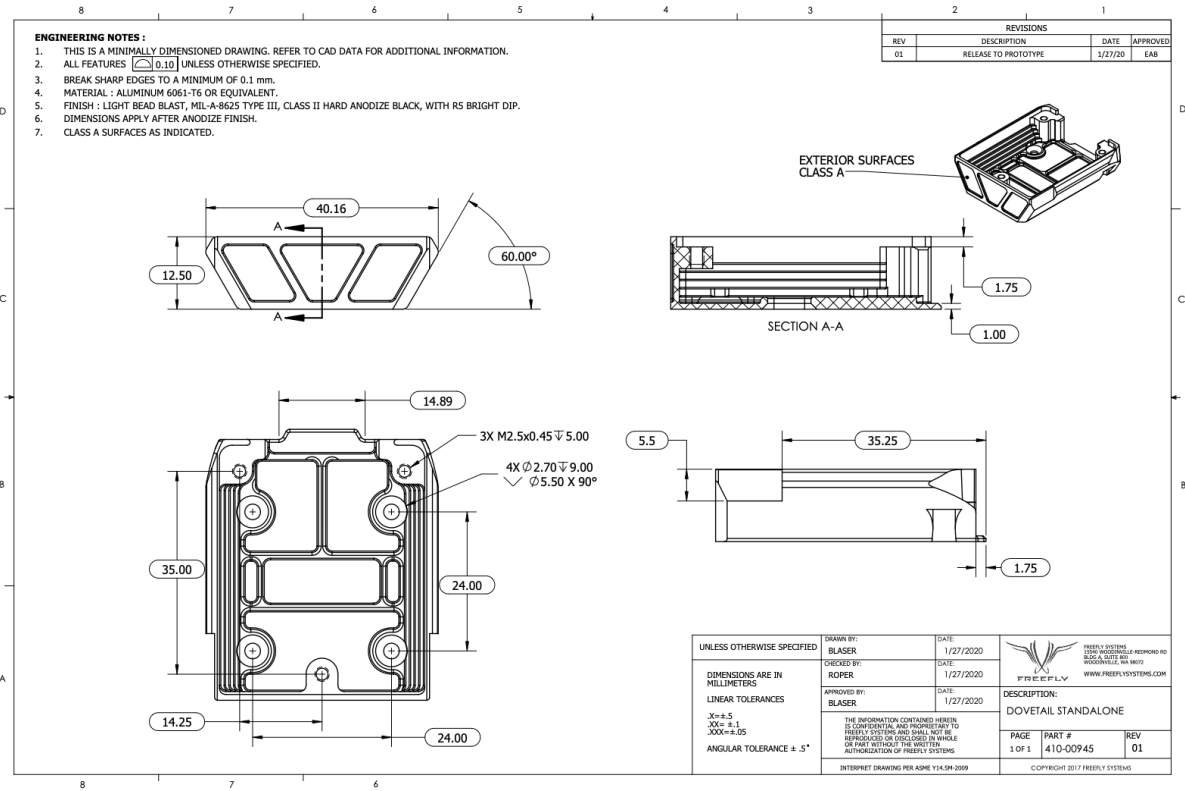

## Electrical Considerations

### Hot-Swap Protection Mechanism

To enable safe hot-swapping of the PPB we require a mechanism to limit inrush current and supply voltage to the external device(s).

#### Options

1. LTC4231: Micropower Hot Swap Controller. This device controls back-to-back Mosfets (to protect the pixhawk from being back-powered) located between the power supply and the PPB connector. To turn this device on the payload must pull a pin high.
  - a. Vin range: 2.7V - 36V; automotive rated
2. LTC4281: Hot Swap Controller with I2C with Compatible Monitoring of power out. This device controls a Mosfet(s) located between the power supply and the PPB connector. To turn this device on the payload must pull a pin down to ground.
  - a. Vin range: 2.9V - 33V; not automotive rated
  - b. Has output monitoring which is very useful information.