

# Sensor Networks and Mobile Data Communication, Assignment 2

UID: 1690550

March 7, 2017

## 1 Preparation and initial readings

Before we could attempt to compare the different models ran with different parameters, some initial readings had to be taken. Originally, the readings were taken over a very narrow range of distances between nodes and the transmission power. Namely, the power ranged from 0.1 to 0.12 dBm, and the distance ranged from 180 to 180.9 m. No packets were received during the original simulation.

We decided to look at a much wider range for both of these parameters. First we note that 802.11b standard lists 20 dBm as the standard transmission power for WiFi, with -100 dBm being the minimal received signal power. Using the default parameters for the model, we took readings at transmission power ranging from -10 dBm to 3 dBm, in 0.5 dBm intervals, and at distance in the range 10 m to 200 m, in 5 m intervals. Figure 1 show the maximum transmission distance for each of the power values.

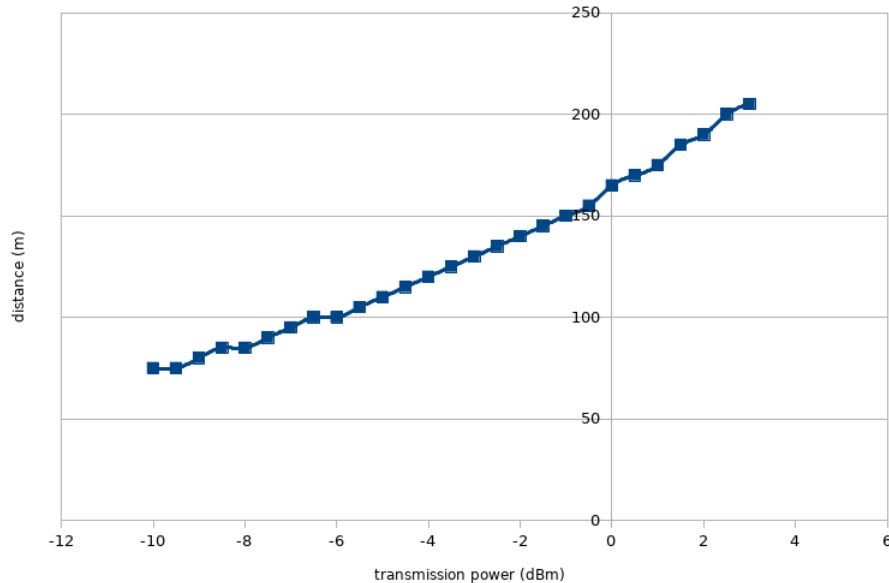


Figure 1: Maximum transmission distance for the given transmission power.

These results will be considered the "normal" output, to which we can compare the outcomes of any modifications.

## 2 Log-distance propagation loss model (Methods 1)

The equation to calculate loss in the log-distance propagation model<sup>1</sup> is:

$$L = L_0 + 10n\log_{10}\left(\frac{d}{d_0}\right)$$

with  $L$  being the relative path loss,  $L_0$  the path loss at reference distance  $d_0$ ,  $n$  being the path loss distance exponent, and  $d$  the distance at which we're looking.

The model has 3 attributes: path loss exponent, reference distance, and reference loss. Reference distance and loss come together, and we shall look at them first. This pair of attributes describes how much power we lose at the reference distance from the source. It is included in the model to avoid taking  $\log_{10}(0)$  which tends to  $-\infty$ . Therefore there is no point in attempting to get a reading at a shorter distance, as it will not be meaningful.

Effectively, these attributes describe how much to add to the loss, to account for skipping the reference distance in the calculations. It should not come as a surprise that increasing the reference loss, decreases transmission range.

We have measured the transmission distance, with reference loss ranging from 7 to 20 dB in 0.5 dB intervals, at transmission power -10 dBm. The outcome is shown in the graph below.

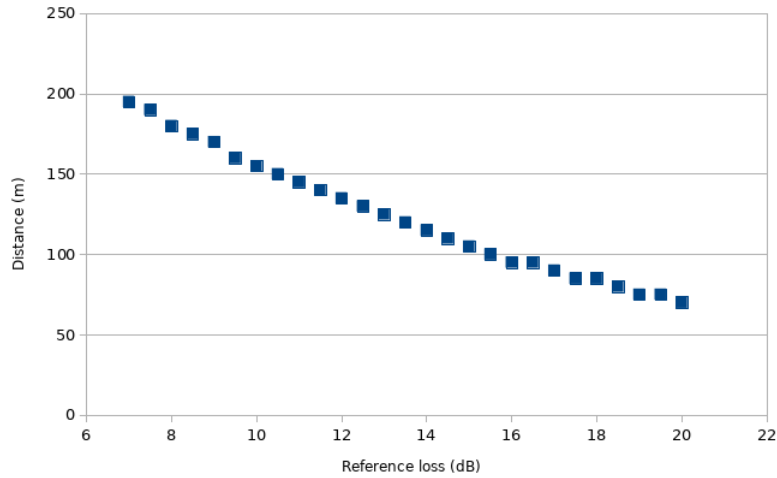


Figure 2: Maximum distance reached for a given reference loss.

It is not ideal to increase the reference distance, as it will limit the range at which we can take the readings. Attempting to find the loss at a distance less than the reference distance, will return the transmission power.

The other parameter in the model is the exponent  $n$ . Recall the model equation:

$$\begin{aligned} L &= L_0 + 10n\log_{10}\left(\frac{d}{d_0}\right) \\ &= L_0 + 10\log_{10}\left(\left(\frac{d}{d_0}\right)^n\right) \end{aligned}$$

Therefore, we can expect an exponential decrease in the maximum distance reached, as we increase the exponent. Our findings, summarised in the graph in Fig. 3 indeed demonstrate this trend. (Readings taken at transmission power -10 dBm.)

<sup>1</sup>[https://www.nsnam.org/docs/release/3.19/doxygen/classns3\\_1\\_1\\_log\\_distance\\_propagation\\_loss\\_model.html](https://www.nsnam.org/docs/release/3.19/doxygen/classns3_1_1_log_distance_propagation_loss_model.html)

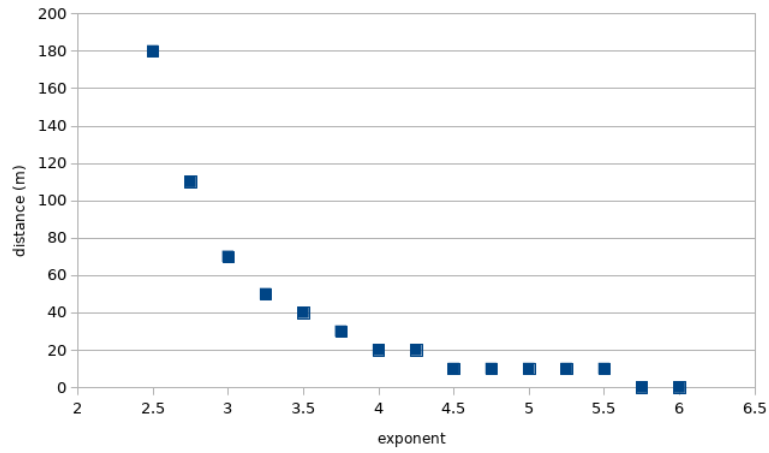


Figure 3: Maximum distance reached for a given exponent.

### 3 Friis propagation loss model

This model has been first introduced by H. Friis in 1946<sup>2</sup>.

---

<sup>2</sup>H. Friis, "A note on simple transmission formula" in *Proc. IRE*, 1946