

Feedback — Homework 3

[Help Center](#)

You submitted this quiz on **Sun 19 Apr 2015 11:22 PM PDT**. You got a score of **10.00** out of **10.00**.


Question 1

Fast Fourier Transform (FFT) speeds up the computation of the Discrete Fourier Transform (DFT) of a signal by compromising the accuracy of the result

Your Answer	Score	Explanation
<input type="radio"/> True		
<input checked="" type="radio"/> False	✓ 1.00	
Total	1.00 / 1.00	

Question 2

The continuous image $x(t_1, t_2)$ has the following frequency spectrum. What is the minimum number of samples that should be taken from any 10cm by 10cm square region on the image to avoid aliasing?

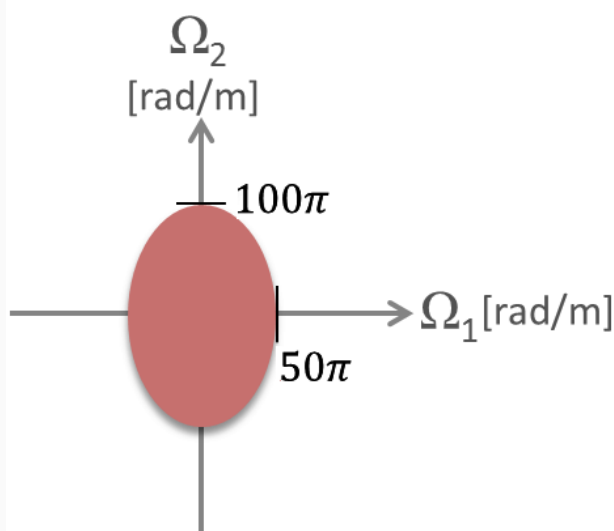

Your Answer	Score	Explanation
<input type="radio"/> 5		
<input type="radio"/> 25		
<input checked="" type="radio"/> 50	✓ 1.00	
<input type="radio"/> 100		
Total	1.00 / 1.00	

Question 3

Imagine you want to decrease the resolution of a 1024×1024 pixel image by a factor of 2 in each direction so that you end up with a 512×512 lower resolution image. Which one of the following procedures should you follow?

Your Answer	Score	Explanation
<input type="radio"/> low-pass filtering of the original image followed by discarding half of the pixels in the resulting image		
<input checked="" type="radio"/> low-pass filtering of the original image followed by discarding three quarters of the pixels in the resulting image	✓ 1.00	
<input type="radio"/> high-pass filtering of the original image followed by discarding half of the pixels in the resulting image		
<input type="radio"/> high-pass filtering of the original image followed by discarding three quarters of the pixels in the resulting image		
Total	1.00 / 1.00	

Question 4

Imagine now that you want to display a low resolution image on a high resolution TV screen.

Which one of the following statements is true?

Your Answer	Score	Explanation
<input type="radio"/> This can only be done in the spatial domain where the image is taken.		
<input type="radio"/> This can only be done in the frequency domain.		
<input checked="" type="radio"/> This can be done in the spatial domain.	✓ 1.00	
<input type="radio"/> Going from low resolution to high resolution is practically not possible.		
Total	1.00 / 1.00	

Question 5

$x(n_1, n_2)$ is defined as $x(n_1, n_2) = (-1)^{n_1+n_2}$ when $0 \leq n_1, n_2 \leq 2$ and zero elsewhere. Denote by $X(k_1, k_2)$, where $0 \leq k_1, k_2 \leq 2$, the DFT of $x(n_1, n_2)$. What is the value of $X(1, 2)$?


Your Answer	Score	Explanation
<input type="radio"/> $1 + j\sqrt{3}$		
<input type="radio"/> $1 - j\sqrt{3}$		
<input checked="" type="radio"/> 4	✓ 1.00	
<input type="radio"/> $(1 + j\sqrt{3})^2$		
Total	1.00 / 1.00	

Question 6

A 4×4 pixel image $x(n_1, n_2)$ is depicted below. Denote by $X(k_1, k_2)$ the 4×4 point DFT of

$x(n_1, n_2)$. Calculate $X(0, 0)$

You entered:

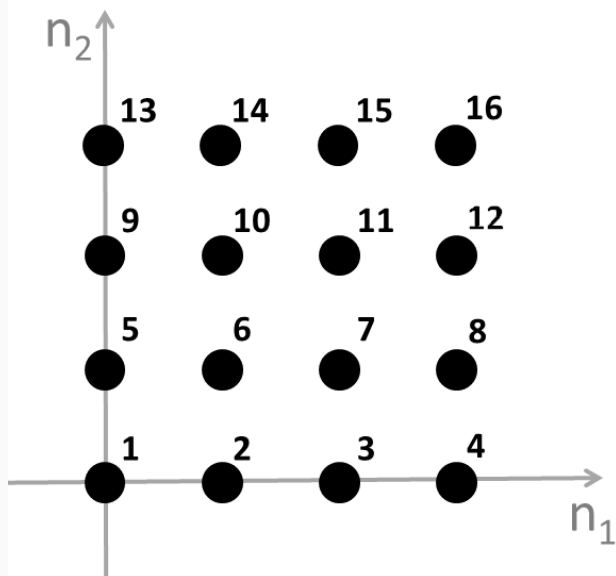


136

Your Answer	Score	Explanation
136	✓ 1.00	
Total	1.00 / 1.00	

Question 7

Check all statements that are true regarding the 4×3 point DFT of the image $x(n_1, n_2)$ shown below

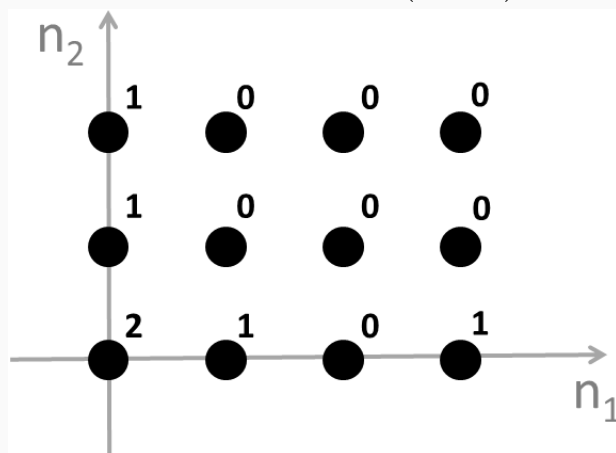

Your Answer	Score	Explanation
<input checked="" type="checkbox"/> $X(k_1, k_2)$ is real	✓ 0.20	
<input type="checkbox"/> $X(1, k_2) = X(2, k_2)$ for $0 \leq k_2 \leq 2$	✓ 0.20	

<input type="checkbox"/> $X(k_1, 0) = X(k_1, 2)$ for $0 \leq k_1 \leq 3$	✓	0.20
<input type="checkbox"/> $X(k_1, k_2) = X(k_2, k_1)$ for $0 \leq k_1, k_2 \leq 2$	✓	0.20
<input checked="" type="checkbox"/> $X(0, 0) = 6$	✓	0.20

Total	1.00 / 1.00	
-------	-------------	--

Question 8

In this problem you will get hands-on experience with changing the resolution of an image, i.e., down-sampling and up-sampling. Follow the instructions below to finish this problem. (1)

Download the original image from [here](#). The original image is an 8-bit gray-scale image of width 479 and height 359 pixels. Convert the original image from type 'uint8' (8-bit integer) to 'double' (real number). (2) Recall from the lecture that in order to avoid aliasing (e.g., jagged edges) when down-sampling an image, you will need to first perform low-pass filtering of the original image. For this step, create a 3×3 low-pass filter with all coefficients equal to $1/9$. Perform low-pass filtering with this filter using the MATLAB function "imfilter" with 'replicate' as the third argument. For more information about low-pass filtering using MATLAB, refer to the programming problem in the homework of Week 2. (3) Obtain the down-sampled image by removing every other row and column from the filtered image, that is, removing the 2nd, 4th, all the way to the 358th row, and then removing the 2nd, 4th, all the way to the 478th column.

The resulting image should be of width 240 and height 180 pixels. This completes the procedure for image down-sampling. In the next steps, you will up-sample this low-resolution image to the original resolution via spatial domain processing. (4) Create an all-zero MATLAB array of width 479 and height 359. For every odd-valued $i \in [1, 359]$ and odd-valued $j \in [1, 479]$, set the value of the newly created array at (i, j) equal to the value of the low-resolution image at $(\frac{i+1}{2}, \frac{j+1}{2})$. After this step you have inserted zeros into the low-resolution image. (5) Convolve the result obtained from step (4) with a filter with coefficients $[0.25, 0.5, 0.25; 0.5, 1, 0.5; 0.25, 0.5, 0.25]$ using the MATLAB function "imfilter". In this step you should only provide "imfilter" with two arguments instead of three, that was the case in step (1). The two arguments are the result from step (4) and the filter specified in this step. This step essentially performs bilinear interpolation to obtain the up-sampled image. (6) Compute the PSNR between the upsampled image obtained from step (5) and the original image. For more

information about PSNR, refer to the programming problem in the homework of Week 2. Enter the PSNR you have obtained to two decimal points in the box below.

You entered:

28.1753

Your Answer		Score	Explanation
28.1753	✓	3.00	
Total		3.00 / 3.00	