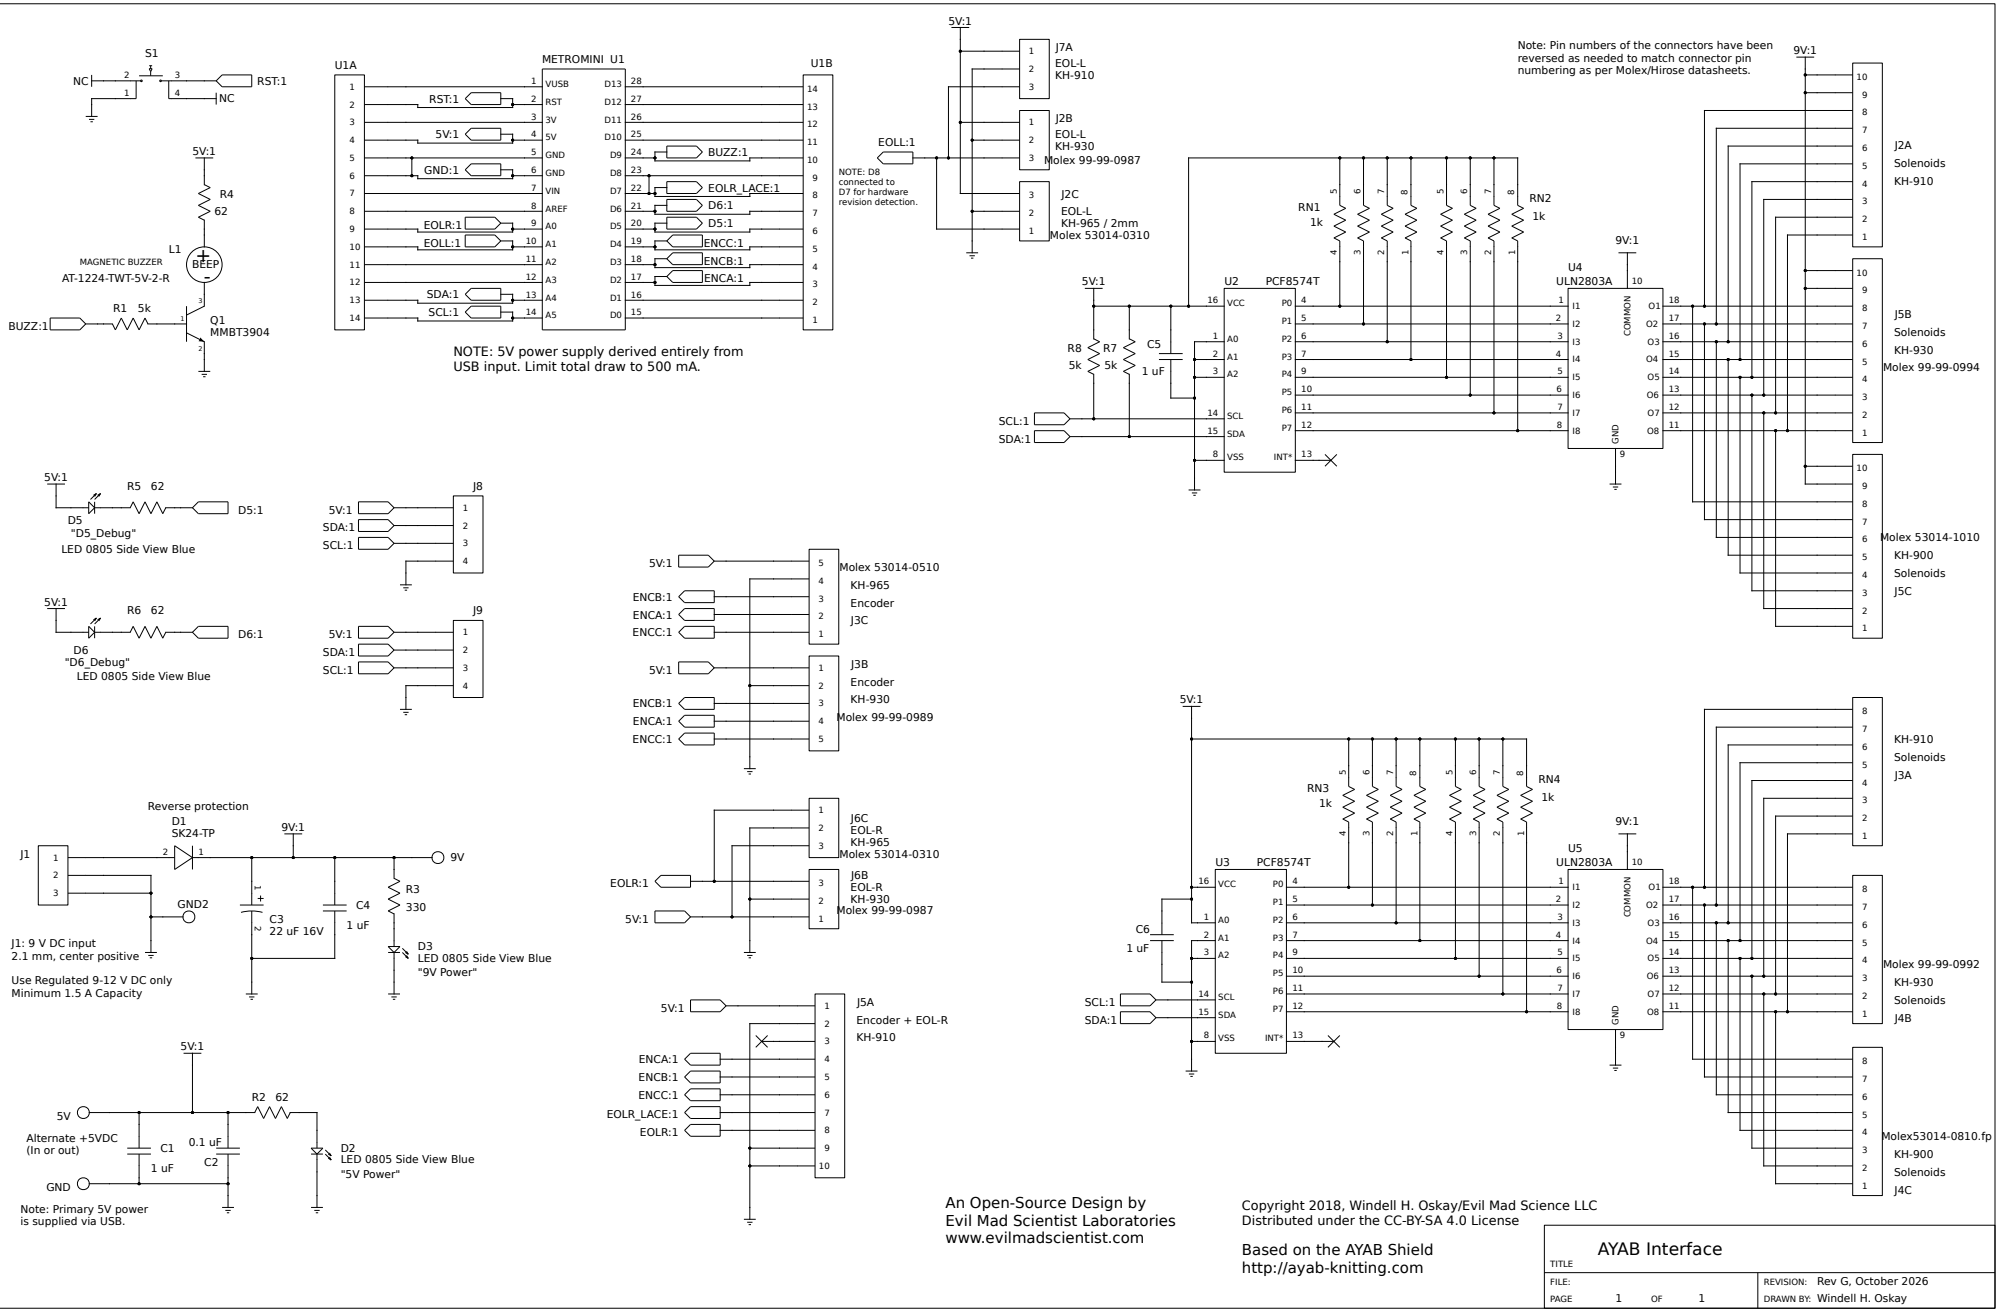
S1
NC
RST:1
NC
5V:1
R4
62
L1
MAGNETIC BUZZER
AT-1224-TWT-5V-2-R
BEEP
BUZZ:1
R1 5k
Q1
MMBT3904
U1A
METROMINI U1
U1B
RST:1
5V:1
GND:1
EOLR:1
EOLL:1
SDA:1
SCL:1
BUZZ:1
EOLR_LACE:1
D6:1
D5:1
ENCC:1
ENCB:1
ENCA:1
NOTE: 5V power supply derived entirely from
USB input. Limit total draw to 500 mA.
5V:1
J7A
EOL-L
KH-910
J2B
EOL-L
KH-930
Molex 99-99-0987
J2C
EOL-L
KH-965 / 2mm
Molex 53014-0310
EOLL:1
NOTE: D8
connected to
D7 for hardware
revision detection.
Note: Pin numbers of the connectors have been
reversed as needed to match connector pin
numbering as per Molex/Hirose datasheets.
9V:1
J2A
Solenoids
KH-910
J5B
Solenoids
KH-930
Molex 99-99-0994
Molex 53014-1010
KH-900
Solenoids
J5C
RN1
1k
RN2
1k
U2
PCF8574T
U4
ULN2803A
COMMON
GND
R8
5k
R7
5k
C5
1 uF
SCL:1
SDA:1
5V:1
D5
"D5_Debug"
LED 0805 Side View Blue
R5 62
D5:1
D6
"D6_Debug"
LED 0805 Side View Blue
R6 62
D6:1
J8
J9
5V:1
SDA:1
SCL:1
5V:1
ENCB:1
ENCA:1
ENCC:1
Molex 53014-0510
KH-965
Encoder
J3C
J3B
Encoder
KH-930
Molex 99-99-0989
J6C
EOL-R
KH-965
Molex 53014-0310
J6B
EOL-R
KH-930
Molex 99-99-0987
EOLR:1
5V:1
J5A
Encoder + EOL-R
KH-910
ENCA:1
ENCB:1
ENCC:1
EOLR_LACE:1
EOLR:1
Reverse protection
D1
SK24-TP
J1
GND2
9V:1
9V
C3
22 uF 16V
C4
1 uF
R3
330
D3
LED 0805 Side View Blue
"9V Power"
J1: 9 V DC input
2.1 mm, center positive
Use Regulated 9-12 V DC only
Minimum 1.5 A Capacity
5V:1
5V
Alternate +5VDC
(In or out)
GND
C1
1 uF
C2
0.1 uF
R2 62
D2
LED 0805 Side View Blue
"5V Power"
Note: Primary 5V power
is supplied via USB.
RN3
1k
RN4
1k
U3
PCF8574T
U5
ULN2803A
C6
1 uF
SCL:1
SDA:1
KH-910
Solenoids
J3A
Molex 99-99-0992
KH-930
Solenoids
J4B
Molex53014-0810.fp
KH-900
Solenoids
J4C
An Open-Source Design by
Evil Mad Scientist Laboratories
www.evilmadscientist.com
Copyright 2018, Windell H. Oskay/Evil Mad Science LLC
Distributed under the CC-BY-SA 4.0 License
Based on the AYAB Shield
http://ayab-knitting.com
AYAB Interface
TITLE
FILE:
PAGE 1 OF 1
REVISION: Rev G, October 2026
DRAWN BY: Windell H. Oskay