



G2G
LIGHTING

Creating a Greener World

Phone:(973)575-2600 Fax:(973)575-2603
155A 10th St Passaic,NJ 07055
www.g2glighting.com

Dimming Controller RF-3 Keys

5VDC, 12VDC, 24VDC optional
Select your voltage when ordering



SPECIFICATIONS

Input voltage:

DC5V、12V、24V optional

Output current:

Less than 8A

Output Power:

5V<40W, 12V<96W, 24V<192W

Working temperature: -20-60℃

Output Circuits : single circuit

Package dimensions:

L122XW85XH42 mm


Product dimensions:

L110XW56XH34 mm

KEY FUNCTIONS

brightness
adjusting+

brightness
adjusting-




Power switch

change to Static mode when strobing

brightness adjusting

- 1、 Change the brightness of your LED lights
- 2、 change the mode from static to strobe when click the switch of up and down at the same time
- 3、 Adjust the speed of strobe

INSTALLATION DIAGRAM

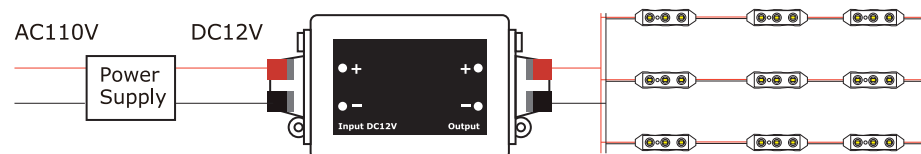

Dimming Controller

Manual adjusting knob

Variable in adjusting 12V constant current led modules

Variable in adjusting 12v-24v constant voltage LED modules/ light strip / light bar



1. 0 ~ 100% adjustable in brightness, change the brightness softly and steadily
2. Use the PWM technology to protect your lights from damaging of current shock.
3. Change the brightness of your lights by controlling the output power and current.
4. Mainly use to change the brightness of single color LED lights/light bar
5. Not suitable for RGB LED lights.

SPECIFICATIONS

Dimming range:

0-3%-100% Stepless adjusted

Power Input:

DC 12-24V 30A

Current Input:

0-30A Less than 30A

Power: 12V-360W

Working Temperature:

-20 ~ 60 °C

Dimensions:

66mm(L)x 61mm(W)x 20mm(H)

Weight: 90g

Packing Weight: 110g

Material: metal

INSTALLATION DIAGRAM

