

EZTECH DIGITAL INC.
251 Little Falls Drive, Wilmington, New Castle Country, Delaware
19808



WARNING


This product can expose you to the chemical lead, which is known to the state of California to cause cancer.

For more information, go to
www.P65Warnings.ca.gov

Reolink

OMVI X16 PoE

Operational Instructions

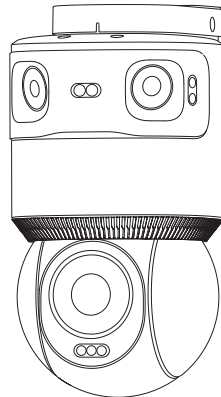

58.03.010.0495



Item No. : P952

Contents

01	What's in the Box	02
02	Device Overview	03
03	Initial Setup	05
04	Maintenance Guidelines	11
05	Install the Camera	12
06	Specifications	22
07	Important Safety Instructions	22
08	Troubleshooting	23
09	Legal Disclaimer	24
10	Notification of Compliance	25

01 What's in the Box



Camera



Mounting Bracket



Mounting Template



1m Ethernet Cable



PoE Injector



Power Cord
(for PoE Injector)



Pack of Screws



Waterproof Lid



Surveillance Sticker




Operational Instructions




NOTE:

Mounting bracket compatible with C-type holes on Reolink D20 and RLA-JBL1 junction boxes (junction box sold separately; wall-mount only).

What You Also Need *Not Included



#1 & #2 PH Screwdrivers




Power Drill



Ladder
(If Necessary)

02 Device Overview

- | | |
|--|----------------------|
| 1 4 Lens | 11 Bracket Screws |
| 2 3 7 Dual-Light LEDs (Spotlight & IR) | 12 Mounting Base |
| 5 6 Infrared LEDs | 13 Mounting Bracket |
| 8 Microphone | 14 Reset Button |
| 9 LAN Port | 15 microSD Card Slot |
| 10 Power Port | 16 Speaker |

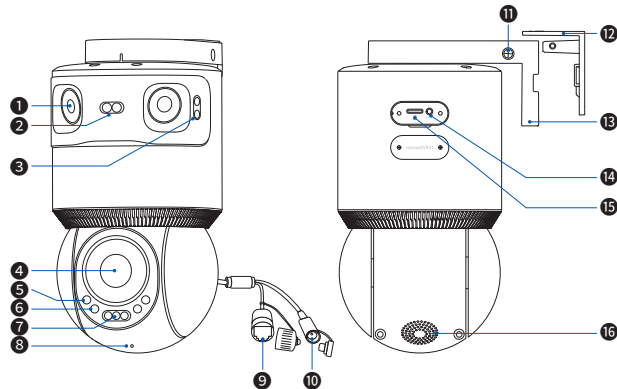

03 Initial Setup

Step 1. Download the Reolink App or Client

• On Smartphone



• On PC

Download the Reolink Client: Go to > Support > Download Center > App & Client.



NOTE:

To connect the camera to a Reolink PoE NVR, use the NVR interface for setup.


Step 2. Power on the Camera

1. Connect the camera to a PoE injector with an Ethernet cable.
2. Power on the PoE injector and connect it to your router.



NOTE:

If the camera does not respond, reset it and cover the lens to simulate darkness. Then check whether the infrared lights or spotlights turn on.

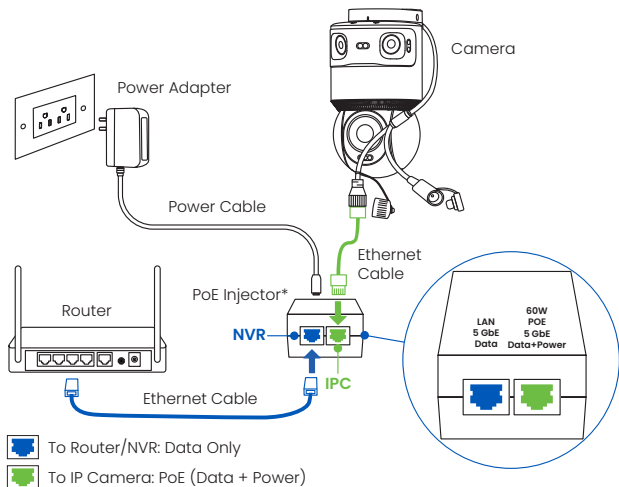


NOTE:

The camera can also be powered via a PoE switch, a 12V/3A DC adapter, or a Reolink PoE NVR. (Sold separately)


Step 3. Initialize the Camera

Tap the "+" button in the top corner, scan the camera's QR code, and follow the on-screen instructions to complete the setup.

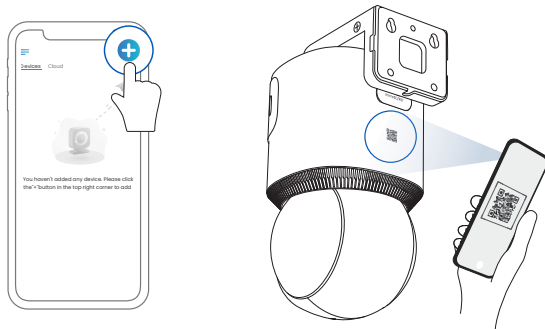

Step 4. Insert the microSD Card (Optional)

Rotate the bracket to expose the microSD slot. Use a #1 Phillips screwdriver to open the cover, insert the card (sold separately), and secure the cover back in place.

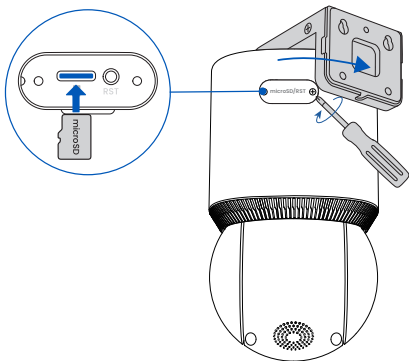


NOTE:

It is recommended to use a Class 10, 512GB microSD card for video storage.

Step 5. Disconnect the Ethernet Cable Before Installation

For easier installation, it is recommended to disconnect the camera's Ethernet cable before starting. Reconnect them according to the instructions during installation.

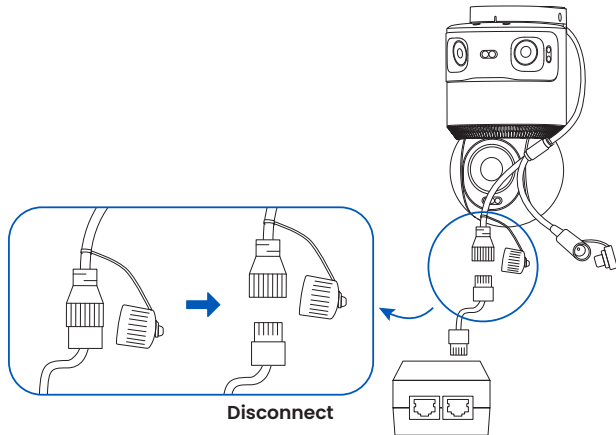

04 Maintenance Guidelines

Tip 1. Mounting for Optimal Image Quality



- Ensure both the camera location and the monitored area are evenly lit.



- Avoid pointing at light sources or directly at windows to prevent flare and overexposure.



- Avoid installing in deep shade; position the camera to face a well-lit zone.

Tip 2. Protecting Your Camera



- Keep the LAN Port and power port dry and free from dirt/debris to maintain its resistance.

Tip 3. Regular Maintenance




- Periodically clean the lens gently with a soft cloth.

05 Install the Camera


Step 1. Choose a Mounting Location

Recommended installation height: 3 m (9.8 ft) or higher.

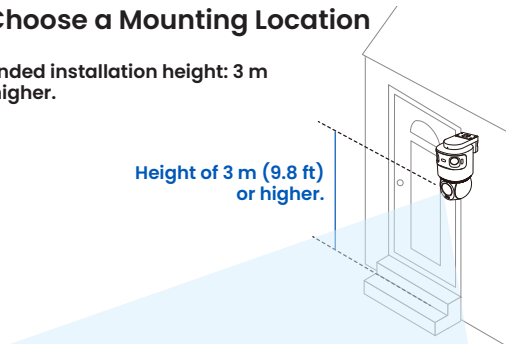

Mounting options


Ceiling Mounting



Wall Mounting



Corner Mounting




NOTE:


The corner bracket needs to be purchased separately.

Cable Routing Methods


A



B



C



Step 2. Secure the Mounting Bracket

Drill holes as indicated in the mounting template. Use included long screws to secure the mounting base.




NOTE:

Use the included drywall anchors if needed.


A

Wall Mounting

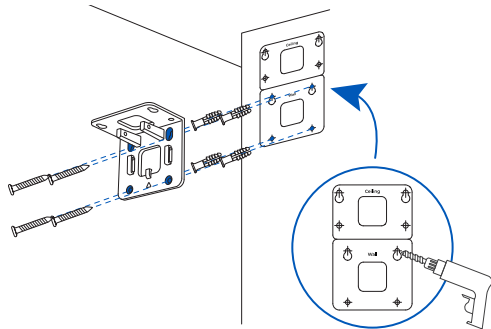


B

Ceiling Mounting

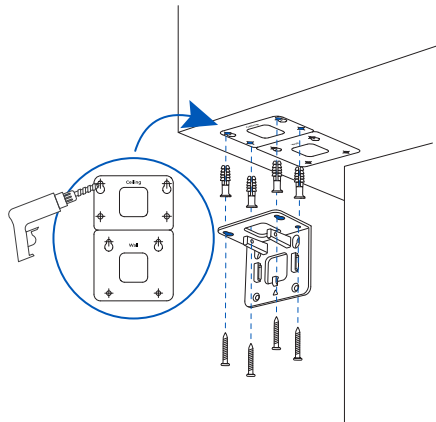


Step 3. Secure the Camera

Select a cable routing method based on your installation. Loosen the camera's captive screws by turning them counterclockwise, seat the camera into the bracket, and then tighten the screws by turning them clockwise.

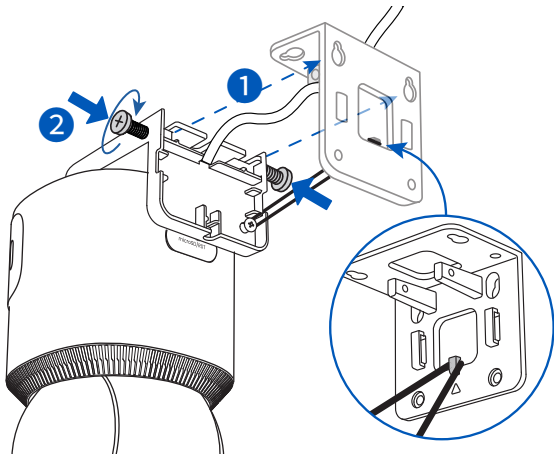


Step 4. Connect the Waterproof Lid and Ethernet Cable

Hang the camera on the mount and connect the Waterproof Lid (refer to next page) and Ethernet cable.

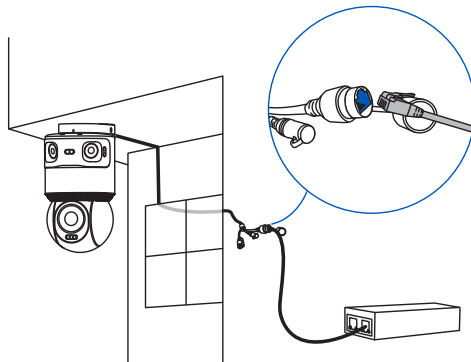


Waterproof Lid Connection

- 1 Route the Ethernet cable through the components in this order: **A, B, C**, then **D**. **B** is a split rubber seal that allows side-entry installation over the Ethernet cable.
- 2 Insert the Ethernet cable into the camera's PoE connector.
- 3 Attach component **D** to the camera's PoE connector and twist to lock it in place.
- 4 First insert **C** into **D**, then firmly press **B** into **D**, and finally screw **A** into **D**. Do not overtighten, as this may push **B** and **C** out of position.

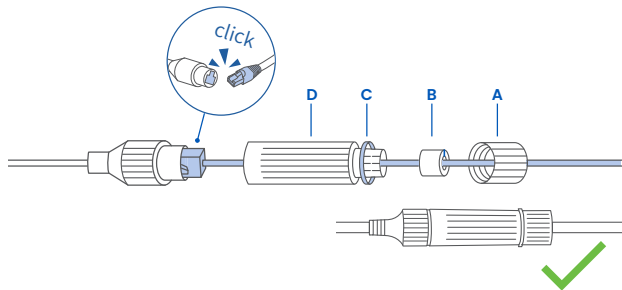

Step 5: Adjust the Camera Angles


The upper panoramic cam

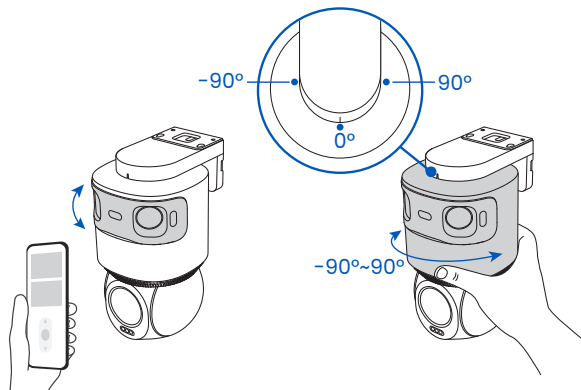

NOTE:

The upper dual-lens module can be panned manually and tilted remotely using the Reolink APP, Client, or NVR.

The lower PT cam

**NOTE:**

The PTZ lens can be remotely controlled through the Reolink App, Client, or NVR.

06 Specifications

Operating Temperature: $-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$ ($14^{\circ}\text{F} \sim 131^{\circ}\text{F}$)

Operating Humidity: 10%~90%

Weight: 2.85KG

For additional specifications, please visit .

07 Important Safety Instructions

Please read the instructions carefully before using the device.

1. Replace only with the same or equivalent type of accessories recommended by Reolink.
2. Do not use the device in an environment that exceeds the recommended temperature range.
3. Do not use the device in an environment that exceeds the recommended humidity range.
4. Do not attempt to disassemble, repair, or alter the device by yourself.
5. Always follow the local safety laws and regulations when using

the device.

6. The device contains (or comes with) small components, small plastic elements, and other small parts that may cause choking hazards. Keep the device and its accessories out of reach of children. Consult a physician immediately if small parts are swallowed.
7. The device contains (or comes with) cables or cords that may cause strangulation hazards. Keep the device and its accessories out of reach of child.

08 Troubleshooting

Camera Doesn't Work Properly When Added to the Reolink NVR or Home Hub

If your Reolink camera isn't working properly after being added to an NVR or Home Hub, please make sure the firmware on your camera, NVR, and Hub is updated to the latest version. If the issue continues after updating, contact Reolink Support at .

09 Legal Disclaimer

To the maximum extent permitted by applicable law, this document and the product described, with its hardware, software, firmware, and services, are delivered on an "as-is" and "as-available" basis, with all faults and without warranty of any kind. Reolink disclaims all warranties, express or implied, including but not limited to, warranties of merchantability, satisfactory quality, fitness for a particular purpose, accuracy, and non-infringement of third-party rights. In no event will Reolink, its directors, officers, employees, or agents be liable to you for any special, consequential, incidental or indirect damages, including but not limited to damages for loss of business profits, business interruption, or loss of data or documentation, in connection with the use of this product, even if Reolink has been advised of the possibility of such damages.

To the extent permitted by applicable law, your use of the Reolink products and services is at your sole risk and you assume all risks associated with internet access. Reolink does not take any responsibilities for abnormal operation, privacy leakage or other damages resulting from cyber attacks, hacker attacks, virus inspections, or other internet security risks. However, Reolink will provide timely technical support if required.

The laws and regulations related to this product vary by jurisdiction. Please check all relevant laws and regulations in your jurisdiction before using this product to ensure that your use conforms to the applicable law and regulation. During the use of the product, you must comply with relevant local laws and regulations. Reolink is not responsible for any illegal or improper use and its consequences. Reolink is not liable in the event that this product is used with illegitimate purposes, such as third-party rights infringement, medical treatment, safety equipment, or other situations where the product failure could lead to death or personal injury, or for weapons of mass destruction, chemical and biological weapons, nuclear explosion, and any unsafe nuclear energy uses or anti-humanity purposes. In the event of any conflicts between this manual and the applicable law, the latter prevails.

10 Notification of Compliance

FCC Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

ISED Compliance Statements

This Class B digital apparatus complies with Canadian ICES-003.
Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Limited Warranty

This product comes with a 2-year limited warranty that is valid only if purchased from Reolink Official Store or a Reolink authorized reseller. [Learn more:](#)

NOTE: We hope that you enjoy the new purchase. But if you are not satisfied with the product and plan to return, we strongly suggest that you reset the camera to factory default settings and take out the inserted SD card before returning.

Terms and Privacy

Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at

Technical Support

If you need any technical help, please visit our official support site and contact our

support team before returning the products, .

Terms of Service

By using the Product Software that is embedded on the Reolink product, you agree to the terms&conditions between you and Reolink. [Learn more:](#)

Trademarks Acknowledgement

"Reolink" and other Reolink's trademarks and logos are the properties of Reolink. Other trademarks and logos mentioned are the properties of their respective owners.