



INVERTIS UNIVERSITY BAREILLY

A Project Report

On

“OBSTACLE AVOIDANCE ROBOTIC VEHICLE”

SUBMITTED TO:

CSED Invertis University

Team Name : Team B

SUBMITTED BY :

BCA 4th Sem. (c)

Under the guidance :

Deepak Sir

Harsh Sir

Kostubh Sir

Project Name : obstacle avoiding Car

Name	Student ID.
Aakash Verma (Leader)	BC2021195
Amit Kumar Verma (Co-Leader)	BC2021183
Chetanya Raj Verma	BC2021136
Om Shiv	BC2021234
Mo. Adil	BC2021233
Mohtashim Khan	BC2021203
Mo. Amaan	BC2021155
Junaid Saifi	BC2021191


**OBSTACLE AVOIDANCE
ROBOTIC VEHICLE**

using

ULTRASONIC SENSOR

and

ARDUINO CONTROLLER

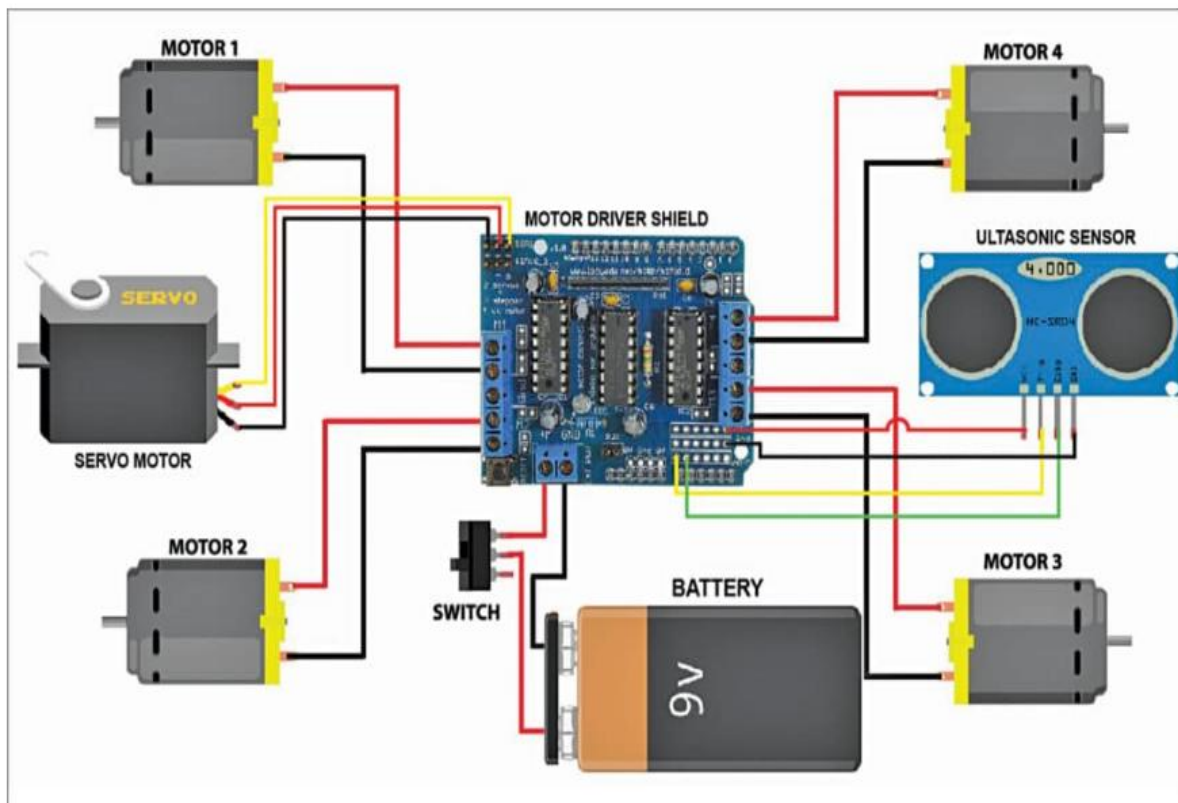

ABSTRACT

Obstacle avoidance is one of the most important aspects of mobile robotics. Without it, robot movement would be very restrictive and fragile. This project proposes robotic vehicle that has an intelligence built in it such that it directs itself whenever an obstacle comes in its path. So, to protect the robot from any physical damages.

This can be design to build an obstacle avoidance robotic vehicle using ultrasonic sensors for its movement. A microcontroller(AT mega 328P) is used to achieve the desired operation. An ultrasonic sensor is used to detect any obstacle ahead of it and sends a command to the microcontroller. Depending on the input signal received, the micro-controller redirects the robot to move in an alternate direction by actuating the motors which are interfaced to it through a motor driver.

INTRODUCTION

Robotics is part of today's communication. In today's world ROBOTICS is fast growing and interesting field. It is simplest way for latest technology modification. Now a days communication is part of advancement of technology, so we decided to work on ROBOTICS field, and design something which will make human life simpler in day today aspect. Thus we are supporting this cause.

An obstacle avoiding robot is an intelligent device, which can automatically sense and overcome obstacles on its path. Obstacle Avoidance is a robotic discipline with the objective of moving vehicles on the basis of the sensorial information. The use of these methods front to classic methods (path planning) is a natural alternative when the scenario is dynamic with an unpredictable behaviour. In these cases, the surroundings do not remain invariable, and thus the sensory information is used to detect the changes consequently adapting moving. It will automatically scan the surrounding for further path.

This project is basic stage of any automatic robot. This ROBOT has sufficient intelligence to cover the maximum area of provided space. It has a ultrasonic sensor which are used to sense the obstacles coming in between the path of ROBOT. It will move in a particular direction and avoid the obstacle which is coming in its path. We have used two D.C motors to give motion to the ROBOT. The construction of the ROBOT circuit is easy and small .The electronics parts used in the ROBOT circuits are easily available and cheap too.

LITERATURE REVIEW


LITERATURE REVIEW:

We reviewed different obstacle detecting robot mechanisms that have been built by a lot of students and other practitioners that are in existence. For an autonomous mobile robot performing a navigationbased task in a vague environment, to detect and to avoid encountered obstacles is an important issue and a key function for the robot body safety as well as for the task continuity. Obstacle detection and avoidance in a real-world environment that appears so easy to humans is a rather difficult task for autonomous mobile robots and is still a well- researched topic in robotics. In many previous works, a wide range of sensors and various methods for detecting and avoiding obstacles for mobile robot purpose have been proposed. Good references related to the developed sensor systems and proposed detection and avoidance algorithms can be found. Based on these developed sensor systems, various approaches related to this work can be grouped .

Robots need miscellaneous of sensors to obtain information about the world around them. Sensors will help detect position, velocity, acceleration and range for the object in the robot's workspace. There is a variety of sensors used to detect the range of an object. One of the most common range finders is the ultrasonic transducer. Vision systems are also used to greatly improve the robot's versatility, speed and accuracy for its complex and difficult task. Electronic signals are sent to a mobile robot's motor controllers and auditory signals can guide the blind traveller around the obstacles the developed robot uses ultrasonic range finder for detection and mapping to avoid collision with the unexpected obstacles.

DESIGN & HARDWARE REQUIREMENTS

Design:

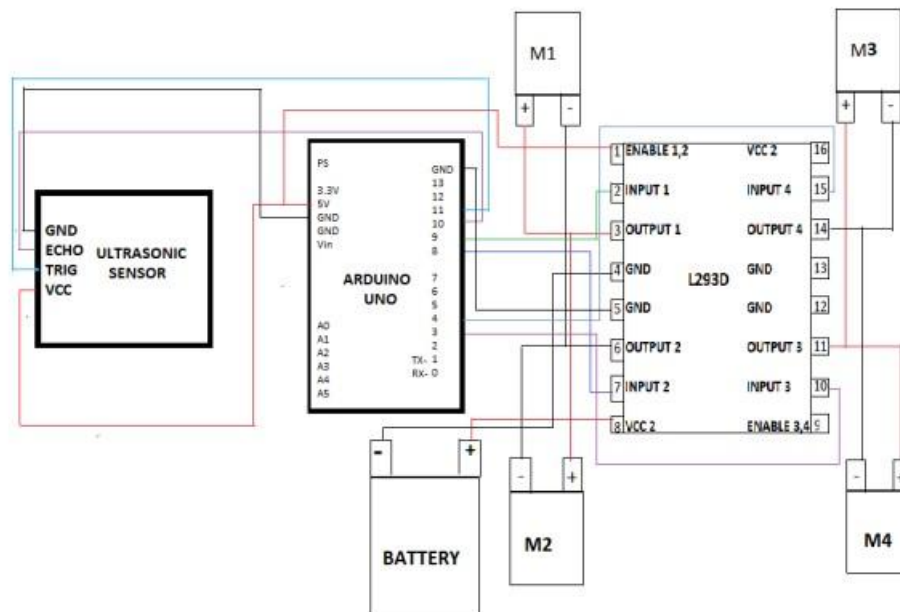


Hardware:

- Arduino UNO
- Ultrasonic sensor
- Gear Motors
- Motor driver IC(L293D)
- Servo Motor
- Battery
- Jumper Wires
- Chassis
- Wheels

BLOCK DIAGRAM

BLOCK DIAGRAM

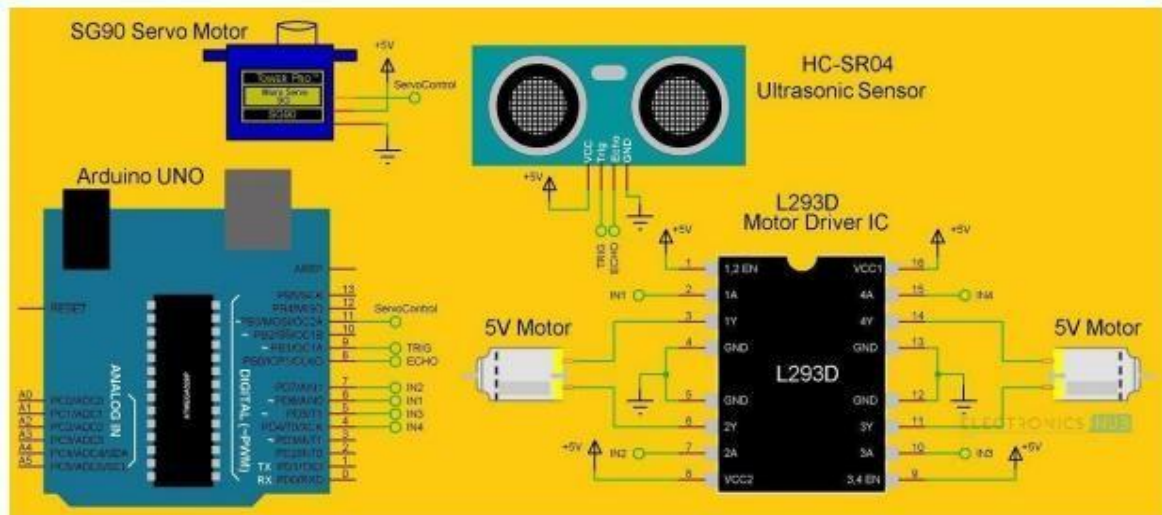

The basic block diagram of the obstacle avoiding car is shown in above figure. Mainly this block diagram consists of the following essential blocks.

1. Arduino uno
2. Ultrasonic sensor
3. Motor driver(L293D)

1) Arduino uno -

Arduino Uno is an ATmega 328p Microcontroller based prototyping board. It is an open source electronic prototyping platform that can be used with various sensors and actuators. It is used for controlling all the operation and assign task to each device.

2) Ultrasonic sensor -

It is an Ultrasonic Range Finder Sensor. It is a non-contact based distance measurement system and can measure distance of 2cm to 4m. Ultrasonic sensor is mainly use to detect the obstacle

3) Motor driver -

It is a motor driver which can provide bi-directional drive current for two motors.


WORKING

Working Principle:

The obstacle avoidance robotic vehicle uses ultrasonic sensors for its movements. Arduino is used to achieve the desired operation. The motors are connected through motor driver IC to Arduino. The ultrasonic sensor is attached in front of the robot.

Whenever the robot is going on the desired path the ultrasonic sensor transmits the ultrasonic waves continuously from its sensor head. Whenever an obstacle comes ahead of it the ultrasonic waves are reflected back from an object and that information is passed to the arduino. The arduino controls the motors left, right, back, front, based on ultrasonic signals. In order to control the speed of each motor pulse width modulation is used (PWM).

When ultrasonic sensor detect the object which is kept inside the path it will send the signal toward the arduino uno and according to that it will it will rotate the motor M3 & M4 in forward direction and rotate the motor M1 & M2 in reverse direction such way that the car get moving in left direction. Similarly in every time when-ever an obstacle in found to be in path of car it will detect it and rotate the car in left direction to avoid the obstacle.

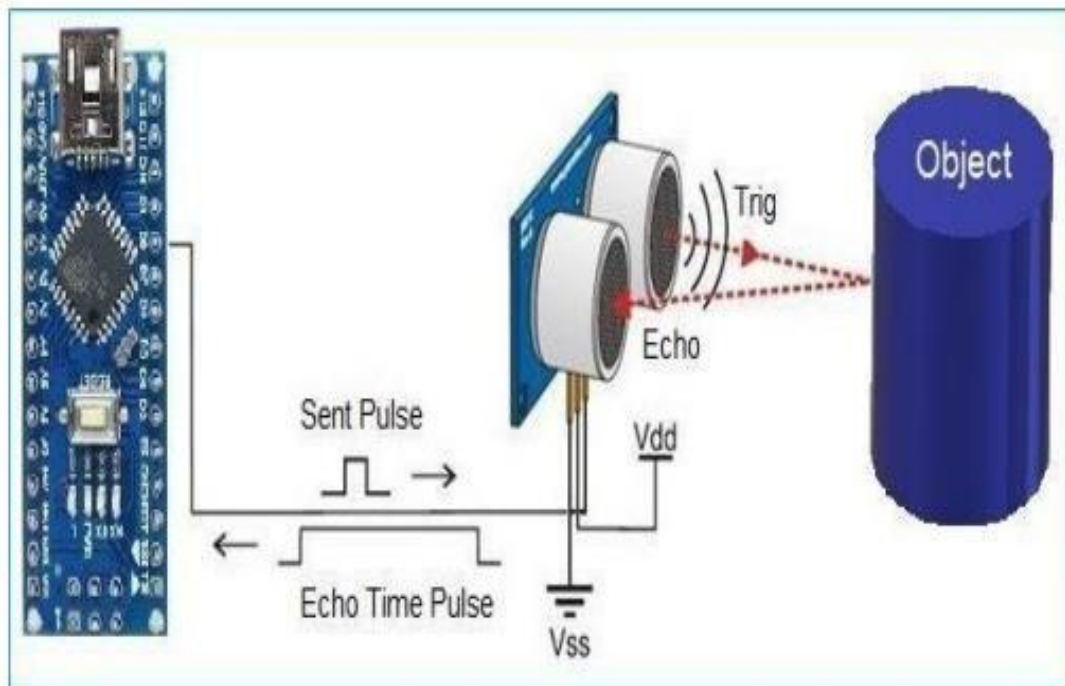


Arduino UNO:



Some Thing About Arduino Uno :

Arduino Uno is a microcontroller board based on the ATmega328P. It has 14 digital input/output pins (of which 6 can be used as PWM outputs), 6 analog inputs, a 16 MHz quartz crystal, a USB connection, a power jack, an ICSP header and a reset button. It contains everything needed to support the microcontroller; simply connect it to a computer with a USB cable or power it with a AC-to-DC adapter or battery to get started. You can tinker with your UNO without working too much about doing something wrong, worst-case scenario you can replace the chip for a few dollars and start over again. "Uno" means one in Italian and was chosen to mark the release of Arduino Software (IDE) 1.0. The Uno board and version of Arduino Software (IDE) were the reference versions of Arduino, now evolved to newer releases. The Uno board is the first in a series of USB Arduino boards, and the reference model for the Arduino platform; for an extensive list of current, past or outdated boards see the Arduino index of boards.

Motor Drivers (L293D IC):

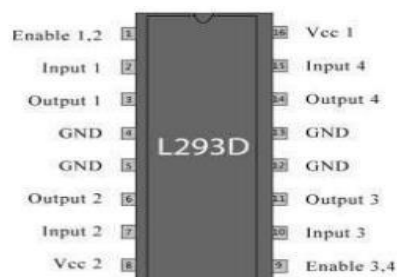

- Motor drivers take a low current control signal but provide a higher current signal, thus acting as a current amplifier. The higher current signal drives the motors. L293D is a motor driver that allows direct current (DC) motor to drive on either direction. It contains two inbuilt H-bridge driver circuits. To rotate the motor in clockwise or anticlockwise direction, voltage need to change its direction. H-bridge is a circuit that allows voltage to be flown in either direction. Hence H-bridge IC are ideal for driving a DC motor.
- Here are 4 input pins for L293d, pin 2,7 on the left and pin 15 ,10 on the right as shown on the pin diagram. Left input pins will regulate the rotation of motor connected across left side and right input for motor on the right-hand side. The motors are rotated on the basis of the inputs provided across the input pins as LOGIC 0 or LOGIC 1. For rotating the motor in clockwise direction the input pins has to be provided with Logic 1 and Logic 0. Enable pins 1 and 9 (corresponding to the two motors) must be high for motors to start operating. When an enable input is high, the associated driver gets enabled. As a result, the outputs become active and work in phase with their inputs. Similarly, when the enable input is low, that driver is disabled, and their outputs are off and in the high-impedance state.




ULTRASONIC SENSOR:



- An Ultrasonic sensor is a device that can measure the distance to an object by using sound waves. It measures distance by sending out a sound wave at a specific frequency and listening for that sound wave to bounce back. By recording the elapsed time between the sound wave being generated and the sound wave bouncing back, it is possible to calculate the distance between the sonar sensor and the object.

- It emits an ultrasound at 40 000 Hz which travels through the air and if there is an object or obstacle on its path It will bounce back to the module. Considering the travel time and the speed of the sound you can calculate the distance.
- The HC-SR04 Ultrasonic Module has 4 pins, Ground, VCC, Trig and Echo. The Ground and the VCC pins of the module needs to be connected to the Ground and the 5 volts pins on the Arduino Board respectively and the trig and echo pins to any Digital I/O pin on the Arduino Board.
- In order to generate the ultra-sound you need to set the Trig on a High State for 10 μ s. That will send out an 8cycle sonic burst which will travel at the speed sound and it will be received in the Echo pin. The Echo pin will output the time in microseconds the sound wave travelled.

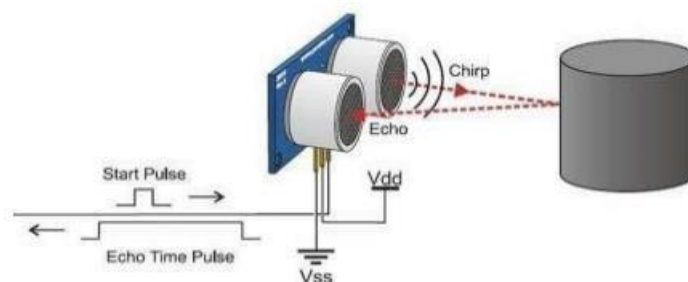


Gear Motors:




- The obstacle detection and avoiding robot uses two 200rpm and 12V DC geared motors. The motor used has a 6mm shaft diameter with internal holes. The internal

holes are for easy mounting of the wheels by using screws. It is an easy to use low cost motor for robotics application.

- An Electric DC motor is a machine which converts electric energy into mechanical energy. The working of DC motor is based on the principle that when a current carrying conductor is placed in a magnetic field, it experiences a mechanical force. The direction of mechanical force is given by Fleming's Left-hand Rule and its magnitude is given by $F = BIL$ Newton.
- DC motors are seldom used in ordinary applications because all electric supply companies furnish alternating current.

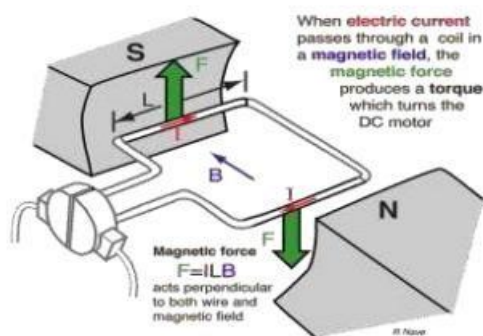

CIRCUIT DIAGRAM:

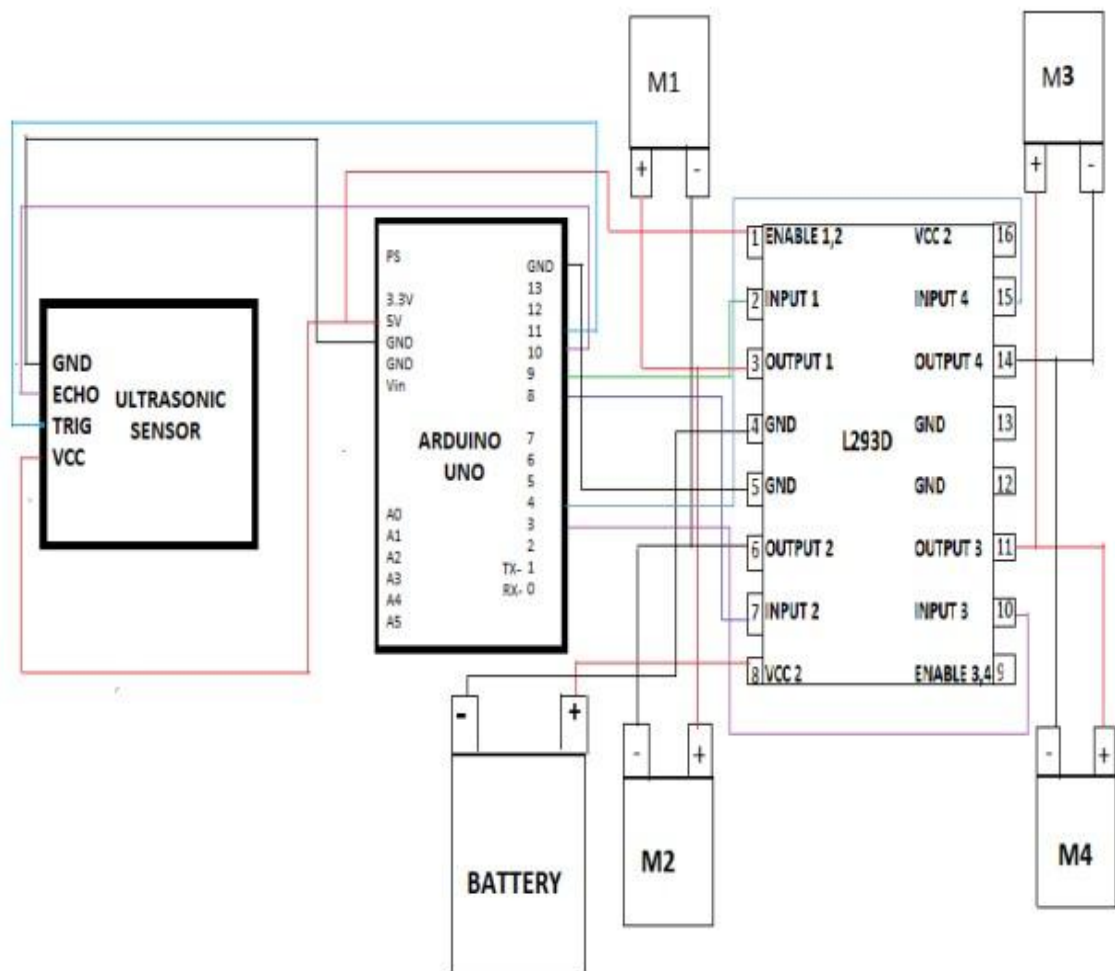

APPLICATIONS

This device has application in surveying different landscapes and mapping them. It can also be used in commercial devices like

- Automated lawn mover
- Smart roomcleaner etc
- Obstacle avoiding robots can be used in almost all mobile robot navigation systems.

- They can also be used in dangerous environments, where human penetration could be fatal.
- Unmanned vehicle driving
- Mining Vehicle that uses Obstacle **Detection**

Problem/Issue

Road accident is a major issue in many countries, mostly fast moving vehicles face collision on roads . Usually to avoid the collision and accidents on the road the road breakers and traffic police wardens are controlling the flow of traffic .

Even if the person is capable of following the traffic rules sometimes the weather conditions abruptly changes and the driver cannot control the happenings .

Another issue is the uncontrollable condition that if a person gets sleepy during the driving it can also cause collisions with nearby objects.



EXPERIMENTAL RESULTS

The result is obtained for obstacle avoidance robot using Arduino, if the robot moves forward if any obstacle detect it check for other directions and moves where there is no obstacles it moves in forward direction, to sense the obstacle ultrasonic sensor is used. We used servo motor to rotate the ultrasonic sensor.

The working principle of the robot is transmitting sensed signal to the microcontroller to control the DC motors for obstacle avoidance. The direction of the motors to move either clockwise or anti clockwise directions as provided by the microcontroller.

Ultrasonic sensor detect a moving object while IR sensor does not detect any object, the robot will move backward (motor 1 and motor 2 counter clockwise).

The sensor also detects object, the robot will stop (motor 1 and motor 2 OFF). After 50 ms, motor 1 will move clockwise and the robot will turn left. After 500 ms, the robot will move forward (motor 1 and motor 2 clockwise) and after 1000ms, both motors will stop. From the flow chart in Figure 10, it shows that the IR sensors are very effective in sensing signals in their path for the obstacle avoiding robots evade obstacles in its path .