RP2350 CONNECT · REV A

PCB fabrication specification · first article

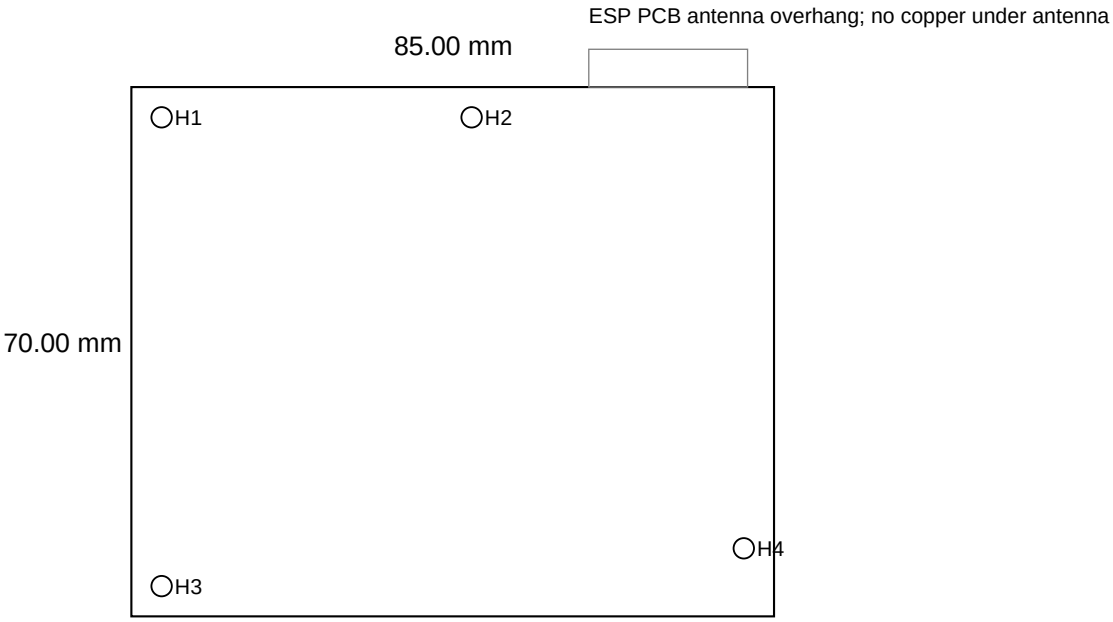

Finished board: 85 x 70 mm; 1.6 mm FR-4, Tg >=150 C; ENIG, lead-free.

Green solder mask; white silkscreen; nominal 35 um copper on all six layers.

Layer order: F.Cu / In1.Cu GND / In2.Cu signal / In3.Cu signal / In4.Cu 3V3 / B.Cu.

PCBWay to finalize a symmetric 1.6 mm stack; closely couple outer/reference layers.

Minimum track: 0.127 mm. Minimum copper clearance: 0.10 mm.

Routing vias: 0.45/0.20 mm; power/thermal vias also 0.55/0.25 mm.

Minimum drill: 0.20 mm. Hole-to-hole clearance >=0.25 mm.

Copper-to-edge clearance >=0.30 mm. Four 2.7 mm NPTH mounting holes.

Resin fill + copper cap vias (type VII), including solder-pad and module thermal vias.

Do not fill connector PTH holes. Follow supplied mask/paste and drill files.

All 118 components fitted on top, including TH sockets and connectors.

USB/card/Qwiic openings and antenna overhang must stay clear of panel rails.

Bare-board electrical test against supplied IPC-D-356 netlist.

See PCBWAY-INSTRUCTIONS.md for procurement, polarity, panelization and assembly.

See TEST-PLAN.md for first-article rail, USB, battery, memory, radio and SD tests.

Diagram: board outline and mounting holes, 1:1; coordinates in PCB-features.csv.