ASTER2350 / REV A / FABRICATION

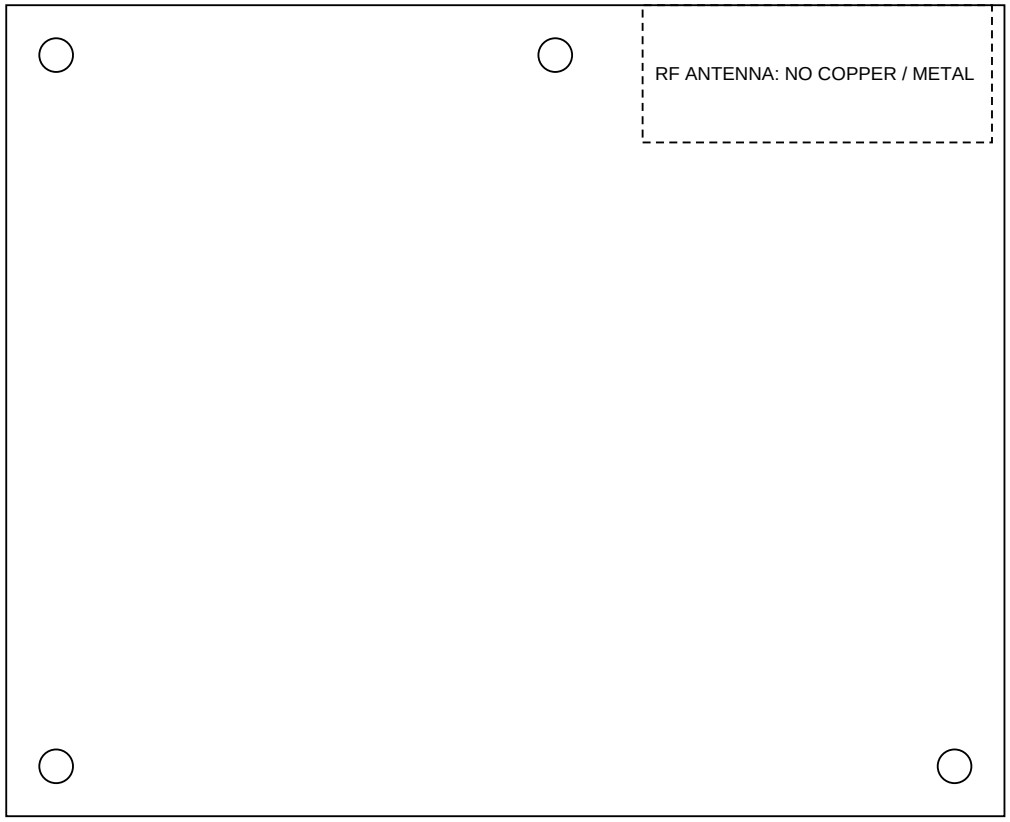

Origin (0,0): lower left. Four NPTH mounting holes: diameter 2.70 mm.

4-layer FR-4 / Tg >=150 C / ENIG / lead-free

1.60 mm +/-10%; green mask, white legend both sides

Copper: nominal 35 um finished each layer

L1 F.Cu: components, signals and local ground

L2 In1.Cu: ground reference; no signal tracks

L3 In2.Cu: 3.3 V pour plus signal tracks

L4 B.Cu: signals, ground and local VSYS region

Min track / space: 0.10 / 0.10 mm

Ordinary vias: 0.60 land / 0.30 finished drill

One local escape via: 0.50 / 0.20 mm

Annular ring: 0.15 mm; no HDI or via-in-pad

USB: 90 ohm differential +/-10% controlled impedance

Nominal top dielectric: 0.10 mm; confirm stack

Fabricator must provide coupon/report and DFM

Plated USB shell slots: use PTH Excellon routing

NPTH and plated drills supplied separately

100% electrical test against IPC-D-356

No components on bottom; all BOM parts fitted

Panelization by assembler, outside RF keepout

FIRST ARTICLE HOLD; unvalidated prototype

Gerber Edge.Cuts and drill coordinates control geometry. This illustration does not replace fabrication data. See ASSEMBLY.md.