NEMA11 RP2040 — four mounting holes

Dimensioned comparison · millimetres · centre datums · review only · A4 landscape

Reference NEMA14 v1.13.0

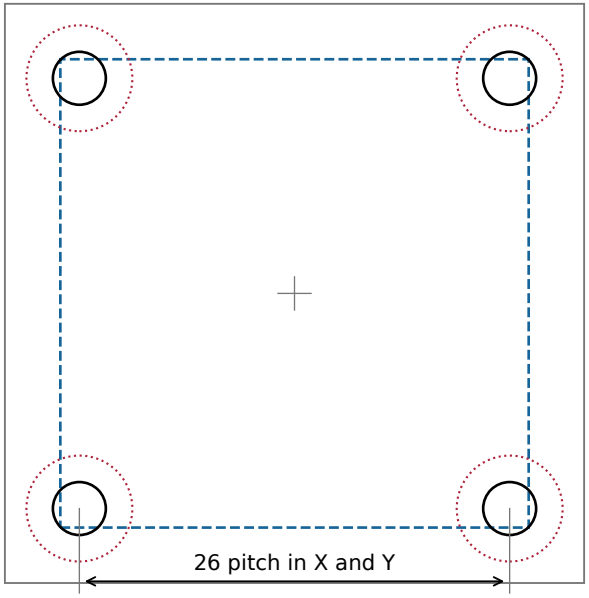

4 × Ø3.2 holes; Ø6.4 head exclusions
35 × 35 reference PCB
Hole bounds exceed frame by 0.45 per side

Current native NEMA11 PCB

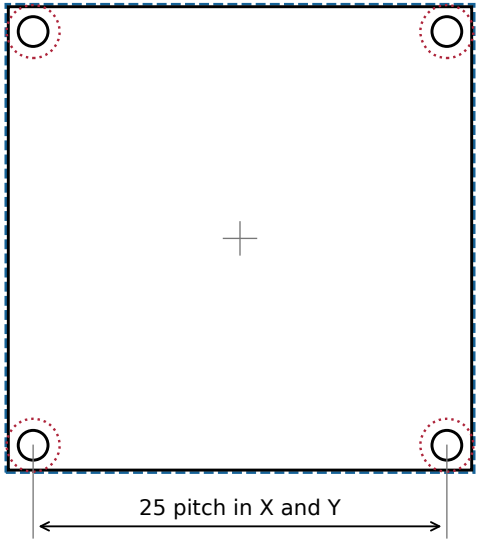

4 × Ø1.8 NPTH; Ø3.2 head exclusions on all 6 layers
28 × 28 PCB; 0.60 nominal hole-to-edge web
Candidate M1.6 screws: maximum head Ø3.0

OEM motor — FRONT face only

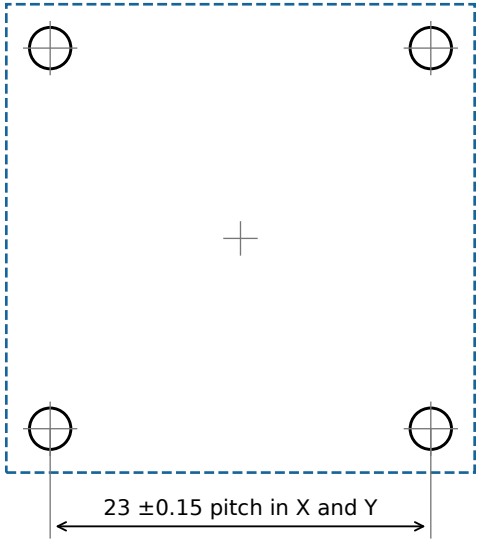

4 × M2.5 FRONT threads; depth 3.5 MIN
28.3 MAX frame; 33 MAX body length
Bounding frame shown; corner profile is not specified

Blue dashed square: the same 28.3 × 28.3 assembly limit in every view. Views are drawn at the same scale.

The PCB holes attach to a separate front-anchored carrier proposal. No motor rear holes or rear shaft are assumed.

The complete buzzer circuit is omitted; GPIO16 is explicitly NC. All 76 fitted electrical components remain on top.

Actual native PCB mount positions and six-layer exclusions are checked. This drawing omits component placement and tool envelopes.

Dimensions are nominal unless the OEM limit is stated. Fasteners, carrier strength, centring and manufacturing tolerances remain unqualified.

NOT A FABRICATION RELEASE. Current copper checks: 0 DRC errors, 0 opens, 0 shorts; remaining release requirements still apply.