

SAFE TESTING

This instrument has been designed and tested according to IEC Publication 61010: Safety Requirements for Electronic Measuring Apparatus. This instruction manual contains warnings and safety rules which must be observed by the user to ensure safe operation of the instrument and retain it in safe condition. Therefore, read through these operating instructions before starting to use the instrument.

IMPORTANT:

1. This instrument must only be used by a competent and trained person and operated in strict accordance with the instructions. KYORITSU will not accept liability for any damage or injury caused by misuse or non-compliance with the instructions or with the safety procedures.
2. It is essential to read and to understand the safety rules contained in the instructions or with the safety procedures.

❖ The symbol  indicated on the instrument means that the user must refer to the related sections in the manual for safe operation of the instrument. Be sure to carefully read instructions following each symbol  in this manual.


 DANGER	is reserved for conditions and actions that are likely to cause serious or fatal injury.
 WARNING	is reserved for conditions and actions that can cause serious or fatal injury.
 CAUTION	is reserved for conditions and actions that can cause a minor injury or instrument damage.

Measurement categories (Over-voltage categories)

To ensure safe operation of measuring instruments, IEC 61010 establishes safety standards for various electrical environments, categorized as O to CAT IV, and called measurement categories. Higher-numbered categories

correspond to electrical environments with greater momentary energy, so a measuring instrument designed for CAT III environments can endure greater momentary energy than one designed for CAT II.

O	Measuring circuits without a MEASUREMENT CATEGORY.
CAT II	Electrical circuits of equipment connected to an AC electrical outlet by a power cord.
CAT III	Primary electrical circuits of the equipment connected directly to the distribution panel, and feeders from the distribution panel to outlets.

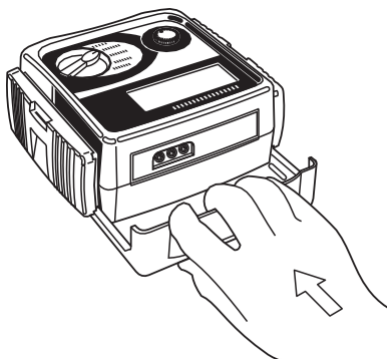

- RCD type AC, RCD for which tripping is ensured for residual sinusoidal alternating currents, whether suddenly applied or slowly rising. This type is the most frequently used on electrical installations.
- RCD type A, RCD for which tripping is ensured for residual sinusoidal alternating currents (like type AC) and residual pulsating direct currents (DC), whether suddenly applied or slowly rising. It is not very used in practice even if it is becoming more and more popular and, in some countries, it is requested by the national regulation instead of type AC.