

The cold start service is called to initialize everything from scratch, reset the paths, startup, and order all vehicles to an initial station to get the system going. At step 5, the cold start service is dormant and doesn't do anything (so we return from the routine)

EQU		
Source A	cold_start_service.step	25
Source B		5

RET		

At Step 10 call init_constants and init_stations to get everything initialized.

Clear the timeout counts for position / path commands.

Set the HLC link status initially down and prev heartbeat to current one so hlc_link_monitor can determine initially if we are talking to the HLC upon first hlc_link_monitor_timer expiry.

Run for loop routine to clear the active flag for each entry in the pos_order tag. Logic will later select which entries in that array to have the HLC pay attention to.

This routine will start the system and discover all vehicles on the track.

Set the path cmd and position order msg service routine steps to 10 so they are available for work.

Then move on to step 20

EQU		
Source A	cold_start_service.step	25
Source B		10

JSR		
Routine Name	init_constants	

JSR		
Routine Name	init_stations	

MOV		
Source	0	
Dest	msg_position_order_timeout_count	0

MOV		
Source	0	
Dest	msg_path_cmd_timeout_count	0

MOV		
Source	0	
Dest	msg_terminus_cmd_timeout_count	0

MOV		
Source	0	
Dest	msg_dio_cmd_timeout_count	0

hlc_link_status

(U)

MOV		
Source	MMI_heartbeat	16250
Dest	previous_hlc_heartbeat	16320

hlc_link_monitor_timer


(RES)


MOV		
Source	10	
Dest	msg_service_path_cmd_step	10

MOV		
Source	10	
Dest	msg_service_move_to_pos_step	10


MOV		
Source	0	
Dest	i	7

MOV		
Source	15	
Dest	cold_start_service.step	25

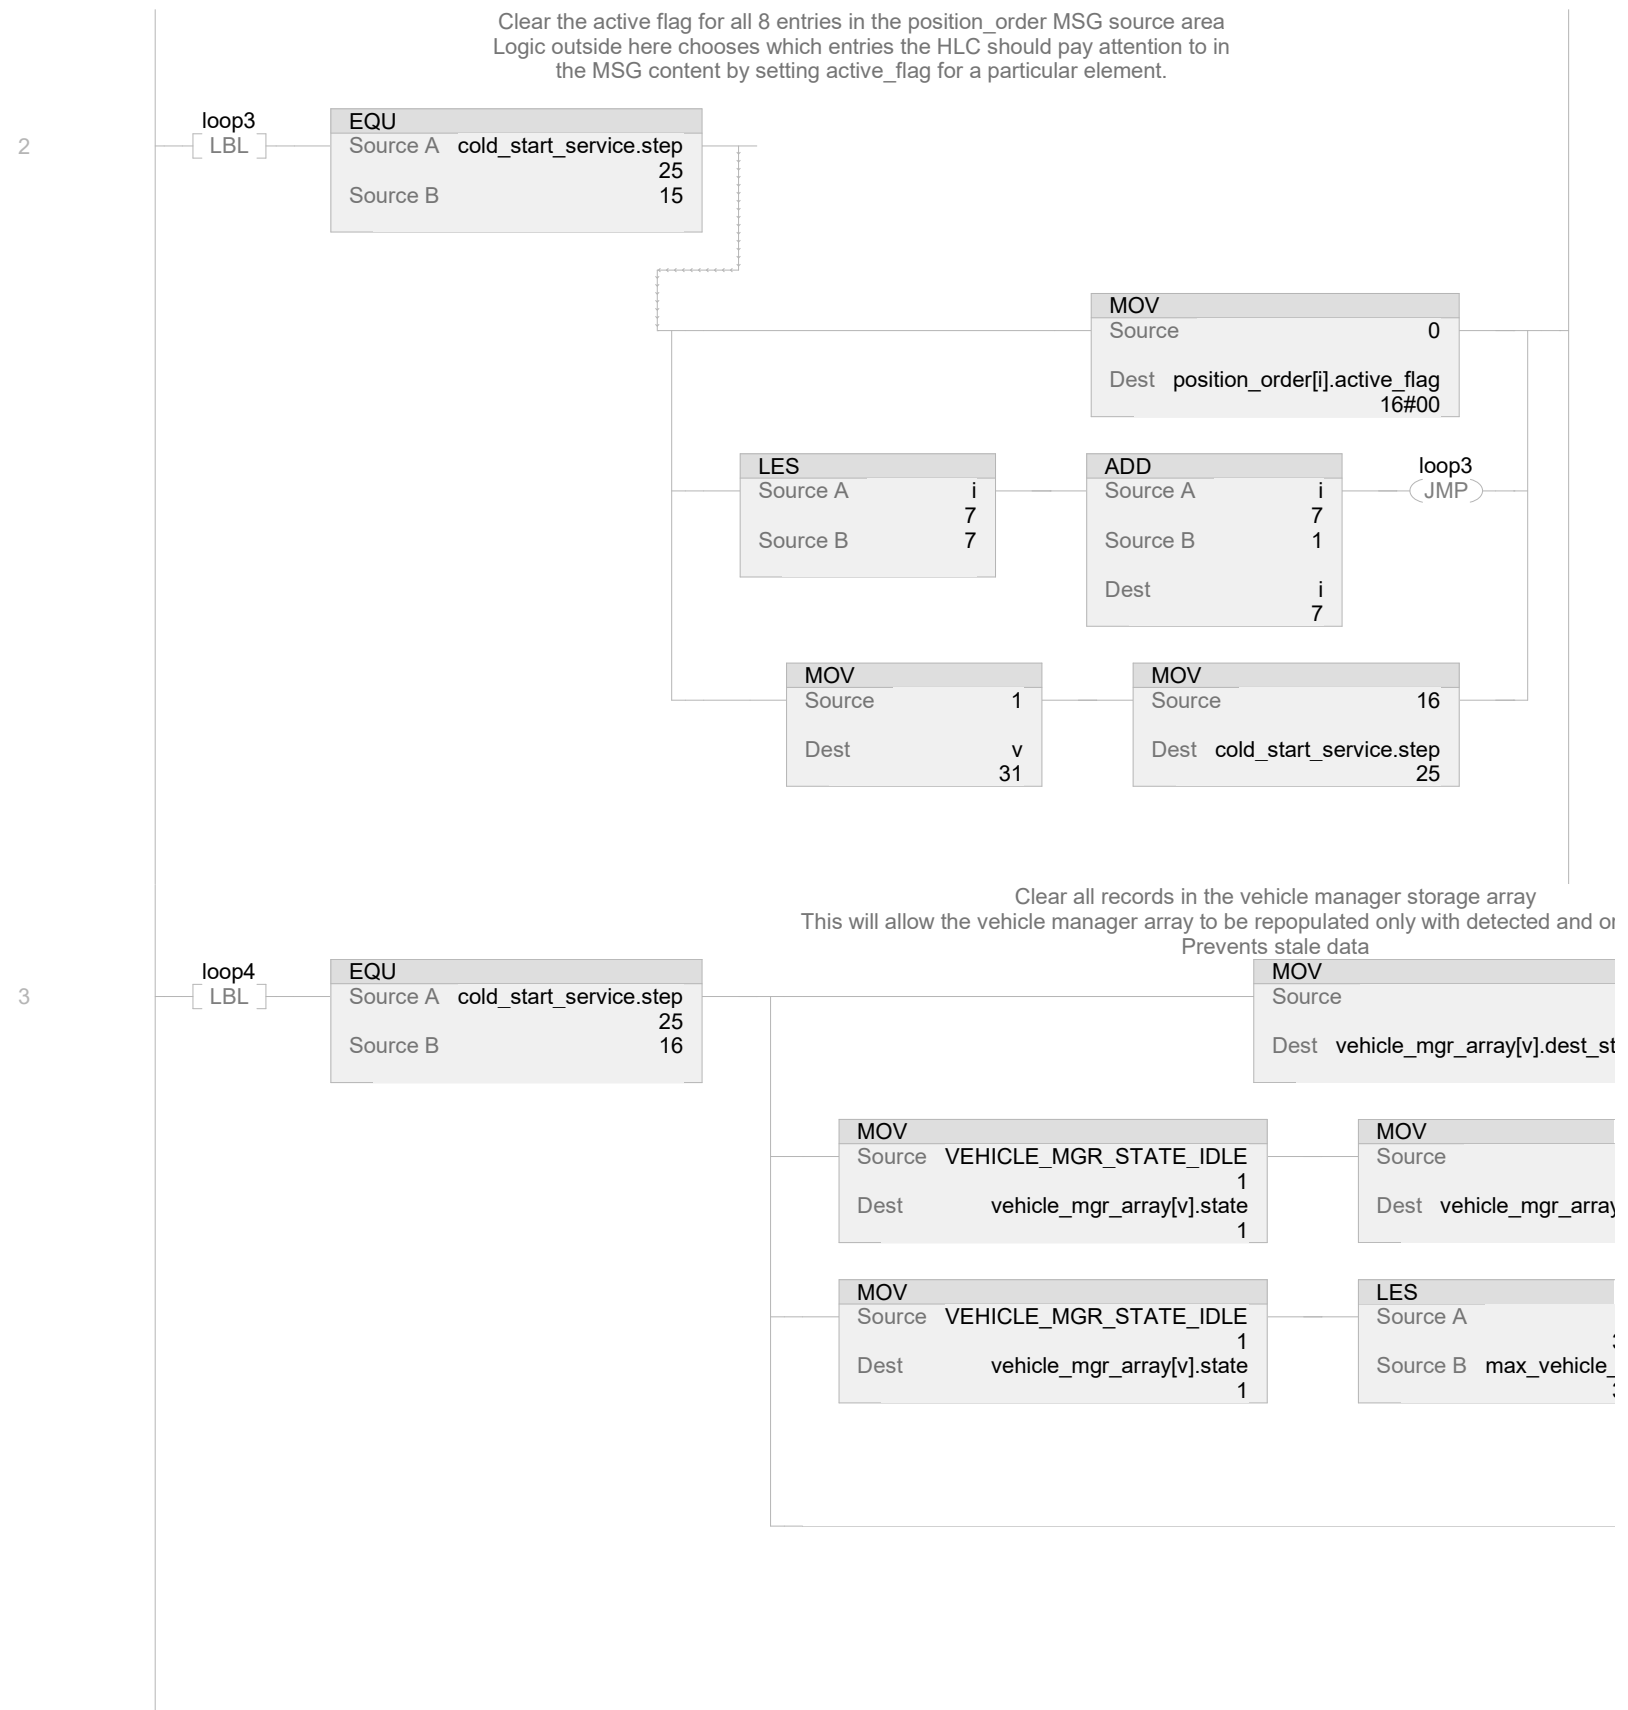


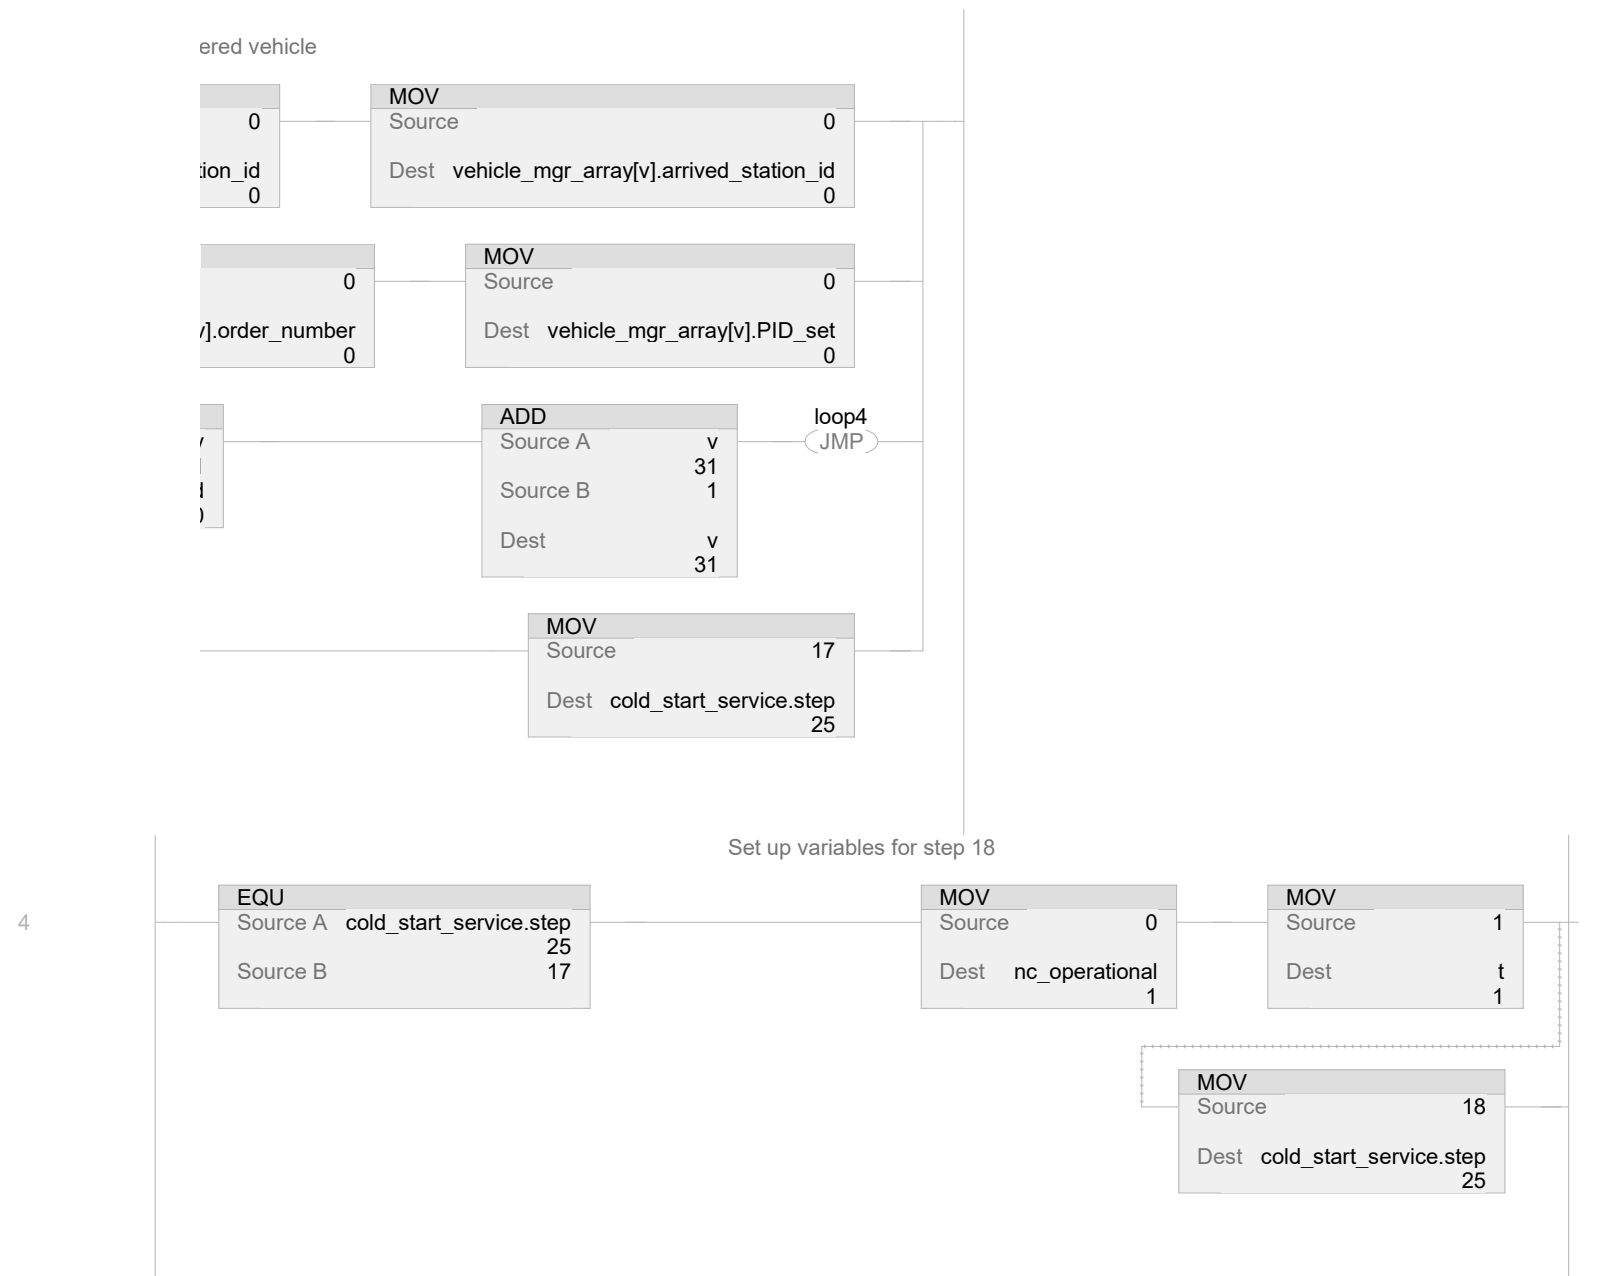


Wait for all NCs to be in the operational state before resetting.

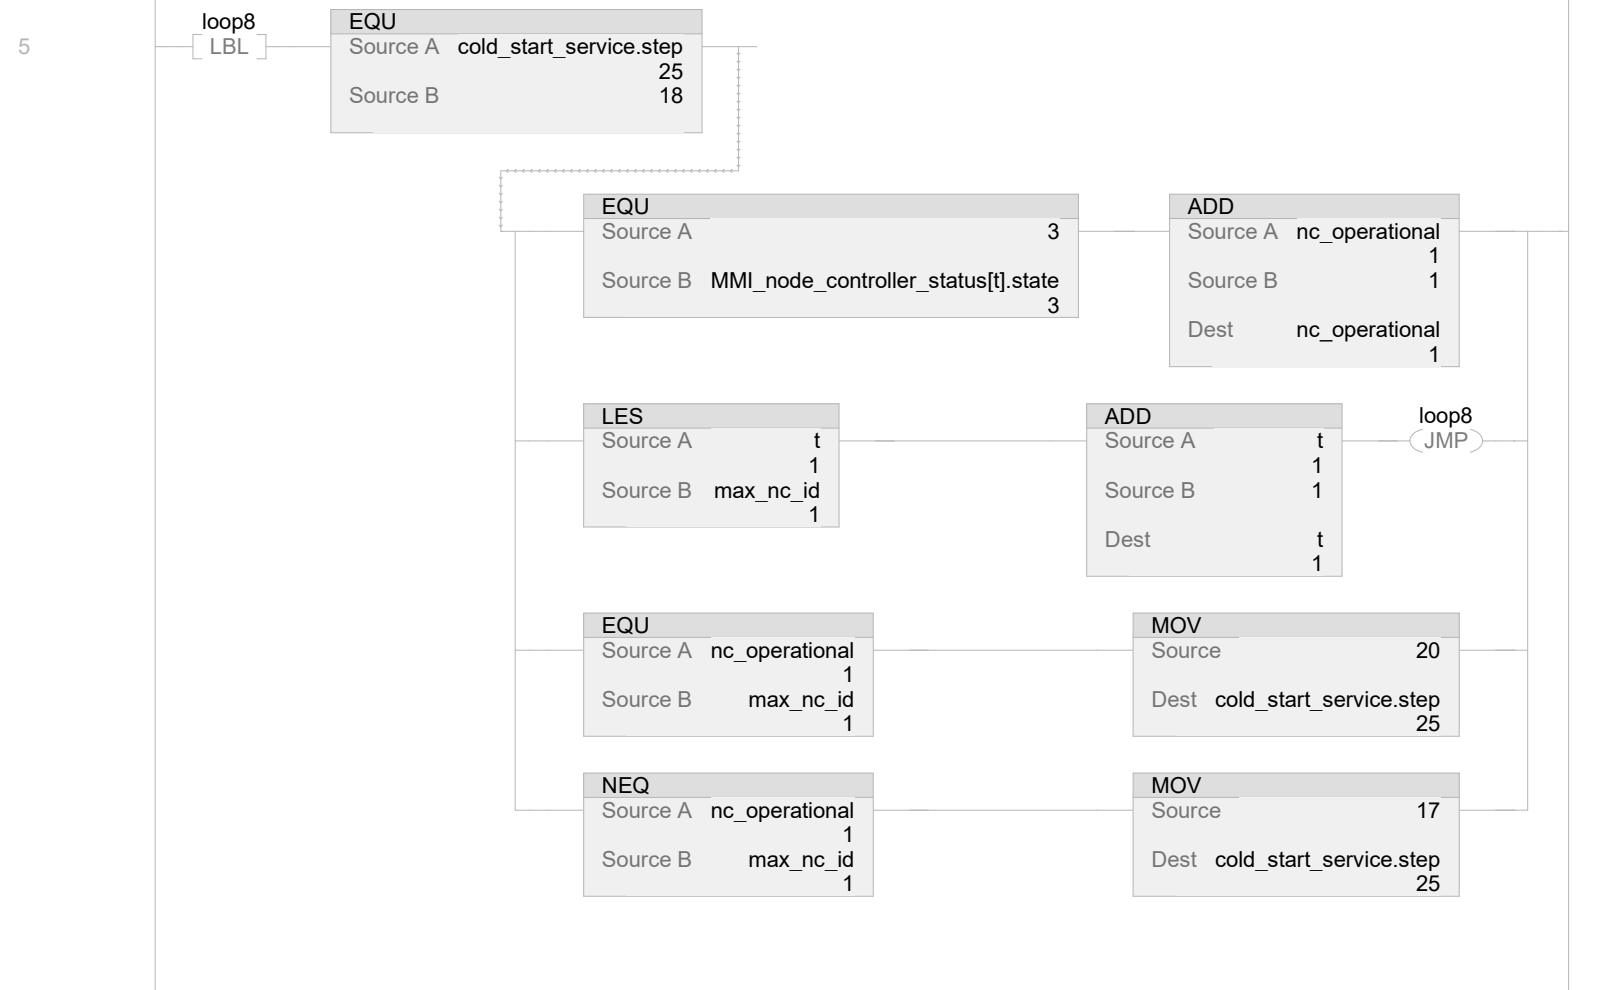


When at step 20 and HLC link is up and path cmd msg service is available for work, format a reset command in path_cmd tag.
Set path_id to zero for all paths, reset command, active flag so HLC acts on this single path cmd entry.
use next_command_count routine to get a new command count and store in cold_start_service. Store command count in path_cmd
Set the msg_service_path_cmd_step to 20 to let the msg service do the msg for us.
Set up the cold start service timer for 10 seconds so we can wait for path command completion or timeout so we can retry.
Go to next step 30

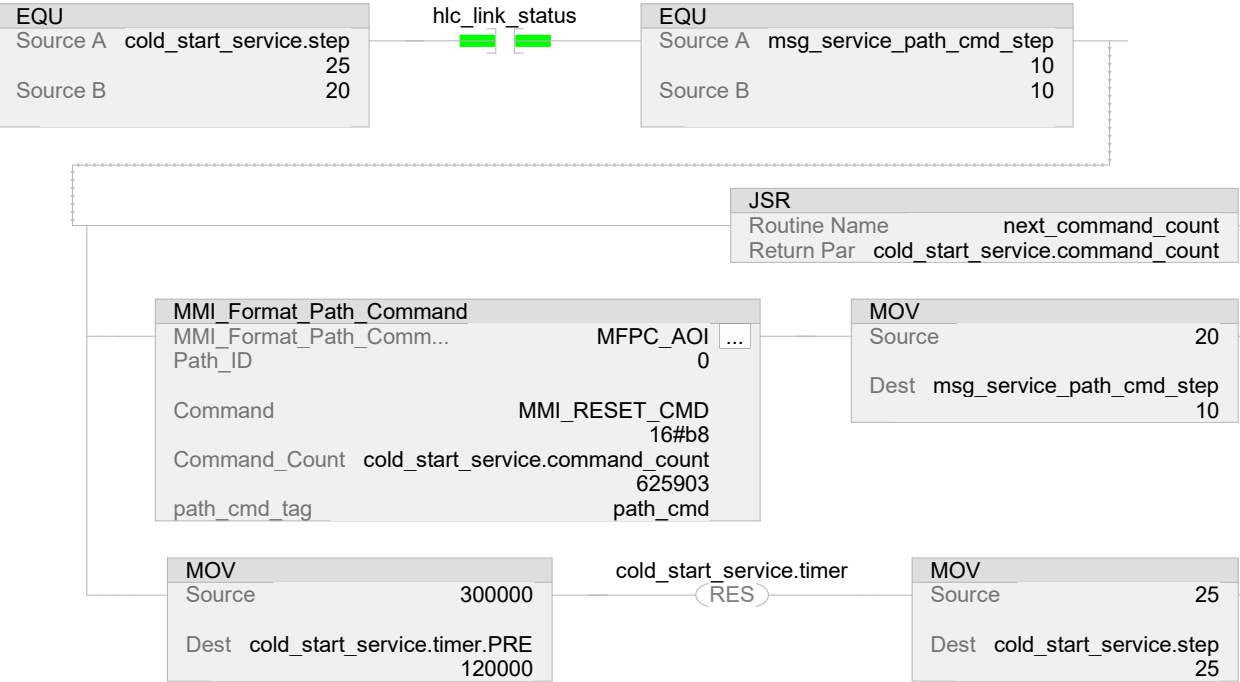


Initialize variables for step 30
restart cold start routine if process times out

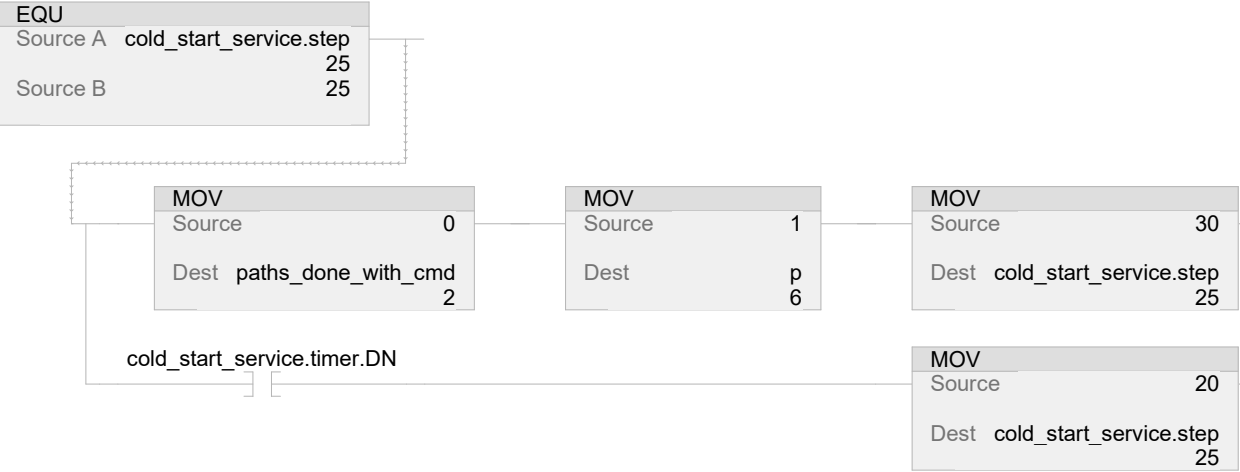


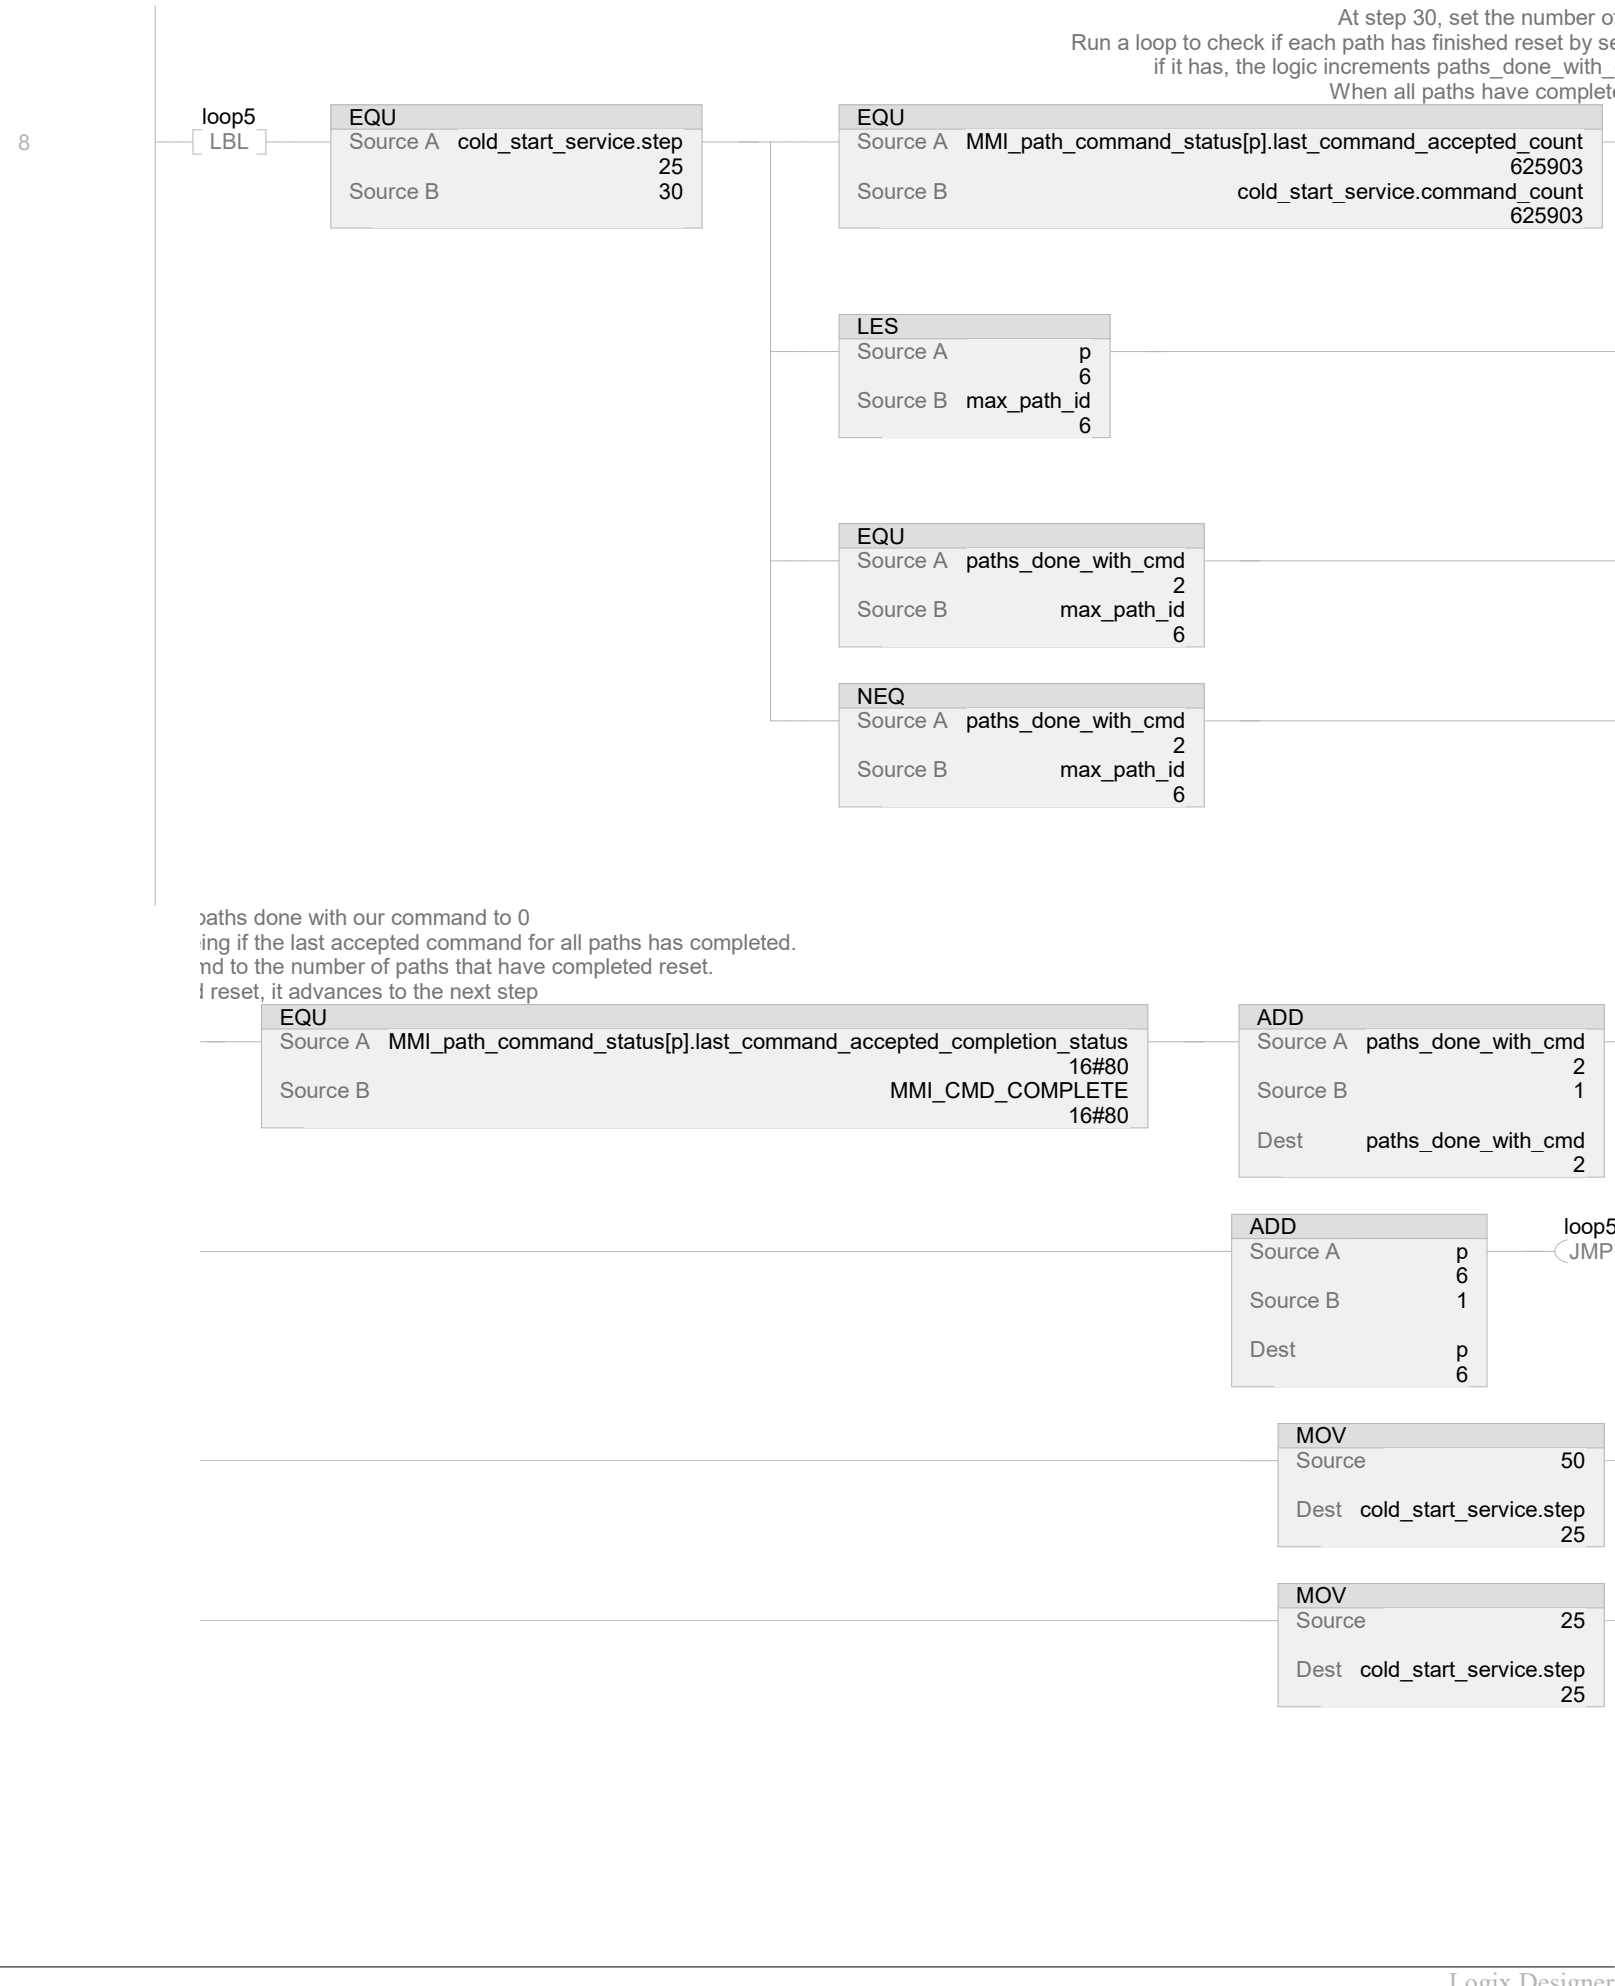

9

Reset is done, when path_cmd msg service is ready at step 10, format a startup command the same way we formatted the reset command above and tell msg service to kick the command and set a timeout again.

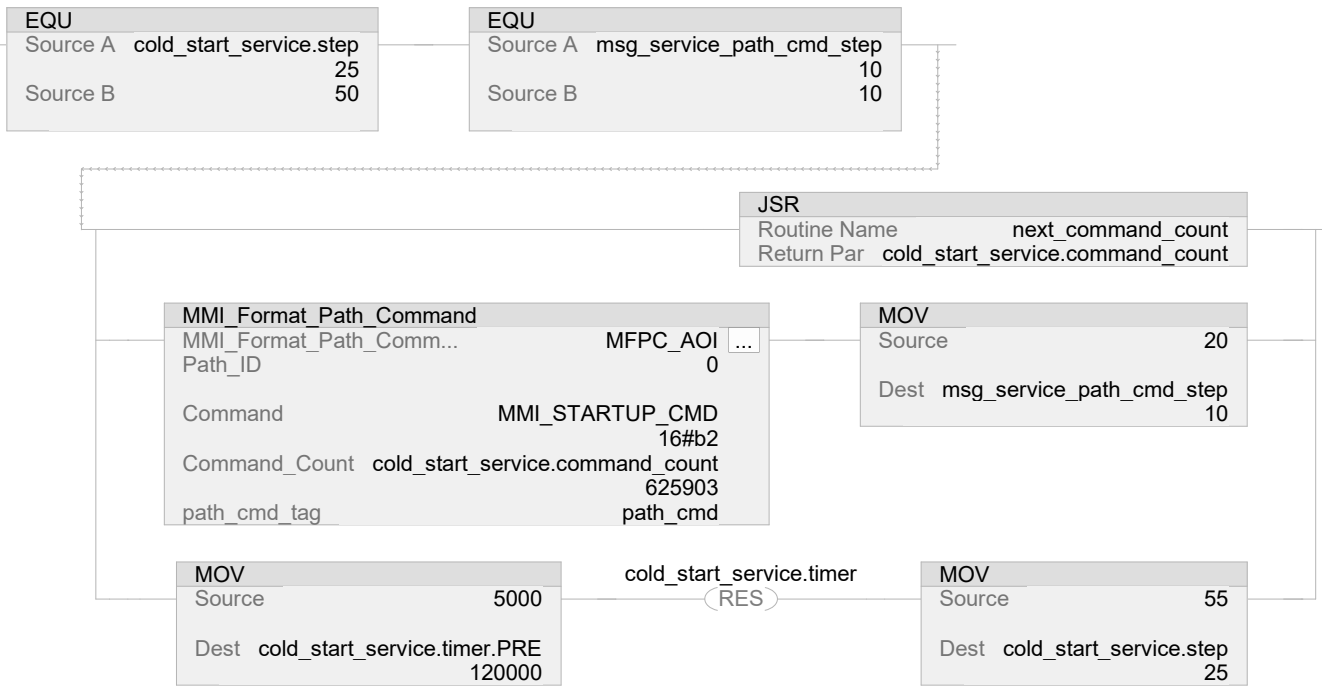

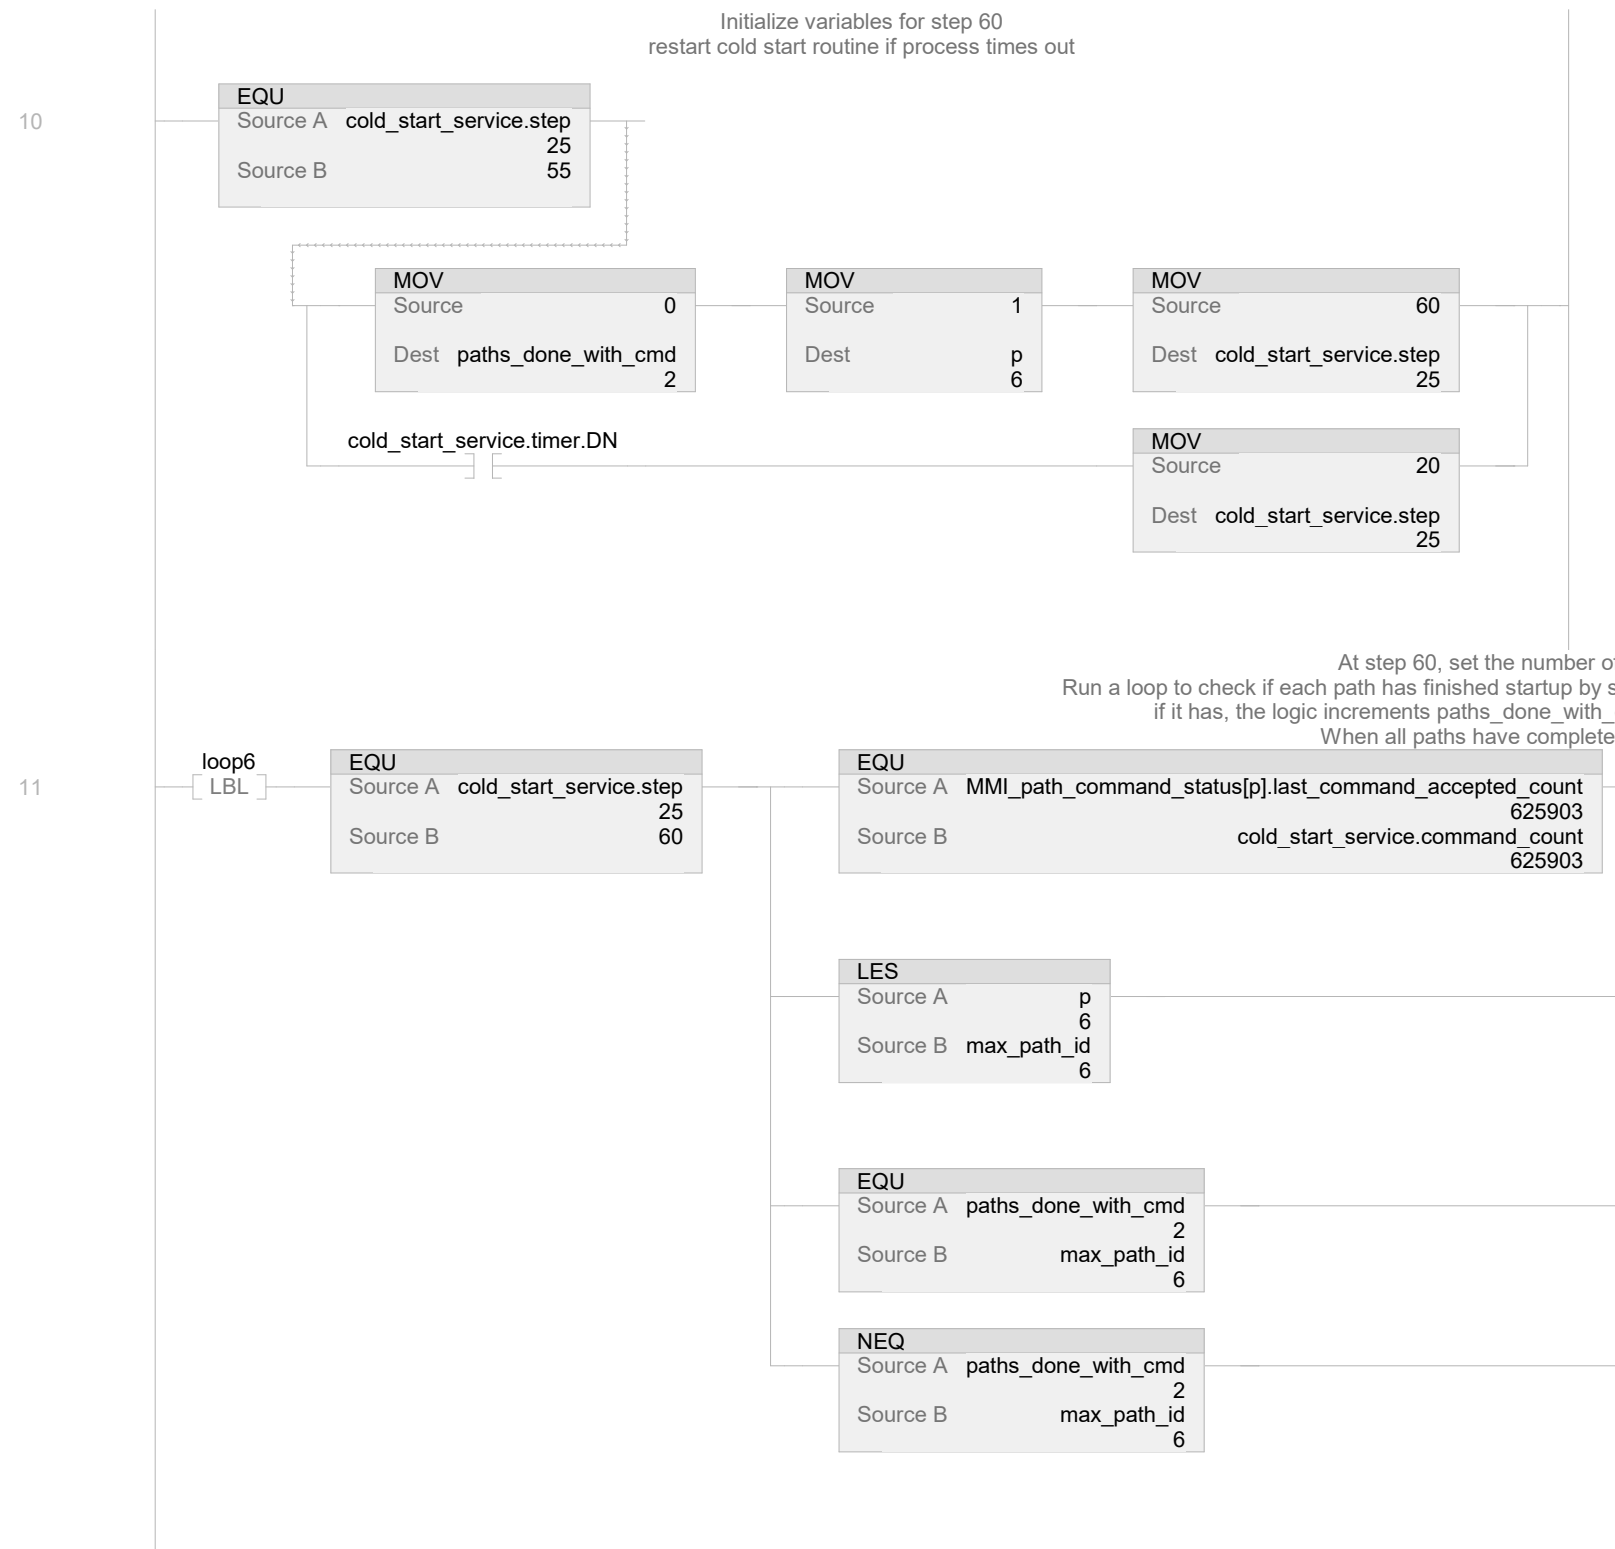

startup, it advances to the next step

