[نام دانشگاه]

[دانشکده / گروه]

سیستم‌های دیجیتال ۲ (ریزپردازنده)

پروژهٔ ۱


VOID RUNNER

یک بازی تیراندازی فضایی عمودی روی Arduino Mega

۴۳۲ LED تکی · صفحه‌کلید ۹ دکمه‌ای · ۴ بازر · بدون ماژول و کتابخانه

دانشجو	[نام دانشجو]
شمارهٔ دانشجویی	[شمارهٔ دانشجویی]
استاد	[نام استاد]
درس	سیستم‌های دیجیتال ۲ (ریزپردازنده)
نیم‌سال	[نیم‌سال، مثلاً پاییز ۱۴۰۵]
تاریخ	[تاریخ تحویل]
بستر	Arduino Mega 2560، شبیه‌سازی‌شده در Wokwi
کد منبع	https://github.com/Arash1Kazemi/void-runner

سخت‌افزار

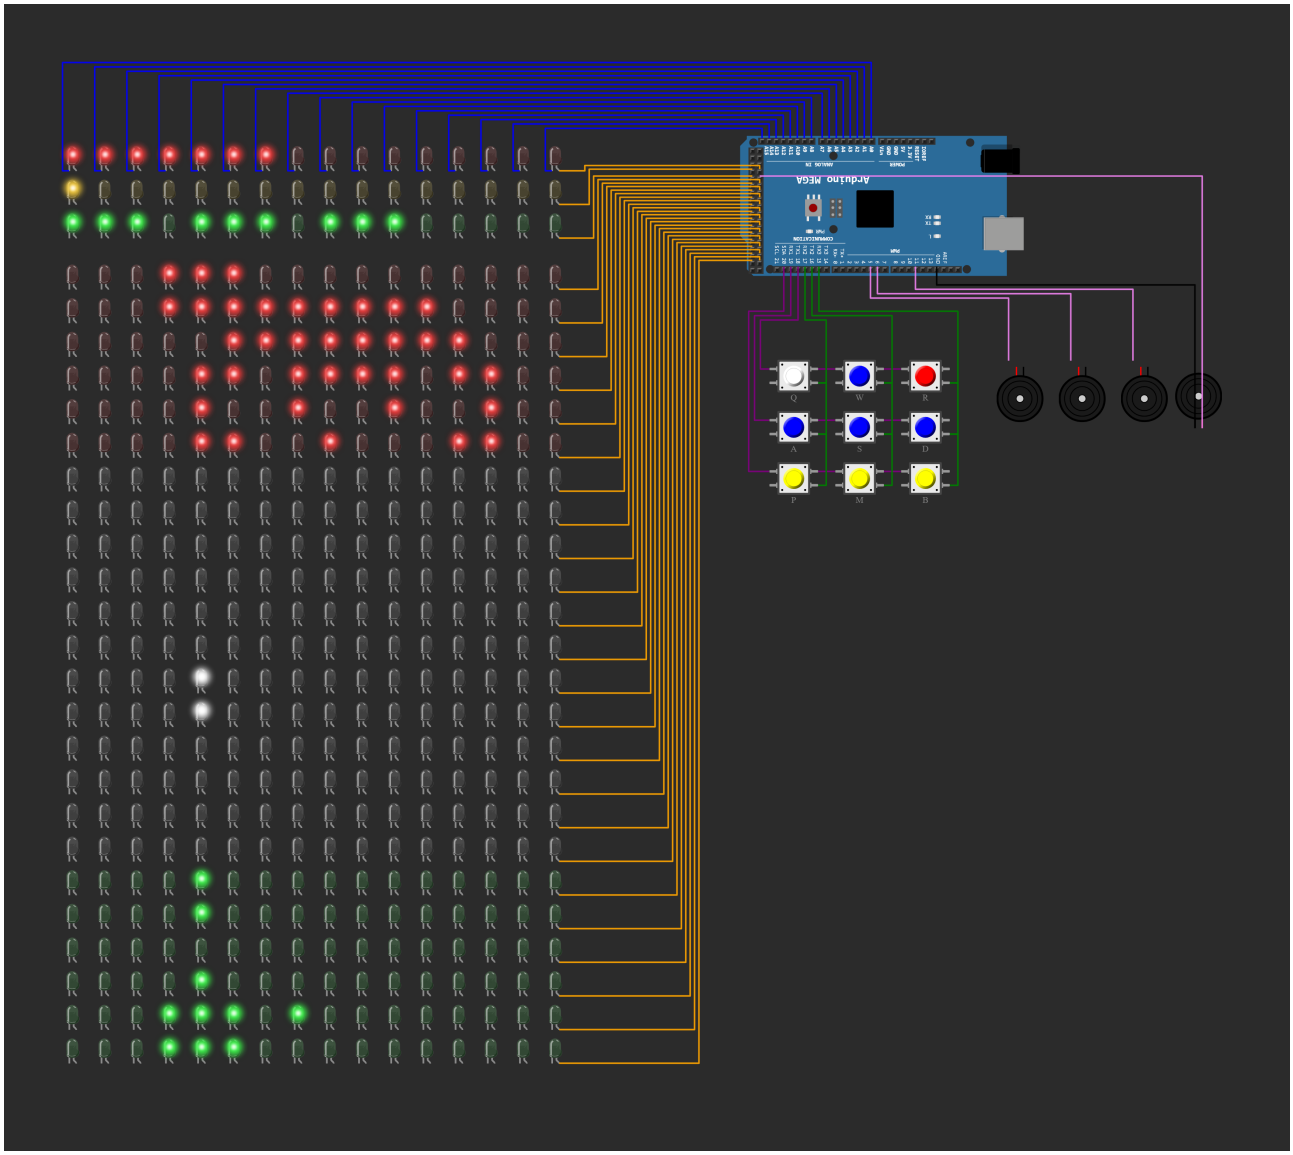

شکل ۱: کل مدار در *Wokwi:* ۴۳۲ *LED* (چپ)، *Arduino Mega 2560* (بالا)، صفحه‌کلید ۳ × ۳ از دکمه‌های فشاری و ۴ بازر (راست). *LED*ها یک لحظهٔ واقعی از بازی را نشان می‌دهند: نبرد با باس *WARDEN*.

۳. عملکرد پروژه


VOID RUNNER یک بازی آرکید کامل است که فقط با قطعه‌های مجاز درس ساخته شده: یک Arduino Mega 2560، LEDهای تکی، دکمه‌های فشاری تکی و بازر. هیچ ماژول آماده‌ای (نه ماژول ماتریس LED، نه ماژول صفحه‌کلید) و هیچ کتابخانه‌ای به کار نرفته است؛ صفحه‌نمایش، صفحه‌کلید و موسیقی چهارصدایی همه با کد خودمان کنترل می‌شوند. بازیکن یک سفینهٔ کوچک را در پایین یک صفحهٔ LED به ابعاد ۱۶ × ۲۴ هدایت می‌کند، به دشمن‌ها و سنگ‌های فضایی شلیک می‌کند، جعبه‌های مهمات و جان اضافه جمع می‌کند و در پایان هر یک از سه مرحله با یک باس می‌جنگد. پروژه در شبیه‌ساز Wokwi اجرا می‌شود (Wokwi for VS Code و wokwi.com).

۱.۳ قطعه‌ها و اتصال‌ها

قطعه	تعداد	اتصال به Mega
Arduino Mega 2560	۱	–
LEDهای تکی (wokwi-led)، یک ماتریس	۴۳۲	صفحهٔ بازی ۱۶ × ۲۴ + سه نوار وضعیت ۱۶تایی. ۲۷ سیم سطر (آند) روی پایه‌های ۲۲ تا ۴۵ و ۴۷ تا ۴۹، ۱۶ سیم ستون (کاتد) روی A0 تا A15
دکمه‌های فشاری (wokwi-pushbutton)، ماتریس ۳ × ۳	۹	سطرها روی پایه‌های ۱۸ تا ۲۰، ستون‌ها روی ۱۵ تا ۱۷
بازرها (wokwi-buzzer)	۴	پایه‌های ۵، ۶، ۱۱ و ۴۶ (خروجی‌های Timer3، Timer4، Timer1 و Timer5)

جدول ۱: قطعه‌های دستگاه.

۵۳ پایه از پایه‌های Mega استفاده شده و هر هدر فقط یک کار دارد: هدر دوردیفه سطرهای LED را راه می‌اندازد، هدر آنالوگ ستون‌های LED را، هدر ارتباطی صفحه‌کلید را و هدر PWM بازرها را. در شبیه‌سازی به مقاومت نیازی نیست. فایل مدار (`diagram.json`) و فهرست پایه‌های کد (`pins.h`) هر دو با یک برنامه (`tools/gen_circuit.py`) ساخته می‌شوند که همهٔ سیم‌ها را هم بررسی می‌کند؛ بنابراین مدار و کد همیشه با هم هماهنگ‌اند.

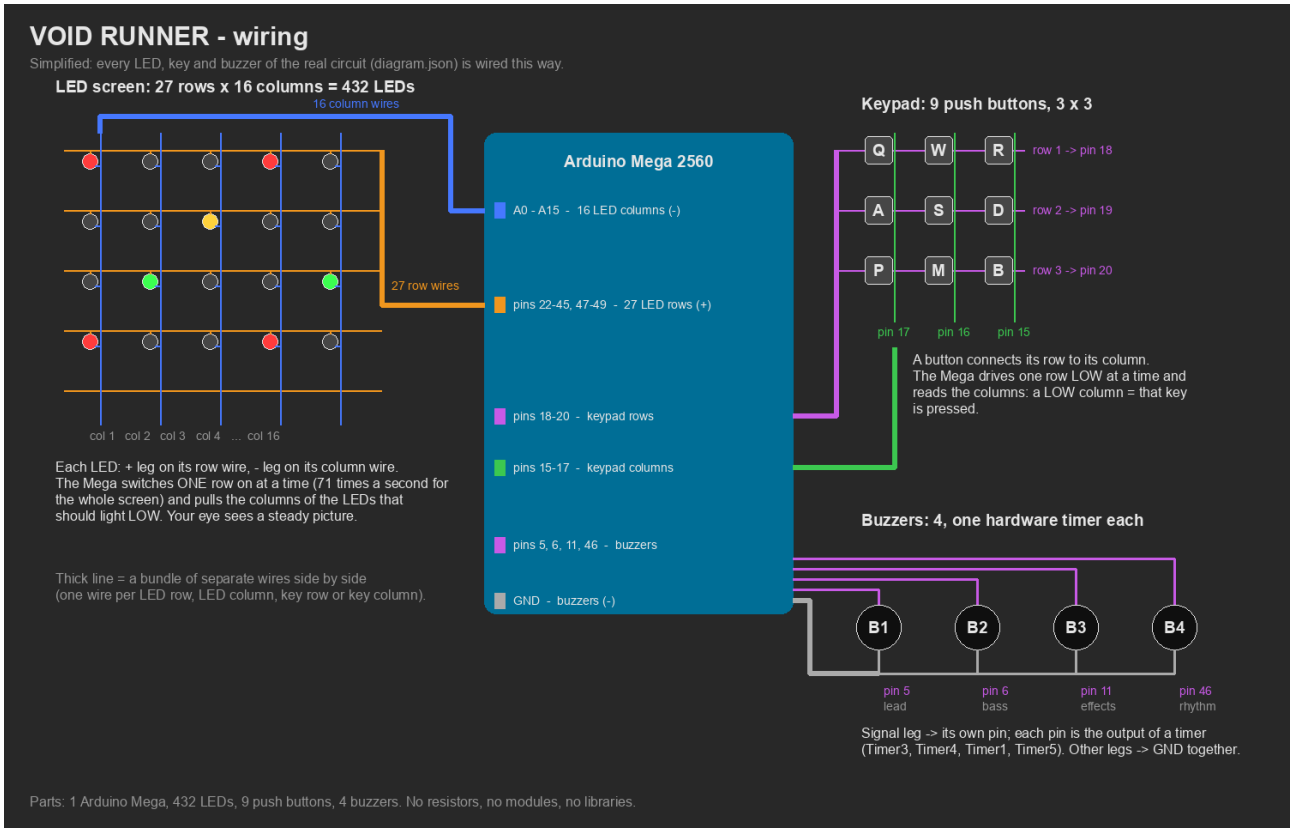

شکل ۲: سیم‌کشی ساده‌شده: هر *LED*، کلید و بازر چگونه وصل شده است.


۲.۳ صفحه‌نمایش LED

همهٔ ۴۳۲ LED **یک ماتریس** ۲۷ سطر × ۱۶ ستون می‌سازند: پایهٔ + هر LED روی سیم سطر آن و پایهٔ − روی سیم ستون آن است. Mega **در هر لحظه فقط یک سطر** را روشن می‌کند و ستون‌های LEDهایی را که باید روشن شوند LOW می‌کند. یک وقفهٔ Timer2 حدود ۱۹۰۰ بار در ثانیه به سطر بعدی می‌رود، پس کل صفحه ۷۱ بار در ثانیه از نو کشیده می‌شود و چشم تصویری ثابت می‌بیند. ستون‌ها با دو رجیستر پورت (`PORTF` و `PORTK`) یک‌جا نوشته می‌شوند: این کار حدود ۳٪ پردازنده را می‌گیرد، در حالی که `digitalWrite` حدود ۳۵٪ می‌گرفت.

بازی تصویر را در حافظه (`frame`، یک کلمهٔ ۱۶ بیتی برای هر سطر) می‌کشد و وقتی تمام شد آن را به صفحه کپی می‌کند؛ بنابراین هرگز تصویر نیمه‌کاره نمایش داده نمی‌شود.

ناحیه	رنگ LED	کاربرد در بازی
نوار وضعیت ۱	قرمز	پیشرفت مرحله، سپس جان باس
نوار وضعیت ۲	زرد	مهمات (وقتی کم است چشمک می‌زند)
نوار وضعیت ۳	سبز	جان‌ها (برای هر جان یک بلوک سه‌تایی LED)
سطرهای ۰ تا ۵ بازی	قرمز	جای ورود دشمن‌ها و باس‌ها، «WARN» و «ZONE»
سطرهای ۶ تا ۱۷ بازی	سفید	فضای باز، صفحه‌های پیام
سطرهای ۱۸ تا ۲۳ بازی	سبز	منطقهٔ بازیکن

جدول ۲: رنگ *LED*ها. هر *LED* رنگی ثابت دارد، مانند نوارهای رنگی کابینت بازی *Space Invaders* در سال ۱۹۷۸.

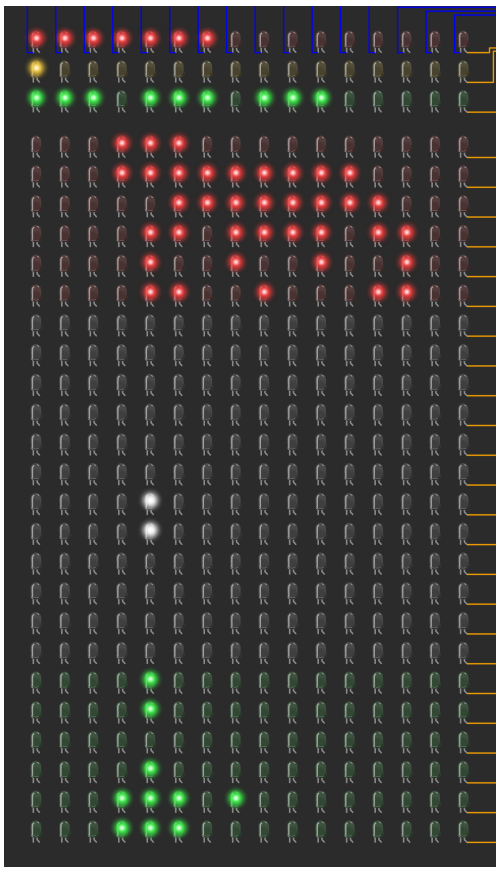


شکل ۳: پنل *LED* در *Wokwi* هنگام نبرد با باس.

روشنایی. هر LED فقط ۱/۲V زمان روشن است. Wokwi روشنایی را به صورت (سهم زمان روشن بودن)^(۱/gamma) نشان می‌دهد؛ با gamma پیش‌فرض، یک LED روشن فقط ۳۲٪ روشن دیده می‌شد که دیدنش سخت بود. به همین دلیل هر LED مقدار gamma = ۳۰ (۹۰٪) دارد؛ این همان کاری است که یک نمایشگر مالتی‌پلکس واقعی با جریان بیشتر در بازهٔ زمانی کوتاه هر LED انجام می‌دهد. هر LED همچنین fps = ۳۰۰ دارد تا اجسام متحرک واضح بمانند، و هر چیزی که چشمک می‌زند دست‌کم ۱۶۰ میلی‌ثانیه روشن و خاموش می‌ماند تا چشمک دیده شود.

متن هرگز اسکرول نمی‌شود (حروف متحرک در شبیه‌ساز به یک لکهٔ سفید تبدیل می‌شدند). هر پیام یک **صفحهٔ** ثابت از کلمه‌های کوتاه است، حداکثر چهار حرف کوچک در هر خط، که ۰٫۹ ثانیه نمایش داده می‌شود؛ هر جا کلمه لازم نباشد، رقم‌ها و علامت‌های بزرگ به کار می‌روند.

۳.۳ صفحه‌کلید و کنترل‌ها

۹ دکمهٔ فشاری یک ماتریس ۳ × ۳ می‌سازند، برای هر کلیدی که بازی استفاده می‌کند یک دکمه. کد در هر لحظه یک سطر را LOW می‌کند و سه ستون را با مقاومت‌های pull-up داخلی می‌خواند، پس کلید فشرده LOW خوانده می‌شود. سطرهایی که خوانده نمی‌شوند به ورودی تبدیل می‌شوند تا دو کلید فشرده هرگز یک خروجی HIGH و یک خروجی LOW را به هم اتصال کوتاه نکنند. لرزش (bounce) هر کلید حذف می‌شود. روی دکمه‌ها حروف صفحه‌کلید نوشته شده و در Wokwi به صفحه‌کلید رایانه هم پاسخ می‌دهند.

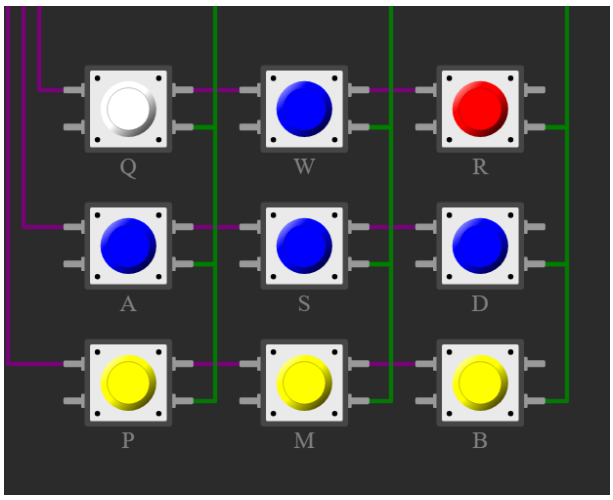

شکل ۴: صفحه‌کلید در *Wokwi*.


کلید	کار
W A S D	حرکت (ضربهٔ کوتاه = یک پیکسل، نگه داشتن = سُر خوردن)
R	شلیک (ضربهٔ کوتاه = یک گلوله، نگه داشتن = شلیک خودکار) · تأیید در منوها
Q	بازگشت · مکث در بازی
P	مکث / ادامه
M	روشن / خاموش کردن صدا (در هر صفحه، ذخیره می‌شود)
B	روشنایی ۱۰۰ / ۵۰ / ۲۰ درصد (در هر صفحه، ذخیره می‌شود)

جدول ۳: کلیدها.

شلیک: با فشار R یک گلوله شلیک می‌شود؛ اگر نگه دارید، هر ۰٫۲ ثانیه یک گلولهٔ دیگر می‌آید (با شروع شلیک خودکار صدای جیک کوتاهی پخش می‌شود و دماغهٔ سفینه چشمک می‌زند). **حرکت:** ضربهٔ کوتاه یک پیکسل جابه‌جا می‌کند و نگه داشتن، سفینه را پس از ۰٫۱۷ ثانیه به حرکت پیوسته درمی‌آورد. جدیدترین کلید برنده است: کلید حرکت شلیک را قطع می‌کند و تا وقتی R نگه داشته شود سفینه سُر نمی‌خورد.

۴.۳ چهار بازر

هر بازر به پایهٔ خروجی تایمر سخت‌افزاری ۱۶ بیتی خودش وصل است. در حالت CTC با «toggle on com-pare match» تایمر خودش پایه را تغییر می‌دهد؛ پس هر نت هیچ زمانی از پردازنده نمی‌گیرد و **چهار نت می‌توانند همزمان پخش شوند** (`tone()` آردوینو فقط یکی را پخش می‌کند). تایمرها با کلاک کُند (÷۲۵۶) کار می‌کنند که نت‌ها را تا حدود C7 با خطای کمتر از ۱٪ در زیروبمی نگه می‌دارد.

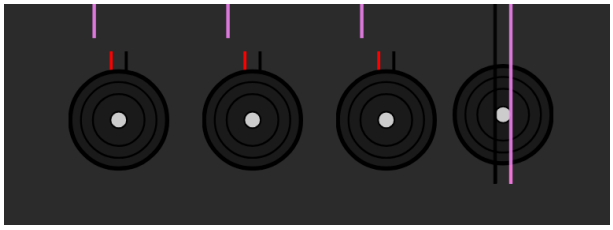


شکل ۵: چهار بازر در *Wokwi*.

بازر	پایه / تایمر	کار
۱	5 / Timer3	گیتار لید (ملودی)
۲	6 / Timer4	باس
۳	11 / Timer1	همهٔ جلوه‌های صوتی و صداهای منو (موسیقی فقط در قطعه‌های کوتاه)
۴	46 / Timer5	گیتار ریتم: یک پنجم بالاتر از باس (باس + ریتم = پاور کورد)

جدول ۴: صداها.

۵.۳ لوگوی شروع و موسیقی خوشامد

وقتی دستگاه روشن می‌شود، یک لوگوی ۵٫۶ ثانیه‌ای همزمان با ملودی خوشامد پخش می‌شود: تصویر با ساعت خود آهنگ پیش می‌رود، پس هر حرکت دقیقاً روی یک نت می‌افتد. «VOID» تابلویی عمودی از حروف درشت ۱۰ × ۵ است و نوارهای وضعیت مثل نوار پیشرفت راه‌اندازی پر می‌شوند. هر کلیدی لوگو را رد می‌کند.

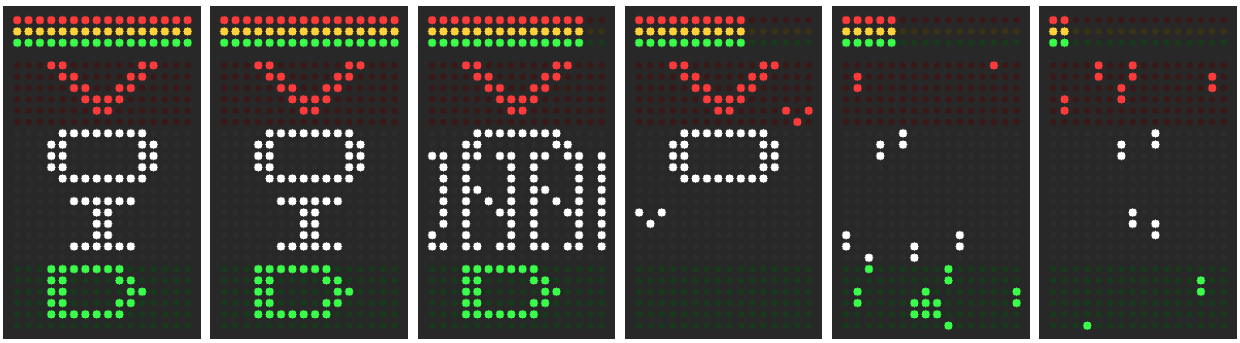


شکل ۶: لوگوی شروع.

زمان	تصویر	صدا
۰٫۰ – ۱٫۲ ث	پرش فضایی: رگه‌های ستاره‌ها تندتر می‌شوند	صدای «ووش» رو به بالا + صدای بم ممتد A2
۱٫۲ – ۲٫۰ ث	سفینه بالا می‌آید و ترمز می‌کند	نت‌های ترمز E4 C4 A3
۲٫۰ – ۲٫۴ ث	سفینه به بالا و بیرون می‌پرد	لغزش سریع رو به بالا
۲٫۴ – ۳٫۶ ث	حروف V، O، I و D یکی‌یکی با سوسو روشن می‌شوند؛ پهپادها از کنار می‌گذرند	A4 C5 E5 A5، با صدای جرقه در هر سوسو
۳٫۶ – ۴٫۸ ث	«RUNNER» روی نواری تیره که سفینه آن را می‌کشد عبور می‌کند	ملودی + هارمونی + خط باس
۴٫۸ – ۵٫۶ ث	کل صفحه می‌درخشد، سپس تابلو روشن می‌ماند	آکورد لا مینور

جدول ۵: زمان‌بندی لوگو.

۶.۳ صفحهٔ عنوان، نمایش خودکار و منو

صفحهٔ عنوان تابلوی VOID را روشن نگه می‌دارد و سفینه‌ها از کنارش می‌گذرند؛ هر ۷ ثانیه یک بنر صفحه‌های «PUSH»، یک R بزرگ، «TO» و «PLAY» را نشان می‌دهد. اگر ۲۰ ثانیه هیچ کلیدی زده نشود، **نمایش خودکار** (دمو) شروع می‌شود: خلبان خودکار خودش بازی می‌کند تا کلیدی زده شود. R منو را باز می‌کند: PLAY، SHIP، OPTS و BEST (انتخاب با W/S، باز کردن با R، بازگشت با Q)؛ گزینهٔ انتخاب‌شده زیرخط دارد.

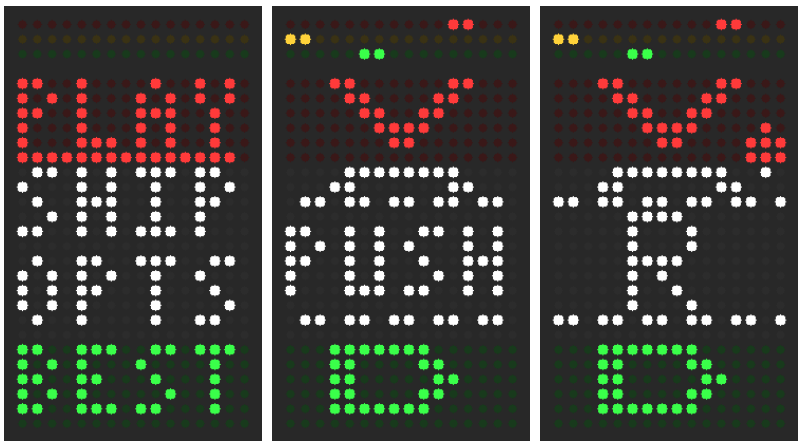


عنوان بنر منو

شکل ۷: صفحهٔ عنوان و منوی اصلی.

۷.۳ آشیانه و تنظیمات

در **آشیانه** بازیکن با A/D یکی از سه سفینه را انتخاب می‌کند. سفینه سه برابر بزرگ‌تر نمایش داده می‌شود و سه نوار وضعیت سرعت، مهمات و قدرت شلیک آن را نشان می‌دهند. **تنظیمات** چند صفحه‌اند: LITE (روشنایی)، SND (صدا)، DIFF (EASY / NORM / HARD) و TEST (آزمون LED). با W/S صفحه انتخاب می‌شود، با A/D یا R مقدار تغییر می‌کند و نقطه‌های پایین صفحه جای شما را نشان می‌دهند. همهٔ تنظیمات در EEPROM ذخیره می‌شوند.

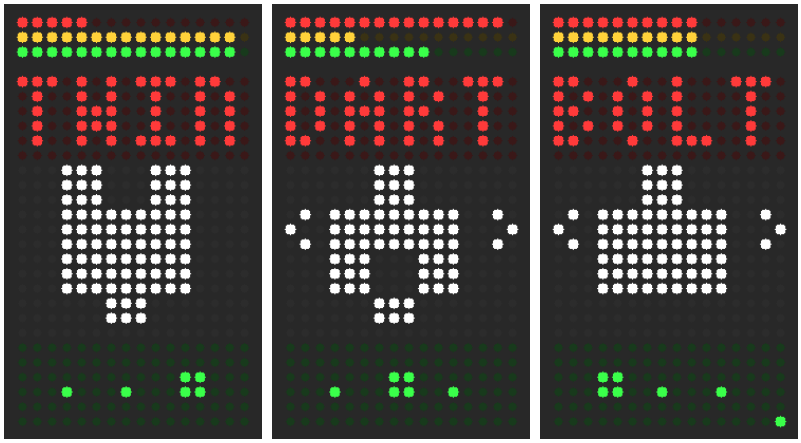


TWIN DART BOLT

شکل ۸: آشیانه.

سفینه	سرعت	شلیک	مهمات	توضیح
BOLT	۷۰ میلی‌ثانیه / پیکسل	هر ۰٫۲۰ ثانیه	۶۰	متعادل
DART	۴۵ میلی‌ثانیه / پیکسل	هر ۰٫۲۲ ثانیه	۴۰	سریع‌ترین، مهمات کمتر
TWIN	۹۵ میلی‌ثانیه / پیکسل	هر ۰٫۲۶ ثانیه	۸۰	دو گلوله در هر شلیک (۲ مهمات)، کُندترین

جدول ۶: سه سفینه.

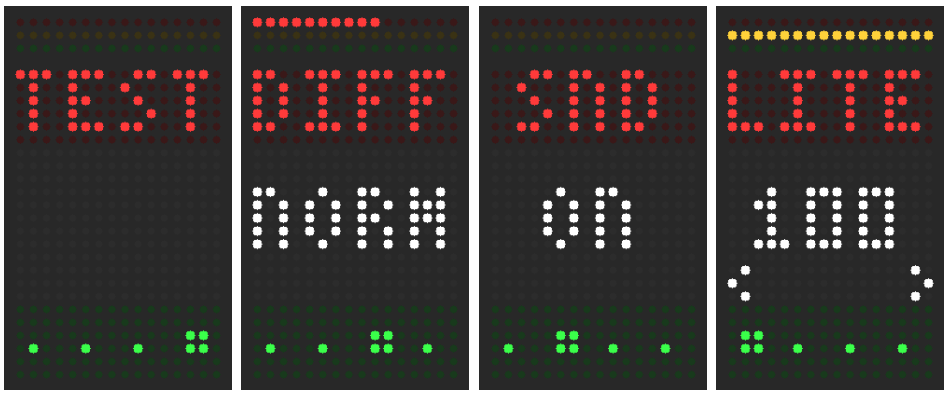


TEST DIFF SND LITE

شکل ۹: صفحه‌های تنظیمات.

۸.۳ بازی کردن

هر بازی سه مرحله دارد. هر مرحله با صفحه‌های «ZONE» و شمارهٔ بزرگ مرحله، نام مرحله و «GO!» همراه با یک فانفار شروع می‌شود. سپس دشمن‌ها و سنگ‌های مرحله طبق فهرست ورودشان می‌آیند. وقتی فهرست تمام شد و صفحه خالی شد، «WARN» و یک علامت هشدار چشمک‌زن با آژیر ظاهر می‌شوند و نوار قرمز پر می‌شود؛ سپس باس با موسیقی خودش می‌آید. وقتی باس منفجر شد، صفحه‌های «ZONE DONE»، امتیاز جایزه و «LIFE UP» می‌آیند و مرحلهٔ بعد شروع می‌شود. پس از آخرین باس، صفحهٔ پیروزی بلافاصله می‌آید.

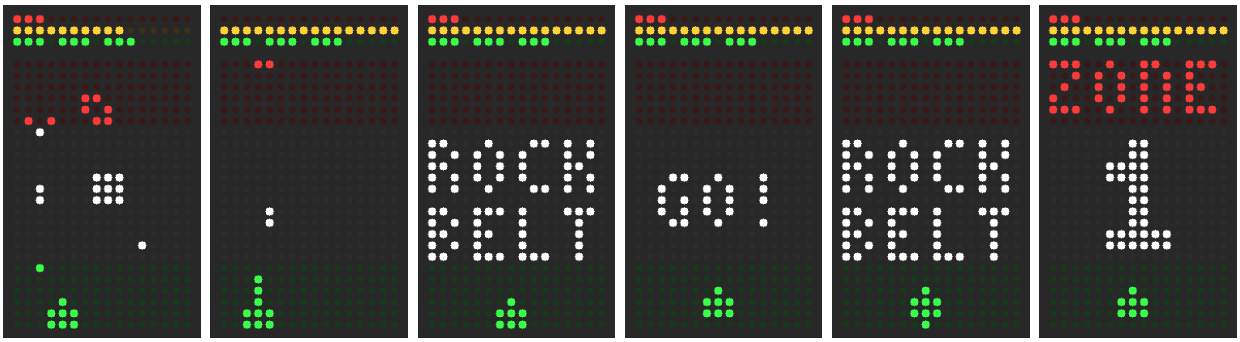


مرحلهٔ ۱ مرحلهٔ ۱ مرحلهٔ ۱ GO! نام مرحله ZONE 1

شکل ۱۰: شروع مرحلهٔ ۱، *ROCK BELT*، و بازی.

موضوع	قاعده
جان‌ها	EASY ۴، NORMAL ۳، HARD ۳ (حداکثر ۴). اصابت: انفجار، لرزش صفحه و ۲ ثانیه سپر چشمک‌زن. پس از هر مرحله یک جان اضافه؛ جان اضافه را می‌توان جمع کرد.
مهمات	برای هر سفینه (۶۰ / ۴۰ / ۸۰)، در شروع هر مرحله پر. جعبهٔ مهمات بسته به سختی ۲۰+ / ۱۵ / ۱۲ می‌دهد. در ۵ یا کمتر یک بوق هشدار می‌زند، نوار زرد چشمک می‌زند و همیشه یک جعبه فرستاده می‌شود. خالی: یک تق خشک.
دشمن‌ها	همه از بازیکن کُندترند؛ حداکثر ۴ / ۵ / ۶ دشمن هم‌زمان روی صفحه (مرحلهٔ ۱ / ۲ / ۳). فقط از سطرهای بالایی شلیک می‌کنند، هرگز درست کنار سفینه نه، و هرگز روی هم نمی‌روند تا صفحهٔ کوچک خوانا بماند.
سنگ‌های فضایی	شکل‌هایی توخالی و ناهموار (کوچک ۳ × ۳، بزرگ ۴ × ۳) که آهسته می‌افتند و کج می‌روند؛ سنگ بزرگ با ۲ ضربه به دو سنگ کوچک می‌شکند. برخورد با آن‌ها آسیب می‌زند.
انفجارها	فقط باس‌ها و سفینهٔ بازیکن به پیکسل‌های پرّان منفجر می‌شوند؛ دشمن‌ها فقط با صدای انفجار ناپدید می‌شوند (تکه‌های پرّان شبیه گلوله دیده می‌شدند).
برخوردها	دقیق در حد پیکسل: اصابت فقط وقتی حساب می‌شود که پیکسل‌های روشن به هم برسند.
امتیاز	پهپاد ۱۰، زیگزاگی ۱۵، مین‌گذار ۲۰، رزمناو ۴۰، سنگ ۵ / ۱۰، مین ۲، برداشتنی ۵، باس‌ها ۲۰۰ / ۳۰۰ / ۵۰۰، جایزهٔ مرحله ۱۰۰ × شمارهٔ مرحله؛ حداکثر ۹۹۹۹.

جدول ۷: قواعد بازی.

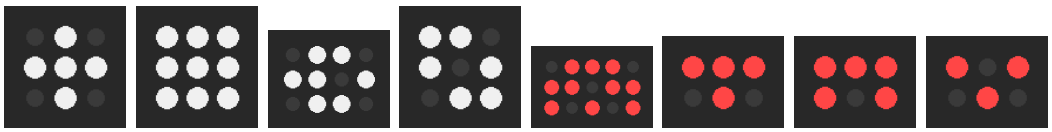

شکل ۱۱: دشمن‌ها، سنگ‌ها و برداشتنی‌ها، پیکسل به پیکسل.

دشمن	رفتار
پهپاد (Drone)	آهسته پایین می‌آید، مستقیم به پایین شلیک می‌کند
زیگزاگی (Weaver)	زیگزاگ‌زنان پایین می‌آید، گاه‌گاهی شلیک می‌کند
مین‌گذار (Mine-layer)	از بالای صفحه عبور می‌کند و مین می‌اندازد (می‌توان به مین‌ها شلیک کرد)
رزمناو (Cruiser)	۵ ضربه؛ نزدیک بالا می‌ایستد، به پهلو می‌لغزد، به سمت بازیکن نشانه می‌گیرد و یک جان اضافه می‌اندازد
سنگ‌ها	می‌افتند و به پهلو می‌روند؛ سنگ بزرگ به دو تکه می‌شکند

جدول ۸: انواع دشمن.


۹.۳ نوارهای وضعیت

سه نوار بالای صفحهٔ بازی وضعیت بازی را در یک نگاه نشان می‌دهند. قرمز: مرحله چقدر پیش رفته؛ هنگام هشدار پر می‌شود و در نبرد با باس جان باس را نشان می‌دهد که با هر ضربه کم می‌شود. زرد: مهمات باقی‌مانده (وقتی ۵ یا کمتر بماند چشمک می‌زند). سبز: جان‌ها، برای هر جان یک بلوک سه‌تایی .LED

۱۰.۳ سه مرحله و باس‌هایشان


مرحله	دشمن‌ها	باس
۱ – ROCK BELT	پهپادها و سنگ‌های فراوان	**WARDEN**: پهن (۱۰ × ۴)، در بالا می‌لغزد، شلیک پخش سه‌تایی، سنگ می‌اندازد؛ زیر نصف جان سریع‌تر و با شلیک پخش پنج‌تایی
۲ – DEEP MIST	زیگزاگی‌ها، مین‌گذارها، پهپادها	**HUNTER**: کوچک و سریع؛ به نقطه‌ای تازه می‌پرد، یک جفت شلیک نشانه‌گیری‌شده می‌زند و هر ۷ ثانیه چشمک می‌زند و به سمت بازیکن شیرجه می‌رود
۳ – THE VOID	رزمناوها، همهٔ دشمن‌های دیگر، بارش سنگ	**VOID KING**: عظیم (۱۲ × ۵)، شلیک پخش پنج‌تایی، پهپاد فرا می‌خواند؛ در نصف جان چشمش باز می‌شود (غرش، لرزش)، سپس رگبارهای سه‌تایی نشانه‌گیری‌شده و بارش سنگ

جدول ۹: مرحله‌ها و باس‌ها. جان باس‌ها: ۲۴ / ۲۲ / ۴۰، متناسب با سختی.

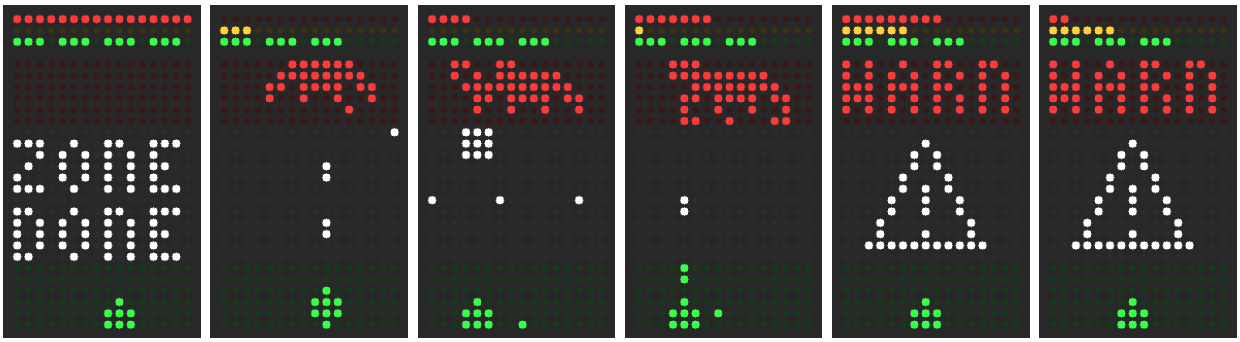


ZONE DONE | شکست باس | WARDEN | WARDEN | علامت هشدار | WARN

شکل ۱۲: مرحلهٔ ۱: هشدار، نبرد با *WARDEN* و پایان مرحله.

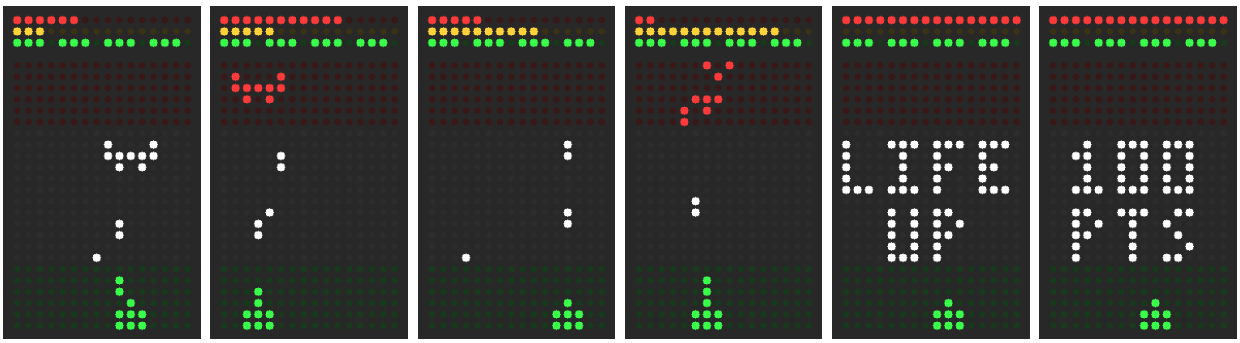


HUNTER | HUNTER | مرحلهٔ ۲ | مرحلهٔ ۲ | LIFE UP | جایزه

شکل ۱۳: مرحلهٔ ۲، *DEEP MIST*، و *HUNTER*.

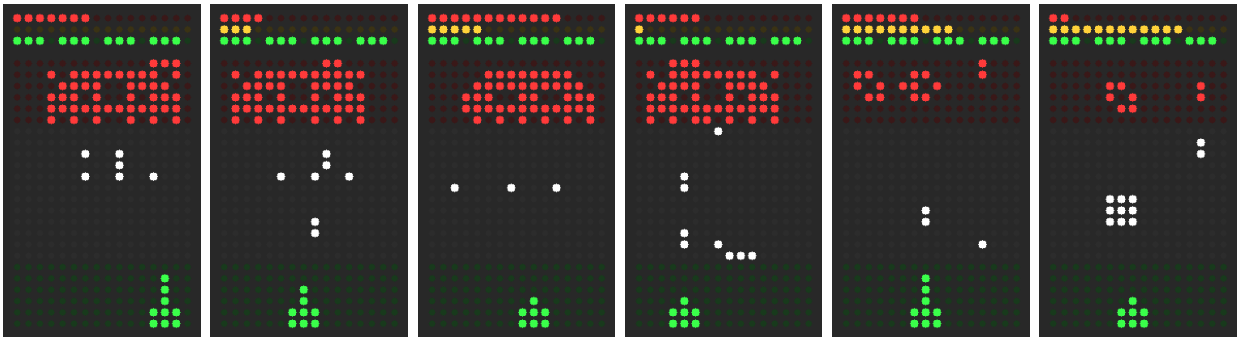

شکل ۲ | چشم باز | VOID KING | VOID KING | مرحلهٔ ۳ | مرحلهٔ ۳

شکل ۱۴: مرحلهٔ ۳، *THE VOID*، و *VOID KING* در هر دو شکل.

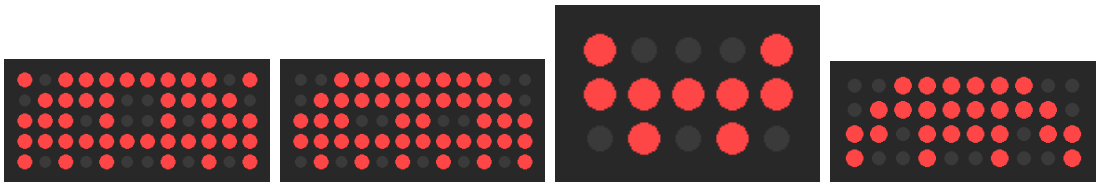

VOID KING، شکل ۲ | VOID KING | HUNTER | WARDEN


شکل ۱۵: باس‌ها، پیکسل به پیکسل.

سختی	جان‌ها	شلیک دشمن	جان باس	جعبهٔ مهمات
EASY	۴	۱٫۵ برابر کُندتر	۸۰ %	۲۰+
NORMAL	۳	عادی	۱۰۰ %	۱۵+
HARD	۳	۱٫۳۳ برابر سریع‌تر	۱۳۰ %	۱۲+

جدول ۱۰: سطح‌های سختی (*OPTS* ← *DIFF*).

۱۱.۳ مکث، پایان بازی، پیروزی و بهترین امتیاز

P (یا Q) بازی را متوقف می‌کند: ساعت بازی می‌ایستد، امتیاز و یک علامت مکث بزرگ نمایش داده می‌شود و صفحه‌های «P:GO» و «Q:EX» کلیدها را توضیح می‌دهند. وقتی آخرین جان از دست برود، **GAME OVER** امتیاز (برای رکورد تازه چشمک‌زن) و بهترین امتیاز را نشان می‌دهد. پس از VOID KING، صفحهٔ **پیروزی** آتش‌بازی و صفحه‌های «YOU WIN!»، «VOID SAFE» و امتیاز را نشان می‌دهد. صفحهٔ **BEST** بالاترین امتیاز، اینکه آن بازی تا کجا رسید (ZONE ۱ تا ۳ یا WIN) و سختی آن را نشان می‌دهد؛ این امتیاز در EEPROM نگه داشته می‌شود، پس در یک Arduino واقعی با قطع برق هم پاک نمی‌شود.

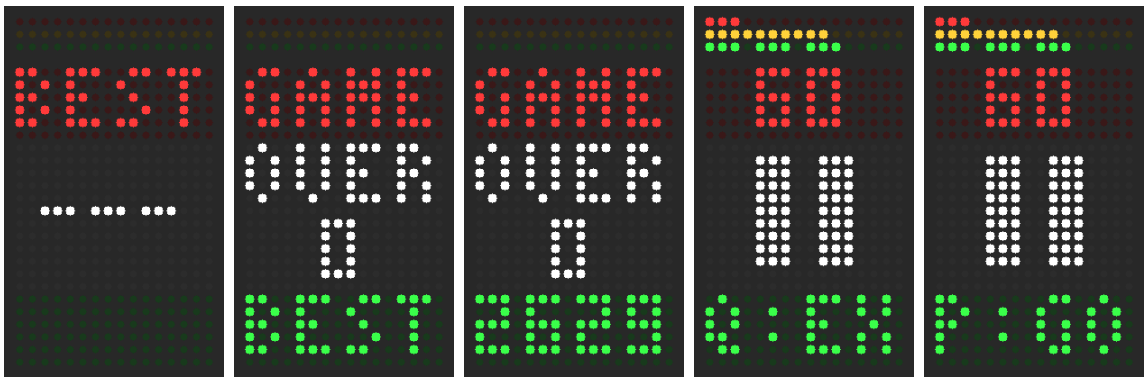

شکل ۱۶: مکث و پایان بازی.



شکل ۱۷: پیروزی و بهترین امتیاز.

۱۲.۳ صدا و موسیقی

همهٔ موسیقی‌ها به صورت فهرست نت، یکی برای هر بازر، در حافظهٔ فلش نوشته شده‌اند. آهنگ‌های داخل بازی قطعه‌های متال اصیلی هستند که برای این پروژه با یک نگارش کوتاه (`tools/compose_music.py`) نوشته شده‌اند: بازر ۱ گیتار لید، بازر ۲ باس و بازر ۴ گیتار ریتمی را یک پنجم بالاتر از باس می‌نوازد که با هم مثل یک پاور کورد شنیده می‌شوند. بازر ۳ برای جلوه‌های صوتی آزاد نگه داشته می‌شود، پس هیچ جلوه‌ای موسیقی را قطع نمی‌کند.


آهنگ	سبک	ویژگی
ROCK BELT (مرحلهٔ ۱)	ترش سریع، می مینور، حدود ۱۹۰ BPM، تکرار هر ۱۰٫۲ ثانیه	ریتم «گالوپ» روی E بم؛ ملودی پرسش و پاسخ
DEEP MIST (مرحلهٔ ۲)	آهسته و سنگین، drop-D، نیم‌ضرب، تکرار هر ۱۲٫۸ ثانیه	ضربه‌های خفهٔ کوتاه با سکوت بین آن‌ها؛ لید کمرنت و مرموز
THE VOID (مرحلهٔ ۳)	گروو سنکوپ‌دار، می مینور، تکرار هر ۹٫۶ ثانیه	ضربه‌های خارج از ضرب؛ یک ملودی که می‌شود زمزمه کرد
باس (هر سه)	ترمولو پیکینگ، کروماتیک، حدود ۲۱۰ BPM، تکرار هر ۴٫۵ ثانیه	نت‌های یک‌شانزدهم بی‌وقفه؛ یک لید ناله‌مانند

جدول ۱۱: آهنگ‌های داخل بازی.

موسیقی‌های دیگر: ملودی شروع، فانفار مرحله، پایان مرحله، پیروزی و پایان بازی. جلوه‌های صوتی اولویت دارند تا یک صدای مهم هرگز با یک صدای کوچک قطع نشود: شلیک، جیک شلیک خودکار، تق خالی، اصابت، انفجار، انفجار بزرگ، اصابت به بازیکن، برداشتن، جان اضافه، مهمات کم، آژیر هشدار، غرش باس و جاروب آزمون LED. انفجارها نویز هستند (هر ۶ میلی‌ثانیه یک فرکانس تصادفی)؛ جلوه‌های دیگر بین دو فرکانس می‌لغزند.

۱۳.۳ آزمون LED

OPTS ← TEST سخت‌افزار را بررسی می‌کند: همهٔ LEDها روشن، سپس جاروب سطرها (اول نوارهای وضعیت)، جاروب ستون‌ها و یک صفحهٔ شطرنجی، همراه با بوق‌های رو به بالا. یک LED یا سیم خراب به‌راحتی پیدا می‌شود.

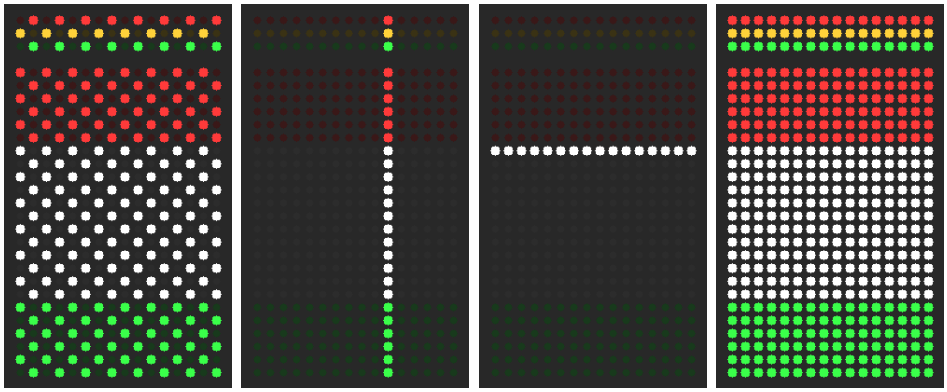

شکل ۱۸: آزمون *LED*.

۱۴.۳ پایداری و اندازه‌گیری‌ها

- **هیچ چیز مسدود نمی‌کند:** در بازی هیچ `delay()` وجود ندارد. هر ۲۰ میلی‌ثانیه یک تصویر تازه ساخته می‌شود و هر بخش برنامه در هر تصویر یک گام کوچک برمی‌دارد. بازی ساعت خودش (`gameMs`) را دارد که هنگام مکث می‌ایستد.
- **صفحه‌نمایش:** وقفهٔ Timer2 تصویر را هر کاری که کد بازی انجام دهد نشان می‌دهد؛ ۳٪ پردازنده.
- **سرعت شبیه‌سازی:** تایمرها با کلاک‌های کُند کار می‌کنند و تایمرهای بی‌استفاده متوقف می‌شوند، چون Wokwi برای هر شمارش تایمر وقت صرف می‌کند. اندازه‌گیری: حدود ۹۳٪ زمان واقعی هنگام لوگو و ۹۱٪ وقتی همهٔ LEDها روشن‌اند.
- **حافظه:** فقط آرایه‌های با اندازهٔ ثابت (بدون `malloc`)، پس هیچ چیز وسط بازی تمام نمی‌شود. ۳۳ کیلوبایت از ۲۴۸ کیلوبایت فلش و ۲٫۰ کیلوبایت از ۸ کیلوبایت RAM استفاده شده؛ فونت‌ها، تصاویر پیکسلی، موسیقی و فهرست‌های ورود در فلش نگه داشته می‌شوند.
- **انصاف:** حداکثر ۴ تا ۶ دشمن همزمان، بدون شلیک از فاصلهٔ نزدیک، وقتی مهمات کم شود همیشه یک جعبه می‌آید و برنده شدن در هر مرحله بررسی شده است.

۱۵.۳ آزمون‌ها

علاوه بر بازی در Wokwi، کد واقعی بازی همراه با یک جایگزین کوچک برای آردوینو (رجیسترها به صورت متغیر، ساعت شبیه‌سازی‌شده، صفحه‌کلید شبیه‌سازی‌شده) روی رایانه کامپایل می‌شود. اسکریپت‌های آزمون کلید می‌زنند و خروجی Serial و صفحه را بررسی می‌کنند، پس یک بازی کامل در کمتر از یک ثانیه اجرا می‌شود. یک **خلبان خودکار** که مثل یک بازیکن محتاط بازی می‌کند برای بررسی برنده‌شدنی بودن هر مرحله و تنظیم سختی به کار رفت.

آزمون	چه چیزی را بررسی می‌کند	نتیجه
controls	ضربهٔ کوتاه، سُر خوردن، محدودهٔ سطرها، تک‌شلیک، آهنگ شلیک خودکار، لغو شلیک با حرکت، سُر نخوردن هنگام شلیک	قبول
screens	رد کردن لوگو، عنوان، منو، آشیانه، تنظیمات، آزمون LED، بهترین امتیاز، مکث، پایان بازی و رکورد تازه، کلیدهای سراسری، خاموش و روشن کردن (EEPROM)، نمایش خودکار	قبول
playthrough	هر سه مرحله و باس‌ها، شکل دوم VOID KING، پیروزی	قبول
balance	خلبان خودکار بدون سپر که فقط هر ۲۵۰ میلی‌ثانیه واکنش نشان می‌دهد (تقریباً مثل انسان)، ۴۸ بازی برای هر سختی	EASY ۴۷ از ۴۸، NORMAL ۳۸ از ۴۸، HARD ۲۷ از ۴۸ برد
اجرای QA	چهار عامل آزمون همهٔ بخش‌ها را بازی و تحت فشار آزمایش کردند (بیش از ۱۰۰۰ بازی و اجرای کلیدهای تصادفی)	بدون کرش یا گیر کردن؛ یافته‌ها رفع یا فهرست شدند

جدول ۱۲: آزمون‌های خودکار.

فرمان‌های آزمون Serial (در ترمینال Wokwi تایپ می‌شوند و با ! شروع می‌شوند) به آزمون کمک می‌کنند: !d صفحه را به صورت متن نشان می‌دهد، !s وضعیت بازی را، !1 تا !3 از یک مرحله شروع می‌کنند، !b مستقیم به باس می‌رود، !i سپر می‌دهد و !x خلبان خودکار را روشن می‌کند.

۴. کد پروژه

برنامه به زبان C++ برای Arduino Mega نوشته شده است (توابع هستهٔ آردوینو، به‌علاوهٔ دسترسی مستقیم به رجیسترها هر جا سرعت یا زمان‌بندی لازم بوده؛ بدون کتابخانه). برنامه یک اسکچ است، `void_runner.ino`، با یک فایل سرآیند برای هر ماژول؛ در Wokwi هر فایل یک زبانه است. همهٔ فایل‌ها با هم به صورت یک واحد کامپایل می‌شوند. منطق بازی در گام‌های ۲۰ میلی‌ثانیه‌ای پیش می‌رود؛ صفحه‌نمایش و صدا روی تایمرهای سخت‌افزاری اجرا می‌شوند.


فایل	محتوا	خط
void_runner.ino	فایل اصلی	۲۸۳
config.h	تنظیمات	۴۳
pins.h	شمارهٔ پایه‌ها (تولیدشده)	۳۹
display.h	صفحه‌نمایش LED	۲۴۳
input.h	صفحه‌کلید	۷۴
sound.h	موتور صدا	۲۴۴
tunes.h	آهنگ‌ها و جلوه‌های صوتی	۲۰۱
storage.h	EEPROM: تنظیمات و بهترین امتیاز	۶۴
font.h	فونت‌ها (تولیدشده)	۹۹
art.h	تصاویر پیکسلی	۱۴۷
logo.h	لوگوی شروع و ملودی خوشامد	۱۶۱
title.h	صفحهٔ عنوان	۳۴
menu.h	منوی اصلی	۵۳
world.h	همهٔ چیزهای روی صفحهٔ بازی	۲۶۸
player.h	سفینهٔ بازیکن	۱۴۳
enemies.h	دشمن‌ها و سنگ‌ها	۱۶۷
levels.h	سه مرحله	۸۹
boss.h	باس‌ها	۲۰۰
game.h	یک بازی	۵۳۶
autopilot.h	خلبان خودکار	۱۴۳
screens.h	صفحه‌های دیگر	۳۱۹
جمع		**۳۵۵۰**

جدول ۱۳: فایل‌های برنامه.

هر فایل در ادامه با یک توضیح کوتاه و فهرست توابعش (برگرفته از توضیحی که بالای هر تابع نوشته شده) شروع می‌شود و پس از آن کد کامل آن می‌آید.

۱.۴ void_runner.ino – فایل اصلی

اسکچی که Wokwi کامپایل می‌کند؛ همهٔ فایل‌های دیگر زبانه‌های آن هستند (یک واحد ترجمه). `setup()` تایمرهای بی‌استفاده را متوقف می‌کند، صفحه، صفحه‌کلید و صدا را راه می‌اندازد و تنظیمات ذخیره‌شده را بار می‌کند. `loop()` هر ۲۰ میلی‌ثانیه یک تصویر می‌سازد: کلیدها را می‌خواند، کلیدهای سراسری M و B را رسیدگی می‌کند، صفحهٔ فعلی را اجرا می‌کند و صدا را پخش می‌کند. صفحه‌ها یک ماشین حالت می‌سازند (لوگو ← عنوان ← منو ← بازی ← مکث / پایان بازی / پیروزی ...): هر تابع صفحه، صفحهٔ بعدی را برمی‌گرداند. فرمان‌های آزمون Serial (`!d`، `!s` و ...) هم اینجا رسیدگی می‌شوند.

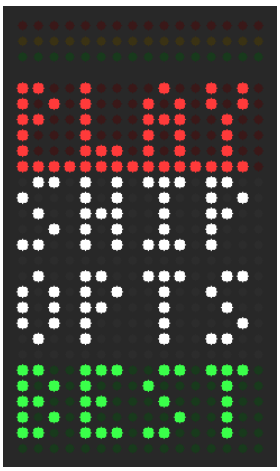

شکل ۱۹: آنچه *void_runner.ino* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
goTo(Screen next)	به صفحهٔ دیگری می‌رود: زمان باز شدنش را به خاطر می‌سپارد، آن را ثبت می‌کند و کاری را که آن صفحه اول لازم دارد انجام می‌دهد (شروع موسیقی لوگو، قطع صداها، ذخیرهٔ امتیاز، ...).
globalKeys()	کلیدهایی که در همهٔ صفحه‌ها کار می‌کنند: B = روشنایی، M = روشن/خاموش کردن صدا (هر دو ذخیره می‌شوند).
serialCommands()	فرمان‌های آزمون Serial با ‹!› شروع می‌شوند، پس حروفی که اشتباهی در ترمینال Wokwi تایپ شوند کاری نمی‌کنند (معمولاً یعنی صفحه‌کلید به جای دکمه‌ها با ترمینال حرف می‌زند): !d چاپ صفحه به صورت متن · !s چاپ وضعیت بازی · !3 !2 !1 شروع بازی از مرحلهٔ ۱، ۲ یا ۳ · !b رفتن به باس · !w باس همهٔ جانش را از دست می‌دهد · !i روشن/خاموش کردن سپر (بدون اصابت) · !x روشن/خاموش کردن خلبان خودکار · !f روشن/خاموش کردن حالت سریع (۸ گام بازی در هر تصویر) · !k از دست دادن آخرین جان
drawScreen(uint32_t now)	یک تصویر از صفحهٔ فعلی: کلیدهایش را رسیدگی می‌کند، آن را می‌کشد و هر وقت لازم باشد به صفحهٔ دیگری می‌رود (ماشین حالت صفحه‌ها).
setup()	یک بار هنگام روشن شدن اجرا می‌شود: Serial، صفحهٔ LED، صفحه‌کلید، بازرها و تنظیمات ذخیره‌شده، سپس لوگوی شروع.
loop()	پیوسته اجرا می‌شود: صفحه‌کلید را می‌خواند، موسیقی را ادامه می‌دهد، فرمان‌های آزمون را می‌خواند و هر ۲۰ میلی‌ثانیه یک تصویر تازه می‌کشد.

کد منبع

```
/*
 * VOID RUNNER -- a vertical space shooter on an Arduino Mega.
 *
 * Hardware (see diagram.json; pins.h is generated with it by tools/gen_circuit.py):
 *   - 16 x 24 game screen + 3 status bars, 432 single LEDs in one row/column matrix
 *   - 3 x 3 keypad of single push buttons (W A S D move, R fire / OK, Q back,
 *     P pause, M sound on/off, B brightness)
 *   - 4 buzzers, one hardware timer each: lead, bass, effects, rhythm guitar
 *
 * Code tabs:
 *   config.h    settings              display.h  LED screen, drawing, text
 *   input.h     keypad                sound.h    buzzers, music engine, effects
 *   tunes.h     songs and effects     storage.h  settings + high score in EEPROM
```

```
 *   art.h      pixel art             font.h     two pixel fonts (generated)
 *   logo.h     start-up logo         title.h    title screen
 *   menu.h     main menu             screens.h  hangar, options, best, pause, end screens
 *   world.h    everything on the game screen (player, shots, enemies, boss ...)
 *   player.h   the player's ship     enemies.h  enemy and rock behaviour
 *   boss.h     the three bosses      levels.h   the three phases (spawn lists)
 *   game.h     one game: phases, collisions, status bars
 *   autopilot.h  the ship flies itself (the title screen's demo, automatic tests)
 *
 * This file: the screen state machine, the Serial test commands and the main loop.
 */
#include "pins.h"
#include "config.h"
#include "display.h"
#include "input.h"
#include "sound.h"
#include "storage.h"
#include "logo.h"
#include "title.h"
#include "menu.h"
#include "game.h"
#include "screens.h"

Screen screen = SCR_LOGO;
uint32_t screenStart = 0;                // when the current screen started (ms)
uint16_t frameNo = 0;                    // counts pictures, for blinking
uint32_t frameWorkUs = 0, frameWorkMaxUs = 0;   // CPU time of one picture (test info)
const uint32_t DEMO_AFTER_MS = 20000;    // title screen untouched this long: demo game

const char SCREEN_NAMES[][9] PROGMEM = {
  "logo", "title", "menu", "hangar", "options", "best",
  "game", "pause", "gameover", "victory", "ledtest"
};

// Switches to another screen: remembers when it opened, logs it, and does what that
// screen needs first (start the logo music, stop sounds, save the score, ...).
void goTo(Screen next) {
  Screen from = screen;
  screen = next;
  screenStart = millis();
  Serial.print(F("[VR] screen "));
  Serial.println((const __FlashStringHelper*)SCREEN_NAMES[next]);
  switch (next) {
    case SCR_LOGO:     logoBegin(); break;
    case SCR_TITLE:
      soundStop();
      if (demoMode) {                    // the demo ends
        demoMode = false;
        autopilot = false;
      }
      break;
    case SCR_MENU:
      if (from == SCR_PAUSE || from == SCR_GAMEOVER || from == SCR_VICTORY) soundStop();
      break;
    case SCR_HANGAR:   hangarBegin(); break;
    case SCR_PAUSE:    soundStop(); break;
    case SCR_GAME:
      if (from == SCR_PAUSE) playStageMusic();   // a new game is started by gameStart()
      break;
    case SCR_GAMEOVER:
      recordScore(game.phase + 1);
      soundPlaySong(SONG_GAMEOVER, 150, false);
      break;
    case SCR_VICTORY:
      recordScore(4);
      nextFirework = 0;
      soundPlaySong(SONG_VICTORY, 100, false);
      Serial.print(F("[VR] victory score="));
      Serial.println(player.score);
      break;
    case SCR_LEDTEST:  soundSfx(SFX(SFX_TEST), 5); break;
    default: break;
  }
}

// Keys that work on every screen: B = brightness, M = sound on/off (both saved).
void globalKeys() {
  if (keyPressed(KEY_BRIGHTNESS)) {
    settings.brightness = (settings.brightness + 1) % sizeof(BRIGHTNESS_LEVELS);
    applyBrightness();
    settingsSave();
    soundBeep(1200, 40);
    Serial.print(F("[VR] brightness "));
    Serial.println(BRIGHTNESS_LEVELS[settings.brightness]);
```

```
  }
  if (keyPressed(KEY_MUTE)) {
    settings.muted = !settings.muted;
    soundSetMuted(settings.muted);
    settingsSave();
    soundBeep(1200, 40);
    Serial.println(settings.muted ? F("[VR] sound off") : F("[VR] sound on"));
  }
}

// Test commands over Serial start with '!', so letters typed by mistake into the Wokwi
// terminal do nothing (they usually mean the keyboard is talking to the terminal
// instead of the buttons):
//   !d  print the screen as text      !s  print the game state
//   !1 !2 !3  start a game at phase 1, 2 or 3
//   !b  skip to the boss              !w  the boss loses all its health
//   !i  shield on/off (no hits)       !x  autopilot on/off
//   !f  fast mode on/off (8 game steps per picture)
//   !k  lose the last life
void serialCommands() {
  static bool command = false;
  while (Serial.available() > 0) {
    char c = Serial.read();
    if (c == '!') {
      command = true;
      continue;
    }
    if (!command) {
      if (isAlpha(c))
        Serial.println(F("[VR] keys are going to the Serial terminal: click an empty spot of the circuit"));
      continue;
    }
    command = false;
    bool inGame = screen == SCR_GAME;
    switch (c) {
      case 'd': displayDump(); break;
      case 's':
        gamePrintState();
        Serial.print(F("[VR] frame work us="));
        Serial.print(frameWorkUs);
        Serial.print(F(" max="));
        Serial.println(frameWorkMaxUs);
        frameWorkMaxUs = 0;
        break;
      case '1': case '2': case '3':
        gameStart(c - '1');
        goTo(SCR_GAME);
        break;
      case 'b': if (inGame) gameSkipToBoss(); break;
      case 'w': if (inGame && game.stage == GS_BOSS) boss.hp = 0; break;
      case 'i':
        testShield = !testShield;
        Serial.println(testShield ? F("[VR] shield on") : F("[VR] shield off"));
        break;
      case 'x':
        autopilot = !autopilot;
        Serial.println(autopilot ? F("[VR] autopilot on") : F("[VR] autopilot off"));
        break;
      case 'f':
        gameSpeed = gameSpeed == 1 ? 8 : 1;
        Serial.println(gameSpeed > 1 ? F("[VR] fast on") : F("[VR] fast off"));
        break;
      case 'k':
        if (inGame && player.lives) {
          testShield = false;
          player.shieldUntil = 0;
          player.lives = 1;
          playerHit(F("test"));
        }
        break;
    }
  }
}

// One picture of the current screen: handles its keys, draws it and switches to another
// screen when needed (the screen state machine).
void drawScreen(uint32_t now) {
  uint32_t t = now - screenStart;
  Screen next = screen;
  switch (screen) {
    case SCR_LOGO: {
      uint16_t skipKeys = keysPressed & ~(keyBit(KEY_BRIGHTNESS) | keyBit(KEY_MUTE));
      if (logoUpdate(frameNo) || skipKeys) next = SCR_TITLE;   // any other key skips the logo
      break;
```

```
    }
    case SCR_TITLE:
      titleDraw(t, frameNo);
      if (keyPressed(KEY_FIRE)) {
        soundBeep(2000, 60);
        next = SCR_MENU;
      } else if (t >= DEMO_AFTER_MS) {   // nobody is playing: show a demo game
        demoMode = true;
        autopilot = true;
        gameStart(0);
        next = SCR_GAME;
        Serial.println(F("[VR] demo"));
      }
      break;
    case SCR_MENU: {
      int8_t choice = menuUpdate();
      if (choice == MENU_BACK) next = SCR_TITLE;
      else if (choice == MENU_ITEM_PLAY) {
        gameStart(0);
        next = SCR_GAME;
      }
      else if (choice == MENU_ITEM_SHIP) next = SCR_HANGAR;
      else if (choice == MENU_ITEM_OPTS) next = SCR_OPTIONS;
      else if (choice == MENU_ITEM_BEST) next = SCR_BEST;
      else menuDraw();
      break;
    }
    case SCR_HANGAR:   next = hangarFrame(now, frameNo); break;
    case SCR_OPTIONS:  next = optionsFrame(frameNo); break;
    case SCR_BEST:     next = bestFrame(frameNo); break;
    case SCR_GAME: {
      if (demoMode) {                    // demo: any key (but B and M) goes back to the title
        uint16_t anyKey = keysPressed & ~(keyBit(KEY_BRIGHTNESS) | keyBit(KEY_MUTE));
        if (anyKey || gameFrame(frameNo) != GAME_ON) next = SCR_TITLE;
        break;
      }
      if (keyPressed(KEY_PAUSE) || keyPressed(KEY_BACK)) {
        next = SCR_PAUSE;
        break;
      }
      GameResult result = gameFrame(frameNo);
      if (result == GAME_OVER) next = SCR_GAMEOVER;
      if (result == GAME_WON) next = SCR_VICTORY;
      break;
    }
    case SCR_PAUSE:
      pauseDraw(t, frameNo);
      if (keyPressed(KEY_PAUSE) || keyPressed(KEY_FIRE)) next = SCR_GAME;
      if (keyPressed(KEY_BACK)) {
        recordScore(game.phase + 1);
        next = SCR_MENU;
      }
      break;
    case SCR_GAMEOVER: next = gameOverFrame(t, frameNo); break;
    case SCR_VICTORY:  next = victoryFrame(t); break;
    case SCR_LEDTEST:  next = ledTestFrame(t); break;
  }
  if (next != screen) goTo(next);
}

// Runs once at power-on: Serial, LED screen, keypad, buzzers and the saved settings,
// then the start-up logo.
void setup() {
  Serial.begin(115200);
  displayBegin();
  inputBegin();
  soundBegin();
  settingsLoad();
  applyBrightness();
  soundSetMuted(settings.muted);
  randomSeed(analogRead(A15) ^ micros());
  Serial.println(F("[VR] VOID RUNNER"));
  Serial.print(F("[VR] saved: best="));
  Serial.print(settings.best);
  Serial.print(F(" ship="));
  Serial.print(settings.ship);
  Serial.print(F(" difficulty="));
  Serial.println(settings.difficulty);
  Serial.println(F("[VR] ready"));
  goTo(SCR_LOGO);
}

// Runs over and over: reads the keypad, keeps the music going, reads test commands, and
// every 20 ms draws a new picture.
```

```
void loop() {
  uint32_t now = millis();
  inputUpdate(now);
  soundUpdate(now);
  serialCommands();
  static uint32_t lastFrame = 0;
  if (now - lastFrame >= FRAME_MS) {     // one new picture every 20 ms
    lastFrame = now;
    frameNo++;
    uint32_t workStart = micros();
    globalKeys();
    drawScreen(now);
    present();
    inputEndFrame();
    frameWorkUs = micros() - workStart;
    if (frameWorkUs > frameWorkMaxUs) frameWorkMaxUs = frameWorkUs;
  }
}
```

۲.۴ config.h – تنظیمات

همهٔ تنظیمات در یک جا: زمان هر تصویر، نام کلیدها، فهرست صفحه‌ها، جدول‌های سختی (جان‌ها، سرعت شلیک دشمن، جان باس، مهمات هر جعبه) و ثابت‌های بازی مانند تعداد جان‌ها و جایزهٔ مرحله. برای تغییر تعادل بازی فقط همین فایل لازم است.

کد منبع

```
/*
 * config.h -- settings of VOID RUNNER in one place (timing, keys, game balance).
 */
#pragma once
#include <Arduino.h>

// ---- timing
const uint8_t FRAME_MS    = 20;           // a new picture is drawn every 20 ms (50 per second)
const uint8_t REFRESH_HZ = 71;            // the LED matrix is scanned 71 times per second

// ---- brightness levels (key B): % of its time slot that each LED row stays lit
const uint8_t BRIGHTNESS_LEVELS[] = {100, 50, 20};

// ---- keys (labels of the keypad buttons = PC keyboard keys)
const char KEY_UP = 'W', KEY_LEFT = 'A', KEY_DOWN = 'S', KEY_RIGHT = 'D';
const char KEY_FIRE = 'R';                // fire, and "OK" in menus
const char KEY_BACK = 'Q';
const char KEY_PAUSE = 'P';
const char KEY_MUTE = 'M';
const char KEY_BRIGHTNESS = 'B';

// ---- the screens of the game
enum Screen : uint8_t {
  SCR_LOGO, SCR_TITLE, SCR_MENU, SCR_HANGAR, SCR_OPTIONS, SCR_BEST,
  SCR_GAME, SCR_PAUSE, SCR_GAMEOVER, SCR_VICTORY, SCR_LEDTEST
};


// ---- difficulty (OPTS): lives at the start, enemy fire speed, ammo per pack
enum Difficulty : uint8_t { DIFF_EASY, DIFF_NORMAL, DIFF_HARD };
const uint8_t DIFF_LIVES[3]      = {4, 3, 3};
const uint8_t DIFF_FIRE_SCALE[3] = {150, 100, 75};   // % of the enemy fire interval
const uint8_t DIFF_BOSS_HP[3]    = {80, 100, 130};   // % of the boss health
const uint8_t DIFF_PACK_AMMO[3]  = {20, 15, 12};

// ---- player
const uint8_t MAX_LIVES = 4;
const uint8_t LOW_AMMO = 5;               // warning beep + blinking ammo bar from here
const uint16_t MOVE_REPEAT_DELAY = 170;  // hold a move key this long before it glides
const uint16_t HIT_SHIELD_MS = 2000;      // blinking, can't be hit, after a hit
const uint8_t PLAYER_SHOT_MS = 35;        // ms per pixel of a player bullet

// ---- scoring
const uint16_t PHASE_BONUS = 100;         // x phase number, at the end of each phase
```

۳.۴ pins.h – شمارهٔ پایه‌ها (تولیدشده)

همراه با مدار توسط tools/gen_circuit.py ساخته می‌شود، پس پایه‌های کد همیشه با سیم‌های مدار یکی‌اند: ۲۷ پایهٔ سطر LED، ۱۶ پایهٔ ستون LED (بیت‌های PORTF و PORTK)، پایه‌های سطر و ستون صفحه‌کلید و چهار پایهٔ بازر.

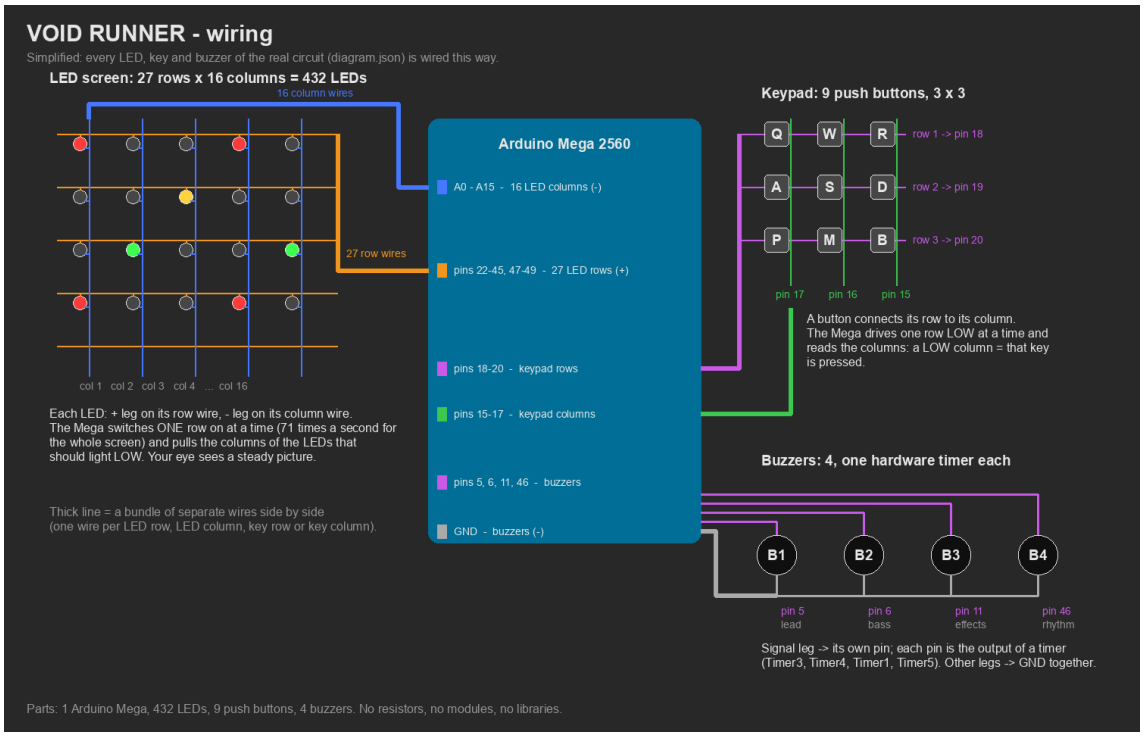

شکل ۲۰: مربوط به *pins.h*.

کد منبع

```
/*
 * pins.h -- GENERATED by tools/gen_circuit.py together with diagram.json.
 * Do not edit by hand: change the generator and run it again, so the circuit
 * and the code always match.
 */
#pragma once
#include <Arduino.h>

// ---- LED screen: 16 columns x 24 game rows + 3 status bars, one big matrix
const uint8_t SCREEN_W    = 16;
const uint8_t SCREEN_H    = 24;
const uint8_t STATUS_ROWS = 3;
const uint8_t TOTAL_ROWS  = SCREEN_H + STATUS_ROWS;

// Anode pin of every LED row: rows 0-23 = game screen top to bottom,
// rows 24-26 = status bars top to bottom (all on the double header).
const uint8_t ROW_PINS[TOTAL_ROWS] = {
  44, 45, 42, 43, 40, 41, 38, 39, 36, 37, 34, 35, 32, 33, 30, 31, 28, 29, 26, 27, 24, 25, 22, 23, 48, 49, 47
};


// Cathode pin of every LED column, left to right: column x is wired to Ax,
// so columns 0-7 are PORTF bits 0-7 and columns 8-15 are PORTK bits 0-7.
const uint8_t COL_PINS[SCREEN_W] = {
  A0, A1, A2, A3, A4, A5, A6, A7, A8, A9, A10, A11, A12, A13, A14, A15
};

// ---- 3 x 3 push-button keypad: contact 1 = row line, contact 2 = column line
const uint8_t KEY_ROWS = 3, KEY_COLS = 3;
const uint8_t KEY_ROW_PINS[KEY_ROWS] = { 18, 19, 20 };
const uint8_t KEY_COL_PINS[KEY_COLS] = { 17, 16, 15 };
const char KEY_NAMES[KEY_ROWS][KEY_COLS] = {
  {'Q', 'W', 'R'},
  {'A', 'S', 'D'},
  {'P', 'M', 'B'}
};
```

```
36
37 // ---- buzzers, each on the "A" output of its own 16-bit timer
38 const uint8_t BUZZER_COUNT = 4;
39 const uint8_t BUZZER_PINS[BUZZER_COUNT] = { 5, 6, 11, 46 };   // Timer3 OC3A, Timer4 OC4A, Timer1 OC1A,
       Timer5 OC5A
```

۴.۴ display.h – صفحه‌نمایش LED

وقفهٔ Timer2 که هر بار یک سطر LED را روشن می‌کند (۷۱ تصویر کامل در ثانیه)، تصویر در حافظه (frame) و همهٔ توابع رسم: پیکسل، مستطیل، بیت‌مپ، حروف دو فونت، عدد، صفحه‌های پیام و نوارهای وضعیت. روشنایی (۱۰۰ / ۵۰ / ۲۰ درصد) با خاموش کردن زودتر سطر در بازهٔ زمانی‌اش ساخته می‌شود.

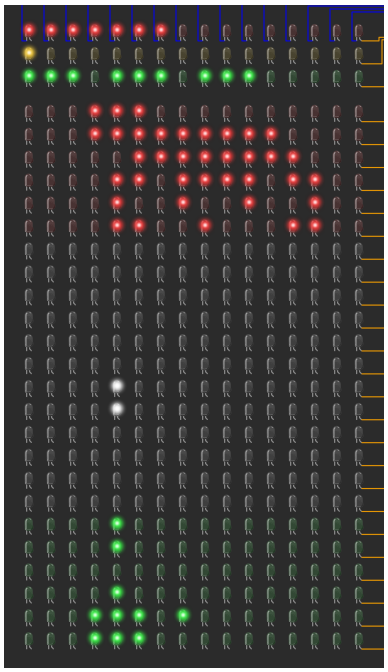

شکل ۲۱: مربوط به *display.h*.

تابع	چه کار می‌کند
displayBegin()	صفحهٔ LED را راه می‌اندازد: پایه‌های سطر و ستون خروجی با همهٔ LEDها خاموش، سپس Timer2 در حالت CTC تا وقفهٔ اسکن ۲۷ × ۷۱ بار در ثانیه اجرا شود.
displaySetBrightness(uint8_t percent)	تعیین می‌کند هر سطر چه مدت از بازهٔ زمانی خودش روشن بماند (۱۰۰ = تمام آن). زیر ۱۰۰٪، دومین تطبیق Timer2 (COMPB) سطر را زودتر خاموش می‌کند.
present()	تصویر تمام‌شده را یک‌جا به بافر اسکن کپی می‌کند تا وقفه هرگز تصویر نیمه‌کاره نشان ندهد.
clearScreen()	همهٔ LEDهای صفحهٔ بازی را در frame خاموش می‌کند (نوارهای وضعیت می‌مانند).
setPixel(int16_t x, int16_t y, bool on)	یک LED صفحهٔ بازی را در frame روشن یا خاموش می‌کند، با جابه‌جایی لرزش صفحه. پیکسل‌های بیرون صفحه نادیده گرفته می‌شوند، پس تصاویر می‌توانند از لبه‌ها بیرون بزنند.
fillRect(int16_t x, int16_t y, int16_t w, int16_t h, bool on)	یک بلوک w × h از LEDها را روشن یا خاموش می‌کند (نوارها، روبان‌ها، پاک کردن یک ناحیه).
drawBitmap(int16_t x, int16_t y, const uint16_t* rows, uint8_t w, uint8_t h, bool on)	بیت‌مپ‌ها در فلش ذخیره‌اند، یک کلمهٔ ۱۶ بیتی برای هر سطر، چپ‌ترین پیکسل = بیت بالا.
drawChar(int16_t x, int16_t y, char ch, bool big, uint8_t scale = 1)	small = فونت ۳×۵ (۴ پیکسل برای هر حرف)، big = فونت ۵×۷ (۶ پیکسل برای هر حرف). رشته‌ها در فلش نگه داشته می‌شوند: با PSTR("TEXT") صدا بزنید. یک حرف یا رقم را با گوشهٔ بالا-چپ در (x، y) می‌کشد؛ نویسه‌های ناشناخته رد می‌شوند. scale = ۲ هر پیکسل را به صورت یک بلوک ۲ × ۲ می‌کشد (شمارهٔ بزرگ مرحله).
textWidth(const char* text, bool big)	پهنای یک متن در فونت کوچک یا بزرگ بر حسب پیکسل (برای وسطچین کردن).
drawText(int16_t x, int16_t y, const char* text, bool big)	متنی از فلش را حرف به حرف می‌کشد؛ حروف بیرون از صفحه نادیده گرفته می‌شوند.
drawTextCentered(int16_t y, const char* text, bool big)	یک متن را به صورت افقی وسطچین در سطر y می‌کشد.

تابع	چه کار می‌کند
pageAt(uint32_t t, uint8_t count)	کدام صفحه از دنبالهٔ count صفحه را t میلی‌ثانیه پس از شروع نشان دهد (آخری می‌ماند).
clearRows(int16_t y, uint8_t h)	h سطر از صفحهٔ بازی را از سطر y خاموش می‌کند (زمینهٔ تمیز برای یک صفحهٔ پیام).
drawPage(const char* line1, const char* line2)	صفحه‌ای از یک یا دو خط کوتاه (از فلش) را در منطقهٔ سفید، سطرهای ۶ تا ۱۷، که اول پاک می‌شود، می‌کشد. line2 می‌تواند NULL باشد.
numberDigits(uint16_t n)	رقم‌های یک عدد را می‌شمارد (برای پهنای آن).
numberWidth(uint16_t n, bool big)	پهنای یک عدد در فونت کوچک یا بزرگ بر حسب پیکسل.
drawNumber(int16_t x, int16_t y, uint16_t n, bool big)	یک عدد را رقم به رقم از راست می‌کشد (بدون صفرهای ابتدایی).
drawNumberCentered(int16_t y, uint16_t n, bool big)	یک عدد را به صورت افقی وسطچین در سطر y می‌کشد.
drawBitmapScaled(int16_t x, int16_t y, const uint16_t* rows, uint8_t w, uint8_t h, uint8_t scale)	بیت‌مپی که scale برابر بزرگ‌تر کشیده می‌شود (پیش‌نمایش سفینه در آشیانه).
setStatusBits(uint8_t bar, uint16_t bits)	سه نوار ۱۶تایی LED بالای صفحهٔ بازی (سطرهای ۲۴، ۲۵ و ۲۶ ماتریس). هر ۱۶ LED یک نوار را یک‌جا تنظیم می‌کند (بیت x = LED x).
setStatusBar(uint8_t bar, uint8_t level)	یک نوار وضعیت را از چپ با level LED (۰ تا ۱۶) پر می‌کند، مثل یک درجه.
displayDump()	تصویر را به صورت متن از Serial چاپ می‌کند (‹#› = روشن)، اول نوارهای وضعیت. آزمون‌های خودکار از آن استفاده می‌کنند (فرمان d!).

کد منبع

```
/*
 * display.h -- the LED screen.
 *
 * 16 x 24 game screen + 3 status bars of single LEDs, wired as ONE matrix:
 * 27 rows (LED anodes, pins 22-48) and 16 columns (LED cathodes, A0-A15).
 *
 * The picture lives in `frame`: one 16-bit word per LED row, bit x = column x.
 * A Timer2 interrupt lights one row at a time; all 27 rows are shown 71 times per
 * second, so the picture stays steady whatever the game code is doing.
 *
 * Blinking: Wokwi shows each LED's brightness averaged over 100 ms, so anything that
 * should visibly blink stays on and off for longer than that (frameNo & 8 = 160 ms).
 */
#pragma once
#include "pins.h"
#include "config.h"
#include "font.h"

uint16_t frame[TOTAL_ROWS];              // the game draws here
volatile uint16_t shown[TOTAL_ROWS];     // the scan interrupt shows this copy
volatile uint8_t scanRow = 0;            // row that is lit right now
const uint8_t SCAN_TICK_US = 16;         // Timer2 runs at 16 MHz / 256

// ============================================================== scanning
// Every Timer2 match: old row off, columns of the next row, next row on.
// Column x is wired to pin Ax, so A0-A7 are the bits of PORTF and A8-A15 the bits of
// PORTK: 8 columns are written in one instruction (12 us per row instead of 140 us with
// digitalWrite, measured in Stage 0).
ISR(TIMER2_COMPA_vect) {
  uint8_t row = scanRow;
  digitalWrite(ROW_PINS[row], LOW);
  row = (row + 1 == TOTAL_ROWS) ? 0 : row + 1;
  uint16_t bits = shown[row];
  PORTF = (uint8_t)~lowByte(bits);       // a LOW column lights its LED
  PORTK = (uint8_t)~highByte(bits);
  digitalWrite(ROW_PINS[row], HIGH);
  scanRow = row;
}

// Brightness: a second match part way through the time slot switches the row off early.
ISR(TIMER2_COMPB_vect) {
  digitalWrite(ROW_PINS[scanRow], LOW);
}

// Starts the LED screen: row and column pins as outputs with every LED off, then Timer2
// in CTC mode, so the scan interrupt runs 27 x 71 times per second.
void displayBegin() {
  for (uint8_t r = 0; r < TOTAL_ROWS; r++) {
    pinMode(ROW_PINS[r], OUTPUT);
```

```
    digitalWrite(ROW_PINS[r], LOW);
  }
  for (uint8_t x = 0; x < SCREEN_W; x++) {
    pinMode(COL_PINS[x], OUTPUT);
    digitalWrite(COL_PINS[x], HIGH);
  }
  TCCR2A = _BV(WGM21);                  // CTC mode: count 0..OCR2A, then start again
  TCCR2B = _BV(CS22) | _BV(CS21);       // prescaler 256: one count = 16 us
  OCR2A = 1000000UL / ((uint32_t)REFRESH_HZ * TOTAL_ROWS * SCAN_TICK_US) - 1;
  TIMSK2 = _BV(OCIE2A);
}

// Sets how long each row stays lit inside its time slot (100 = all of it). Below 100 %
// the second Timer2 match (COMPB) switches the row off early.
void displaySetBrightness(uint8_t percent) {
  if (percent >= 100) {
    TIMSK2 &= ~_BV(OCIE2B);
    return;
  }
  OCR2B = (uint16_t)(OCR2A + 1) * percent / 100;
  TIMSK2 |= _BV(OCIE2B);
}

// Copies the finished picture to the scan buffer in one go, so the interrupt never
// shows a half-drawn picture.
void present() {
  noInterrupts();
  for (uint8_t r = 0; r < TOTAL_ROWS; r++) shown[r] = frame[r];
  interrupts();
}

// ============================================================== drawing (game screen)
// Switches off every LED of the game screen in `frame` (the status bars stay).
void clearScreen() {
  for (uint8_t y = 0; y < SCREEN_H; y++) frame[y] = 0;
}

int8_t shakeX = 0, shakeY = 0;          // screen shake: everything is drawn shifted

// Turns one LED of the game screen on or off in `frame`, shifted by the screen shake.
// Pixels outside the screen are ignored, so sprites may stick out at the edges.
void setPixel(int16_t x, int16_t y, bool on) {
  x += shakeX;
  y += shakeY;
  if (x < 0 || x >= SCREEN_W || y < 0 || y >= SCREEN_H) return;
  if (on) frame[y] |= 1u << x;
  else frame[y] &= ~(1u << x);
}

// Turns a w x h block of LEDs on or off (bars, ribbons, clearing an area).
void fillRect(int16_t x, int16_t y, int16_t w, int16_t h, bool on) {
  for (int16_t j = y; j < y + h; j++)
    for (int16_t i = x; i < x + w; i++) setPixel(i, j, on);
}

// Bitmaps are stored in flash, one 16-bit word per row, leftmost pixel = top bit.
void drawBitmap(int16_t x, int16_t y, const uint16_t* rows, uint8_t w, uint8_t h, bool on) {
  for (uint8_t r = 0; r < h; r++) {
    uint16_t bits = pgm_read_word(rows + r);
    for (uint8_t c = 0; c < w; c++)
      if (bits & (0x8000u >> c)) setPixel(x + c, y + r, on);
  }
}

// ================================================================ text
// small = 3x5 font (4 pixels per letter), big = 5x7 font (6 pixels per letter).
// Strings are kept in flash: call with PSTR("TEXT").
// Draws one letter or digit with its top-left at (x, y); unknown characters are skipped.
// scale = 2 draws every pixel as a 2 x 2 block (the big phase number).
void drawChar(int16_t x, int16_t y, char ch, bool big, uint8_t scale = 1) {
  const char* chars = big ? FONT5x7_CHARS : FONT3x5_CHARS;
  const char* hit = ch ? strchr_P(chars, ch) : NULL;
  if (!hit) return;
  uint8_t w = big ? 5 : 3, h = big ? 7 : 5;
  const uint8_t* glyph = (big ? FONT5x7 : FONT3x5) + (hit - chars) * w;
  for (uint8_t c = 0; c < w; c++) {
    uint8_t bits = pgm_read_byte(glyph + c);
    for (uint8_t r = 0; r < h; r++)
      if (bits & (1 << r)) fillRect(x + c * scale, y + r * scale, scale, scale, true);
  }
}

// Width in pixels of a text in the small or big font (for centring).
int16_t textWidth(const char* text, bool big) {
```

```
  uint8_t n = strlen_P(text);
  return n ? n * (big ? 6 : 4) - 1 : 0;
}

// Draws a text from flash, letter by letter; letters outside the screen are skipped.
void drawText(int16_t x, int16_t y, const char* text, bool big) {
  uint8_t step = big ? 6 : 4;
  for (const char* p = text; char ch = pgm_read_byte(p); p++, x += step)
    if (x > -step && x < SCREEN_W) drawChar(x, y, ch, big);
}

// Draws a text centred horizontally at row y.
void drawTextCentered(int16_t y, const char* text, bool big) {
  drawText((SCREEN_W - textWidth(text, big)) / 2, y, text, big);
}

// ================================================================ pages
// Messages are shown as still "pages" of short words (up to 4 small letters per line),
// one after another, never as scrolling text: Wokwi averages each LED's brightness, so
// moving letters smear into a white block that nobody can read.
const uint16_t PAGE_MS = 900;            // how long one page stays

// Which page of a sequence of `count` pages to show t ms after it started (the last one
// stays).
uint8_t pageAt(uint32_t t, uint8_t count) {
  uint32_t page = t / PAGE_MS;
  return page < count ? page : count - 1;
}

// Switches off h rows of the game screen from row y (a clean background for a page).
void clearRows(int16_t y, uint8_t h) {
  fillRect(0, y, SCREEN_W, h, false);
}

// Draws a page of one or two short lines (from flash) in the white zone, rows 6-17,
// which is cleared first. line2 may be NULL.
void drawPage(const char* line1, const char* line2) {
  clearRows(6, 12);
  if (line2) {
    drawTextCentered(7, line1, false);
    drawTextCentered(13, line2, false);
  } else {
    drawTextCentered(10, line1, false);
  }
}

// ================================================================ numbers
// Counts the digits of a number (for its width).
uint8_t numberDigits(uint16_t n) {
  uint8_t d = 1;
  while (n >= 10) {
    n /= 10;
    d++;
  }
  return d;
}

// Width in pixels of a number in the small or big font.
int16_t numberWidth(uint16_t n, bool big) {
  return numberDigits(n) * (big ? 6 : 4) - 1;
}

// Draws a number digit by digit, starting from the right (no leading zeros).
void drawNumber(int16_t x, int16_t y, uint16_t n, bool big) {
  uint8_t step = big ? 6 : 4;
  for (int8_t i = numberDigits(n) - 1; i >= 0; i--) {
    drawChar(x + i * step, y, '0' + n % 10, big);
    n /= 10;
  }
}


// Draws a number centred horizontally at row y.
void drawNumberCentered(int16_t y, uint16_t n, bool big) {
  drawNumber((SCREEN_W - numberWidth(n, big)) / 2, y, n, big);
}

// Bitmap drawn `scale` times bigger (ship preview in the hangar).
void drawBitmapScaled(int16_t x, int16_t y, const uint16_t* rows, uint8_t w, uint8_t h, uint8_t scale) {
  for (uint8_t r = 0; r < h; r++) {
    uint16_t bits = pgm_read_word(rows + r);
    for (uint8_t c = 0; c < w; c++)
      if (bits & (0x8000u >> c)) fillRect(x + c * scale, y + r * scale, scale, scale, true);
  }
}
```

```
218
219 // ================================================================ status bars
220 // Three bars of 16 LEDs above the game screen (matrix rows 24, 25, 26).
221 // Sets all 16 LEDs of one bar at once (bit x = LED x).
222 void setStatusBits(uint8_t bar, uint16_t bits) {
223   frame[SCREEN_H + bar] = bits;
224 }
225
226 // Fills a status bar from the left with `level` LEDs (0-16), like a gauge.
227 void setStatusBar(uint8_t bar, uint8_t level) {
228   setStatusBits(bar, level >= 16 ? 0xFFFF : (uint16_t)((1u << level) - 1));
229 }
230
231 // ================================================================ test helper
232 // Prints the picture as text over Serial ('#' = on), status bars first. Used by the
233 // automatic tests (command !d).
234 void displayDump() {
235   Serial.println(F("[DUMP] begin"));
236   for (uint8_t i = 0; i < TOTAL_ROWS; i++) {
237     uint8_t r = (i < STATUS_ROWS) ? SCREEN_H + i : i - STATUS_ROWS;   // top to bottom
238     if (i == STATUS_ROWS) Serial.println(F("----------------"));
239     for (uint8_t x = 0; x < SCREEN_W; x++) Serial.print(frame[r] & (1u << x) ? '#' : '.');
240     Serial.println();
241   }
242   Serial.println(F("[DUMP] end"));
243 }
```

۵.۴ input.h – صفحه‌کلید

ماتریس دکمه‌های ۳ × ۳ را سطر به سطر، همان‌طور که در درس آموزش داده شده، می‌خواند و لرزش هر کلید را حذف می‌کند. به خاطر می‌سپارد کدام کلیدها نگه داشته شده‌اند و کدام همین الان فشرده یا رها شده‌اند، تا بخش‌های دیگر بتوانند بپرسند «آیا R همین الان فشرده شد؟» یا «آیا D نگه داشته شده؟».

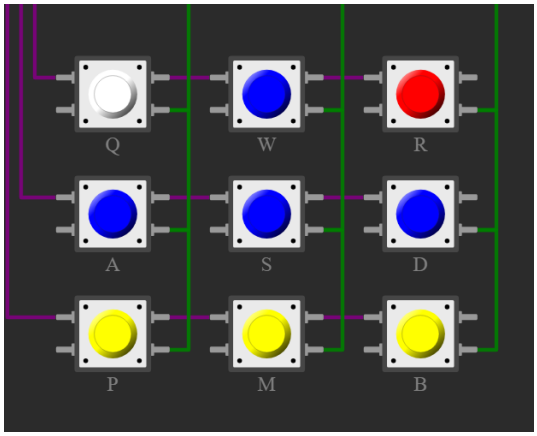

شکل ۲۲: مربوط به *input.h*.

تابع	چه کار می‌کند
inputBegin()	پایه‌های صفحه‌کلید را آماده می‌کند: سطرها خاموش (INPUT)، ستون‌ها با مقاومت pull-up.
keyBit(char key)	بیت یک کلید (بر اساس برچسبش، مثلاً ‹R›) در keysHeld و keysPressed.
keyHeld(char key)	تا وقتی کلید نگه داشته شده true.
keyPressed(char key)	فقط در تصویری که کلید پایین رفت true (یک فشار = یک کار).
inputEndFrame()	فشردن کلیدهای این تصویر را فراموش می‌کند (در پایان هر تصویر صدا زده می‌شود).
readKeys()	کل صفحه‌کلید را یک بار می‌خواند: هر بار یک سطر را LOW می‌کند و سه ستون را می‌خواند. برای هر کلید فشرده یک بیت برمی‌گرداند (اینجا حذف لرزش انجام نمی‌شود).
inputUpdate(uint32_t now)	صفحه‌کلید را هر ۵ میلی‌ثانیه می‌خواند. تغییر فقط وقتی حساب می‌شود که کلیدها چهار بار پشت سر هم یکسان خوانده شوند: این کار لرزش تماسی را که شبیه‌سازی Wokwi می‌کند پنهان می‌کند.

کد منبع

```
/*
 * input.h -- the 3 x 3 push-button keypad (the 9 keys of the game).
 *
 * Same method as the course: drive one row LOW and read the three columns
 * (INPUT_PULLUP, so a pressed key reads LOW). Rows that are not being read are set to
 * INPUT instead of HIGH: with two keys of one column pressed, a HIGH and a LOW output
 * would otherwise be shorted together through the buttons.
 */
#pragma once
#include "pins.h"

uint16_t keysHeld = 0;                  // debounced: bit (row * 4 + column) = key is down
uint16_t keysPressed = 0;               // keys that went down since the last picture

// Sets up the keypad pins: rows switched off (INPUT), columns with pull-up resistors.
void inputBegin() {
  for (uint8_t r = 0; r < KEY_ROWS; r++) pinMode(KEY_ROW_PINS[r], INPUT);
  for (uint8_t c = 0; c < KEY_COLS; c++) pinMode(KEY_COL_PINS[c], INPUT_PULLUP);
}

// The bit of a key (by its label, e.g. 'R') in keysHeld and keysPressed.
uint16_t keyBit(char key) {
  for (uint8_t i = 0; i < KEY_ROWS * KEY_COLS; i++)
    if (KEY_NAMES[i / KEY_COLS][i % KEY_COLS] == key) return 1u << i;
  return 0;
}
```

```


// True while the key is held down.
bool keyHeld(char key) { return keysHeld & keyBit(key); }
// True only in the picture in which the key went down (one press = one action).
bool keyPressed(char key) { return keysPressed & keyBit(key); }
// Forgets this picture's key presses (called at the end of every picture).
void inputEndFrame() { keysPressed = 0; }

// Reads the whole keypad once: drives one row LOW at a time and reads the three columns.
// Returns one bit per key that is down (no debouncing here).
uint16_t readKeys() {
  uint16_t mask = 0;
  for (uint8_t r = 0; r < KEY_ROWS; r++) {
    pinMode(KEY_ROW_PINS[r], OUTPUT);
    digitalWrite(KEY_ROW_PINS[r], LOW);
    delayMicroseconds(5);                // let the line settle
    for (uint8_t c = 0; c < KEY_COLS; c++)
      if (digitalRead(KEY_COL_PINS[c]) == LOW) mask |= 1u << (r * KEY_COLS + c);
    pinMode(KEY_ROW_PINS[r], INPUT);
  }
  return mask;
}

// Reads the keypad every 5 ms. A change only counts once the keys read the same
// four times in a row: that hides the contact bounce that Wokwi simulates.
void inputUpdate(uint32_t now) {
  static uint32_t lastScan = 0;
  static uint16_t candidate = 0;
  static uint8_t sameScans = 0;
  if (now - lastScan < 5) return;
  lastScan = now;
  uint16_t raw = readKeys();
  if (raw != candidate) {
    candidate = raw;
    sameScans = 0;
    return;
  }
  if (sameScans < 3) sameScans++;
  if (sameScans < 3 || candidate == keysHeld) return;
  uint16_t changed = candidate ^ keysHeld;
  keysPressed |= changed & candidate;
  keysHeld = candidate;
  for (uint8_t i = 0; i < KEY_ROWS * KEY_COLS; i++) {
    if (!(changed & (1u << i))) continue;
    Serial.print((keysHeld & (1u << i)) ? F("[KEY] DOWN ") : F("[KEY] UP "));
    Serial.println(KEY_NAMES[i / KEY_COLS][i % KEY_COLS]);
  }
}
```

۶.۴ sound.h – موتور صدا

چهار بازر را با چهار تایمر ۱۶ بیتی در حالت CTC toggle راه می‌اندازد، پس هر بازر نت خود را بدون مصرف وقت پردازنده پخش می‌کند. یک موتور موسیقی کوچک آهنگ‌هایی را که به صورت فهرست نت نوشته شده‌اند (یکی برای هر صدا، تکرارشونده یا یک‌باره) پخش می‌کند و یک موتور جلوه روی صدای ۳ جلوه‌های صوتی را با اولویت پخش می‌کند. بی‌صدا کردن (M) همه چیز را ساکت می‌کند.

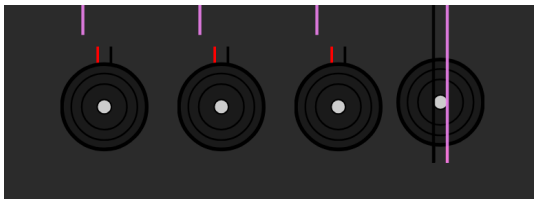

شکل ۲۳: مربوط به *sound.h*.

تابع	چه کار می‌کند
buzzerTone(uint8_t v, uint16_t hz)	بازر v را با تنظیم تایمرش وادار به پخش hz می‌کند (۰ = سکوت)؛ اگر همان فرکانس را پخش می‌کند کاری نمی‌کند.
soundBegin()	تایمرهایی را که آردوینو خودش راه می‌اندازد متوقف می‌کند و پایه‌های بازر را خروجی می‌کند.
noteHz(uint8_t pitch)	شمارهٔ نت MIDI ← فرکانس: یک اکتاو از مقدارهای دقیق، و برای هر اکتاو پایین‌تر نصف.
loadNote(Voice& v)	نت فعلی یک صدا را از فلش کپی می‌کند و طول آن را بر حسب میلی‌ثانیه حساب می‌کند.
soundPlaySong(const Track* tracks, uint8_t tickMs, bool loop)	یک آهنگ را شروع می‌کند: یک ترک برای هر بازر (0 count = آن بازر ساکت می‌ماند)، tickMs = طول یک تیک، loop = در پایان از نو.
songTime()	میلی‌ثانیه از شروع آهنگ؛ لوگو از آن استفاده می‌کند تا تصویرهایش روی نت‌ها بیفتند.
soundSfx(const SfxPart* parts, uint8_t count, uint8_t priority)	یک جلوهٔ صوتی را روی بازر ۳ شروع می‌کند، مگر اینکه جلوهٔ مهم‌تری در حال پخش باشد.
soundStop()	همهٔ موسیقی‌ها و جلوه‌ها را متوقف می‌کند و چهار بازر را ساکت می‌کند.
sfxUpdate(uint32_t now)	جلوهٔ فعلی را روی بازر ۳ پخش می‌کند: وقتی یک بخش تمام شد به بخش بعدی می‌رود، فرکانس را می‌لغزاند، یا هر ۶ میلی‌ثانیه به یک فرکانس تصادفی می‌پرد (نویز برای انفجارها).
soundEffect(uint8_t v, uint16_t hz)	یک جلوه بازر v را با فرکانس hz در اختیار می‌گیرد تا soundRelease (صدای ووش و جرقهٔ لوگو).
soundRelease(uint8_t v)	بازر v را به موسیقی برمی‌گرداند.
soundBeep(uint16_t hz, uint16_t ms)	یک بوق کوتاه روی بازر ۳ (منوها، هشدارها)؛ جای هر جلوهٔ دیگری را می‌گیرد.
soundSetMuted(bool muted)	همهٔ صداها را خاموش یا روشن می‌کند (کلید M)؛ موسیقی بی‌صدا ادامه می‌یابد.
soundUpdate(uint32_t now)	تا جای ممکن زیاد صدا زده شود: هر صدا را به نت بعدی‌اش می‌برد و بازرها را راه می‌اندازد.

کد منبع

```
/*
 * sound.h -- four buzzers = four voices.
 *
 * Each buzzer pin is the "A" output of its own 16-bit timer (pin 5 = Timer3, pin 6 =
 * Timer4, pin 11 = Timer1, pin 46 = Timer5). In CTC mode with "toggle on compare match"
 * the timer flips the pin by itself: a note costs no CPU time, and four notes can sound
 * at once (Arduino's tone() can only play one). The Mega has no fifth free timer
 * (Timer0 runs millis(), Timer2 scans the LED screen).
 *
 * Jobs: buzzer 1 = lead, buzzer 2 = bass, buzzer 4 = rhythm guitar / harmony, and
 * buzzer 3 = every sound effect and menu sound (in the short jingles it plays music too). The timers run at
     16 MHz / 256: notes up to
 * about C7 stay within 1 % of their pitch, and Wokwi simulates this slow clock far
 * faster than /8 (measured in Stage 0).
 *
 * Music is written as one list of notes per voice (MIDI note numbers, 60 = middle C)
```

```
 * with lengths in "ticks". Effects (glides, beeps) take over a voice for a while.
 */
#pragma once
#include "pins.h"

struct TimerRegs {
  volatile uint8_t* tccrA;
  volatile uint8_t* tccrB;
  volatile uint16_t* ocrA;
  volatile uint16_t* tcnt;
};
const TimerRegs VOICE_TIMER[BUZZER_COUNT] = {
  { &TCCR3A, &TCCR3B, &OCR3A, &TCNT3 },  // pin 5  = OC3A
  { &TCCR4A, &TCCR4B, &OCR4A, &TCNT4 },  // pin 6  = OC4A
  { &TCCR1A, &TCCR1B, &OCR1A, &TCNT1 },  // pin 11 = OC1A
  { &TCCR5A, &TCCR5B, &OCR5A, &TCNT5 },  // pin 46 = OC5A
};
const uint8_t SFX_VOICE = 2;             // buzzer 3 (pin 11): sound effects and beeps

struct Note { uint8_t pitch; uint8_t ticks; };   // pitch 0 = rest
struct Track { const Note* notes; uint8_t count; };

struct Voice {
  const Note* notes;                     // track in flash (NULL = no music on this voice)
  uint8_t count, index;
  uint32_t noteStart;
  uint16_t noteMs;
  uint8_t pitch;
  bool effect;                           // an effect has taken over the voice
  uint16_t effectHz;
  uint32_t effectEnd;                    // 0 = until released
  uint16_t playingHz;                    // what the buzzer plays right now
};
Voice voices[BUZZER_COUNT];
uint8_t songTickMs = 50;
uint32_t songStart = 0;
bool songLoops = false;
bool soundMuted = false;
const uint8_t NOTE_GAP_MS = 12;          // short silence at the end of each note

// ================================================================ hardware
// Makes buzzer v play hz (0 = silent) by setting up its timer; does nothing if it already
// plays that frequency.
void buzzerTone(uint8_t v, uint16_t hz) {
  if (soundMuted) hz = 0;
  if (hz == voices[v].playingHz) return;
  voices[v].playingHz = hz;
  const TimerRegs& t = VOICE_TIMER[v];
  *t.tccrB = 0;                          // stop the timer while changing it
  if (hz == 0) {
    *t.tccrA = 0;                        // disconnect the pin from the timer
    digitalWrite(BUZZER_PINS[v], LOW);
    return;
  }
  // Mode bits first: in Arduino's default PWM mode a new OCRnA value would wait for the
  // end of a PWM cycle that a stopped timer never reaches, and the note would be lost.
  *t.tccrA = _BV(COM1A0);                // toggle pin on match (same bit in timers 1, 3, 4, 5)
  *t.tcnt = 0;
  *t.ocrA = F_CPU / (2UL * 256 * hz) - 1;  // f = 16 MHz / (2 * 256 * (OCRnA + 1))
  *t.tccrB = _BV(WGM12) | _BV(CS12);     // CTC mode, prescaler 256: start
}

// Stops the timers Arduino starts by itself and makes the buzzer pins outputs.
void soundBegin() {
  // Arduino starts timers 1, 3, 4 and 5 even when nothing uses them, and Wokwi spends
  // time on every timer count: stop them. A buzzer's timer restarts when it plays.
  // Clearing the A registers too leaves Arduino's PWM mode (see buzzerTone).
  TCCR1B = 0; TCCR1A = 0;
  TCCR3B = 0; TCCR3A = 0;
  TCCR4B = 0; TCCR4A = 0;
  TCCR5B = 0; TCCR5A = 0;
  for (uint8_t v = 0; v < BUZZER_COUNT; v++) pinMode(BUZZER_PINS[v], OUTPUT);
}

// MIDI note number -> frequency: one octave of exact values, halved per octave down.
uint16_t noteHz(uint8_t pitch) {
  static const uint16_t OCTAVE8[12] PROGMEM = {4186, 4435, 4699, 4978, 5274, 5588,
                                               5920, 6272, 6645, 7040, 7459, 7902};
  return pgm_read_word(&OCTAVE8[pitch % 12]) >> (9 - pitch / 12);
}

// ================================================================ music
// Copies the voice's current note from flash and works out its length in ms.
void loadNote(Voice& v) {
```

```
  Note n;
  memcpy_P(&n, &v.notes[v.index], sizeof(Note));
  v.pitch = n.pitch;
  v.noteMs = (uint16_t)n.ticks * songTickMs;
}

// Starts a song: one track per buzzer (count 0 = that buzzer stays silent), tickMs =
// length of one tick, loop = start again at the end.
void soundPlaySong(const Track* tracks, uint8_t tickMs, bool loop) {
  uint32_t now = millis();
  songTickMs = tickMs;
  songStart = now;
  songLoops = loop;
  for (uint8_t i = 0; i < BUZZER_COUNT; i++) {
    Voice& v = voices[i];
    v.notes = tracks[i].count ? tracks[i].notes : NULL;
    v.count = tracks[i].count;
    v.index = 0;
    v.noteStart = now;
    if (v.notes) loadNote(v);
  }
}

// ms since the song started; the logo uses it so its pictures land on the notes.
uint32_t songTime() {
  return millis() - songStart;
}

// ============================================================== sound effects (buzzer 3)
// An effect is a short list of parts in flash. Each part slides from one frequency to
// another (fromHz == toHz: a steady tone, 0 Hz: a pause) or, with noise set, jumps to a
// random frequency in that range every few ms (explosions). A new effect only replaces
// the one playing if it is at least as important (priority).
struct SfxPart { uint16_t fromHz, toHz, ms; uint8_t noise; };

const SfxPart* sfxParts = NULL;
uint8_t sfxCount = 0, sfxIndex = 0, sfxPriority = 0;
SfxPart sfxPart;                          // copy of the part playing now
uint32_t sfxPartStart = 0, sfxNoiseAt = 0;
uint16_t sfxNoiseHz = 0;

// Starts a sound effect on buzzer 3, unless a more important one is playing.
void soundSfx(const SfxPart* parts, uint8_t count, uint8_t priority) {
  if (sfxCount && priority < sfxPriority) return;
  sfxParts = parts;
  sfxCount = count;
  sfxIndex = 0;
  sfxPriority = priority;
  sfxPartStart = millis();
  memcpy_P(&sfxPart, &parts[0], sizeof(SfxPart));
}

// Stops all music and effects and silences the four buzzers.
void soundStop() {
  sfxCount = 0;
  for (uint8_t i = 0; i < BUZZER_COUNT; i++) {
    voices[i].notes = NULL;
    voices[i].effect = false;
    buzzerTone(i, 0);
  }
}

// Plays the current effect on buzzer 3: moves on to the next part when one ends, slides
// the frequency, or jumps to a random frequency every 6 ms (noise for explosions).
void sfxUpdate(uint32_t now) {
  if (!sfxCount) return;
  Voice& v = voices[SFX_VOICE];
  while (now - sfxPartStart >= sfxPart.ms) {
    sfxPartStart += sfxPart.ms;
    if (++sfxIndex == sfxCount) {
      sfxCount = 0;
      v.effect = false;
      return;
    }
    memcpy_P(&sfxPart, &sfxParts[sfxIndex], sizeof(SfxPart));
  }
  uint16_t hz;
  if (sfxPart.noise) {
    if ((int32_t)(now - sfxNoiseAt) >= 0) {
      sfxNoiseHz = random(sfxPart.fromHz, sfxPart.toHz);
      sfxNoiseAt = now + 6;
    }
    hz = sfxNoiseHz;
  } else {
```

```
    int32_t span = (int32_t)sfxPart.toHz - (int32_t)sfxPart.fromHz;
    hz = sfxPart.fromHz + span * (int32_t)(now - sfxPartStart) / sfxPart.ms;
  }
  v.effect = true;
  v.effectHz = hz;
  v.effectEnd = 0;
}

// ============================================================== effects
// An effect takes over buzzer v at hz until soundRelease (logo whoosh and crackle).
void soundEffect(uint8_t v, uint16_t hz) {
  voices[v].effect = true;
  voices[v].effectHz = hz;
  voices[v].effectEnd = 0;
}

// Gives buzzer v back to the music.
void soundRelease(uint8_t v) {
  voices[v].effect = false;
}

// A short beep on buzzer 3 (menus, alerts); it replaces any effect.
void soundBeep(uint16_t hz, uint16_t ms) {
  sfxCount = 0;                                    // a beep replaces any effect
  Voice& v = voices[SFX_VOICE];
  v.effect = true;
  v.effectHz = hz;
  v.effectEnd = millis() + ms;
  if (v.effectEnd == 0) v.effectEnd = 1;
}

// Turns all sound off or on (M key); the music keeps running silently.
void soundSetMuted(bool muted) {
  soundMuted = muted;
  for (uint8_t i = 0; i < BUZZER_COUNT; i++) buzzerTone(i, 0);
}

// Call as often as possible: moves every voice on to its next note and drives the buzzers.
void soundUpdate(uint32_t now) {
  sfxUpdate(now);
  for (uint8_t i = 0; i < BUZZER_COUNT; i++) {
    Voice& v = voices[i];
    while (v.notes && now - v.noteStart >= v.noteMs) {   // next note (catch up if late)
      v.noteStart += v.noteMs;
      if (++v.index == v.count) {
        if (!songLoops) {
          v.notes = NULL;
          break;
        }
        v.index = 0;
      }
      loadNote(v);
    }
    if (v.effect && v.effectEnd && (int32_t)(now - v.effectEnd) >= 0) v.effect = false;
    uint16_t hz = 0;
    if (v.effect) hz = v.effectHz;
    else if (v.notes && v.pitch && now - v.noteStart < (uint32_t)v.noteMs - NOTE_GAP_MS)
      hz = noteHz(v.pitch);
    buzzerTone(i, hz);
  }
}
```

tunes.h V.۴ – آهنگ‌ها و جلوه‌های صوتی

فهرست نت‌های هر آهنگ و بخش‌های هر جلوهٔ صوتی، همه در فلش. چهار آهنگ داخل بازی با tools/compose_music.py از یک نگارش کوتاه نت ساخته می‌شوند؛ قطعه‌های کوتاه (فانفار، پایان مرحله، پیروزی، پایان بازی) و جلوه‌ها مستقیم همین‌جا نوشته شده‌اند.

کد منبع

```
/*
 * tunes.h -- music and sound effects (all in flash).
 *
 * Songs: one note list per buzzer, MIDI note numbers (60 = middle C, 0 = rest) and
 * lengths in ticks. The in-game songs are original metal tracks: buzzer 1 = lead guitar,
 * buzzer 2 = bass, buzzer 4 = rhythm guitar (a fifth above the bass: a power chord).
 * They leave buzzer 3 to the sound effects, so effects never cut the music. The songs are
 * written in a short notation in tools/compose_music.py, which fills the block below.
 * Effects: parts that slide between two frequencies (or noise for explosions).
 * The start-up melody lives in logo.h.
 */
#pragma once
#include "sound.h"

#define TRACK(notes) {notes, sizeof(notes) / sizeof(Note)}
#define NO_TRACK {NULL, 0}
#define SFX(parts) parts, sizeof(parts) / sizeof(SfxPart)

// ---- BEGIN songs generated by tools/compose_music.py (edit the songs there)
// ================================================================ Phase 1, ROCK BELT: thrash, E minor, galloping bass
// 8 bars, 1 tick = 80 ms, one loop = 10.2 s
const Note PHASE1_LEAD[] PROGMEM = {
  {64, 4}, {67, 2}, {69, 2}, {71, 4}, {69, 2}, {67, 2}, {69, 4}, {67, 2},
  {64, 2}, {62, 4}, {64, 4}, {64, 4}, {67, 2}, {69, 2}, {71, 4}, {74, 2},
  {76, 2}, {70, 4}, {69, 4}, {67, 4}, {66, 4}, {76, 6}, {74, 2}, {71, 4},
  {67, 4}, {69, 6}, {71, 2}, {67, 4}, {64, 4}, {76, 2}, {74, 2}, {71, 2},
  {69, 2}, {67, 2}, {69, 2}, {71, 2}, {74, 2}, {66, 8}, {71, 8},
};
const Note PHASE1_BASS[] PROGMEM = {
  {40, 2}, {40, 1}, {40, 1}, {40, 2}, {40, 1}, {40, 1}, {40, 2}, {40, 1},
  {40, 1}, {40, 2}, {40, 1}, {40, 1}, {40, 2}, {40, 1}, {40, 1}, {40, 2},
  {40, 1}, {40, 1}, {43, 2}, {43, 1}, {43, 1}, {45, 2}, {45, 1}, {45, 1},
  {40, 2}, {40, 1}, {40, 1}, {40, 2}, {40, 1}, {40, 1}, {40, 2}, {40, 1},
  {40, 1}, {40, 2}, {40, 1}, {40, 1}, {40, 2}, {40, 1}, {40, 1}, {40, 2},
  {40, 1}, {40, 1}, {46, 4}, {45, 4}, {40, 2}, {40, 1}, {40, 1}, {40, 2},
  {40, 1}, {40, 1}, {40, 2}, {40, 1}, {40, 1}, {40, 2}, {40, 1}, {40, 1},
  {40, 2}, {40, 1}, {40, 1}, {40, 2}, {40, 1}, {40, 1}, {43, 2}, {43, 1},
  {43, 1}, {45, 2}, {45, 1}, {45, 1}, {48, 2}, {48, 1}, {48, 1}, {48, 2},
  {48, 1}, {48, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1},
  {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 8},
};
const Note PHASE1_RHYTHM[] PROGMEM = {
  {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1},
  {47, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 2},
  {47, 1}, {47, 1}, {50, 2}, {50, 1}, {50, 1}, {52, 2}, {52, 1}, {52, 1},
  {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1},
  {47, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 2},
  {47, 1}, {47, 1}, {53, 4}, {52, 4}, {47, 2}, {47, 1}, {47, 1}, {47, 2},
  {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1},
  {47, 2}, {47, 1}, {47, 1}, {47, 2}, {47, 1}, {47, 1}, {50, 2}, {50, 1},
  {50, 1}, {52, 2}, {52, 1}, {52, 1}, {55, 2}, {55, 1}, {55, 1}, {55, 2},
  {55, 1}, {55, 1}, {54, 2}, {54, 1}, {54, 1}, {54, 2}, {54, 1}, {54, 1},
  {54, 2}, {54, 1}, {54, 1}, {54, 2}, {54, 1}, {54, 1}, {54, 8},
};
const Track SONG_PHASE1[BUZZER_COUNT] = {TRACK(PHASE1_LEAD), TRACK(PHASE1_BASS), NO_TRACK, TRACK(PHASE1_RHYTHM)};
const uint8_t SONG_PHASE1_TICK_MS = 80;

// ================================================================ Phase 2, DEEP MIST: slow drop-D chugs, D minor
// 8 bars, 1 tick = 100 ms, one loop = 12.8 s
const Note PHASE2_LEAD[] PROGMEM = {
  {0, 8}, {69, 4}, {65, 4}, {64, 8}, {62, 4}, {0, 4}, {0, 8}, {69, 4},
  {72, 4}, {70, 8}, {69, 4}, {0, 4}, {74, 6}, {72, 2}, {69, 4}, {65, 4},
  {67, 6}, {69, 2}, {64, 8}, {65, 4}, {64, 4}, {62, 4}, {61, 4}, {62, 12},
  {0, 4},
};
const Note PHASE2_BASS[] PROGMEM = {
  {38, 1}, {38, 1}, {0, 1}, {38, 1}, {38, 2}, {0, 2}, {38, 1}, {38, 1},
  {0, 1}, {38, 1}, {41, 2}, {40, 2}, {38, 1}, {38, 1}, {0, 1}, {38, 1},
```

```
  {38, 2}, {0, 2}, {45, 4}, {44, 2}, {43, 2}, {38, 1}, {38, 1}, {0, 1},
  {38, 1}, {38, 2}, {0, 2}, {38, 1}, {38, 1}, {0, 1}, {38, 1}, {41, 2},
  {40, 2}, {38, 1}, {38, 1}, {0, 1}, {38, 1}, {38, 2}, {0, 2}, {45, 4},
  {44, 2}, {43, 2}, {38, 1}, {38, 1}, {0, 1}, {38, 1}, {38, 2}, {0, 2},
  {38, 1}, {38, 1}, {0, 1}, {38, 1}, {41, 2}, {40, 2}, {38, 1}, {38, 1},
  {0, 1}, {38, 1}, {38, 2}, {0, 2}, {45, 4}, {44, 2}, {43, 2}, {38, 1},
  {38, 1}, {0, 1}, {38, 1}, {38, 2}, {0, 2}, {38, 1}, {38, 1}, {0, 1},
  {38, 1}, {41, 2}, {40, 2}, {46, 8}, {45, 8},
};
const Note PHASE2_RHYTHM[] PROGMEM = {
  {45, 1}, {45, 1}, {0, 1}, {45, 1}, {45, 2}, {0, 2}, {45, 1}, {45, 1},
  {0, 1}, {45, 1}, {48, 2}, {47, 2}, {45, 1}, {45, 1}, {0, 1}, {45, 1},
  {45, 2}, {0, 2}, {52, 4}, {51, 2}, {50, 2}, {45, 1}, {45, 1}, {0, 1},
  {45, 1}, {45, 2}, {0, 2}, {45, 1}, {45, 1}, {0, 1}, {45, 1}, {48, 2},
  {47, 2}, {45, 1}, {45, 1}, {0, 1}, {45, 1}, {45, 2}, {0, 2}, {52, 4},
  {51, 2}, {50, 2}, {45, 1}, {45, 1}, {0, 1}, {45, 1}, {45, 2}, {0, 2},
  {45, 1}, {45, 1}, {0, 1}, {45, 1}, {48, 2}, {47, 2}, {45, 1}, {45, 1},
  {0, 1}, {45, 1}, {45, 2}, {0, 2}, {52, 4}, {51, 2}, {50, 2}, {45, 1},
  {45, 1}, {0, 1}, {45, 1}, {45, 2}, {0, 2}, {45, 1}, {45, 1}, {0, 1},
  {45, 1}, {48, 2}, {47, 2}, {53, 8}, {52, 8},
};
const Track SONG_PHASE2[BUZZER_COUNT] = {TRACK(PHASE2_LEAD), TRACK(PHASE2_BASS), NO_TRACK, TRACK(
    PHASE2_RHYTHM)};
const uint8_t SONG_PHASE2_TICK_MS = 100;

// ================================================================ Phase 3, THE VOID: syncopated groove, E
    minor
// 8 bars, 1 tick = 75 ms, one loop = 9.6 s
const Note PHASE3_LEAD[] PROGMEM = {
  {71, 4}, {71, 2}, {67, 2}, {69, 4}, {64, 4}, {71, 4}, {71, 2}, {67, 2},
  {72, 4}, {71, 4}, {71, 4}, {71, 2}, {67, 2}, {69, 4}, {64, 2}, {67, 2},
  {66, 4}, {67, 4}, {69, 4}, {71, 4}, {76, 4}, {74, 2}, {71, 2}, {74, 4},
  {76, 4}, {79, 4}, {78, 2}, {76, 2}, {74, 4}, {71, 4}, {76, 2}, {71, 2},
  {67, 2}, {64, 2}, {76, 2}, {71, 2}, {67, 2}, {64, 2}, {76, 1}, {74, 1},
  {71, 1}, {69, 1}, {67, 1}, {69, 1}, {71, 1}, {74, 1}, {76, 8},
};
const Note PHASE3_BASS[] PROGMEM = {
  {40, 1}, {0, 1}, {40, 1}, {0, 1}, {40, 1}, {40, 1}, {0, 2}, {43, 2},
  {40, 2}, {46, 2}, {45, 2}, {40, 1}, {0, 1}, {40, 1}, {0, 1}, {40, 1},
  {40, 1}, {0, 2}, {48, 4}, {47, 4}, {40, 1}, {0, 1}, {40, 1}, {0, 1},
  {40, 1}, {40, 1}, {0, 2}, {43, 2}, {40, 2}, {46, 2}, {45, 2}, {40, 1},
  {0, 1}, {40, 1}, {0, 1}, {40, 1}, {40, 1}, {0, 2}, {48, 4}, {47, 4},
  {40, 1}, {0, 1}, {40, 1}, {0, 1}, {40, 1}, {40, 1}, {0, 2}, {43, 2},
  {40, 2}, {46, 2}, {45, 2}, {40, 1}, {0, 1}, {40, 1}, {0, 1}, {40, 1},
  {40, 1}, {0, 2}, {48, 4}, {47, 4}, {40, 2}, {40, 2}, {40, 2}, {40, 2},
  {40, 2}, {40, 2}, {40, 2}, {40, 2}, {40, 1}, {40, 1}, {40, 1}, {40, 1},
  {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1},
  {40, 1}, {40, 1}, {40, 1}, {40, 1},
};
const Note PHASE3_RHYTHM[] PROGMEM = {
  {47, 1}, {0, 1}, {47, 1}, {0, 1}, {47, 1}, {47, 1}, {0, 2}, {50, 2},
  {47, 2}, {53, 2}, {52, 2}, {47, 1}, {0, 1}, {47, 1}, {0, 1}, {47, 1},
  {47, 1}, {0, 2}, {55, 4}, {54, 4}, {47, 1}, {0, 1}, {47, 1}, {0, 1},
  {47, 1}, {47, 1}, {0, 2}, {50, 2}, {47, 2}, {53, 2}, {52, 2}, {47, 1},
  {0, 1}, {47, 1}, {0, 1}, {47, 1}, {47, 1}, {0, 2}, {55, 4}, {54, 4},
  {47, 1}, {0, 1}, {47, 1}, {0, 1}, {47, 1}, {47, 1}, {0, 2}, {50, 2},
  {47, 2}, {53, 2}, {52, 2}, {47, 1}, {0, 1}, {47, 1}, {0, 1}, {47, 1},
  {47, 1}, {0, 2}, {55, 4}, {54, 4}, {47, 2}, {47, 2}, {47, 2}, {47, 2},
  {47, 2}, {47, 2}, {47, 2}, {47, 2}, {47, 1}, {47, 1}, {47, 1}, {47, 1},
  {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1},
  {47, 1}, {47, 1}, {47, 1}, {47, 1},
};
const Track SONG_PHASE3[BUZZER_COUNT] = {TRACK(PHASE3_LEAD), TRACK(PHASE3_BASS), NO_TRACK, TRACK(
    PHASE3_RHYTHM)};
const uint8_t SONG_PHASE3_TICK_MS = 75;

// ================================================================ Boss fights: tremolo bass, chromatic
    lead
// 4 bars, 1 tick = 70 ms, one loop = 4.5 s
const Note BOSS_LEAD[] PROGMEM = {
  {76, 2}, {77, 2}, {76, 2}, {75, 2}, {76, 8}, {77, 2}, {79, 2}, {77, 2},
  {76, 2}, {77, 8}, {79, 2}, {81, 2}, {82, 2}, {81, 2}, {79, 4}, {76, 4},
  {70, 4}, {69, 4}, {68, 4}, {67, 4},
};
const Note BOSS_BASS[] PROGMEM = {
  {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1},
  {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1},
  {41, 1}, {41, 1}, {41, 1}, {41, 1}, {41, 1}, {41, 1}, {41, 1}, {41, 1},
  {41, 1}, {41, 1}, {41, 1}, {41, 1}, {41, 1}, {41, 1}, {41, 1}, {41, 1},
  {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1}, {40, 1},
  {43, 1}, {43, 1}, {43, 1}, {43, 1}, {46, 1}, {46, 1}, {46, 1}, {46, 1},
  {46, 1}, {46, 1}, {46, 1}, {46, 1}, {46, 1}, {46, 1}, {46, 1}, {46, 1},
  {45, 1}, {45, 1}, {45, 1}, {45, 1}, {45, 1}, {45, 1}, {45, 1}, {45, 1},
};
```

```
const Note BOSS_RHYTHM[] PROGMEM = {
  {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1},
  {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1},
  {48, 1}, {48, 1}, {48, 1}, {48, 1}, {48, 1}, {48, 1}, {48, 1}, {48, 1},
  {48, 1}, {48, 1}, {48, 1}, {48, 1}, {48, 1}, {48, 1}, {48, 1}, {48, 1},
  {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1}, {47, 1},
  {50, 1}, {50, 1}, {50, 1}, {50, 1}, {53, 1}, {53, 1}, {53, 1}, {53, 1},
  {53, 1}, {53, 1}, {53, 1}, {53, 1}, {53, 1}, {53, 1}, {53, 1}, {53, 1},
  {52, 1}, {52, 1}, {52, 1}, {52, 1}, {52, 1}, {52, 1}, {52, 1}, {52, 1},
};
const Track SONG_BOSS[BUZZER_COUNT] = {TRACK(BOSS_LEAD), TRACK(BOSS_BASS), NO_TRACK, TRACK(BOSS_RHYTHM)};
const uint8_t SONG_BOSS_TICK_MS = 70;
// ---- END songs generated by tools/compose_music.py

// ================================================================ short tunes (play once)
const Note STING_A[] PROGMEM = {{69, 2}, {76, 2}, {81, 4}};       // a phase begins
const Note STING_B[] PROGMEM = {{64, 2}, {69, 2}, {76, 4}};
const Note STING_C[] PROGMEM = {{45, 8}};
const Track SONG_STING[BUZZER_COUNT] = {TRACK(STING_A), TRACK(STING_B), TRACK(STING_C)};

const Note CLEAR_A[] PROGMEM = {{76, 2}, {79, 2}, {84, 6}};       // a phase is cleared
const Note CLEAR_B[] PROGMEM = {{72, 2}, {76, 2}, {79, 6}};
const Note CLEAR_C[] PROGMEM = {{48, 10}};
const Track SONG_CLEAR[BUZZER_COUNT] = {TRACK(CLEAR_A), TRACK(CLEAR_B), TRACK(CLEAR_C)};

const Note WIN_A[] PROGMEM = {{72, 2}, {76, 2}, {79, 2}, {84, 6}, {81, 2}, {83, 2}, {84, 8}};
const Note WIN_B[] PROGMEM = {{64, 2}, {67, 2}, {72, 2}, {76, 6}, {77, 2}, {79, 2}, {76, 8}};
const Note WIN_C[] PROGMEM = {{48, 6}, {55, 6}, {53, 4}, {48, 8}};
const Track SONG_VICTORY[BUZZER_COUNT] = {TRACK(WIN_A), TRACK(WIN_B), TRACK(WIN_C)};

const Note OVER_A[] PROGMEM = {{64, 4}, {63, 4}, {62, 4}, {61, 12}};
const Note OVER_B[] PROGMEM = {{57, 4}, {56, 4}, {55, 4}, {52, 12}};
const Note OVER_C[] PROGMEM = {{45, 12}, {40, 12}};
const Track SONG_GAMEOVER[BUZZER_COUNT] = {TRACK(OVER_A), TRACK(OVER_B), TRACK(OVER_C)};

// ================================================================ sound effects (buzzer 3)
// {from Hz, to Hz, ms, noise}; priorities: 1 shot ... 6 player hit
const SfxPart SFX_SHOT[] PROGMEM = {{2200, 1300, 35, 0}};
const SfxPart SFX_CHIRP[] PROGMEM = {{1500, 2600, 40, 0}};                  // auto-fire starts
const SfxPart SFX_EMPTY[] PROGMEM = {{2600, 2600, 8, 0}};                   // dry click
const SfxPart SFX_HIT[] PROGMEM = {{900, 650, 40, 0}};                      // enemy hit
const SfxPart SFX_BOOM[] PROGMEM = {{200, 900, 180, 1}};                    // enemy destroyed
const SfxPart SFX_BIG_BOOM[] PROGMEM = {{100, 600, 500, 1}, {600, 80, 300, 0}};
const SfxPart SFX_PLAYER_HIT[] PROGMEM = {{1200, 150, 350, 0}, {80, 300, 250, 1}};
const SfxPart SFX_PICKUP[] PROGMEM = {{800, 1600, 70, 0}, {1600, 2400, 70, 0}};
const SfxPart SFX_LIFE[] PROGMEM = {{660, 660, 80, 0}, {880, 880, 80, 0}, {1320, 1320, 140, 0}};
const SfxPart SFX_LOW_AMMO[] PROGMEM = {{1100, 1100, 60, 0}, {0, 0, 50, 0}, {1100, 1100, 60, 0}};
const SfxPart SFX_SIREN[] PROGMEM = {
  {600, 1200, 250, 0}, {1200, 600, 250, 0}, {600, 1200, 250, 0},
  {1200, 600, 250, 0}, {600, 1200, 250, 0}, {1200, 600, 250, 0},
};
const SfxPart SFX_ROAR[] PROGMEM = {{90, 400, 600, 1}};                     // boss changes form
const SfxPart SFX_TEST[] PROGMEM = {{400, 2000, 900, 0}};                   // LED test sweep
```

۸.۴ storage.h – EEPROM: تنظیمات و بهترین امتیاز

سفینهٔ انتخابی، سختی، روشنایی، تنظیم صدا و بهترین امتیاز (همراه با مرحله‌ای که رسید و سختی آن) را با استفادهٔ مستقیم از رجیسترهای EEPROM در EEPROM مگا ذخیره می‌کند. یک بایت نشانه مشخص می‌کند که EEPROM دادهٔ معتبر دارد یا نه.



شکل ۲۴: آنچه *storage.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
eepromRead(uint16_t address)	یک بایت از EEPROM می‌خواند (اگر نوشتنی هنوز در جریان باشد اول صبر می‌کند).
eepromWrite(uint16_t address, uint8_t value)	یک بایت در EEPROM می‌نویسد، فقط اگر تغییر کرده باشد (صرفه‌جویی در زمان و فرسایش EEPROM).
settingsSave()	تنظیمات و بهترین امتیاز را ذخیره می‌کند: یک بایت نشانه، سپس ساختار Settings.
settingsLoad()	تنظیمات را هنگام روشن شدن بار می‌کند. اگر EEPROM تنظیمی نداشته باشد (تراشهٔ نو، شبیه‌سازی تازه) یا مقداری خارج از محدوده باشد، مقدارهای پیش‌فرض به کار می‌روند.

کد منبع

```
/*
 * storage.h -- settings and the high score, kept in the Mega's EEPROM.
 *
 * Written with the EEPROM registers directly (no library):
 *   EEAR = address, EEDR = data byte,
 *   EECR: EERE starts a read; EEMPE then EEPE (within 4 clock cycles) starts a write.
 * A write takes about 3.4 ms, so the next access waits while EEPE is still set.
 * (Wokwi keeps the EEPROM while a simulation runs; a restart starts empty.)
 */
#pragma once
#include "config.h"

struct Settings {
  uint8_t brightness;                   // index into BRIGHTNESS_LEVELS
  uint8_t muted;
  uint8_t difficulty;
  uint8_t ship;                         // chosen in the hangar
  uint16_t best;                        // high score
  uint8_t bestPhase;                    // phase reached with the high score (4 = won)
  uint8_t bestDifficulty;               // difficulty the high score was made on
};
Settings settings;
const uint8_t EE_MAGIC = 0xA7;          // marks an EEPROM that holds our settings

// Reads one byte of the EEPROM (first waits if a write is still busy).
uint8_t eepromRead(uint16_t address) {
  while (EECR & _BV(EEPE)) {}           // wait for a write in progress
  EEAR = address;
  EECR |= _BV(EERE);
  return EEDR;
}

// Writes one byte to the EEPROM, only if it changed (saves time and EEPROM wear).
```


```
void eepromWrite(uint16_t address, uint8_t value) {
  if (eepromRead(address) == value) return;   // saves EEPROM wear (and time)
  EEAR = address;
  EEDR = value;
  noInterrupts();                        // EEPE must follow EEMPE within 4 cycles
  EECR |= _BV(EEMPE);
  EECR |= _BV(EEPE);
  interrupts();
}

// Saves the settings and the best score: a marker byte, then the Settings struct.
void settingsSave() {
  eepromWrite(0, EE_MAGIC);
  const uint8_t* p = (const uint8_t*)&settings;
  for (uint8_t i = 0; i < sizeof(Settings); i++) eepromWrite(1 + i, p[i]);
}

// Loads the settings at start-up. If the EEPROM holds none (new chip, new simulation) or
// a value is out of range, the defaults are used.
void settingsLoad() {
  settings = {0, 0, DIFF_NORMAL, 0, 0, 0, DIFF_EASY};
  if (eepromRead(0) == EE_MAGIC) {
    uint8_t* p = (uint8_t*)&settings;
    for (uint8_t i = 0; i < sizeof(Settings); i++) p[i] = eepromRead(1 + i);
  }
  if (settings.brightness >= sizeof(BRIGHTNESS_LEVELS)) settings.brightness = 0;
  if (settings.difficulty > DIFF_HARD) settings.difficulty = DIFF_NORMAL;
  if (settings.ship > 2) settings.ship = 0;
  if (settings.bestDifficulty > DIFF_HARD) settings.bestDifficulty = DIFF_EASY;
  settings.muted = settings.muted ? 1 : 0;
}
```

۹.۴ font.h – فونت‌ها (تولیدشده)

دو فونت پیکسلی: حروف کوچک ۳ × ۵ (چهار حرف در یک خط جا می‌شود) و حروف و رقم‌های بزرگ ۵ × ۷. آن‌ها به صورت هنر ASCII در `tools/gen_font.py` کشیده شده‌اند که این فایل را می‌نویسد.

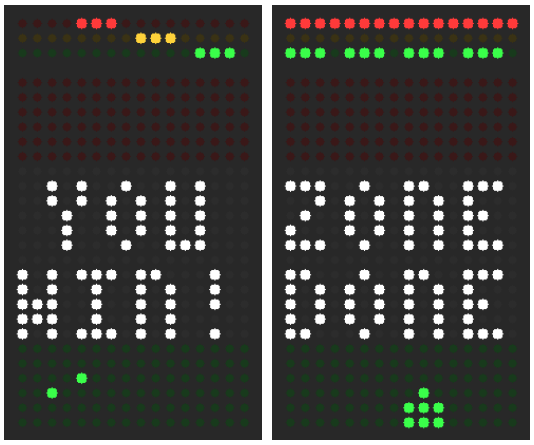

شکل ۲۵: آنچه *font.h* می‌کشد یا به کار می‌برد.

کد منبع

```
/*
 * font.h -- GENERATED by tools/gen_font.py (the letters are drawn there as ASCII art).
 * Each glyph is stored column by column, one byte per column, bit 0 = top row.
 */
#pragma once
#include <avr/pgmspace.h>

// 3 x 5 font: glyph i is the i-th character of FONT3x5_CHARS
const char FONT3x5_CHARS[] PROGMEM = "ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789 -!:.>";
const uint8_t FONT3x5[] PROGMEM = {
  0x1E, 0x05, 0x1E,  // 'A'
  0x1F, 0x15, 0x0A,  // 'B'
  0x0E, 0x11, 0x11,  // 'C'
  0x1F, 0x11, 0x0E,  // 'D'
  0x1F, 0x15, 0x11,  // 'E'
  0x1F, 0x05, 0x01,  // 'F'
  0x0E, 0x11, 0x1D,  // 'G'
  0x1F, 0x04, 0x1F,  // 'H'
  0x11, 0x1F, 0x11,  // 'I'
  0x08, 0x10, 0x0F,  // 'J'
  0x1F, 0x04, 0x1B,  // 'K'
  0x1F, 0x10, 0x10,  // 'L'
  0x1F, 0x06, 0x1F,  // 'M'
  0x1F, 0x01, 0x1E,  // 'N'
  0x0E, 0x11, 0x0E,  // 'O'
  0x1F, 0x05, 0x02,  // 'P'
  0x0E, 0x19, 0x16,  // 'Q'
  0x1F, 0x05, 0x1A,  // 'R'
  0x12, 0x15, 0x09,  // 'S'
  0x01, 0x1F, 0x01,  // 'T'
  0x1F, 0x10, 0x1F,  // 'U'
  0x0F, 0x10, 0x0F,  // 'V'
  0x1F, 0x0C, 0x1F,  // 'W'
  0x1B, 0x04, 0x1B,  // 'X'
  0x03, 0x1C, 0x03,  // 'Y'
  0x19, 0x15, 0x13,  // 'Z'
  0x1F, 0x11, 0x1F,  // '0'
  0x12, 0x1F, 0x10,  // '1'
  0x1D, 0x15, 0x17,  // '2'
  0x15, 0x15, 0x1F,  // '3'
  0x07, 0x04, 0x1F,  // '4'
  0x17, 0x15, 0x1D,  // '5'
  0x1F, 0x15, 0x1D,  // '6'
  0x01, 0x1D, 0x03,  // '7'
  0x1F, 0x15, 0x1F,  // '8'
  0x17, 0x15, 0x1F,  // '9'
  0x00, 0x00, 0x00,  // ' '
  0x04, 0x04, 0x04,  // '-'
  0x00, 0x17, 0x00,  // '!'
```

```
  0x00, 0x0A, 0x00,  // ':'
  0x00, 0x10, 0x00,  // '.'
  0x1F, 0x0E, 0x04,  // '>'
};

// 5 x 7 font: glyph i is the i-th character of FONT5x7_CHARS
const char FONT5x7_CHARS[] PROGMEM = " !-.:0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZ";
const uint8_t FONT5x7[] PROGMEM = {
  0x00, 0x00, 0x00, 0x00, 0x00,  // ' '
  0x00, 0x00, 0x5F, 0x00, 0x00,  // '!'
  0x08, 0x08, 0x08, 0x08, 0x08,  // '-'
  0x00, 0x60, 0x60, 0x00, 0x00,  // '.'
  0x00, 0x36, 0x36, 0x00, 0x00,  // ':'
  0x3E, 0x51, 0x49, 0x45, 0x3E,  // '0'
  0x00, 0x42, 0x7F, 0x40, 0x00,  // '1'
  0x42, 0x61, 0x51, 0x49, 0x46,  // '2'
  0x21, 0x41, 0x45, 0x4B, 0x31,  // '3'
  0x18, 0x14, 0x12, 0x7F, 0x10,  // '4'
  0x27, 0x45, 0x45, 0x45, 0x39,  // '5'
  0x3C, 0x4A, 0x49, 0x49, 0x30,  // '6'
  0x01, 0x71, 0x09, 0x05, 0x03,  // '7'
  0x36, 0x49, 0x49, 0x49, 0x36,  // '8'
  0x06, 0x49, 0x49, 0x29, 0x1E,  // '9'
  0x7E, 0x09, 0x09, 0x09, 0x7E,  // 'A'
  0x7F, 0x49, 0x49, 0x49, 0x36,  // 'B'
  0x3E, 0x41, 0x41, 0x41, 0x22,  // 'C'
  0x7F, 0x41, 0x41, 0x41, 0x3E,  // 'D'
  0x7F, 0x49, 0x49, 0x49, 0x41,  // 'E'
  0x7F, 0x09, 0x09, 0x09, 0x01,  // 'F'
  0x3E, 0x41, 0x49, 0x49, 0x7A,  // 'G'
  0x7F, 0x08, 0x08, 0x08, 0x7F,  // 'H'
  0x00, 0x41, 0x7F, 0x41, 0x00,  // 'I'
  0x20, 0x40, 0x41, 0x3F, 0x01,  // 'J'
  0x7F, 0x08, 0x14, 0x22, 0x41,  // 'K'
  0x7F, 0x40, 0x40, 0x40, 0x40,  // 'L'
  0x7F, 0x02, 0x0C, 0x02, 0x7F,  // 'M'
  0x7F, 0x04, 0x08, 0x10, 0x7F,  // 'N'
  0x3E, 0x41, 0x41, 0x41, 0x3E,  // 'O'
  0x7F, 0x09, 0x09, 0x09, 0x06,  // 'P'
  0x3E, 0x41, 0x51, 0x21, 0x5E,  // 'Q'
  0x7F, 0x09, 0x19, 0x29, 0x46,  // 'R'
  0x46, 0x49, 0x49, 0x49, 0x31,  // 'S'
  0x01, 0x01, 0x7F, 0x01, 0x01,  // 'T'
  0x3F, 0x40, 0x40, 0x40, 0x3F,  // 'U'
  0x1F, 0x20, 0x40, 0x20, 0x1F,  // 'V'
  0x7F, 0x20, 0x18, 0x20, 0x7F,  // 'W'
  0x63, 0x14, 0x08, 0x14, 0x63,  // 'X'
  0x03, 0x04, 0x78, 0x04, 0x03,  // 'Y'
  0x61, 0x51, 0x49, 0x45, 0x43,  // 'Z'
};
```

۱۰.۴ art.h – تصاویر پیکسلی

هر تصویر بازی به صورت عدد دودویی: یک کلمهٔ ۱۶ بیتی برای هر سطر، یک‌ها پیکسل‌های روشن‌اند. سه سفینه، دشمن‌ها، سنگ‌ها، برداشتنی‌ها، باس‌ها، علامت هشدار و حروف لوگو.



شکل ۲۶: آنچه *art.h* می‌کشد یا به کار می‌برد.

کد منبع

```
/*
 * art.h -- pixel art, stored in flash. One 16-bit word per row, the leftmost pixel is
 * the top bit, so the 1s in each binary number draw the picture.
 */
#pragma once
#include <avr/pgmspace.h>

// ================================================================ the player's ships (3 x 3)
const uint16_t SHIP_BOLT[3] PROGMEM = {         // BOLT: balanced
  0b0100000000000000,                           //  .#.
  0b1110000000000000,                           //  ###
  0b1110000000000000,                           //  ###
};
const uint16_t SHIP_DART[3] PROGMEM = {         // DART: fast
  0b0100000000000000,                           //  .#.
  0b1110000000000000,                           //  ###
  0b1010000000000000,                           //  #.#
};
const uint16_t SHIP_TWIN[3] PROGMEM = {         // TWIN: two guns
  0b1010000000000000,                           //  #.#
  0b1110000000000000,                           //  ###
  0b1110000000000000,                           //  ###
};
const uint16_t SHIP_LEFT[3] PROGMEM = {         // BOLT flying left (logo)
  0b0110000000000000,                           //  .##
  0b1110000000000000,                           //  ###
  0b0110000000000000,                           //  .##
};
const uint16_t* const SHIP_UP = SHIP_BOLT;


// ================================================================ enemies and rocks
const uint16_t ENEMY_DRONE[2] PROGMEM = {       // drone: slow, shoots straight down
  0b1010000000000000,                           //  #.#
  0b0100000000000000,                           //  .#.
};
const uint16_t ENEMY_WEAVER[2] PROGMEM = {      // weaver: zig-zags
  0b1110000000000000,                           //  ###
  0b1010000000000000,                           //  #.#
};
const uint16_t ENEMY_MINER[2] PROGMEM = {       // mine-layer: crosses the top, drops mines
  0b1110000000000000,                           //  ###
  0b0100000000000000,                           //  .#.
};
const uint16_t ENEMY_CRUISER[3] PROGMEM = {     // cruiser: tough, aims at you
  0b0111000000000000,                           //  .###.
  0b1101100000000000,                           //  ##.##
  0b1010100000000000,                           //  #.#.#
};
// Rocks are hollow and lumpy (a crater in the middle), so they don't look like any ship.
const uint16_t ROCK_SMALL[3] PROGMEM = {
  0b1100000000000000,                           //  ##.
  0b1010000000000000,                           //  #.#
  0b0110000000000000,                           //  .##
};
const uint16_t ROCK_BIG[3] PROGMEM = {          // breaks into two small rocks
  0b0110000000000000,                           //  .##.
  0b1101000000000000,                           //  ##.#
  0b0110000000000000,                           //  .##.
};
```

```
60
61
62  // ============================================================== pickups (blinking)
63  const uint16_t PICKUP_AMMO[3] PROGMEM = {      // ammo crate: solid, unlike the hollow rocks
64    0b1110000000000000,                          //  ###
65    0b1110000000000000,                          //  ###
66    0b1110000000000000,                          //  ###
67  };
68  const uint16_t PICKUP_LIFE[3] PROGMEM = {      // extra life
69    0b0100000000000000,                          //  .#.
70    0b1110000000000000,                          //  ###
71    0b0100000000000000,                          //  .#.
72  };
73
74  // ================================================================ bosses
75  const uint16_t BOSS_WARDEN[4] PROGMEM = {      // phase 1: wide and slow, spread shots
76    0b0011111110000000,                          //  ..######..
77    0b0111111111000000,                          //  .########.
78    0b1101111011000000,                          //  ##.####.##
79    0b1001001001000000,                          //  #..#..#..#
80  };
81  const uint16_t BOSS_HUNTER[3] PROGMEM = {      // phase 2: small and fast, dashes and charges
82    0b1000100000000000,                          //  #...#
83    0b1111100000000000,                          //  #####
84    0b0101000000000000,                          //  .#.#.
85  };
86  const uint16_t BOSS_KING[5] PROGMEM = {        // phase 3: the Void King, first form
87    0b0011111111000000,                          //  ..########..
88    0b0111111111100000,                          //  .##########.
89    0b1110011001110000,                          //  ###..##..###
90    0b1111111111110000,                          //  ##############
91    0b0101010101010000,                          //  .#.#.#.#.#.#
92  };
93  const uint16_t BOSS_KING_ANGRY[5] PROGMEM = {  // second form: the eye opens
94    0b1011111111010000,                          //  #.########.#
95    0b0111100111100000,                          //  .####..####.
96    0b1110100101110000,                          //  ###.#..#.###
97    0b1111111111110000,                          //  ##############
98    0b1010100101010000,                          //  #.#.#..#.#.#
99  };
100
101 // ================================================================ signs
102 const uint16_t WARNING_SIGN[10] PROGMEM = {    // 11 x 10, shown before each boss
103   0b0000010000000000,                          //  .....#.....
104   0b0000101000000000,                          //  ....#.#....
105   0b0000101000000000,                          //  ....#.#....
106   0b0001000100000000,                          //  ...#...#...
107   0b0001010100000000,                          //  ...#.#.#...
108   0b0010010010000000,                          //  ..#..#..#..
109   0b0010010010000000,                          //  ..#..#..#..
110   0b0100000001000000,                          //  .#.......#.
111   0b0100010001000000,                          //  .#...#...#.
112   0b1111111111100000,                          //  ###########
113 };
114
115 // ============================================================== logo: "VOID", bold 10 x 5 letters
116 const uint8_t LOGO_W = 10, LOGO_H = 5, LOGO_X = 3;
117 const uint8_t LOGO_Y[4] = {0, 6, 12, 18};      // V in the red band ... D in the green band
118 const uint16_t LOGO_LETTERS[4][LOGO_H] PROGMEM = {
119   {                                            // V
120     0b1100000011000000,                        //  ##......##
121     0b0110000110000000,                        //  .##....##.
122     0b0011001100000000,                        //  ..##..##..
123     0b0001111000000000,                        //  ...####...
124     0b0000110000000000,                        //  ....##....
125   },
126   {                                            // O
127     0b0111111110000000,                        //  .########.
128     0b1100000011000000,                        //  ##......##
129     0b1100000011000000,                        //  ##......##
130     0b1100000011000000,                        //  ##......##
131     0b0111111110000000,                        //  .########.
132   },
133   {                                            // I
134     0b0011111100000000,                        //  ..######..
135     0b0000110000000000,                        //  ....##....
136     0b0000110000000000,                        //  ....##....
137     0b0000110000000000,                        //  ....##....
138     0b0011111100000000,                        //  ..######..
139   },
140   {                                            // D
141     0b1111111000000000,                        //  #######...
142     0b1100001100000000,                        //  ##....##..
143     0b1100000110000000,                        //  ##.....##.
```

```
    0b1100001100000000,                       //  ##....##..
    0b1111111000000000,                       //  #######...
  },
};
```

۱۱.۴ logo.h – لوگوی شروع و ملودی خوشامد

انیمیشن ۵٫۶ ثانیه‌ای لوگو و ملودی آن. تصویر با ساعت خود آهنگ پیش می‌رود، پس هر حرکت روی یک نت می‌افتد: پرش فضایی، سفینه، حروف VOID، «RUNNER» روی نوار، درخشش و تابلوی روشن.

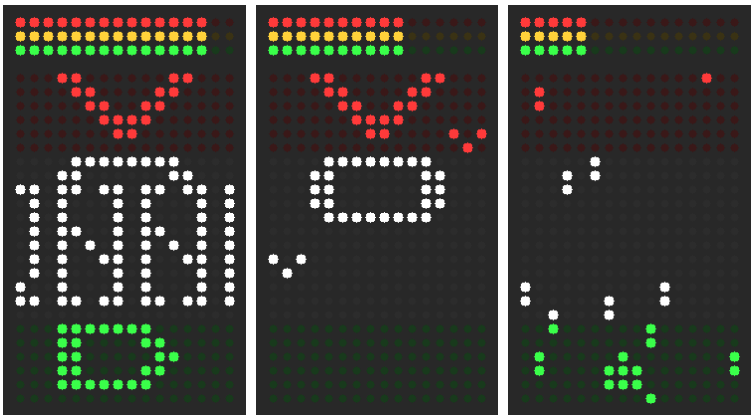

شکل ۲۷: آنچه *logo.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
drawLogoLetter(uint8_t i)	حرف i تابلوی VOID را می‌کشد (V، O، I و D از بالا به پایین).
logoBegin()	لوگو را شروع می‌کند: ستاره‌های پرش فضایی را پخش می‌کند و ملودی خوشامد را آغاز می‌کند.
starSpeed(uint32_t t)	سرعت ستاره‌ها بر حسب ۱/۱۶ پیکسل در هر تصویر: تند می‌شود، ترمز می‌کند، سپس آرام می‌رود.
drawStars(uint32_t t)	ستاره‌های پرش فضایی را حرکت می‌دهد و می‌کشد؛ هرچه تندتر بروند رگه‌شان بلندتر است.
drawShipUp(int16_t x, int16_t y, uint16_t frameNo)	سفینه را در حال پرواز رو به بالا با شعلهٔ موتور لرزان زیر آن می‌کشد.
logoEffects(uint32_t t)	جلوه‌های صوتی که دنبال تصویر می‌آیند: ووش، لغزش و جرقهٔ حروف.
logoUpdate(uint16_t frameNo)	یک تصویر از لوگو می‌کشد. وقتی لوگو تمام شد true برمی‌گرداند.

کد منبع

```
/*
 * logo.h -- the start-up logo, played in sync with the welcome melody.
 *
 * The picture is driven by the song's own clock (songTime()), so every movement lands
 * on its note. Timeline (ms):
 *     0 - 1200  warp: star streaks rush past and speed up      rising "whoosh" + low drone
 *  1200 - 2000  the ship rises from the bottom and brakes       3 falling braking notes
 *  2000 - 2400  the ship shoots up and out of the screen        quick rising glide
 *  2400 - 3600  V, O, I, D light up one by one, flickering on;  one note per letter
 *               enemy drones fly past in the side margins       + crackle while it flickers
 *  3600 - 4800  "RUNNER" crosses on a dark ribbon, towed by     melody, harmony and bass
 *               the ship
 *  4800 - 5600  the whole screen flashes, then the sign glows   final A-minor chord
 * The status bars fill up during the logo like a start-up progress bar.
 */
#pragma once
#include "display.h"
#include "sound.h"
#include "art.h"

// ---- welcome melody: one track per buzzer, 1 tick = 50 ms (MIDI note numbers)
const Note BOOT_MELODY[] PROGMEM = {
  {0, 24},                                          // warp (whoosh is an effect)
  {0, 16},                                          // ship arrives
  {0, 8},                                           // ship leaves (glide is an effect)
  {69, 6}, {72, 6}, {76, 6}, {81, 6},               // V O I D: A4 C5 E5 A5
  {76, 3}, {74, 3}, {72, 3}, {74, 3}, {76, 3}, {76, 3}, {76, 6},   // RUNNER tune
  {76, 8}, {0, 8},                                  // final chord, top note E5
};
const Note BOOT_HARMONY[] PROGMEM = {
```

```
  {0, 24},
  {64, 4}, {60, 4}, {57, 6}, {0, 2},                // braking: E4 C4 A3
  {0, 32},
  {72, 6}, {71, 6}, {69, 6}, {71, 6},               // C5 B4 A4 B4
  {72, 8}, {0, 8},                                  // final chord, middle note C5
};
const Note BOOT_BASS[] PROGMEM = {
  {45, 24},                                         // A2 drone under the warp
  {0, 24},
  {0, 24},                                          // (crackle effects)
  {45, 3}, {45, 3}, {52, 3}, {45, 3}, {45, 3}, {45, 3}, {43, 3}, {45, 3},  // bass line
  {57, 8}, {0, 8},                                  // final chord, low note A3
};
const Track BOOT_SONG[BUZZER_COUNT] = {
  {BOOT_MELODY, sizeof(BOOT_MELODY) / sizeof(Note)},
  {BOOT_HARMONY, sizeof(BOOT_HARMONY) / sizeof(Note)},
  {BOOT_BASS, sizeof(BOOT_BASS) / sizeof(Note)},
};
const uint8_t BOOT_TICK_MS = 50;
const uint16_t LOGO_END_MS = 5600;
const uint16_t LETTER_START[4] = {2400, 2700, 3000, 3300};
const uint8_t LETTER_FLICKER_MS = 120;

// ---- warp stars: y is stored in 1/16 pixel so they can move smoothly
const uint8_t STAR_COUNT = 12;
int8_t starX[STAR_COUNT];
int16_t starY16[STAR_COUNT];

// Draws letter i of the VOID sign (V, O, I, D from top to bottom).
void drawLogoLetter(uint8_t i) {
  drawBitmap(LOGO_X, LOGO_Y[i], LOGO_LETTERS[i], LOGO_W, LOGO_H, true);
}

// Starts the logo: scatters the warp stars and starts the welcome melody.
void logoBegin() {
  for (uint8_t i = 0; i < STAR_COUNT; i++) {
    starX[i] = random(SCREEN_W);
    starY16[i] = random(SCREEN_H * 16);
  }
  soundPlaySong(BOOT_SONG, BOOT_TICK_MS, false);
}

// Star speed in 1/16 pixel per picture: speeds up, brakes, then drifts.
uint8_t starSpeed(uint32_t t) {
  if (t < 1200) return 4 + 28 * t / 1200;
  if (t < 2000) return 32 - 29 * (t - 1200) / 800;
  return 3;
}

// Moves and draws the warp stars; the faster they fly, the longer their streaks.
void drawStars(uint32_t t) {
  uint8_t speed = starSpeed(t);
  uint8_t len = 1 + speed / 10;                     // faster = longer streak
  for (uint8_t i = 0; i < STAR_COUNT; i++) {
    starY16[i] += speed;
    if (starY16[i] / 16 - len > SCREEN_H) {         // fell off the bottom: start again on top
      starY16[i] = -16 * (int16_t)random(4);
      starX[i] = random(SCREEN_W);
    }
    for (uint8_t k = 0; k < len; k++) setPixel(starX[i], starY16[i] / 16 - k, true);
  }
}

// Draws the ship flying up, with a flickering engine flame below it.
void drawShipUp(int16_t x, int16_t y, uint16_t frameNo) {
  drawBitmap(x, y, SHIP_UP, 3, 3, true);
  if (frameNo & 1) setPixel(x + 1, y + 3, true);    // flickering engine flame
}

// Sound effects that follow the picture: whoosh, glide and letter crackle.
void logoEffects(uint32_t t) {
  if (t < 1200) soundEffect(0, 150 + 1350 * t / 1200);
  else if (t >= 2000 && t < 2300) soundEffect(0, 400 + 1200 * (t - 2000) / 300);
  else soundRelease(0);
  bool crackle = false;
  for (uint8_t i = 0; i < 4; i++)
    if (t >= LETTER_START[i] && t < LETTER_START[i] + LETTER_FLICKER_MS) crackle = true;
  if (crackle) soundEffect(2, random(1500, 3500));
  else soundRelease(2);
}

// Draws one picture of the logo. Returns true when the logo is over.
bool logoUpdate(uint16_t frameNo) {
  uint32_t t = songTime();
```

```
  if (t >= LOGO_END_MS) {
    soundRelease(0);
    soundRelease(2);
    return true;
  }
  logoEffects(t);
  clearScreen();
  if (t < 2400) drawStars(t);
  if (t >= 1200 && t < 2000) {                    // ship rises and brakes
    uint32_t p = (t - 1200) * 100 / 800, rest = 100 - p;
    drawShipUp(6, 19 + 5 * rest * rest / 10000, frameNo);
  } else if (t >= 2000 && t < 2400) {             // ship shoots up and out
    uint32_t q = (t - 2000) * 100 / 400;
    int16_t y = 19 - (int16_t)(23 * q * q / 10000);
    drawShipUp(6, y, frameNo);
    setPixel(7, y + 4, true);                     // longer flame
  }
  if (t >= LETTER_START[0] && t < 4800) {
    for (uint8_t i = 0; i < 4; i++) {             // letters light up, flickering at first
      if (t < LETTER_START[i]) continue;
      uint32_t age = t - LETTER_START[i];
      if (age >= LETTER_FLICKER_MS || (age / 30) % 2 == 0) drawLogoLetter(i);
    }
    if (t < 3600) {                               // drones fly past in the side margins
      drawBitmap(0, -2 + (int16_t)((t - 2400) * 26 / 1200), ENEMY_DRONE, 3, 2, true);
      if (t >= 2800) drawBitmap(13, -2 + (int16_t)((t - 2800) * 26 / 1200), ENEMY_DRONE, 3, 2, true);
    }
  }
  if (t >= 3600 && t < 4800) {                    // "RUNNER" on a dark ribbon, towed by the ship
    fillRect(0, 8, SCREEN_W, 9, false);
    for (uint8_t x = 0; x < SCREEN_W; x++)
      if ((x + t / 60) % 3) {                     // ribbon edges move like a conveyor
        setPixel(x, 8, true);
        setPixel(x, 16, true);
      }
    int16_t x = 16 - (int16_t)((t - 3600) * 51 / 1200);
    drawText(x, 9, PSTR("RUNNER"), true);
    drawBitmap(x - 4, 11, SHIP_LEFT, 3, 3, true);
  }
  if (t >= 4800) {                                // final hit: flash, then the sign glows
    if (t < 4900) fillRect(0, 0, SCREEN_W, SCREEN_H, true);
    else for (uint8_t i = 0; i < 4; i++) drawLogoLetter(i);
  }
  uint8_t level = t >= 4800 ? 16 : t * 16 / 4800;  // status bars: start-up progress
  for (uint8_t b = 0; b < STATUS_ROWS; b++) setStatusBar(b, level);
  return false;
}
```

۱۲.۴ title.h – صفحهٔ عنوان

تابلوی VOID روشن می‌ماند، سفینه‌ها مدام از کنارش می‌گذرند و هر ۷ ثانیه یک بنر صفحه‌های «PUSH»، یک R بزرگ، «TO» و «PLAY» را نشان می‌دهد. پس از ۲۰ ثانیه بدون کلید، نمایش خودکار شروع می‌شود.



شکل ۲۸: آنچه *title.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
titleDraw(uint32_t t, uint16_t frameNo)	یک تصویر از صفحهٔ عنوان در زمان t (میلی‌ثانیه از باز شدن) می‌کشد.


کد منبع

```
/*
 * title.h -- title screen: the VOID sign stays lit, ships keep flying past it, and every
 * 7 seconds a banner shows the pages "PUSH", a big R, "TO", "PLAY".
 */
#pragma once
#include "display.h"
#include "art.h"
#include "logo.h"

// Draws one picture of the title screen at time t (ms since it opened).
void titleDraw(uint32_t t, uint16_t frameNo) {
  clearScreen();
  for (uint8_t i = 0; i < 4; i++) drawLogoLetter(i);
  drawBitmap(0, -2 + (int16_t)(t % 2400 * 26 / 2400), ENEMY_DRONE, 3, 2, true);   // drone down the left
  int16_t shipY = 24 - (int16_t)(t % 2000 * 28 / 2000);                            // ship up the right
  drawBitmap(13, shipY, SHIP_UP, 3, 3, true);
  if (frameNo & 1) setPixel(14, shipY + 3, true);
  uint32_t b = t % 7000;
  if (b < 4 * PAGE_MS) {                              // the banner: PUSH, R, TO, PLAY
    fillRect(0, 8, SCREEN_W, 9, false);
    for (uint8_t x = 0; x < SCREEN_W; x++)
      if ((x + t / 60) % 3) {
        setPixel(x, 8, true);
        setPixel(x, 16, true);
      }
    uint8_t page = b / PAGE_MS;
    if (page == 1) drawChar(5, 9, 'R', true);     // the big R, 5 x 7
    else drawTextCentered(10, page == 0 ? PSTR("PUSH") : page == 2 ? PSTR("TO") : PSTR("PLAY"), false);
  }
  for (uint8_t bar = 0; bar < STATUS_ROWS; bar++) {      // status bars: a slow chase
    uint8_t head = (t / 120 + bar * 5) % 16;
    setStatusBits(bar, (1u << head) | (1u << ((head + 15) % 16)));
  }
}
```

۱۳.۴ menu.h – منوی اصلی

منوی PLAY، SHIP، OPTS و BEST: W/S زیرخط را جابه‌جا می‌کند، R گزینه را باز می‌کند و Q به صفحهٔ عنوان برمی‌گردد.

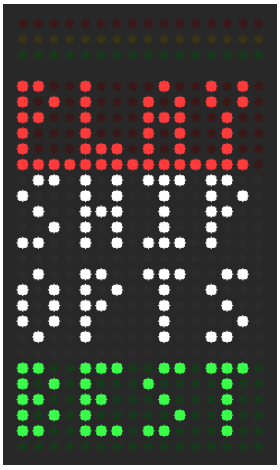

شکل ۲۹: آنچه *menu.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
menuItem(uint8_t i)	متن گزینهٔ i منو (فهرست متن‌ها در فلش ذخیره است).
menuUpdate()	کلیدها را رسیدگی می‌کند؛ گزینهٔ باز شدنی، MENU_BACK یا MENU_NONE را برمی‌گرداند.
menuDraw()	چهار گزینهٔ منو را می‌کشد، زیر گزینهٔ انتخاب‌شده خط می‌کشد و نوارهای وضعیت را خاموش می‌کند.

کد منبع

```
/*
 * menu.h -- main menu: PLAY, SHIP, OPTS, BEST (W/S to choose, R to open, Q back).
 * The chosen item is underlined.
 */
#pragma once
#include "display.h"
#include "input.h"
#include "sound.h"

const char MENU_PLAY[] PROGMEM = "PLAY";
const char MENU_SHIP[] PROGMEM = "SHIP";
const char MENU_OPTS[] PROGMEM = "OPTS";
const char MENU_BEST[] PROGMEM = "BEST";
const char* const MENU_ITEMS[] PROGMEM = {MENU_PLAY, MENU_SHIP, MENU_OPTS, MENU_BEST};
enum MenuItem : int8_t { MENU_ITEM_PLAY, MENU_ITEM_SHIP, MENU_ITEM_OPTS, MENU_ITEM_BEST };
const uint8_t MENU_COUNT = 4;
uint8_t menuIndex = 0;

// Text of menu item i (the list of texts is stored in flash).
const char* menuItem(uint8_t i) {
  return (const char*)pgm_read_ptr(&MENU_ITEMS[i]);
}

const int8_t MENU_NONE = -1, MENU_BACK = -2;


// Handles the keys; returns the item to open, MENU_BACK or MENU_NONE.
int8_t menuUpdate() {
  if (keyPressed(KEY_UP)) {
    menuIndex = (menuIndex + MENU_COUNT - 1) % MENU_COUNT;
    soundBeep(1400, 25);
  }
  if (keyPressed(KEY_DOWN)) {
    menuIndex = (menuIndex + 1) % MENU_COUNT;
    soundBeep(1400, 25);
  }
  if (keyPressed(KEY_FIRE)) {
    soundBeep(2000, 60);
```

```
    return menuIndex;
  }
  if (keyPressed(KEY_BACK)) return MENU_BACK;
  return MENU_NONE;
}

// Draws the four menu items, underlines the chosen one and switches the status bars off.
void menuDraw() {
  clearScreen();
  for (uint8_t i = 0; i < MENU_COUNT; i++) {
    uint8_t y = i * 6;
    if (i == menuIndex) fillRect(0, y + 5, 15, 1, true); // underline in the gap below
    drawText(0, y, menuItem(i), false);
  }
  for (uint8_t bar = 0; bar < STATUS_ROWS; bar++) setStatusBits(bar, 0);
}
```

۱۴.۴ world.h – همهٔ چیزهای روی صفحهٔ بازی

داده‌های دنیای بازی در مخزن‌هایی با اندازهٔ ثابت: بازیکن، گلوله‌ها و مین‌ها، دشمن‌ها و سنگ‌ها، برداشتنی‌ها، ذرات انفجار و باس، همراه با جدول‌های سه سفینه و انواع دشمن و توابع کمکی کوچک برای ساختن آن‌ها. `malloc` به کار نرفته، پس هیچ چیز وسط بازی تمام نمی‌شود.

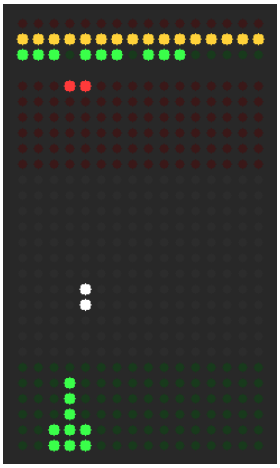

شکل ۳۰: آنچه *world.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
playerShip()	ردیف جدول (سرعت، آهنگ شلیک، مهمات ...) سفینه‌ای که استفاده می‌شود.
shipPixel(int8_t x, int8_t y)	اگر سفینهٔ بازیکن در موقعیت (x، y) صفحه پیکسل روشن داشته باشد true: اصابت دقیق.
addScore(uint16_t points)	امتیاز را اضافه می‌کند؛ امتیاز در ۹۹۹۹ متوقف می‌شود (چهار رقم روی صفحه جا می‌شود).
playerShotCount()	گلوله‌های بازیکن در هوا را می‌شمارد (حداکثر MAX_PLAYER_SHOTS).
newShot(int8_t x, int8_t y, uint8_t kind, uint16_t stepMs)	یک گلوله یا مین تازه را در جای خالی مخزن شلیک‌ها می‌گذارد و آن را برمی‌گرداند، یا اگر همهٔ جاها پر باشد NULL.
enemyShot(int8_t x, int8_t y, int8_t dx, uint8_t sideEvery, uint8_t stepMs)	یک گلولهٔ دشمن شلیک می‌کند: مستقیم به پایین، یا با dx = ۱- / ۱ هر sideEvery سطر یک گام به پهلو (شلیک پخش).
aimedShot(int8_t x, int8_t y, uint8_t stepMs)	شلیکی که به سمت بازیکن می‌رود: هر چند سطر یک بار یک گام به پهلو برمی‌دارد.
infoOf(const Enemy& e)	ردیف جدول (تصویر، اندازه، جان، امتیاز، سرعت) نوع یک دشمن.
fireDelay(uint16_t ms)	فاصلهٔ شلیک دشمن را متناسب با سختی تغییر می‌دهد (EASY کُندتر، HARD سریع‌تر).
spawnEnemy(uint8_t type, int8_t x, int8_t y)	یک دشمن یا سنگ تازه از یک نوع را در (x، y) در جای خالی می‌گذارد و آن را برمی‌گرداند، یا اگر همهٔ جاها پر باشد NULL.
enemiesAlive()	دشمن‌ها و سنگ‌های روی صفحه را می‌شمارد.
spawnPickup(uint8_t type, int8_t x, int8_t y)	اگر جای خالی باشد، یک برداشتنی (جعبهٔ مهمات یا جان اضافه) در (x، y) می‌اندازد.
pickupAlive(uint8_t type)	اگر برداشتنی از این نوع روی صفحه باشد true.
explode(int8_t cx, int8_t cy, uint8_t count, uint8_t speed)	یک انفجار را شروع می‌کند: حداکثر count پیکسل با سرعت‌های تصادفی از (cx، cy) به بیرون پرتاب می‌شوند.
bossSprite()	تصویر باس فعلی (VOID KING برای هر شکل یک تصویر دارد).
shake(uint8_t frames)	صفحه را برای چند تصویر می‌لرزاند (لرزش طولانی‌تری که در جریان است کوتاه نمی‌شود).
worldClear()	صفحهٔ بازی را خالی می‌کند: بدون شلیک، دشمن، برداشتنی، پیکسل انفجار یا باس.

کد منبع

```
1  /*
```

```
 * world.h -- everything that lives on the game screen: the player, bullets, enemies and
 * rocks, pickups, explosion particles and the boss.
 *
 * Only fixed-size arrays (no malloc): the Mega has 8 KB of RAM and nothing may run out in
 * the middle of a game. Positions are in LED pixels, (0,0) = top-left of the game screen.
 * All timing uses gameMs, a clock that advances one frame at a time and stops on pause.
 */
#pragma once
#include "config.h"
#include "display.h"
#include "sound.h"
#include "tunes.h"
#include "art.h"
#include "storage.h"

uint32_t gameMs = 0;
const int8_t PLAYER_MIN_Y = 9, PLAYER_MAX_Y = SCREEN_H - 3;

// ================================================================ the three ships
struct ShipInfo {
  const char* name;                     // in flash
  const uint16_t* sprite;
  uint8_t moveMs;                       // ms per pixel while gliding
  uint16_t fireMs;                      // ms between shots while R is held
  uint8_t ammoMax;
  bool twin;                            // two guns: two bullets, two ammo per shot
  uint8_t speedLevel, ammoLevel, fireLevel;   // 1..3, shown in the hangar
};
const char NAME_BOLT[] PROGMEM = "BOLT";
const char NAME_DART[] PROGMEM = "DART";
const char NAME_TWIN[] PROGMEM = "TWIN";
const ShipInfo SHIPS[3] = {
  {NAME_BOLT, SHIP_BOLT, 70, 200, 60, false, 2, 2, 2},
  {NAME_DART, SHIP_DART, 45, 220, 40, false, 3, 1, 2},
  {NAME_TWIN, SHIP_TWIN, 95, 260, 80, true, 1, 3, 3},
};

// ================================================================ player
struct Player {
  int8_t x, y;                          // top-left of the 3 x 3 ship
  uint8_t ship, lives, ammo;
  uint16_t score;
  bool firing;                          // R was pressed and no move key cancelled it
  uint8_t burst;                        // shots since R was pressed
  char moveKey;                         // move key that is held (0 = none)
  bool gliding;                         // the key was held long enough to glide
  uint32_t nextShot, nextMove, shieldUntil;
  bool lowAmmoWarned;
};
Player player;
bool testShield = false;                // test hook: the player can't be hit
bool autopilot = false;                 // test hook: the game plays itself

// The table entry (speed, fire rate, ammo ...) of the ship in use.
const ShipInfo& playerShip() {
  return SHIPS[player.ship];
}

// True if the player's ship has a lit pixel at screen position (x, y): exact hits.
bool shipPixel(int8_t x, int8_t y) {
  int8_t c = x - player.x, r = y - player.y;
  if (c < 0 || c > 2 || r < 0 || r > 2) return false;
  return pgm_read_word(playerShip().sprite + r) & (0x8000u >> c);
}

// Adds points to the score, which stops at 9999 (four digits fit on the screen).
void addScore(uint16_t points) {
  player.score = (player.score + points > 9999) ? 9999 : player.score + points;
}

// ================================================================ shots (player and enemy)
enum ShotKind : uint8_t { SHOT_PLAYER, SHOT_ENEMY, SHOT_MINE };
struct Shot {
  int8_t x, y, dx;                      // dx: sideways step (-1, 0, 1)
  uint8_t sideEvery, sideCount;         // sideways step every n down steps
  uint16_t stepMs;                      // ms per pixel
  uint8_t kind;
  uint32_t next;
  bool alive;
};
const uint8_t MAX_SHOTS = 28, MAX_PLAYER_SHOTS = 6;
Shot shots[MAX_SHOTS];

// Counts the player's bullets in the air (at most MAX_PLAYER_SHOTS).
```

```
uint8_t playerShotCount() {
  uint8_t n = 0;
  for (uint8_t i = 0; i < MAX_SHOTS; i++)
    if (shots[i].alive && shots[i].kind == SHOT_PLAYER) n++;
  return n;
}

// Puts a new bullet or mine in a free slot of the shot pool and returns it, or NULL when
// all slots are in use.
Shot* newShot(int8_t x, int8_t y, uint8_t kind, uint16_t stepMs) {
  for (uint8_t i = 0; i < MAX_SHOTS; i++) {
    Shot& s = shots[i];
    if (s.alive) continue;
    s = {x, y, 0, 1, 0, stepMs, kind, gameMs + stepMs, true};
    return &s;
  }
  return NULL;                          // pool full: the shot is simply not fired
}

// Fires an enemy bullet: straight down, or with dx = -1 / 1 one step sideways every
// sideEvery rows (spread shots).
void enemyShot(int8_t x, int8_t y, int8_t dx, uint8_t sideEvery, uint8_t stepMs) {
  Shot* s = newShot(x, y, SHOT_ENEMY, stepMs);
  if (s) {
    s->dx = dx;
    s->sideEvery = sideEvery;
  }
}

// A shot that heads for the player: it steps sideways once every few rows.
void aimedShot(int8_t x, int8_t y, uint8_t stepMs) {
  int8_t cols = (player.x + 1) - x, rows = player.y - y;
  if (rows < 1) rows = 1;
  int8_t dx = (cols > 0) - (cols < 0);
  uint8_t every = cols ? constrain(rows / abs(cols), 1, 6) : 1;
  enemyShot(x, y, dx, every, stepMs);
}

// ============================================================== enemies and rocks
enum EnemyType : uint8_t { EN_DRONE, EN_WEAVER, EN_MINER, EN_CRUISER, EN_ROCK_S, EN_ROCK_B };
struct EnemyInfo {
  const uint16_t* sprite;
  uint8_t w, h, hp;
  uint8_t score;
  uint16_t stepMs;                      // ms per pixel of its main movement
};
const EnemyInfo ENEMY_INFO[6] = {
  {ENEMY_DRONE, 3, 2, 1, 10, 450},
  {ENEMY_WEAVER, 3, 2, 1, 15, 600},
  {ENEMY_MINER, 3, 2, 2, 20, 280},
  {ENEMY_CRUISER, 5, 3, 5, 40, 500},
  {ROCK_SMALL, 3, 3, 1, 5, 360},
  {ROCK_BIG, 4, 3, 2, 10, 520},
};
struct Enemy {
  int8_t x, y, dir;
  uint8_t type, hp, flash, steps;
  uint32_t nextMove, nextSide, nextShot;
  bool alive;
};
const uint8_t MAX_ENEMIES = 16;
Enemy enemies[MAX_ENEMIES];

// The table entry (sprite, size, health, points, speed) of an enemy's type.
const EnemyInfo& infoOf(const Enemy& e) {
  return ENEMY_INFO[e.type];
}

// Scales an enemy fire interval by the difficulty (EASY slower, HARD faster).
uint16_t fireDelay(uint16_t ms) {
  return (uint32_t)ms * DIFF_FIRE_SCALE[settings.difficulty] / 100;
}

// Puts a new enemy or rock of a type at (x, y) in a free slot and returns it, or NULL
// when all slots are in use.
Enemy* spawnEnemy(uint8_t type, int8_t x, int8_t y) {
  for (uint8_t i = 0; i < MAX_ENEMIES; i++) {
    Enemy& e = enemies[i];
    if (e.alive) continue;
    const EnemyInfo& info = ENEMY_INFO[type];
    e = {x, y, 1, type, info.hp, 0, 0, gameMs + info.stepMs, gameMs + 300,
         gameMs + fireDelay(1200 + random(1500)), true};
    return &e;
  }
```

```
  return NULL;
}

// Counts the enemies and rocks on the screen.
uint8_t enemiesAlive() {
  uint8_t n = 0;
  for (uint8_t i = 0; i < MAX_ENEMIES; i++) n += enemies[i].alive;
  return n;
}

// ================================================================ pickups
enum PickupType : uint8_t { PK_AMMO, PK_LIFE };
struct Pickup {
  int8_t x, y;
  uint8_t type;
  uint32_t next;
  bool alive;
};
const uint8_t MAX_PICKUPS = 4;
Pickup pickups[MAX_PICKUPS];

// Drops a pickup (ammo crate or extra life) at (x, y) if a slot is free.
void spawnPickup(uint8_t type, int8_t x, int8_t y) {
  for (uint8_t i = 0; i < MAX_PICKUPS; i++)
    if (!pickups[i].alive) {
      pickups[i] = {(int8_t)constrain(x, 0, SCREEN_W - 3), y, type, gameMs + 350, true};
      return;
    }
}

// True if a pickup of this type is on the screen.
bool pickupAlive(uint8_t type) {
  for (uint8_t i = 0; i < MAX_PICKUPS; i++)
    if (pickups[i].alive && pickups[i].type == type) return true;
  return false;
}

// ============================================================== explosion particles
// Only the boss and the player's ship explode into flying pixels; ordinary enemies just
// vanish, so the small screen does not fill up with debris that looks like bullets.
struct Particle {
  int16_t x16, y16;                     // position in 1/16 pixel
  int8_t vx, vy;                        // speed in 1/16 pixel per frame
  uint8_t life;                         // frames left
};
const uint8_t MAX_PARTICLES = 40;
Particle particles[MAX_PARTICLES];

// Starts an explosion: up to `count` pixels fly out from (cx, cy) at random speeds.
void explode(int8_t cx, int8_t cy, uint8_t count, uint8_t speed) {
  for (uint8_t i = 0; i < MAX_PARTICLES && count; i++) {
    Particle& p = particles[i];
    if (p.life) continue;
    p = {(int16_t)(cx * 16 + 8), (int16_t)(cy * 16 + 8), (int8_t)random(-speed, speed + 1),
         (int8_t)random(-speed, speed + 1), (uint8_t)random(8, 18)};
    count--;
  }
}

// ================================================================ boss
enum BossKind : uint8_t { BOSS_KIND_WARDEN, BOSS_KIND_HUNTER, BOSS_KIND_KING };
struct Boss {
  bool alive;
  uint8_t kind, w, h, flash, form, mode;
  int8_t x, y, dir, targetX;
  int16_t hp, maxHp;
  uint32_t nextMove, nextShot, nextAction, modeUntil;
  uint8_t burst;
};
Boss boss;

// The picture of the current boss (the VOID KING has one per form).
const uint16_t* bossSprite() {
  if (boss.kind == BOSS_KIND_WARDEN) return BOSS_WARDEN;
  if (boss.kind == BOSS_KIND_HUNTER) return BOSS_HUNTER;
  return boss.form ? BOSS_KING_ANGRY : BOSS_KING;
}

// ================================================================ helpers
// True when two boxes overlap (the ship against enemies, rocks, the boss, pickups).
bool boxesTouch(int8_t ax, int8_t ay, uint8_t aw, uint8_t ah,
                int8_t bx, int8_t by, uint8_t bw, uint8_t bh) {
  return ax < bx + bw && bx < ax + aw && ay < by + bh && by < ay + ah;
}
```


```

uint8_t shakeFrames = 0;
// Shakes the screen for some pictures (a longer shake already running is not cut short).
void shake(uint8_t frames) {
  if (frames > shakeFrames) shakeFrames = frames;
}

// Empties the game screen: no shots, enemies, pickups, explosion pixels or boss.
void worldClear() {
  for (uint8_t i = 0; i < MAX_SHOTS; i++) shots[i].alive = false;
  for (uint8_t i = 0; i < MAX_ENEMIES; i++) enemies[i].alive = false;
  for (uint8_t i = 0; i < MAX_PICKUPS; i++) pickups[i].alive = false;
  for (uint8_t i = 0; i < MAX_PARTICLES; i++) particles[i].life = 0;
  boss.alive = false;
}
```

۱۵.۴ player.h – سفینهٔ بازیکن

قواعد کلید برای حرکت و شلیک (ضربهٔ کوتاه، نگه داشتن، شلیک خودکار، برتری جدیدترین کلید)، مهمات و هشدار کمبود مهمات، آسیب دیدن (از دست دادن جان، انفجار، لرزش، سپر) و رسم سفینه.

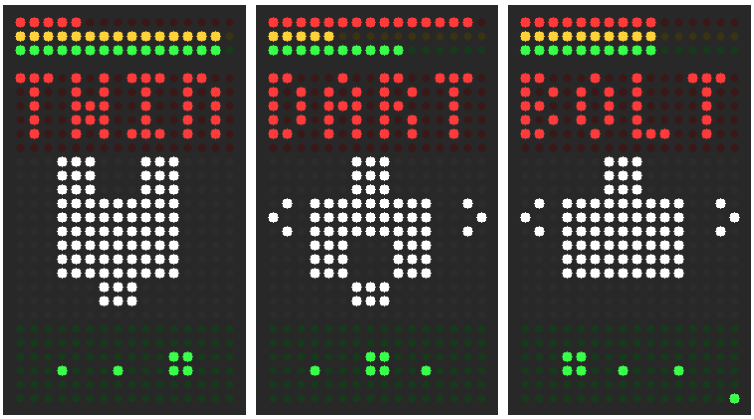

شکل ۳۱: آنچه *player.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
playerStart(bool newGame)	سفینه را آماده می‌کند: پایین وسط، مهمات پر، بدون شلیک. newGame = همچنین سفینهٔ آشیانه، جان‌های سطح سختی و امتیاز ۰ (مرحلهٔ تازه این‌ها را نگه می‌دارد).
playerShielded()	تا وقتی به سفینه نمی‌شود ضربه زد true (۲ ثانیه پس از اصابت، یا فرمان آزمون i!).
movePlayer(char key)	سفینه را یک پیکسل در جهت کلید حرکت می‌برد و آن را روی صفحه و در سطرهای ۹ تا ۲۳ نگه می‌دارد.
playerFire()	اگر مهمات و جای خالی گلوله باشد یک شلیک انجام می‌دهد (TWIN: دو گلوله). صدای شلیک را پخش می‌کند (با شروع شلیک خودکار یک جیک) و وقتی مهمات کم شود یک بار هشدار می‌دهد.
playerKeys()	کلیدها: یک بار در هر تصویر صدا زده می‌شود (فشردن کلیدها برای هر تصویر شمرده می‌شود).
playerStep()	حرکت و شلیک: یک بار در هر گام بازی (۲۰ میلی‌ثانیه از زمان بازی) صدا زده می‌شود.
playerHit(const __FlashStringHelper* cause)	به سفینه ضربه خورده (مگر سپر داشته باشد): یک جان کمتر، ۲ ثانیه سپر، انفجار، لرزش و صدا. cause می‌گوید چه چیزی به آن خورده، برای گزارش Serial، مثلاً F("shot").
drawPlayer(uint16_t frameNo)	سفینه و شعلهٔ موتورش را می‌کشد؛ هنگام داشتن سپر چشمک می‌زند و هنگام شلیک خودکار دماغه‌اش چشمک می‌زند.

کد منبع

```
/*
 * player.h -- the player's ship: moving, firing, ammo and lives.
 *
 * Key rules (agreed in the design):
 *   move   tap = one pixel; hold = after a short delay the ship glides at its speed
 *   fire   press R = one bullet; keep holding = auto-fire (a chirp, the nose blinks);
 *          release R = stop
 *   The newest key wins: a move key stops the fire (press R again to fire again), and
 *   while R is held the ship does not glide.
 * Every shot costs ammo (TWIN: two bullets, two ammo). At LOW_AMMO a warning beeps and
 * the yellow bar blinks. A hit costs a life and gives two seconds of blinking shield.
 */
#pragma once
#include "world.h"
#include "input.h"

const char MOVE_KEYS[4] = {KEY_UP, KEY_LEFT, KEY_DOWN, KEY_RIGHT};

// Gets the ship ready: bottom centre, full ammo, not firing. newGame = also the ship from
// the hangar, the lives of the difficulty and score 0 (a new phase keeps those).
```

```
void playerStart(bool newGame) {
  if (newGame) {
    player.ship = settings.ship;
    player.lives = DIFF_LIVES[settings.difficulty];
    player.score = 0;
  }
  player.x = (SCREEN_W - 3) / 2;
  player.y = SCREEN_H - 4;
  player.ammo = playerShip().ammoMax;    // every phase starts with a full magazine
  player.firing = false;
  player.moveKey = 0;
  player.shieldUntil = 0;
  player.lowAmmoWarned = false;
}

// True while the ship can't be hit (2 s after a hit, or the test hook !i).
bool playerShielded() {
  return testShield || gameMs < player.shieldUntil;
}

// Moves the ship one pixel in the direction of a move key, staying on the screen and in
// rows 9-23.
void movePlayer(char key) {
  int8_t dx = (key == KEY_RIGHT) - (key == KEY_LEFT);
  int8_t dy = (key == KEY_DOWN) - (key == KEY_UP);
  player.x = constrain(player.x + dx, 0, SCREEN_W - 3);
  player.y = constrain(player.y + dy, PLAYER_MIN_Y, PLAYER_MAX_Y);
}

// Fires one shot (TWIN: two bullets) if there is ammo and a free bullet slot. Plays the
// shot sound (a chirp when auto-fire starts) and warns once when ammo gets low.
void playerFire() {
  const ShipInfo& ship = playerShip();
  uint8_t bullets = (ship.twin && player.ammo >= 2) ? 2 : 1;
  if (player.ammo == 0) {
    soundSfx(SFX(SFX_EMPTY), 2);
    player.nextShot = gameMs + ship.fireMs;
    return;
  }
  if (playerShotCount() + bullets > MAX_PLAYER_SHOTS) return;   // try again next step
  if (bullets == 2) {
    newShot(player.x, player.y - 1, SHOT_PLAYER, PLAYER_SHOT_MS);
    newShot(player.x + 2, player.y - 1, SHOT_PLAYER, PLAYER_SHOT_MS);
  } else {
    newShot(player.x + 1, player.y - 1, SHOT_PLAYER, PLAYER_SHOT_MS);
  }
  player.ammo -= bullets;
  player.nextShot = gameMs + ship.fireMs;
  if (++player.burst == 2) soundSfx(SFX(SFX_CHIRP), 2);   // auto-fire has started
  else soundSfx(SFX(SFX_SHOT), 1);
  if (player.ammo <= LOW_AMMO && !player.lowAmmoWarned) {
    player.lowAmmoWarned = true;
    soundSfx(SFX(SFX_LOW_AMMO), 4);
  }
}

// Keys: called once per picture (key presses are counted per picture).
void playerKeys() {
  if (autopilot) return;
  for (uint8_t i = 0; i < 4; i++)
    if (keyPressed(MOVE_KEYS[i])) {      // newest move key takes over and stops the fire
      player.moveKey = MOVE_KEYS[i];
      player.gliding = false;
      player.nextMove = gameMs;          // first pixel right away
      player.firing = false;
    }
  if (keyPressed(KEY_FIRE)) {
    player.firing = true;
    player.burst = 0;
    player.nextShot = gameMs;            // first bullet right away
  }
  if (player.moveKey && !keyHeld(player.moveKey)) {   // let go: another held move key?
    player.moveKey = 0;
    for (uint8_t i = 0; i < 4; i++)
      if (keyHeld(MOVE_KEYS[i])) {
        player.moveKey = MOVE_KEYS[i];
        player.gliding = true;
        player.nextMove = gameMs + playerShip().moveMs;
      }
  }
}

// Movement and fire: called once per game step (20 ms of game time).
void playerStep() {
```

```
  if (player.lives == 0) return;
  if (player.firing) {
    if (!autopilot && !keyHeld(KEY_FIRE)) player.firing = false;   // R released
    else if (gameMs >= player.nextShot) playerFire();
  }
  if (!player.firing && player.moveKey && gameMs >= player.nextMove) {
    movePlayer(player.moveKey);
    player.nextMove = gameMs + (player.gliding ? playerShip().moveMs : MOVE_REPEAT_DELAY);
    player.gliding = true;
  }
}

// The ship is hit (unless shielded): one life less, 2 s shield, explosion, shake and sound.
// cause says what hit it, for the Serial log, e.g. F("shot").
void playerHit(const __FlashStringHelper* cause) {
  if (playerShielded() || player.lives == 0) return;
  player.lives--;
  player.shieldUntil = gameMs + HIT_SHIELD_MS;
  player.firing = false;
  explode(player.x + 1, player.y + 1, 12, 14);
  shake(12);
  soundSfx(SFX(SFX_PLAYER_HIT), 6);
  Serial.print(F("[VR] hit by "));
  Serial.print(cause);
  Serial.print(F(", lives "));
  Serial.println(player.lives);
}

// Draws the ship and its engine flame; it blinks while shielded, and its nose blinks
// during auto-fire.
void drawPlayer(uint16_t frameNo) {
  if (player.lives == 0) return;
  if (gameMs < player.shieldUntil && (frameNo & 8)) return;    // blinks while shielded
  const uint16_t* sprite = playerShip().sprite;
  drawBitmap(player.x, player.y, sprite, 3, 3, true);
  if (player.firing && player.burst >= 2 && (frameNo & 8))      // auto-fire: the nose blinks
    drawBitmap(player.x, player.y, sprite, 3, 1, false);
  if (frameNo & 1) setPixel(player.x + 1, player.y + 3, true);  // engine flame
}
```

۱۶.۴ enemies.h – دشمن‌ها و سنگ‌ها

هر نوع دشمن چگونه حرکت و شلیک می‌کند، و قاعده‌ای که آن‌ها را از هم دور نگه می‌دارد: یک حرکت نباید دشمن را نزدیک‌تر از یک پیکسل خالی به دشمن دیگر ببرد، پس دشمن کنار می‌رود، برمی‌گردد یا صبر می‌کند. دشمن‌های تازه نزدیک‌ترین ستون آزاد را می‌گیرند.



شکل ۳۲: آنچه *enemies.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
touchesOther(const Enemy& e, int8_t x, int8_t y, uint8_t gap)	اگر دشمن e در (x، y) به دشمن دیگری بخورد: true با gap = ۱ حتی وقتی فقط کنار هم باشند و پیکسل خالی بینشان نباشد.
canMoveTo(const Enemy& e, int8_t x, int8_t y)	اگر دشمن e بتواند به (x، y) برود .true روی LEDهای ۱۶ × ۲۴ دو دشمن روی پیکسل‌های یکسان به یک لکهٔ ناخوانا تبدیل می‌شوند، پس یک حرکت نباید آن را نزدیک‌تر از یک پیکسل خالی به دشمن دیگر ببرد (اگر از قبل همین‌قدر نزدیک بوده‌اند حرکت مجاز است، تا دو دشمن کنار هم هرگز همدیگر را برای همیشه گیر نیندازند).
moveDown(Enemy& e)	دشمن را یک پیکسل پایین می‌برد. اگر چیزی سر راه باشد، به جای آن کنار می‌رود (اول در جهت خودش) یا در این گام صبر می‌کند.
moveSide(Enemy& e)	دشمن را یک پیکسل در جهت خودش به پهلو می‌برد؛ اگر چیزی سر راه باشد (یا لبهٔ صفحه: فقط مین‌گذارها از پهلوها وارد و خارج می‌شوند) به جای آن برمی‌گردد. اگر حرکت کرد true برمی‌گرداند.
spawnFromTable(uint8_t type, int8_t x)	دشمنی را درست بالای صفحه قرار می‌دهد (مین‌گذارها از پهلو وارد می‌شوند).
updateEnemy(Enemy& e)	یک دشمن یا سنگ را برای یک گام بازی حرکت می‌دهد و می‌گذارد شلیک کند؛ هر نوع الگوی خودش را دارد (فهرست بالای فایل را ببینید). هر چیزی که از پایین خارج شود حذف می‌شود.
updateEnemies()	همهٔ دشمن‌ها و سنگ‌های زنده را به‌روز می‌کند (یک بار در هر گام بازی).
drawEnemies()	همهٔ دشمن‌ها و سنگ‌ها را می‌کشد؛ آنکه همین الان ضربه خورده لحظه‌ای پنهان می‌شود.

کد منبع

```
/*
 * enemies.h -- how each enemy and rock moves and shoots. Every one moves slowly (the
 * player is always faster); each type has its own shot:
 *   drone     sinks, shoots straight down
 *   weaver    sinks while zig-zagging, shoots straight down now and then
 *   miner     crosses the top of the screen and drops mines
 *   cruiser   stops near the top, slides sideways and fires shots aimed at the player
 *   rocks     fall and drift; a big rock breaks into two small ones
 */
#pragma once
#include "world.h"

const int8_t ENEMY_FIRE_MAX_Y = 9;

// True if enemy e, placed at (x, y), would touch another enemy: with gap = 1 also when they
// are only side by side with no empty pixel between them.
bool touchesOther(const Enemy& e, int8_t x, int8_t y, uint8_t gap) {
  const EnemyInfo& info = infoOf(e);
  for (uint8_t i = 0; i < MAX_ENEMIES; i++) {
    const Enemy& o = enemies[i];
    if (!o.alive || &o == &e) continue;
    const EnemyInfo& oi = infoOf(o);
    if (boxesTouch(x - gap, y - gap, info.w + 2 * gap, info.h + 2 * gap, o.x, o.y, oi.w, oi.h))
      return true;
  }
  return false;
}
```

```
28
29  // True if enemy e may move to (x, y). On 16 x 24 LEDs two enemies on the same pixels merge
30  // into one unreadable blob, so a move may not bring it closer than one empty pixel to
31  // another enemy (a move is still allowed if they were already that close, so two enemies
32  // side by side can't block each other forever).
33  bool canMoveTo(const Enemy& e, int8_t x, int8_t y) {
34    if (touchesOther(e, x, y, 0) && !touchesOther(e, e.x, e.y, 0)) return false;
35    return !touchesOther(e, x, y, 1) || touchesOther(e, e.x, e.y, 1);
36  }
37
38  // Moves an enemy one pixel down. If something is in the way it steps aside instead (its
39  // own direction first), or waits for this step.
40  void moveDown(Enemy& e) {
41    if (canMoveTo(e, e.x, e.y + 1)) { e.y++; return; }
42    const int8_t maxX = SCREEN_W - infoOf(e).w;
43    int8_t d = e.dir ? e.dir : 1;
44    for (uint8_t i = 0; i < 2; i++, d = -d) {
45      int8_t x = e.x + d;
46      if (x >= 0 && x <= maxX && canMoveTo(e, x, e.y)) { e.x = x; return; }
47    }
48  }
49
50  // Moves an enemy one pixel sideways in its direction; if something is in the way (or the
51  // screen edge: only miners fly in and out at the sides) it turns around instead. Returns
52  // true if it moved.
53  bool moveSide(Enemy& e) {
54    int8_t x = e.x + e.dir;
55    bool inside = e.type == EN_MINER || (x >= 0 && x <= SCREEN_W - infoOf(e).w);
56    if (inside && canMoveTo(e, x, e.y)) { e.x = x; return true; }
57    e.dir = -e.dir;
58    return false;
59  }
60
61  // Puts an enemy on the screen just above the top (miners come in from the side).
62  void spawnFromTable(uint8_t type, int8_t x) {
63    const EnemyInfo& info = ENEMY_INFO[type];
64    if (type == EN_MINER) {
65      bool fromLeft = x < SCREEN_W / 2;
66      Enemy* e = spawnEnemy(type, fromLeft ? -3 : SCREEN_W, 1 + random(3));
67      if (!e) return;
68      e->dir = fromLeft ? 1 : -1;
69      while (e->x > -20 && e->x < SCREEN_W + 20 && touchesOther(*e, e->x, e->y, 1))
70        e->x -= e->dir;                    // another one is there: queue up further outside
71      return;
72    }
73    Enemy* e = spawnEnemy(type, constrain(x, 0, SCREEN_W - info.w), -info.h);
74    if (!e) return;
75    // Something is already entering there: take the nearest free column (+1, -1, +2, -2 ...),
76    // and if the whole row is busy, queue up higher above the screen.
77    for (int8_t d = 1; d < 2 * SCREEN_W && touchesOther(*e, e->x, e->y, 1); d++) {
78      int8_t tryX = e->x + ((d & 1) ? (d + 1) / 2 : -d / 2);
79      if (tryX >= 0 && tryX <= SCREEN_W - info.w && !touchesOther(*e, tryX, e->y, 1)) e->x = tryX;
80    }
81    while (e->y > -20 && touchesOther(*e, e->x, e->y, 1)) e->y--;
82    if (type == EN_ROCK_S || type == EN_ROCK_B) e->dir = random(3) - 1;   // drift
83  }
84
85  // Moves one enemy or rock for one game step and lets it shoot; each type has its own
86  // pattern (see the list at the top). Anything that leaves at the bottom is removed.
87  void updateEnemy(Enemy& e) {
88    const EnemyInfo& info = infoOf(e);
89    // Enemies only shoot from the upper part of the screen: a bullet fired right next to
90    // the ship could not be dodged. The ship may fly up to row 9 too, so a bullet must also
91    // start at least 3 rows above it.
92    bool canShoot = e.y >= 0 && e.y <= ENEMY_FIRE_MAX_Y && e.y + info.h + 3 <= player.y;
93    switch (e.type) {
94      case EN_DRONE:
95        if (gameMs >= e.nextMove) { moveDown(e); e.nextMove += info.stepMs; }
96        if (gameMs >= e.nextShot) {
97          if (canShoot) enemyShot(e.x + 1, e.y + 2, 0, 1, 110);
98          e.nextShot = gameMs + fireDelay(2600 + random(1800));
99        }
100       break;
101
102     case EN_WEAVER:
103       if (gameMs >= e.nextMove) { moveDown(e); e.nextMove += info.stepMs; }
104       if (gameMs >= e.nextSide) {              // zig-zag: three steps one way, then back
105         if (!moveSide(e)) e.steps = 0;         // blocked: zig-zags back early
106         else if (++e.steps >= 3 || e.x <= 0 || e.x >= SCREEN_W - info.w) {
107           e.dir = -e.dir;
108           e.steps = 0;
109         }
110         e.nextSide = gameMs + 220;
111       }
```

```
      if (gameMs >= e.nextShot) {
        if (canShoot) enemyShot(e.x + 1, e.y + 2, 0, 1, 100);
        e.nextShot = gameMs + fireDelay(4000 + random(2000));
      }
      break;

    case EN_MINER:
      if (gameMs >= e.nextMove) { moveSide(e); e.nextMove += info.stepMs; }   // blocked: turns back
      if (gameMs >= e.nextShot) {
        if (e.x >= 0 && e.x <= SCREEN_W - info.w) newShot(e.x + 1, e.y + 2, SHOT_MINE, 300);
        e.nextShot = gameMs + fireDelay(1300);
      }
      if ((e.dir > 0 && e.x > SCREEN_W) || (e.dir < 0 && e.x < -info.w)) e.alive = false;
      break;

    case EN_CRUISER:
      if (e.y < 3) {
        if (gameMs >= e.nextMove) { moveDown(e); e.nextMove += info.stepMs; }
      } else if (gameMs >= e.nextSide) {
        if (moveSide(e) && (e.x <= 0 || e.x >= SCREEN_W - info.w)) e.dir = -e.dir;
        e.nextSide = gameMs + 650;
      }
      if (gameMs >= e.nextShot) {
        if (e.y >= 0) aimedShot(e.x + 2, e.y + 3, 100);
        e.nextShot = gameMs + fireDelay(1800);
      }
      break;


    default:                                    // rocks
      if (gameMs >= e.nextMove) { moveDown(e); e.nextMove += info.stepMs; }
      if (e.dir && gameMs >= e.nextSide) {
        if (e.x + e.dir < 0 || e.x + e.dir > SCREEN_W - info.w) e.dir = -e.dir;   // edge
        else moveSide(e);
        e.nextSide = gameMs + 1400;
      }
      break;
  }
  if (e.y >= SCREEN_H) e.alive = false;        // left the screen at the bottom
  if (e.flash) e.flash--;
}

// Updates every enemy and rock that is alive (once per game step).
void updateEnemies() {
  for (uint8_t i = 0; i < MAX_ENEMIES; i++)
    if (enemies[i].alive) updateEnemy(enemies[i]);
}

// Draws every enemy and rock; one that was just hit is hidden for a moment.
void drawEnemies() {
  for (uint8_t i = 0; i < MAX_ENEMIES; i++) {
    const Enemy& e = enemies[i];
    if (!e.alive || e.flash) continue;   // a hit enemy disappears for a moment (120 ms)
    const EnemyInfo& info = infoOf(e);
    drawBitmap(e.x, e.y, info.sprite, info.w, info.h, true);
  }
}
```

۱۷.۴ levels.h – سه مرحله

فهرست ورود هر مرحله (چه وقت، چه چیزی، کجا)، سقف تعداد دشمن، نام، آهنگ و باس آن. فهرست‌ها در فلش ذخیره شده‌اند.

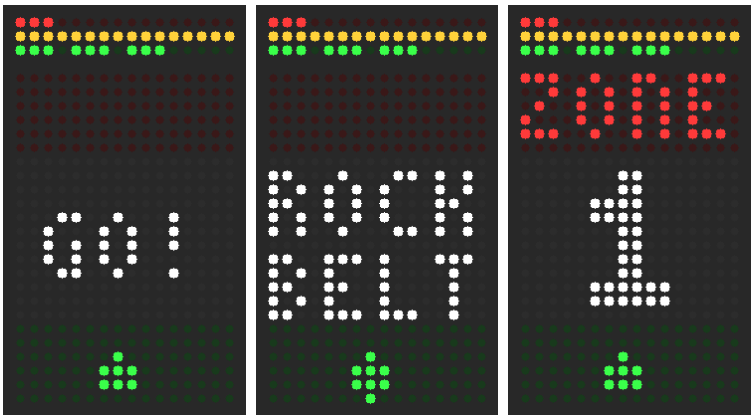

شکل ۳۳: آنچه *levels.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
spawnAt(uint8_t phase, uint8_t i)	ورودی i فهرست ورود یک مرحله را از فلش به RAM کپی می‌کند.

کد منبع

```
/*
 * levels.h -- the three phases. Each phase is a list of spawns: wait (in 0.1 s after the
 * previous spawn), what, and x. SP_CLEAR waits until the screen is empty; SP_AMMO and
 * SP_LIFE drop a pickup. After the last entry (and an empty screen) the boss comes.
 * The enemies are slow, so they would pile up: the list also waits while the phase's
 * maximum number of enemies is on the screen (that keeps 16 x 24 LEDs readable).
 */
#pragma once
#include "world.h"
#include "tunes.h"

struct Spawn { uint8_t wait, what; int8_t x; };
const uint8_t SP_AMMO = 10, SP_LIFE = 11, SP_CLEAR = 12;
#define DR EN_DRONE
#define WV EN_WEAVER
#define MN EN_MINER
#define CR EN_CRUISER
#define RS EN_ROCK_S
#define RB EN_ROCK_B

// ---- phase 1: Rock Belt (asteroids) -- drones and lots of rocks
const Spawn PHASE1[] PROGMEM = {
  {15, RS, 3}, {12, DR, 2}, {8, DR, 11}, {12, RB, 6}, {12, DR, 6},
  {0, DR, 10}, {12, RS, 12}, {10, SP_CLEAR, 0}, {5, SP_AMMO, 7},
  {10, DR, 1}, {5, DR, 6}, {5, DR, 11}, {14, RB, 3}, {12, DR, 4},
  {0, DR, 9}, {12, RS, 7}, {10, DR, 2}, {4, DR, 7}, {4, DR, 12},
  {12, RB, 0}, {10, SP_CLEAR, 0}, {5, SP_AMMO, 3},
  {8, DR, 0}, {3, DR, 4}, {3, DR, 8}, {3, DR, 12}, {14, RB, 6},
  {12, RS, 12}, {10, SP_CLEAR, 0},
};

// ---- phase 2: Deep Mist (a nebula) -- weavers and mine-layers
const Spawn PHASE2[] PROGMEM = {
  {15, WV, 3}, {10, WV, 10}, {14, MN, 0}, {12, DR, 6}, {10, WV, 1},
  {6, WV, 12}, {14, DR, 7}, {10, MN, 15}, {12, DR, 2}, {0, DR, 11},
  {12, SP_CLEAR, 0}, {5, SP_AMMO, 6},
  {10, WV, 5}, {4, WV, 9}, {12, MN, 0}, {8, MN, 15}, {14, RB, 6},
  {10, DR, 1}, {4, DR, 7}, {4, DR, 12}, {12, WV, 2}, {6, WV, 11},
  {10, RS, 4}, {12, SP_CLEAR, 0}, {5, SP_LIFE, 9},
  {10, MN, 0}, {6, WV, 6}, {6, WV, 9}, {10, MN, 15}, {10, DR, 3},
  {4, DR, 10}, {12, SP_CLEAR, 0}, {5, SP_AMMO, 4},
};

// ---- phase 3: The Void -- cruisers, everything else, and rock showers
const Spawn PHASE3[] PROGMEM = {
```

```
  {15, CR, 5}, {14, DR, 1}, {4, DR, 12}, {12, RS, 3}, {8, RS, 12},
  {14, WV, 6}, {12, SP_CLEAR, 0}, {5, SP_AMMO, 5},
  {10, CR, 1}, {16, CR, 10}, {10, RB, 6}, {8, RS, 14},
  {12, WV, 2}, {4, WV, 11}, {12, MN, 0}, {12, SP_CLEAR, 0}, {5, SP_AMMO, 9},
  {8, RS, 2}, {6, RS, 10}, {8, RB, 5},
  {12, DR, 0}, {3, DR, 5}, {3, DR, 10}, {10, CR, 5}, {12, WV, 1},
  {4, WV, 12}, {12, SP_CLEAR, 0}, {5, SP_LIFE, 7}, {5, SP_AMMO, 3},
};


#undef DR
#undef WV
#undef MN
#undef CR
#undef RS
#undef RB

struct PhaseInfo {
  const Spawn* spawns;
  uint8_t count;
  uint8_t maxEnemies;                    // at most this many on the screen at once
  const char* name1;                     // the phase name: two words of up to 4
  const char* name2;                     // letters (in flash), shown as a page
  const Track* song;
  uint8_t songTickMs;
  uint8_t boss;
};
const char NAME_ROCK[] PROGMEM = "ROCK";
const char NAME_BELT[] PROGMEM = "BELT";
const char NAME_DEEP[] PROGMEM = "DEEP";
const char NAME_MIST[] PROGMEM = "MIST";
const char NAME_THE[] PROGMEM = "THE";
const char NAME_VOID[] PROGMEM = "VOID";
const PhaseInfo PHASES[3] = {
  {PHASE1, sizeof(PHASE1) / sizeof(Spawn), 4, NAME_ROCK, NAME_BELT, SONG_PHASE1, SONG_PHASE1_TICK_MS,
     BOSS_KIND_WARDEN},
  {PHASE2, sizeof(PHASE2) / sizeof(Spawn), 5, NAME_DEEP, NAME_MIST, SONG_PHASE2, SONG_PHASE2_TICK_MS,
     BOSS_KIND_HUNTER},
  {PHASE3, sizeof(PHASE3) / sizeof(Spawn), 6, NAME_THE, NAME_VOID, SONG_PHASE3, SONG_PHASE3_TICK_MS,
     BOSS_KIND_KING},
};

// Copies entry i of a phase's spawn list from flash into RAM.
Spawn spawnAt(uint8_t phase, uint8_t i) {
  Spawn s;
  memcpy_P(&s, &PHASES[phase].spawns[i], sizeof(Spawn));
  return s;
}
```

۱۸.۴ boss.h – باس‌ها

رفتار WARDEN، HUNTER (یک ماشین حالت کوچک: پرش، نشانه‌گیری، یورش) و VOID KING (دو شکل)، جان و رسم آن‌ها.

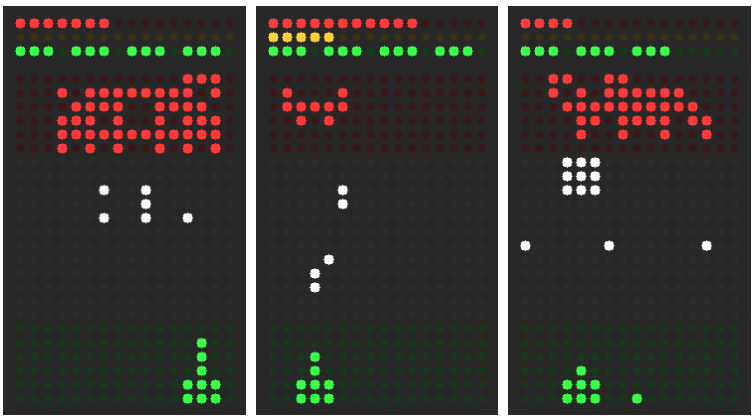

شکل ۳۴: آنچه *boss.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
bossStart(uint8_t kind)	باس یک مرحله را آماده می‌کند: اندازه، جان آن (متناسب با سختی)، شروع درست بالای صفحه تا به داخل بلغزد، و زمان نخستین شلیک و نخستین کارش.
bossAngry()	وقتی باس نصف جانش یا بیشتر را از دست داده باشد true (آن وقت سخت‌تر حمله می‌کند).
bossSlide(uint16_t ms)	باس را هر ms میلی‌ثانیه یک پیکسل به پهلو می‌برد و در لبه‌های صفحه برمی‌گرداند.
updateWarden()	نوبت WARDEN: در بالا می‌لغزد، شلیک پخش سه‌تایی می‌زند (وقتی خشمگین است پنج‌تایی) و هر V ثانیه سنگ می‌اندازد.
updateHunter()	نوبت HUNTER، یک ماشین حالت کوچک (boss.mode): FIGHT حرکت بعدی را انتخاب می‌کند، DASH سریع به یک ستون تصادفی می‌رود، AIM یک جفت شلیک نشانه‌گیری‌شده می‌زند، CHARGE_UP / CHARGE_DOWN به سمت بازیکن شیرجه می‌رود و برمی‌گردد.
updateKing()	نوبت VOID KING. زیر نصف جان یک بار شکلش عوض می‌شود (چشم باز می‌شود، غرش، لرزش). شکل ۱: شلیک پخش پنج‌تایی و فرا خواندن پهپادها. شکل ۲: رگبارهای سه‌تایی نشانه‌گیری‌شده و بارش سنگ.
updateBoss()	باس را برای یک گام بازی حرکت می‌دهد: اول از بالا به داخل می‌لغزد، سپس رفتار نوع خودش را اجرا می‌کند.
drawBoss(uint16_t frameNo)	باس را می‌کشد؛ تا وقتی boss.flash رو به صفر می‌شمارد چشمک می‌زند (پیش از شیرجه، هنگام تغییر شکل و هنگام سوختن).

کد منبع

```
/*
 * boss.h -- the three bosses (health is shown on the red status bar).
 *   WARDEN     (phase 1) wide and slow, slides along the top, 3-way spread shots,
 *              drops rocks; gets faster below half health
 *   HUNTER     (phase 2) small and FAST: dashes to a new spot, fires an aimed pair,
 *              and every few seconds charges straight down at the player
 *   VOID KING  (phase 3) huge; 5-way spread and calls in drones; below half health it
 *              changes form (the eye opens), fires aimed volleys and makes rocks rain
 */
#pragma once
#include "world.h"
#include "enemies.h"

enum BossMode : uint8_t { BM_ENTER, BM_FIGHT, BM_DASH, BM_AIM, BM_CHARGE_DOWN, BM_CHARGE_UP };
const uint16_t BOSS_SCORE[3] = {200, 300, 500};

// Gets the boss of a phase ready: its size, its health (scaled by the difficulty), a start
// just above the screen so it slides in, and the times of its first shot and action.
void bossStart(uint8_t kind) {
  boss = {};
  boss.alive = true;
```

```
  boss.kind = kind;
  const uint8_t W[3] = {10, 5, 12}, H[3] = {4, 3, 5}, HP[3] = {24, 22, 40};
  boss.w = W[kind];
  boss.h = H[kind];
  boss.maxHp = (int16_t)HP[kind] * DIFF_BOSS_HP[settings.difficulty] / 100;
  boss.hp = boss.maxHp;
  boss.x = (SCREEN_W - boss.w) / 2;
  boss.y = -boss.h;
  boss.dir = 1;
  boss.mode = BM_ENTER;
  boss.nextMove = gameMs;
  boss.nextShot = gameMs + 2500;
  boss.nextAction = gameMs + 4000;
}

// True when the boss has lost half its health or more (it then attacks harder).
bool bossAngry() {
  return boss.hp * 2 <= boss.maxHp;
}

// Moves the boss one pixel sideways every `ms`, turning around at the screen edges.
void bossSlide(uint16_t ms) {
  if (gameMs < boss.nextMove) return;
  boss.x += boss.dir;
  if (boss.x <= 0 || boss.x >= SCREEN_W - boss.w) boss.dir = -boss.dir;
  boss.nextMove = gameMs + ms;
}

// WARDEN's turn: slides along the top, fires a 3-way spread (5-way when angry) and drops
// rocks every 7 seconds.
void updateWarden() {
  bossSlide(bossAngry() ? 90 : 150);
  if (gameMs >= boss.nextShot) {       // 3-way spread from the three "guns"
    int8_t y = boss.y + boss.h;
    enemyShot(boss.x + 1, y, -1, 2, 90);
    enemyShot(boss.x + 4, y, 0, 1, 90);
    enemyShot(boss.x + 8, y, 1, 2, 90);
    if (bossAngry()) {
      enemyShot(boss.x, y, -1, 1, 90);
      enemyShot(boss.x + 9, y, 1, 1, 90);
    }
    boss.nextShot = gameMs + fireDelay(bossAngry() ? 1000 : 1600);
  }
  if (gameMs >= boss.nextAction) {     // drops rocks
    spawnFromTable(EN_ROCK_S, random(SCREEN_W - 3));
    if (bossAngry()) spawnFromTable(EN_ROCK_S, random(SCREEN_W - 3));
    boss.nextAction = gameMs + 7000;
  }
}

// HUNTER's turn, a small state machine (boss.mode): FIGHT picks the next move, DASH flies
// fast to a random column, AIM fires a pair of aimed shots, CHARGE_DOWN / CHARGE_UP dives
// at the player and climbs back.
void updateHunter() {
  switch (boss.mode) {
    case BM_FIGHT:
      if (gameMs < boss.modeUntil) break;        // short rest after shooting
      if (gameMs >= boss.nextAction) {           // time for a charge
        boss.mode = BM_CHARGE_DOWN;
        boss.flash = 15;
        boss.burst = 0;
        boss.nextMove = gameMs + 300;            // short warning blink first
      } else {
        boss.targetX = random(SCREEN_W - boss.w + 1);
        boss.mode = BM_DASH;
      }
      break;
    case BM_DASH:                                // fast: one pixel every 40 ms
      if (gameMs >= boss.nextMove) {
        boss.x += (boss.targetX > boss.x) - (boss.targetX < boss.x);
        boss.nextMove = gameMs + (bossAngry() ? 30 : 40);
        if (boss.x == boss.targetX) {
          boss.mode = BM_AIM;
          boss.modeUntil = gameMs + 350;
          boss.burst = 0;
        }
      }
      break;
    case BM_AIM:                                 // pause, then an aimed pair of shots
      if (gameMs >= boss.modeUntil) {
        aimedShot(boss.x + 2, boss.y + boss.h, 85);
        boss.modeUntil = gameMs + 160;
        if (++boss.burst >= (bossAngry() ? 3 : 2)) {
          boss.mode = BM_FIGHT;
```

```
          boss.modeUntil = gameMs + fireDelay(500);
        }
      }
      break;
    case BM_CHARGE_DOWN:                          // dives, steering toward the player
      if (gameMs >= boss.nextMove) {
        boss.y++;
        if (++boss.burst % 3 == 0) boss.x += (player.x - 1 > boss.x) - (player.x - 1 < boss.x);
        boss.x = constrain(boss.x, 0, SCREEN_W - boss.w);
        boss.nextMove = gameMs + 35;
        if (boss.y >= 15) boss.mode = BM_CHARGE_UP;
      }
      break;
    case BM_CHARGE_UP:
      if (gameMs >= boss.nextMove) {
        boss.y--;
        boss.nextMove = gameMs + 60;
        if (boss.y <= 1) {
          boss.mode = BM_FIGHT;
          boss.nextAction = gameMs + (bossAngry() ? 5000 : 7000);
        }
      }
      break;
  }
}

// VOID KING's turn. Below half health it changes form once (eye opens, roar, shake).
// Form 1: 5-way spread and calls in drones. Form 2: aimed triple volleys and rock rain.
void updateKing() {
  if (!boss.form && bossAngry()) {                // second form
    boss.form = 1;
    boss.flash = 20;
    shake(25);
    explode(boss.x + boss.w / 2, boss.y + 2, 14, 12);
    soundSfx(SFX(SFX_ROAR), 6);
    Serial.println(F("[VR] boss form 2"));
  }
  bossSlide(boss.form ? 200 : 260);
  int8_t y = boss.y + boss.h;
  if (gameMs >= boss.nextShot) {
    if (!boss.form) {                             // 5-way spread
      enemyShot(boss.x + 1, y, -1, 1, 95);
      enemyShot(boss.x + 3, y, -1, 2, 95);
      enemyShot(boss.x + 6, y, 0, 1, 95);
      enemyShot(boss.x + 8, y, 1, 2, 95);
      enemyShot(boss.x + 10, y, 1, 1, 95);
      boss.nextShot = gameMs + fireDelay(2200);
    } else {                                      // aimed volley from three points
      aimedShot(boss.x + 2, y, 90);
      aimedShot(boss.x + 6, y, 90);
      aimedShot(boss.x + 9, y, 90);
      boss.nextShot = gameMs + fireDelay(1700);
    }
  }
  if (gameMs >= boss.nextAction) {
    if (!boss.form) {                             // calls in drones
      uint8_t drones = 0;
      for (uint8_t i = 0; i < MAX_ENEMIES; i++)
        drones += enemies[i].alive && enemies[i].type == EN_DRONE;
      if (drones < 2) spawnFromTable(EN_DRONE, random(SCREEN_W - 3));
      boss.nextAction = gameMs + 6000;
    } else {                                      // rock rain
      spawnFromTable(EN_ROCK_S, random(SCREEN_W - 3));
      boss.nextAction = gameMs + 2200;
    }
  }
}


// Moves the boss for one game step: first it slides in from the top, then it runs the
// behaviour of its kind.
void updateBoss() {
  if (!boss.alive) return;
  if (boss.flash) boss.flash--;
  if (boss.mode == BM_ENTER) {                    // slides in from the top
    if (gameMs >= boss.nextMove) {
      boss.y++;
      boss.nextMove = gameMs + 120;
      if (boss.y >= 1) {
        boss.mode = BM_FIGHT;
        boss.nextAction = gameMs + 4000;
      }
    }
    return;
  }
```

```
  if (boss.kind == BOSS_KIND_WARDEN) updateWarden();
  else if (boss.kind == BOSS_KIND_HUNTER) updateHunter();
  else updateKing();
}

// Draws the boss; while boss.flash counts down it blinks (before a dive, at the form
// change and while it burns).
void drawBoss(uint16_t frameNo) {
  if (!boss.alive || (boss.flash && (frameNo & 8))) return;   // blinks (warning, burning)
  drawBitmap(boss.x, boss.y, bossSprite(), boss.w, boss.h, true);
}
```

۱۹.۴ game.h – یک بازی

یک بازی را اجرا می‌کند: مرحله‌های یک فاز (معرفی، موج‌ها، هشدار، باس، شکست باس، پایان)، تولیدکنندهٔ دشمن‌ها، همهٔ برخوردها (گلوله‌ها، دشمن‌ها، سنگ‌ها، مین‌ها، برداشتنی‌ها، باس)، امتیاز، پیام‌های روی بازی و سه نوار وضعیت.

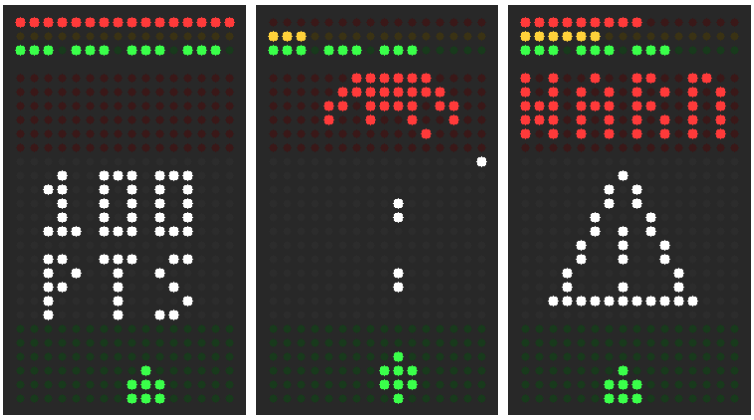

شکل ۳۵: آنچه *game.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
stageTime()	میلی‌ثانیه‌های زمان بازی از شروع مرحلهٔ فعلی.
setStage(uint8_t stage)	فاز را به مرحلهٔ دیگری می‌برد و ساعت مرحله را از نو شروع می‌کند.
playStageMusic()	موسیقی مخصوص مرحلهٔ فعلی (پس از مکث هم به کار می‌رود).
phaseBegin(uint8_t phase)	یک مرحله را شروع می‌کند: صفحه را خالی می‌کند، سفینه را با مهمات پر برمی‌گرداند، فانفار را پخش می‌کند و مرحلهٔ INTRO را آغاز می‌کند.
gameStart(uint8_t phase)	یک بازی تازه شروع می‌کند: ساعت بازی ۰، سفینهٔ انتخاب‌شده، جان‌ها و امتیاز ۰، سپس مرحله (معمولاً مرحلهٔ ۱؛ فرمان‌های آزمون 2! و 3! دیرتر شروع می‌کنند).
destroyEnemy(Enemy& e, bool byPlayer)	یک دشمن یا سنگ را با صدای انفجار حذف می‌کند؛ سنگ بزرگ به دو سنگ کوچک می‌شکند. اگر بازیکن نابودش کرده باشد (byPlayer)، امتیاز هم می‌دهد و شاید یک برداشتنی بیندازد.
hitEnemy(Enemy& e)	گلولهٔ بازیکن به دشمن می‌خورد: دشمن یک واحد جان از دست می‌دهد و لحظه‌ای ناپدید می‌شود، یا اگر فقط یک جان داشت نابود می‌شود.
pointIn(int8_t px, int8_t py, int8_t x, int8_t y, uint8_t w, uint8_t h)	وقتی نقطهٔ (px، py) داخل جعبه‌ای در (x، y) با اندازهٔ w × h باشد true.
playerShotHits(Shot& s)	برخورد گلولهٔ بازیکن با دشمن‌ها، باس و مین‌ها.
shotsStep()	هر گلوله و مین را وقتی زمانش برسد یک پیکسل حرکت می‌دهد (گلوله‌های بازیکن بالا، گلوله‌های دشمن پایین و شاید به پهلو) و بررسی می‌کند که به چه چیزی می‌خورد.
enemyTouchesShip(const Enemy& e)	وقتی پیکسل روشن دشمن یا سنگ روی پیکسل روشن سفینه بیفتد true؛ پس گوشه‌های خالی یک سنگ توخالی (یا فضای بین بال‌های پهپاد) برخورد حساب نمی‌شوند.
contactsStep()	برخورد با دشمن، سنگ یا باس هم یک جان می‌گیرد.
collect(Pickup& p)	سفینه یک برداشتنی گرفت: جعبهٔ مهمات = مهمات بیشتر (تا سقف سفینه)، علامت + = یک جان اضافه (تا ۴). هر دو ۵ امتیاز می‌دهند.
pickupsStep()	برداشتنی‌ها را پایین می‌برد، بررسی می‌کند که سفینه یکی را گرفته یا نه، و وقتی مهمات بازیکن رو به اتمام است یک جعبهٔ مهمات می‌فرستد.
particlesStep()	پیکسل‌های انفجار را حرکت می‌دهد و عمرشان را کم می‌کند (یک گام بازی).
spawnerStep()	فهرست ورود مرحله را پیش می‌برد: وقتی زمان انتظار تمام شد، دشمن، سنگ یا برداشتنی بعدی را روی صفحه می‌گذارد. وقتی صفحه پر است صبر می‌کند، و در SP_CLEAR تا خالی شدن صفحه.
bossDown()	جان باس تمام شده: امتیاز، گلوله‌ها و کمک‌هایش ناپدید می‌شوند، انفجار بزرگ و لرزش صفحه؛ مرحلهٔ BOSS_DOWN را شروع می‌کند.
phaseClear()	یک مرحله برده شد: امتیاز جایزه (۱۰۰ × شمارهٔ مرحله)، یک جان اضافه و آهنگ «clear».

تابع	چه کار می‌کند
stageStep()	مرحلهٔ فعلی را برای یک گام بازی اجرا می‌کند و تصمیم می‌گیرد مرحلهٔ بعدی کی شروع شود (INTRO ← WAVES ← WARNING ← BOSS ← BOSS_DOWN ← CLEAR ← فاز بعد). وقتی بازی تمام شود GAME_OVER یا GAME_WON برمی‌گرداند.
gameStep()	یک گام بازی (۲۰ میلی‌ثانیه از زمان بازی): سفینه، دشمن‌ها، گلوله‌ها، اصابت‌ها، برداشتنی‌ها و انفجارها هر کدام یک بار حرکت می‌کنند، سپس منطق مرحله اجرا می‌شود.
drawGameStatus(uint16_t frameNo)	سه نوار وضعیت را تنظیم می‌کند: قرمز = شمارهٔ مرحله / پیشرفت موج / جان باس، زرد = مهمات (وقتی کم است چشمک می‌زند)، سبز = یک بلوک سه‌تایی LED برای هر جان.
drawGameTexts()	پیام‌های روی بازی، به صورت صفحه‌های ثابت (display.h را ببینید): INTRO «ZONE» و شمارهٔ بزرگ مرحله، سپس نام مرحله، سپس «!GO» · WARNING «WARN» در منطقهٔ قرمز و یک علامت هشدار چشمک‌زن · CLEAR «ZONE DONE»، امتیاز جایزه، «LIFE UP» (اگر جانی اضافه شده باشد) · demo هر ۹ ثانیه: «DEMO»، سپس «ANY KEY»
drawGame(uint16_t frameNo)	یک تصویر از بازی می‌کشد: برداشتنی‌ها، دشمن‌ها، باس، گلوله‌ها، سفینه و انفجارها (هنگام لرزش صفحه جابه‌جا شده)، سپس متن‌های رویی و نوارهای وضعیت.
gameFrame(uint16_t frameNo)	یک تصویر از بازی: کلیدها، گام‌های بازی، رسم.
gameSkipToBoss()	فرمان آزمون :b! دشمن‌ها را حذف می‌کند و فهرست ورود را تمام می‌کند تا باس بیاید.
gamePrintState()	فرمان آزمون :s! مرحله، فاز، امتیاز، جان‌ها، مهمات، جای سفینه، دشمن‌ها، جان باس و زمان بازی را از Serial چاپ می‌کند.

کد منبع

```
/*
 * game.h -- one game, from PLAY to game over or victory.
 *
 * Each of the three phases runs through these stages:
 *   INTRO      the phase number and name as pages, a short fanfare
 *   WAVES      enemies and rocks arrive from the phase's spawn list (levels.h)
 *   WARNING    "WARN" and a blinking warning sign, a siren, the red bar charges up
 *   BOSS       boss fight with its own music; the red bar shows the boss's health
 *   BOSS_DOWN  the boss blows up, the screen shakes
 *   CLEAR      bonus points and one extra life, then the next phase (after the last
 *              boss the game goes straight to the victory screen)
 * and DEAD when the last life is lost.
 *
 * Status bars: red = phase progress / boss health, yellow = ammo (blinks when low),
 * green = lives (one block of three LEDs per life).
 * The game runs in steps of 20 ms of game time (gameMs); a picture is drawn after each
 * step. Pause simply stops calling it. Test hook !f runs several steps per picture.
 */
#pragma once
#include "world.h"
#include "player.h"
#include "autopilot.h"
#include "enemies.h"
#include "boss.h"
#include "levels.h"

enum GameStage : uint8_t { GS_INTRO, GS_WAVES, GS_WARNING, GS_BOSS, GS_BOSS_DOWN, GS_CLEAR, GS_DEAD };
enum GameResult : uint8_t { GAME_ON, GAME_OVER, GAME_WON };

struct Game {
  uint8_t phase, stage, spawnIndex;
  uint32_t stageStart;                    // gameMs
  uint32_t nextSpawn, nextAmmoHelp, nextBoom;
  uint16_t bonus;
  bool lifeUp;                            // the phase clear gave an extra life
};
Game game;
uint8_t gameSpeed = 1;                    // steps per picture (test hook !f: fast)
bool demoMode = false;                    // the title screen's demo: the autopilot plays

const uint16_t INTRO_MS = 3 * PAGE_MS, WARNING_MS = 3000, BOSS_DOWN_MS = 2500;
const uint16_t CLEAR_MS = 3200, DEAD_MS = 2500;
const uint16_t PICKUP_STEP_MS = 250;
const uint8_t DROP_CHANCE = 12;           // % chance that a destroyed enemy drops ammo

```

```
// ms of game time since the current stage began.
uint32_t stageTime() {
  return gameMs - game.stageStart;
}

// Switches the phase to another stage and restarts the stage clock.
void setStage(uint8_t stage) {
  game.stage = stage;
  game.stageStart = gameMs;
}

// The music that belongs to the current stage (also used after a pause).
void playStageMusic() {
  const PhaseInfo& ph = PHASES[game.phase];
  if (game.stage == GS_WAVES) soundPlaySong(ph.song, ph.songTickMs, true);
  else if (game.stage == GS_BOSS) soundPlaySong(SONG_BOSS, SONG_BOSS_TICK_MS, true);
}

// Starts a phase: empties the screen, puts the ship back with full ammo, plays the
// fanfare and begins the INTRO stage.
void phaseBegin(uint8_t phase) {
  game.phase = phase;
  game.spawnIndex = 0;
  game.nextAmmoHelp = 0;
  worldClear();
  playerStart(false);
  setStage(GS_INTRO);
  soundStop();
  soundPlaySong(SONG_STING, 100, false);
  Serial.print(F("[VR] phase "));
  Serial.println(phase + 1);
}

// Starts a new game: game clock at 0, the chosen ship, lives and score 0, then the phase
// (normally phase 1; the test hooks !2 and !3 start later).
void gameStart(uint8_t phase) {
  gameMs = 0;
  playerStart(true);
  phaseBegin(phase);
}

// ================================================================ hits and pickups
// Removes an enemy or rock with a boom; a big rock breaks into two small ones. Destroyed
// by the player (byPlayer), it also gives points and maybe drops a pickup.
void destroyEnemy(Enemy& e, bool byPlayer) {
  const EnemyInfo& info = infoOf(e);
  int8_t x = e.x, y = e.y;
  uint8_t type = e.type;
  e.alive = false;                        // it just vanishes: flying debris only for the
  soundSfx(SFX(SFX_BOOM), 3);             // boss and the player's ship (easier to read)
  if (type == EN_ROCK_B) {                // a big rock breaks into two small ones
    const int8_t w = ENEMY_INFO[EN_ROCK_S].w;          // side by side, also at the edges
    const int8_t ax = constrain(x - 1, 0, SCREEN_W - 2 * w);
    Enemy* a = spawnEnemy(EN_ROCK_S, ax, y);
    Enemy* b = spawnEnemy(EN_ROCK_S, ax + w, y);
    if (a) a->dir = -1;
    if (b) b->dir = 1;
  }
  if (!byPlayer) return;
  addScore(info.score);
  if (type == EN_CRUISER && player.lives < MAX_LIVES) spawnPickup(PK_LIFE, x + 1, y);
  else if (random(100) < DROP_CHANCE && !pickupAlive(PK_AMMO)) spawnPickup(PK_AMMO, x, y);
}

// A player bullet hits an enemy: it loses one health point and disappears for a moment,
// or it is destroyed when it had only one left.
void hitEnemy(Enemy& e) {
  if (e.hp > 1) {
    e.hp--;
    e.flash = 6;
    soundSfx(SFX(SFX_HIT), 2);
  } else {
    destroyEnemy(e, true);
  }
}

// True when the point (px, py) lies inside the box at (x, y) of size w x h.
bool pointIn(int8_t px, int8_t py, int8_t x, int8_t y, uint8_t w, uint8_t h) {
  return px >= x && px < x + w && py >= y && py < y + h;
}

// A player bullet against enemies, the boss and mines.
void playerShotHits(Shot& s) {
  for (uint8_t i = 0; i < MAX_ENEMIES; i++) {
```

```
    Enemy& e = enemies[i];
    if (e.alive && pointIn(s.x, s.y, e.x, e.y, infoOf(e).w, infoOf(e).h)) {
      s.alive = false;
      hitEnemy(e);
      return;
    }
  }
  if (game.stage == GS_BOSS && boss.alive && boss.hp > 0 &&
      pointIn(s.x, s.y, boss.x, boss.y, boss.w, boss.h)) {
    s.alive = false;
    boss.hp--;                            // (no flash: the red bar and the sound show it)
    soundSfx(SFX(SFX_HIT), 2);
    return;
  }
  for (uint8_t i = 0; i < MAX_SHOTS; i++) {   // mines can be shot too
    Shot& m = shots[i];
    if (m.alive && m.kind == SHOT_MINE && m.x == s.x && (m.y == s.y || m.y == s.y + 1)) {
      m.alive = s.alive = false;
      addScore(2);
      soundSfx(SFX(SFX_HIT), 2);
      return;
    }
  }
}

// Moves every bullet and mine one pixel when its time comes (player bullets up, enemy
// bullets down and maybe sideways) and checks what each of them hits.
void shotsStep() {
  for (uint8_t i = 0; i < MAX_SHOTS; i++) {
    Shot& s = shots[i];
    if (!s.alive) continue;
    if (gameMs >= s.next) {
      s.next += s.stepMs;
      s.y += (s.kind == SHOT_PLAYER) ? -1 : 1;
      if (s.dx && ++s.sideCount >= s.sideEvery) {
        s.x += s.dx;
        s.sideCount = 0;
      }
      if (s.y < 0 || s.y >= SCREEN_H || s.x < 0 || s.x >= SCREEN_W) {
        s.alive = false;
        continue;
      }
    }
    if (s.kind == SHOT_PLAYER) playerShotHits(s);
    else if (shipPixel(s.x, s.y) && !playerShielded() && player.lives) {
      s.alive = false;
      playerHit(s.kind == SHOT_MINE ? F("mine") : F("shot"));
    }
  }
}

// True when a lit pixel of the enemy or rock lies on a lit pixel of the ship, so the empty
// corners of a hollow rock (or between a drone's wings) don't count as a crash.
bool enemyTouchesShip(const Enemy& e) {
  const EnemyInfo& info = infoOf(e);
  if (!boxesTouch(e.x, e.y, info.w, info.h, player.x, player.y, 3, 3)) return false;
  for (uint8_t r = 0; r < info.h; r++) {
    uint16_t bits = pgm_read_word(info.sprite + r);
    for (uint8_t c = 0; c < info.w; c++)
      if ((bits & (0x8000u >> c)) && shipPixel(e.x + c, e.y + r)) return true;
  }
  return false;
}

// Flying into an enemy, a rock or the boss also costs a life.
void contactsStep() {
  if (playerShielded() || player.lives == 0) return;
  for (uint8_t i = 0; i < MAX_ENEMIES; i++) {
    Enemy& e = enemies[i];
    if (e.alive && enemyTouchesShip(e)) {
      bool rock = e.type >= EN_ROCK_S;
      destroyEnemy(e, false);
      playerHit(rock ? F("rock") : F("enemy"));
      return;
    }
  }
  if (game.stage == GS_BOSS && boss.alive &&
      boxesTouch(boss.x, boss.y, boss.w, boss.h, player.x, player.y, 3, 3))
    playerHit(F("boss"));
}

// The ship caught a pickup: ammo crate = more ammo (up to the ship's maximum), plus =
// one extra life (up to 4). Both give 5 points.
void collect(Pickup& p) {
```

```
  p.alive = false;
  addScore(5);
  if (p.type == PK_AMMO) {
    uint8_t room = playerShip().ammoMax - player.ammo, pack = DIFF_PACK_AMMO[settings.difficulty];
    player.ammo += pack < room ? pack : room;
    if (player.ammo > LOW_AMMO) player.lowAmmoWarned = false;
    soundSfx(SFX(SFX_PICKUP), 4);
    Serial.println(F("[VR] pickup ammo"));
  } else {
    if (player.lives < MAX_LIVES) player.lives++;
    soundSfx(SFX(SFX_LIFE), 4);
    Serial.println(F("[VR] pickup life"));
  }
}

// Lets the pickups fall, checks whether the ship catches one, and sends an ammo crate
// when the player is about to run out.
void pickupsStep() {
  for (uint8_t i = 0; i < MAX_PICKUPS; i++) {
    Pickup& p = pickups[i];
    if (!p.alive) continue;
    if (gameMs >= p.next) {
      p.next += PICKUP_STEP_MS;
      if (++p.y >= SCREEN_H) p.alive = false;
    }
    if (p.alive && player.lives && boxesTouch(p.x, p.y, 3, 3, player.x, player.y, 3, 3)) collect(p);
  }
  // Running out of ammo: a crate is sent, so the game can always go on.
  bool fighting = game.stage == GS_WAVES || game.stage == GS_BOSS;
  if (fighting && player.ammo <= LOW_AMMO && !pickupAlive(PK_AMMO) && gameMs >= game.nextAmmoHelp) {
    spawnPickup(PK_AMMO, random(SCREEN_W - 2), -3);
    game.nextAmmoHelp = gameMs + 5000;
  }
}

// Moves the explosion pixels and counts down their life (one game step).
void particlesStep() {
  for (uint8_t i = 0; i < MAX_PARTICLES; i++) {
    Particle& p = particles[i];
    if (!p.life) continue;
    p.x16 += p.vx;
    p.y16 += p.vy;
    p.life--;
  }
}

// ================================================================ phase flow
// Works through the phase's spawn list: when the wait is over, puts the next enemy,
// rock or pickup on the screen. Waits while the screen is full, and at SP_CLEAR until
// it is empty.
void spawnerStep() {
  const PhaseInfo& ph = PHASES[game.phase];
  while (game.spawnIndex < ph.count && gameMs >= game.nextSpawn) {
    Spawn s = spawnAt(game.phase, game.spawnIndex);
    if (s.what == SP_CLEAR && enemiesAlive()) return;       // wait for an empty screen
    if (s.what < SP_AMMO && enemiesAlive() >= ph.maxEnemies) return;   // screen is full
    if (s.what == SP_AMMO) spawnPickup(PK_AMMO, s.x, -3);
    else if (s.what == SP_LIFE) spawnPickup(PK_LIFE, s.x, -3);
    else if (s.what < SP_AMMO) spawnFromTable(s.what, s.x);
    if (++game.spawnIndex < ph.count)
      game.nextSpawn = gameMs + spawnAt(game.phase, game.spawnIndex).wait * 100UL;
  }
}

// The boss has no health left: points, its bullets and helpers vanish, big explosion and
// screen shake; begins the BOSS_DOWN stage.
void bossDown() {
  addScore(BOSS_SCORE[boss.kind]);
  for (uint8_t i = 0; i < MAX_SHOTS; i++)           // its bullets vanish ...
    if (shots[i].kind != SHOT_PLAYER) shots[i].alive = false;
  for (uint8_t i = 0; i < MAX_ENEMIES; i++)         // ... and so do its helpers
    enemies[i].alive = false;
  setStage(GS_BOSS_DOWN);
  game.nextBoom = gameMs;
  soundStop();
  soundSfx(SFX(SFX_BIG_BOOM), 5);
  shake(40);
  Serial.println(F("[VR] boss down"));
}

// A phase is won: bonus points (100 x phase), one extra life and the 'clear' tune.
void phaseClear() {
  game.bonus = PHASE_BONUS * (game.phase + 1);
  addScore(game.bonus);
```

```
  game.lifeUp = player.lives < MAX_LIVES;
  if (game.lifeUp) player.lives++;
  setStage(GS_CLEAR);
  soundPlaySong(SONG_CLEAR, 90, false);
  Serial.println(F("[VR] phase clear"));
}

// Runs the current stage for one game step and decides when the next one begins
// (INTRO -> WAVES -> WARNING -> BOSS -> BOSS_DOWN -> CLEAR -> next phase).
// Returns GAME_OVER or GAME_WON when the game ends.
GameResult stageStep() {
  const PhaseInfo& ph = PHASES[game.phase];
  switch (game.stage) {
    case GS_INTRO:
      if (stageTime() >= INTRO_MS) {
        setStage(GS_WAVES);
        playStageMusic();
        game.nextSpawn = gameMs + spawnAt(game.phase, 0).wait * 100UL;
      }
      break;
    case GS_WAVES:
      spawnerStep();
      if (game.spawnIndex >= ph.count && !enemiesAlive()) {
        setStage(GS_WARNING);
        soundStop();
        soundSfx(SFX(SFX_SIREN), 5);
        Serial.println(F("[VR] warning"));
      }
      break;
    case GS_WARNING:
      if (stageTime() >= WARNING_MS) {
        bossStart(ph.boss);
        setStage(GS_BOSS);
        playStageMusic();
        Serial.println(F("[VR] boss"));
      }
      break;
    case GS_BOSS:
      updateBoss();
      if (boss.hp <= 0) bossDown();
      break;
    case GS_BOSS_DOWN:
      boss.flash = 2;                                  // keeps blinking while it burns
      if (stageTime() < 1500 && gameMs >= game.nextBoom) {
        explode(boss.x + random(boss.w), boss.y + random(boss.h), 6, 12);
        game.nextBoom = gameMs + 120;
      }
      if (boss.alive && stageTime() >= 1500) {         // final blast
        boss.alive = false;
        explode(boss.x + boss.w / 2, boss.y + boss.h / 2, 30, 16);
        shake(20);
        soundSfx(SFX(SFX_BIG_BOOM), 5);
      }
      if (stageTime() >= BOSS_DOWN_MS) {
        if (game.phase == 2) {                         // last boss: bonus, then straight to
          addScore(PHASE_BONUS * 3);                   // the victory screen (no ZONE DONE,
          return GAME_WON;                             // no extra life)
        }
        phaseClear();
      }
      break;
    case GS_CLEAR:
      if (stageTime() >= CLEAR_MS) {
        if (game.phase == 2) return GAME_WON;
        phaseBegin(game.phase + 1);
      }
      break;
    case GS_DEAD:
      if (stageTime() >= DEAD_MS) return GAME_OVER;
      break;
  }
  return GAME_ON;
}

// One game step (20 ms of game time): the ship, enemies, bullets, hits, pickups and
// explosions each move once, then the stage logic runs.
GameResult gameStep() {
  gameMs += FRAME_MS;
  if (autopilot) autopilotStep();
  playerStep();
  updateEnemies();
  shotsStep();
  contactsStep();
  pickupsStep();
```

```
  particlesStep();
  if (player.lives == 0 && game.stage != GS_DEAD) {   // the last life is gone
    setStage(GS_DEAD);
    explode(player.x + 1, player.y + 1, 25, 16);
    shake(30);
    soundStop();
    soundSfx(SFX(SFX_BIG_BOOM), 6);
    Serial.print(F("[VR] game over score="));
    Serial.println(player.score);
  }
  return stageStep();
}

// ============================================================== drawing
// Sets the three status bars: red = phase number / wave progress / boss health,
// yellow = ammo (blinks when low), green = one block of 3 LEDs per life.
void drawGameStatus(uint16_t frameNo) {
  uint8_t red = 0;                        // red: phase progress / boss charging / boss health
  if (game.stage == GS_WAVES) red = (uint16_t)game.spawnIndex * 16 / PHASES[game.phase].count;
  if (game.stage == GS_WARNING && (frameNo & 8)) red = stageTime() * 16 / WARNING_MS;
  if (game.stage == GS_BOSS && boss.hp > 0) red = (boss.hp * 16 + boss.maxHp - 1) / boss.maxHp;
  if (game.stage == GS_CLEAR && (frameNo & 8)) red = 16;
  if (game.stage == GS_INTRO) {           // phase number: one block per phase
    uint16_t blocks = 0;
    for (uint8_t i = 0; i <= game.phase; i++) blocks |= 0x7u << (i * 4);
    setStatusBits(0, blocks);
  } else {
    setStatusBar(0, red);
  }
  uint8_t ammoMax = playerShip().ammoMax;   // yellow: ammo, blinks when low
  uint8_t yellow = ((uint16_t)player.ammo * 16 + ammoMax - 1) / ammoMax;
  if (player.ammo <= LOW_AMMO && (frameNo & 8)) yellow = 0;
  setStatusBar(1, yellow);
  uint16_t lives = 0;                     // green: one block of three LEDs per life
  for (uint8_t i = 0; i < player.lives; i++) lives |= 0x7u << (i * 4);
  setStatusBits(2, lives);
}

// The messages on top of the game, as still pages (see display.h):
//   INTRO    "ZONE" + the phase number big, then the phase name, then "GO!"
//   WARNING  "WARN" in the red zone and a blinking warning sign
//   CLEAR    "ZONE DONE", the bonus points, "LIFE UP" (if a life was added)
//   demo     every 9 s: "DEMO", then "ANY KEY"
void drawGameTexts() {
  const PhaseInfo& ph = PHASES[game.phase];
  uint32_t t = stageTime();
  if (game.stage == GS_INTRO) {
    uint8_t page = pageAt(t, 3);
    if (page == 0) {
      clearRows(0, 18);
      drawTextCentered(0, PSTR("ZONE"), false);
      drawChar(5, 7, '1' + game.phase, false, 2);      // 6 x 10 pixels
    } else if (page == 1) {
      drawPage(ph.name1, ph.name2);
    } else {
      drawPage(PSTR("GO!"), NULL);
    }
  } else if (game.stage == GS_WARNING) {
    clearRows(0, 5);
    drawTextCentered(0, PSTR("WARN"), false);
    if ((t / 300) % 2) drawBitmap(2, 7, WARNING_SIGN, 11, 10, true);
  } else if (game.stage == GS_CLEAR) {
    uint8_t page = pageAt(t, 3);
    if (page == 1) {
      clearRows(6, 12);
      drawNumberCentered(7, game.bonus, false);
      drawTextCentered(13, PSTR("PTS"), false);
    } else if (page == 2 && game.lifeUp) {
      drawPage(PSTR("LIFE"), PSTR("UP"));
    } else {
      drawPage(PSTR("ZONE"), PSTR("DONE"));
    }
  } else if (demoMode && gameMs % 9000 < 2 * PAGE_MS) {
    if (pageAt(gameMs % 9000, 2) == 0) drawPage(PSTR("DEMO"), NULL);
    else drawPage(PSTR("ANY"), PSTR("KEY"));
  }
}

// Draws one picture of the game: pickups, enemies, boss, bullets, ship and explosions
// (shifted while the screen shakes), then the texts on top and the status bars.
void drawGame(uint16_t frameNo) {
  if (shakeFrames) {                      // screen shake: everything moves one pixel
    shakeFrames--;
    shakeX = random(-1, 2);
```

```
    shakeY = random(-1, 2);
  }
  clearScreen();
  for (uint8_t i = 0; i < MAX_PICKUPS; i++) {
    const Pickup& p = pickups[i];
    if (p.alive && (p.type == PK_AMMO || (frameNo & 8)))   // the life blinks
      drawBitmap(p.x, p.y, p.type == PK_AMMO ? PICKUP_AMMO : PICKUP_LIFE, 3, 3, true);
  }
  drawEnemies();
  drawBoss(frameNo);
  for (uint8_t i = 0; i < MAX_SHOTS; i++) {
    const Shot& s = shots[i];
    if (!s.alive) continue;
    if (s.kind == SHOT_PLAYER) {         // player bullet: a short streak
      setPixel(s.x, s.y, true);
      setPixel(s.x, s.y + 1, true);
    } else {                             // enemy bullet or mine: one steady pixel
      setPixel(s.x, s.y, true);
    }
  }
  drawPlayer(frameNo);
  for (uint8_t i = 0; i < MAX_PARTICLES; i++)
    if (particles[i].life) setPixel(particles[i].x16 >> 4, particles[i].y16 >> 4, true);
  shakeX = shakeY = 0;

  drawGameTexts();
  drawGameStatus(frameNo);
}


// One picture of the game: keys, game steps, drawing.
GameResult gameFrame(uint16_t frameNo) {
  playerKeys();
  GameResult result = GAME_ON;
  for (uint8_t i = 0; i < gameSpeed && result == GAME_ON; i++) result = gameStep();
  drawGame(frameNo);
  return result;
}

// ================================================================ test hooks
// Test hook !b: removes the enemies and ends the spawn list, so the boss comes next.
void gameSkipToBoss() {
  for (uint8_t i = 0; i < MAX_ENEMIES; i++) enemies[i].alive = false;
  if (game.stage > GS_WAVES) return;
  game.spawnIndex = PHASES[game.phase].count;
  if (game.stage == GS_INTRO) setStage(GS_WAVES);
}

// Test hook !s: prints phase, stage, score, lives, ammo, ship position, enemies, boss
// health and game time over Serial.
void gamePrintState() {
  Serial.print(F("[VR] state phase="));
  Serial.print(game.phase + 1);
  Serial.print(F(" stage="));
  Serial.print(game.stage);
  Serial.print(F(" score="));
  Serial.print(player.score);
  Serial.print(F(" lives="));
  Serial.print(player.lives);
  Serial.print(F(" ammo="));
  Serial.print(player.ammo);
  Serial.print(F(" x="));
  Serial.print(player.x);
  Serial.print(F(" y="));
  Serial.print(player.y);
  Serial.print(F(" enemies="));
  Serial.print(enemiesAlive());
  Serial.print(F(" boss="));
  Serial.print(boss.alive ? boss.hp : 0);
  Serial.print(F(" t="));
  Serial.println(gameMs);
}
```

۲۰.۴ autopilot.h – خلبان خودکار

رباتی که مثل یک بازیکن محتاط بازی می‌کند. نمایش خودکار صفحهٔ عنوان و آزمون‌های خودکار از آن استفاده می‌کنند: برای هر ستون حساب می‌کند چقدر زود چیزی به سفینه در آنجا می‌خورد، به امن‌ترین ستون نزدیک هدفش پرواز می‌کند و وقتی در راستای هدف قرار گرفت شلیک می‌کند.

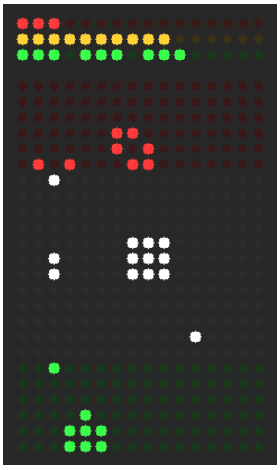

شکل ۳۶: آنچه *autopilot.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
minMs(int32_t a, int32_t b)	کوچک‌تر از دو زمان (میلی‌ثانیه) را برمی‌گرداند.
impactMs(int8_t c)	میلی‌ثانیه تا وقتی چیزی به سفینه برسد، اگر لبهٔ چپ سفینه در ستون c باشد.
autopilotTarget()	هدف خلبان خودکار را انتخاب می‌کند: وقتی مهمات کم است جعبهٔ مهمات، در غیر این صورت باس، و گرنه پایین‌ترین دشمن بالای سفینه. آن ستون را برمی‌گرداند، یا اگر هیچ نباشد ۱-.
autopilotStep()	نوبت خلبان خودکار (در هر گام بازی وقتی x! یا نمایش خودکار روشن است): وقتی سفینه بتواند دوباره حرکت کند، بهترین ستون قابل دسترس را انتخاب می‌کند و یک پیکسل به سمت آن می‌رود، یا وقتی زیر هدفش قرار گرفته شلیک می‌کند.

کد منبع

```
/*
 * autopilot.h -- test hook (!x): the ship flies itself, like a careful player.
 *
 * Used by the automatic tests to play whole games and to check that every phase can be
 * won without the shield. It follows the same rule as a player (it either moves or
 * fires, never both) and stays on the bottom row.
 *
 * How it decides, each time the ship could move one pixel:
 *   1. For every column it works out how many ms are left before a bullet, an enemy or
 *      a rock would touch the ship standing there ("time to impact").
 *   2. A column is reachable if the ship can fly there, one pixel per moveMs, without
 *      passing a column where something hits it on the way.
 *   3. Of the reachable columns that stay safe for a while, it takes the one nearest its
 *      target (an ammo crate when ammo is low, else the boss or the lowest enemy); if
 *      none is safe, the one where the danger arrives last.
 *   4. Lined up under the target in a safe column, it fires.
 */
#pragma once
#include "world.h"
#include "player.h"

const int32_t AUTO_NO_DANGER = 100000;   // "nothing will hit this column"
const int32_t AUTO_SAFE_MS = 450;        // a column must stay clear this long to stop in
#ifndef AUTOPILOT_REACT_MS
#define AUTOPILOT_REACT_MS 0             // PC tests: > 0 = rethinks only this often (slower)
#endif


// Returns the smaller of two times (ms).
int32_t minMs(int32_t a, int32_t b) {
  return a < b ? a : b;
}
```

```
32
33  // ms until something touches the ship if it stands with its left edge in column c.
34  int32_t impactMs(int8_t c) {
35    int8_t top = player.y, bottom = player.y + 2;
36    int32_t first = AUTO_NO_DANGER;
37    for (uint8_t i = 0; i < MAX_SHOTS; i++) {               // enemy bullets and mines
38      const Shot& s = shots[i];
39      if (!s.alive || s.kind == SHOT_PLAYER || s.y > bottom) continue;
40      for (int8_t r = top; r <= bottom; r++) {
41        int8_t down = r - s.y;                                // rows still to fall
42        if (down < 0) continue;
43        int8_t col = s.x + (s.dx ? s.dx * ((down + s.sideCount) / s.sideEvery) : 0);
44        if (col < c || col > c + 2) continue;
45        int32_t t = down ? (int32_t)(s.next - gameMs) + (int32_t)(down - 1) * s.stepMs : 0;
46        first = minMs(first, t);
47      }
48    }
49    for (uint8_t i = 0; i < MAX_ENEMIES; i++) {             // enemies and rocks coming down
50      const Enemy& e = enemies[i];
51      bool staysUp = e.type == EN_MINER || (e.type == EN_CRUISER && e.y >= 3);   // no longer sink
52      if (!e.alive || staysUp || e.y > bottom) continue;
53      const EnemyInfo& info = infoOf(e);
54      int8_t margin = e.type == EN_WEAVER ? 2 : (e.type >= EN_ROCK_S ? 1 : 0);   // side moves
55      if (e.x - margin > c + 2 || e.x + info.w - 1 + margin < c) continue;
56      int8_t down = top - (e.y + info.h - 1);
57      int32_t wait = (int32_t)(e.nextMove - gameMs);        // until its next step down
58      int32_t t = down <= 0 ? 0 : (wait > 0 ? wait : 0) + (int32_t)(down - 1) * info.stepMs;
59      first = minMs(first, t);
60    }
61    if (boss.alive && boss.y + boss.h > top && boss.x <= c + 2 && boss.x + boss.w > c)
62      first = 0;                                            // the boss itself
63    return first;
64  }
65
66  // Chooses what the autopilot aims at: an ammo crate when ammo is low, otherwise the boss,
67  // otherwise the lowest enemy above the ship. Returns that column, or -1 if there is none.
68  int8_t autopilotTarget() {
69    if (player.ammo <= LOW_AMMO)
70      for (uint8_t i = 0; i < MAX_PICKUPS; i++)
71        if (pickups[i].alive && pickups[i].type == PK_AMMO) return pickups[i].x;
72    if (boss.alive) return boss.x + boss.w / 2 - 1;
73    int8_t target = -1, lowest = -100;
74    for (uint8_t i = 0; i < MAX_ENEMIES; i++) {
75      const Enemy& e = enemies[i];
76      if (e.alive && e.y > lowest && e.y < player.y - 6 && e.x >= 0 && e.x < SCREEN_W) {
77        lowest = e.y;
78        target = e.x + infoOf(e).w / 2 - 1;
79      }
80    }
81    return target < 0 ? -1 : constrain(target, 0, SCREEN_W - 3);
82  }
83
84  // The autopilot's turn (every game step while !x or the demo is on): when the ship may
85  // move again it picks the best reachable column and moves one pixel toward it, or fires
86  // when it is lined up under its target.
87  void autopilotStep() {
88    if (player.lives == 0 || gameMs < player.nextMove) return;
89    if (player.y < PLAYER_MAX_Y) {                          // go to the bottom row first
90      movePlayer(KEY_DOWN);
91      player.firing = false;
92      player.nextMove = gameMs + playerShip().moveMs;
93      return;
94    }
95    int32_t moveMs = playerShip().moveMs;
96    static int8_t plan = -1;                                // column chosen last time
97    static uint32_t nextThink = 0;
98    if (AUTOPILOT_REACT_MS && gameMs < nextThink && plan >= 0) {   // still reacting
99      if (plan != player.x) {
100       movePlayer(plan > player.x ? KEY_RIGHT : KEY_LEFT);
101       player.firing = false;
102     }
103     player.nextMove = gameMs + moveMs;
104     return;
105   }
106   int32_t impact[SCREEN_W - 2];
107   for (int8_t c = 0; c <= SCREEN_W - 3; c++) impact[c] = impactMs(c);
108
109   int8_t target = autopilotTarget();
110   int8_t best = player.x;
111   int32_t bestSpare = -AUTO_NO_DANGER;                    // fallback: latest danger
112   int16_t bestDistance = 1000;                            // among safe columns
113   bool bestSafe = false;
114   for (int8_t dir = -1; dir <= 1; dir += 2) {
115     for (int8_t c = player.x, steps = 0; c >= 0 && c <= SCREEN_W - 3; c += dir, steps++) {
```

```
      if (dir > 0 && steps == 0) continue;                // the own column is checked once
      int32_t arrive = steps * moveMs;
      if (steps && impact[c] <= arrive + moveMs) break;    // would be hit on the way
      int32_t spare = impact[c] - arrive;
      bool safe = spare > AUTO_SAFE_MS;
      int16_t distance = (target >= 0 ? abs(c - target) * 4 : 0) + steps;
      if ((safe && (!bestSafe || distance < bestDistance)) || (!bestSafe && !safe && spare > bestSpare)) {
        best = c;
        bestSafe = safe;
        bestSpare = spare;
        bestDistance = distance;
      }
    }
  }
  plan = best;
  nextThink = gameMs + AUTOPILOT_REACT_MS;
  bool linedUp = target >= 0 && abs(target - player.x) <= 1 && player.ammo > 0;
  if (best != player.x) {
    movePlayer(best > player.x ? KEY_RIGHT : KEY_LEFT);   // moving: no fire
    player.firing = false;
  } else if (linedUp && impact[player.x] > AUTO_SAFE_MS) {
    if (!player.firing) player.burst = 0;                 // like pressing R
    player.firing = true;
  } else {
    player.firing = false;
  }
  player.nextMove = gameMs + moveMs;
}
```

۲۱.۴ screens.h – صفحه‌های دیگر

آشیانه، تنظیمات (همراه با آزمون LED)، بهترین امتیاز، مکث، پایان بازی و پیروزی. هر تابع صفحه کلیدهایش را رسیدگی می‌کند، یک تصویر می‌کشد و صفحهٔ بعدی را برمی‌گرداند.

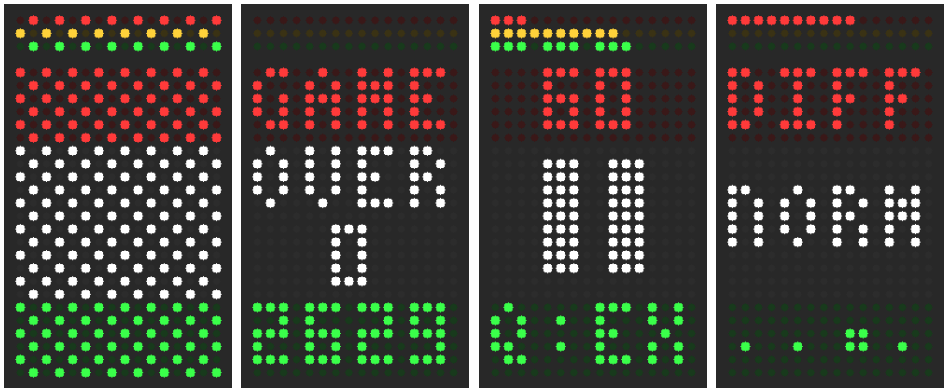

شکل ۳۷: آنچه *screens.h* می‌کشد یا به کار می‌برد.

تابع	چه کار می‌کند
applyBrightness()	روشنایی LEDها را از تنظیم ذخیره‌شده تعیین می‌کند (۱۰۰ / ۵۰ / ۲۰ درصد).
drawSideArrows(int8_t y, uint16_t frameNo)	پیکان‌های کوچک در لبه‌های چپ و راست: «A/D این را تغییر می‌دهد».
drawPageDots(uint8_t count, uint8_t current)	یک نقطه برای هر صفحه در پایین؛ صفحهٔ فعلی یک بلوک بزرگ‌تر است.
clearStatusBars()	هر سه نوار وضعیت را خاموش می‌کند.
hangarBegin()	آشیانه را با سفینه‌ای که الان استفاده می‌شود باز می‌کند.
hangarFrame(uint32_t now, uint16_t frameNo)	یک تصویر از آشیانه: A/D (یا W/S) سفینهٔ دیگری نشان می‌دهد، R آن را برمی‌دارد (ذخیره)، Q بازمی‌گردد. نام، سفینهٔ بزرگ، پیکان‌ها و نقطه‌های صفحه را می‌کشد؛ ویژگی‌ها روی نوارهای وضعیت می‌روند.
optionsFrame(uint16_t frameNo)	یک تصویر از تنظیمات: W/S یکی از LITE، SND، DIFF یا TEST را انتخاب می‌کند؛ A/D یا R آن را تغییر می‌دهد (در EEPROM ذخیره می‌شود)؛ R روی TEST آزمون LED را شروع می‌کند؛ Q بازمی‌گردد.
bestFrame(uint16_t frameNo)	یک تصویر از صفحهٔ BEST: بالاترین امتیاز، سپس (در خط پایین که هر ۱٫۲ ثانیه عوض می‌شود) اینکه تا کجا رسید - «ZONE» و ۱ تا ۳، یا «WIN» - و سختی‌ای که با آن ثبت شد.
pauseDraw(uint32_t t, uint16_t frameNo)	صفحهٔ مکث را می‌کشد: امتیاز، یک علامت مکث بزرگ و کلیدها در صفحه‌ای که هر ۱٫۲ ثانیه عوض می‌شود («P:GO» = با P ادامه، «Q:EX» = با Q خروج)، همراه با نوارهای بازی.
recordScore(uint8_t phaseReached)	اگر امتیاز از رکورد قبلی بهتر باشد، آن را به عنوان بهترین امتیاز ذخیره می‌کند (همراه با مرحلهٔ رسیده، ۴ = برد، و سختی). امتیاز مقدم است؛ امتیاز برابر در سختی بالاتر هم رکورد را می‌گیرد.
gameOverFrame(uint32_t t, uint16_t frameNo)	یک تصویر از GAME OVER: امتیاز (اگر رکورد باشد چشمک‌زن) و بهترین امتیاز؛ پس از ۱ ثانیه، R یا Q به منو می‌برد.
victoryFrame(uint32_t t)	یک تصویر از صفحهٔ پیروزی: آتش‌بازی، صفحه‌های «YOU WIN!»، «VOID SAFE» و امتیاز، و نوارهای وضعیت پرشتاب؛ پس از ۲ ثانیه، R یا Q به منو می‌برد.
ledTestSetRow(uint8_t fromTop, uint16_t bits)	یک سطر ماتریس را تنظیم می‌کند، با شمارش از بالا به همان ترتیبی که ساخته شده (اول نوارهای وضعیت، سپس صفحهٔ بازی).
ledTestFrame(uint32_t t)	یک تصویر از آزمون LED: همه روشن، سپس هر سطر، هر ستون و یک صفحهٔ شطرنجی، با یک بوق رو به بالا برای هر گام. هر کلید (یا پایان آزمون) به تنظیمات برمی‌گرداند.

کد منبع

```
/*
 * screens.h -- the screens around the game:
 *   HANGAR    choose a ship (A/D), R = take it, Q = back.
```

```
 *             Status bars: red = speed, yellow = ammo, green = fire power.
 *   OPTIONS   W/S = item, A/D or R = change: LITE (brightness), SND (sound),
 *             DIFF (difficulty), TEST (LED test). Saved in the EEPROM.
 *   BEST      the high score and how far it got.
 *   PAUSE     P or R = continue, Q = quit to the menu.
 *   GAME OVER / VICTORY   the score; R or Q = menu.
 *   LED TEST  every LED on, then row, column and checker patterns (hardware check).
 * Each xxxFrame() handles the keys, draws one picture and returns the screen to show
 * next (its own screen to stay).
 */
#pragma once
#include "display.h"
#include "input.h"
#include "sound.h"
#include "storage.h"
#include "world.h"
#include "game.h"

// Sets the LED brightness from the saved setting (100 / 50 / 20 %).
void applyBrightness() {
  displaySetBrightness(BRIGHTNESS_LEVELS[settings.brightness]);
}

// Small arrows at the left and right edge: "A/D changes this".
void drawSideArrows(int8_t y, uint16_t frameNo) {
  if (frameNo & 16) return;
  setPixel(1, y, true);
  setPixel(0, y + 1, true);
  setPixel(1, y + 2, true);
  setPixel(14, y, true);
  setPixel(15, y + 1, true);
  setPixel(14, y + 2, true);
}

// One dot per page at the bottom; the current page is a bigger block.
void drawPageDots(uint8_t count, uint8_t current) {
  int8_t x = (SCREEN_W - (count * 4 - 2)) / 2;
  for (uint8_t i = 0; i < count; i++, x += 4) {
    if (i == current) fillRect(x, 20, 2, 2, true);
    else setPixel(x, 21, true);
  }
}

// Switches off all three status bars.
void clearStatusBars() {
  for (uint8_t bar = 0; bar < STATUS_ROWS; bar++) setStatusBits(bar, 0);
}

// ================================================================ hangar
uint8_t hangarShip = 0;
uint32_t hangarSwitched = 0;             // millis() when the ship on show changed

// Opens the hangar on the ship that is in use now.
void hangarBegin() {
  hangarShip = settings.ship;
  hangarSwitched = millis();
}

// One picture of the hangar: A/D (or W/S) shows another ship, R takes it (saved), Q goes
// back. Draws name, big ship, arrows and page dots; the stats go on the status bars.
Screen hangarFrame(uint32_t now, uint16_t frameNo) {
  int8_t step = (keyPressed(KEY_RIGHT) || keyPressed(KEY_DOWN)) -
                (keyPressed(KEY_LEFT) || keyPressed(KEY_UP));
  if (step) {
    hangarShip = (hangarShip + 3 + step) % 3;
    hangarSwitched = now;
    soundBeep(1400, 25);
  }
  if (keyPressed(KEY_FIRE)) {
    settings.ship = hangarShip;
    settingsSave();
    soundSfx(SFX(SFX_PICKUP), 4);
    Serial.print(F("[VR] ship "));
    Serial.println((const __FlashStringHelper*)SHIPS[hangarShip].name);
    return SCR_MENU;
  }
  if (keyPressed(KEY_BACK)) return SCR_MENU;

  const ShipInfo& ship = SHIPS[hangarShip];
  clearScreen();
  drawTextCentered(0, ship.name, false);
  drawBitmapScaled(3, 6, ship.sprite, 3, 3, 3);   // the ship, 3 times bigger
  if (frameNo & 1) fillRect(6, 15, 3, 2, true);   // engine flame
  drawSideArrows(9, frameNo);
```

```
  drawPageDots(3, hangarShip);
  if (hangarShip == settings.ship) setPixel(SCREEN_W - 1, 23, true);   // the ship in use
  // stats on the status bars, growing in after each switch: 5 LEDs per level
  uint32_t grow = now - hangarSwitched;
  uint8_t levels[3] = {ship.speedLevel, ship.ammoLevel, ship.fireLevel};
  for (uint8_t bar = 0; bar < STATUS_ROWS; bar++) {
    uint8_t full = levels[bar] * 5;
    setStatusBar(bar, grow >= 300 ? full : full * grow / 300);
  }
  return SCR_HANGAR;
}

// ============================================================== options
enum OptionItem : uint8_t { OPT_LITE, OPT_SOUND, OPT_DIFF, OPT_TEST, OPTION_COUNT };
const char OPT_NAME_LITE[] PROGMEM = "LITE";
const char OPT_NAME_SND[] PROGMEM = "SND";
const char OPT_NAME_DIFF[] PROGMEM = "DIFF";
const char OPT_NAME_TEST[] PROGMEM = "TEST";
const char* const OPTION_NAMES[OPTION_COUNT] = {OPT_NAME_LITE, OPT_NAME_SND, OPT_NAME_DIFF, OPT_NAME_TEST};
const char DIFF_EASY_NAME[] PROGMEM = "EASY";
const char DIFF_NORMAL_NAME[] PROGMEM = "NORM";
const char DIFF_HARD_NAME[] PROGMEM = "HARD";
const char* const DIFF_NAMES[3] = {DIFF_EASY_NAME, DIFF_NORMAL_NAME, DIFF_HARD_NAME};
uint8_t optionItem = 0;

// One picture of the options: W/S picks LITE, SND, DIFF or TEST; A/D or R changes it
// (saved in the EEPROM); R on TEST starts the LED test; Q goes back.
Screen optionsFrame(uint16_t frameNo) {
  if (keyPressed(KEY_UP) || keyPressed(KEY_DOWN)) {
    optionItem = (optionItem + (keyPressed(KEY_UP) ? OPTION_COUNT - 1 : 1)) % OPTION_COUNT;
    soundBeep(1400, 25);
  }
  int8_t change = keyPressed(KEY_RIGHT) - keyPressed(KEY_LEFT);
  if (keyPressed(KEY_FIRE)) {
    if (optionItem == OPT_TEST) return SCR_LEDTEST;
    change = 1;
  }
  if (change && optionItem != OPT_TEST) {
    if (optionItem == OPT_LITE) {
      settings.brightness = (settings.brightness + 3 + change) % 3;
      applyBrightness();
    } else if (optionItem == OPT_SOUND) {
      settings.muted = !settings.muted;
      soundSetMuted(settings.muted);
    } else {
      settings.difficulty = (settings.difficulty + 3 + change) % 3;
    }
    settingsSave();
    soundBeep(2000, 40);
    Serial.print(F("[VR] option "));
    Serial.print((const __FlashStringHelper*)OPTION_NAMES[optionItem]);
    Serial.print(' ');
    Serial.println(optionItem == OPT_LITE ? BRIGHTNESS_LEVELS[settings.brightness]
                   : optionItem == OPT_SOUND ? !settings.muted : settings.difficulty);
  }
  if (keyPressed(KEY_BACK)) return SCR_MENU;

  clearScreen();
  clearStatusBars();
  drawTextCentered(0, OPTION_NAMES[optionItem], false);
  switch (optionItem) {
    case OPT_LITE:
      drawNumberCentered(9, BRIGHTNESS_LEVELS[settings.brightness], false);
      setStatusBar(1, 16 * BRIGHTNESS_LEVELS[settings.brightness] / 100);   // a brightness gauge
      break;
    case OPT_SOUND:
      drawTextCentered(9, settings.muted ? PSTR("OFF") : PSTR("ON"), false);
      break;
    case OPT_DIFF:
      drawTextCentered(9, DIFF_NAMES[settings.difficulty], false);
      setStatusBar(0, (settings.difficulty + 1) * 5);
      break;
    case OPT_TEST:
      if (frameNo & 16) drawTextCentered(9, PSTR("R"), false);
      break;
  }
  if (optionItem != OPT_TEST) drawSideArrows(15, frameNo);   // under the value
  drawPageDots(OPTION_COUNT, optionItem);
  return SCR_OPTIONS;
}

// ============================================================== best score
// One picture of the BEST page: the high score, then (bottom line, changing every 1.2 s)
// how far it got - "ZONE" and 1-3, or "WIN" - and the difficulty it was made on.
```

```
Screen bestFrame(uint16_t frameNo) {
  if (keyPressed(KEY_BACK) || keyPressed(KEY_FIRE)) return SCR_MENU;
  clearScreen();
  clearStatusBars();
  drawTextCentered(0, PSTR("BEST"), false);
  if (settings.best) drawNumberCentered(9, settings.best, false);
  else drawTextCentered(9, PSTR("---"), false);
  if (settings.bestPhase) {
    bool won = settings.bestPhase >= 4;
    uint8_t page = (frameNo / 60) % (won ? 2 : 3);   // WIN, NORM  or  ZONE, 2, NORM
    if (page == (won ? 1 : 2)) drawTextCentered(18, DIFF_NAMES[settings.bestDifficulty], false);
    else if (won) drawTextCentered(18, PSTR("WIN"), false);
    else if (page == 0) drawTextCentered(18, PSTR("ZONE"), false);
    else drawNumberCentered(18, settings.bestPhase, false);
  }
  if (settings.best && (frameNo & 8)) {  // a little sparkle
    setPixel(1, 7, true);
    setPixel(14, 15, true);
  } else if (settings.best) {
    setPixel(14, 7, true);
    setPixel(1, 15, true);
  }
  return SCR_BEST;
}

// ================================================================ pause
// Draws the pause screen: the score, a big pause sign, and the keys as a page that
// changes every 1.2 s ("P:GO" = P continues, "Q:EX" = Q exits), with the game's bars.
void pauseDraw(uint32_t t, uint16_t frameNo) {
  clearScreen();
  drawNumberCentered(0, player.score, false);
  fillRect(4, 7, 3, 9, true);            // the pause sign: two bars
  fillRect(9, 7, 3, 9, true);
  drawTextCentered(18, (t / 1200) % 2 ? PSTR("Q:EX") : PSTR("P:GO"), false);
  drawGameStatus(frameNo);
}

// ============================================================== game over and victory
bool newBest = false;

// Saves the score as the new best (with the phase reached, 4 = won, and the difficulty)
// if it beats the old one. The score counts first; the same score on a harder difficulty
// also takes the record.
void recordScore(uint8_t phaseReached) {
  newBest = player.score > settings.best ||
            (player.score == settings.best && player.score > 0 &&
             settings.difficulty > settings.bestDifficulty);
  if (!newBest) return;
  settings.best = player.score;
  settings.bestPhase = phaseReached;
  settings.bestDifficulty = settings.difficulty;
  settingsSave();
  Serial.println(F("[VR] new best"));
}

// One picture of GAME OVER: the score (blinking if it is a record) and the best score;
// after 1 s, R or Q goes to the menu.
Screen gameOverFrame(uint32_t t, uint16_t frameNo) {
  if (t > 1000 && (keyPressed(KEY_FIRE) || keyPressed(KEY_BACK))) return SCR_MENU;
  clearScreen();
  clearStatusBars();
  drawTextCentered(0, PSTR("GAME"), false);
  drawTextCentered(6, PSTR("OVER"), false);
  if (!newBest || (frameNo & 8)) drawNumberCentered(12, player.score, false);   // blinks: record
  if ((t / 1500) % 2 == 0) drawTextCentered(18, newBest ? PSTR("NEW") : PSTR("BEST"), false);
  else drawNumberCentered(18, settings.best, false);
  return SCR_GAMEOVER;
}

uint32_t nextFirework = 0;

// One picture of the victory screen: fireworks, pages "YOU WIN!", "VOID SAFE" and the
// score, and racing status bars; after 2 s, R or Q goes to the menu.
Screen victoryFrame(uint32_t t) {
  if (t > 2000 && (keyPressed(KEY_FIRE) || keyPressed(KEY_BACK))) return SCR_MENU;
  if (t >= nextFirework) {               // fireworks in the red and green zones
    bool top = random(2);
    explode(2 + random(SCREEN_W - 4), top ? 1 + random(4) : 18 + random(4), 10, 12);
    if (t > 2600) soundSfx(SFX(SFX_BOOM), 3);   // after the fanfare
    nextFirework = t + 350 + random(400);
  }
  particlesStep();
  clearScreen();
  for (uint8_t i = 0; i < MAX_PARTICLES; i++)
```

```
    if (particles[i].life) setPixel(particles[i].x16 >> 4, particles[i].y16 >> 4, true);
  uint8_t page = (t / 1200) % 3;
  if (page == 0) {
    drawPage(PSTR("YOU"), PSTR("WIN!"));
  } else if (page == 1) {
    drawPage(PSTR("VOID"), PSTR("SAFE"));
  } else {
    clearRows(6, 12);
    drawNumberCentered(7, player.score, false);
    drawTextCentered(13, PSTR("PTS"), false);
  }
  for (uint8_t bar = 0; bar < STATUS_ROWS; bar++) {   // status bars: a fast chase
    uint8_t head = (t / 50 + bar * 4) % 16;
    uint16_t bits = 0;
    for (uint8_t k = 0; k < 3; k++) bits |= 1u << ((head + k) % 16);
    setStatusBits(bar, bits);
  }
  return SCR_VICTORY;
}

// ============================================================ LED test
// Lights every LED, then one row at a time (status bars first), one column at a time,
// and a checkerboard -- a quick way to see that every LED and wire works.
const uint16_t TEST_ALL_MS = 1500, TEST_STEP_MS = 90;

// Sets one matrix row, counted from the top as built (status bars first, then the game
// screen).
void ledTestSetRow(uint8_t fromTop, uint16_t bits) {
  frame[fromTop < STATUS_ROWS ? SCREEN_H + fromTop : fromTop - STATUS_ROWS] = bits;
}

// One picture of the LED test: all on, then each row, each column and a checkerboard,
// with a rising beep per step. Any key (or the end) goes back to the options.
Screen ledTestFrame(uint32_t t) {
  static uint8_t lastStep = 255;
  uint16_t skip = keysPressed & ~(keyBit(KEY_BRIGHTNESS) | keyBit(KEY_MUTE));
  const uint32_t rowsEnd = TEST_ALL_MS + (uint32_t)TOTAL_ROWS * TEST_STEP_MS;
  const uint32_t colsEnd = rowsEnd + (uint32_t)SCREEN_W * TEST_STEP_MS;
  const uint32_t checkEnd = colsEnd + 2000;
  if (skip || t >= checkEnd) {
    lastStep = 255;
    soundStop();
    return SCR_OPTIONS;
  }
  uint8_t step = 0;
  for (uint8_t r = 0; r < TOTAL_ROWS; r++) {
    uint16_t bits = 0xFFFF;                          // all on
    if (t >= colsEnd) {                              // checkerboard, swapping every 250 ms
      bits = ((r + t / 250) & 1) ? 0xAAAA : 0x5555;
    } else if (t >= rowsEnd) {                       // column sweep
      step = (t - rowsEnd) / TEST_STEP_MS;
      bits = 1u << step;
    } else if (t >= TEST_ALL_MS) {                   // row sweep
      step = (t - TEST_ALL_MS) / TEST_STEP_MS;
      bits = (r == step) ? 0xFFFF : 0;
    }
    ledTestSetRow(r, bits);
  }
  if (t >= TEST_ALL_MS && t < colsEnd && step != lastStep) {   // a rising tick per step
    lastStep = step;
    soundBeep(t < rowsEnd ? 300 + step * 40 : 600 + step * 60, 30);
  }
  return SCR_LEDTEST;
}
```

۲۲.۴ ابزارهای توسعه و آزمون‌ها

این برنامه‌ها جزو اسکچ آردوینو نیستند. بخش‌هایی از آن را می‌سازند (مدار، فهرست پایه‌ها، فونت، موسیقی)، تصاویر را تولید می‌کنند و بازی را روی رایانه آزمایش می‌کنند.

فایل	کار
tools/gen_circuit.py	مولد مدار: diagram.json (۴۳۲ LED، ۹ دکمه، ۴ بازر و همهٔ سیم‌ها) و pins.h را می‌سازد، سیم‌ها را طوری مسیر می‌دهد که هرگز از روی هم رد نشوند و همهٔ اتصال‌ها را بررسی می‌کند.
tools/gen_font.py	مولد فونت: حروف هنر ASCII را به font.h تبدیل می‌کند.
tools/compose_music.py	آهنگ‌ساز: آهنگ‌های داخل بازی با یک نگارش کوتاه نت؛ فهرست نت‌هایشان را در tunes.h می‌نویسد و می‌تواند آن‌ها را برای شنیدن به فایل WAV تبدیل کند.
tools/render_dumps.py	تصویرساز صفحه: خروجی‌های صفحه (فرمان d!) را به صورت تصویر PNG یا انیمیشن GIF با رنگ‌های واقعی LED می‌کشد.
tools/draw_wiring.py	نمودار سیم‌کشی: نمودار ساده‌شدهٔ سیم‌کشی را می‌کشد.
tools/render_circuit.py	عکس مدار: کل مدار را با تصاویر خود قطعه‌های Wokwi می‌کشد و با یک تصویر بازی روشن می‌کند.
tools/make_doc.py	همین سند: این سند را از روی کد و خود بازی می‌سازد.
tests/host/Arduino.h	جایگزین آردوینو روی رایانه: رجیسترها به صورت متغیر، ساعت و صفحه‌کلید شبیه‌سازی‌شده، تا کد واقعی بازی روی رایانه اجرا شود.
tests/host/sim.cpp	اجراکنندهٔ آزمون روی رایانه: کد بازی را با اسکریپت‌های آزمون اجرا می‌کند (کلیدها، Serial، خروجی صفحه).
tests/host/run_tests.py	اجراکنندهٔ آزمون‌ها: نسخهٔ رایانه را می‌سازد و همهٔ آزمون‌ها و بررسی تعادل را اجرا می‌کند.
tests/host/controls.txt	آزمون: کنترل‌ها: قواعد کلیدها.
tests/host/screens.txt	آزمون: صفحه‌ها: همهٔ صفحه‌ها و EEPROM.
tests/host/playthrough.txt	آزمون: کل بازی: همهٔ مرحله‌ها تا پیروزی.

tools/gen_circuit.py – مولد مدار

diagram.json (۴۳۲ LED، ۹ دکمه، ۴ بازر و همهٔ سیم‌ها) و pins.h را می‌سازد، سیم‌ها را طوری مسیر می‌دهد که هرگز از روی هم رد نشوند و همهٔ اتصال‌ها را بررسی می‌کند.

```
#!/usr/bin/env python3
"""
VOID RUNNER - circuit generator.

Builds the whole Wokwi circuit (diagram.json) from the tables below and writes the matching
pin table for the sketch (pins.h), so the circuit and the code can never disagree.

  * 16 x 24 game screen + 3 status bars of single LEDs, wired as one row/column matrix
  * 3 x 3 push-button keypad: exactly the 9 keys the game uses (every button also answers
    to a PC keyboard key)
  * 4 buzzers

Layout: LED panel on the left, the Mega (turned 180 degrees) on the right with its
double header facing the panel rows and its analog header facing up for the panel
columns, keypad and buzzers under the Mega. The wires inside the LED panel are hidden,
like a real LED panel; every wire from the panel, keypad and buzzers to the Mega is shown.

To change colours, size or key labels, edit the tables below and run:

    python tools/gen_circuit.py <project_dir> <sketch_dir>

Writes <project_dir>/diagram.json, <sketch_dir>/pins.h and <project_dir>/circuit_preview.png,
then checks that every LED, button and buzzer reaches the right Mega pin and that no two
visible wires cross.
"""
import json
import struct
import sys
import zlib
from pathlib import Path

# ============================================================== design tables (edit these)

SCREEN_W, SCREEN_H, STATUS_ROWS = 16, 24, 3

# Colour bands of the game screen, top to bottom: (first row, last row, light, body).
```

```
# The LED body is kept dark so an LED that is off almost disappears; the light colour is
# what you see when it is on (like the colour strips on the 1978 Space Invaders cabinet).
GAME_ZONES = [
    (0, 5, '#ff3a3a', '#3a1818'),       # enemies and bosses enter here
    (6, 17, '#ffffff', '#2c2c2c'),      # open space
    (18, 23, '#3aff4a', '#183a1c'),     # your ship's zone
]
# One (light, body) pair per status bar, top to bottom: boss health, ammo, lives.
STATUS_COLOURS = [('#ff3a3a', '#3a1818'), ('#ffd23a', '#3a3214'), ('#3aff4a', '#183a1c')]

# Brightness of a lit LED in Wokwi. The screen is multiplexed: each LED is on only 1/27 of
# the time, and Wokwi shows it with brightness = (on-time share) ^ (1 / gamma), measured on
# wokwi.com: default gamma 2.8 -> 32 % (too dim on the grey canvas), 30 -> 90 %. A real LED
# display gets the same effect by driving each LED harder during its short time slot.
LED_GAMMA = '30'
# How often Wokwi updates an LED's brightness. It averages over 8 updates, so the default
# 80 gives a 100 ms window and anything moving smears over several pixels; 300 gives
# 27 ms (about two full screen scans), which keeps moving things sharp.
LED_FPS = '300'

# Keypad, row by row: (label, PC keyboard key, button colour).
# Q back, R fire / OK; W A S D move (W above S, like a keyboard); P pause, M sound, B light.
BUTTONS = [
    [('Q', 'q', 'white'), ('W', 'w', 'blue'), ('R', 'r', 'red')],
    [('A', 'a', 'blue'), ('S', 's', 'blue'), ('D', 'd', 'blue')],
    [('P', 'p', 'yellow'), ('M', 'm', 'yellow'), ('B', 'b', 'yellow')],
]
KR, KC = len(BUTTONS), len(BUTTONS[0])              # keypad rows and columns

# Visible wire colours by job (wires inside the LED panel are hidden).
WIRE = {'row_bus': 'orange', 'col_bus': 'blue', 'key_row': 'purple', 'key_col': 'green',
        'buzzer': 'violet', 'gnd': 'black'}

# ============================================================ part geometry (wokwi-elements)

MM = 96 / 25.4                                      # px per mm
LED_PINS = {'A': (25.0, 42.0), 'C': (15.0, 42.0)}  # wokwi-led is 40 x 50 px
BTN_PINS = {'1.l': (0.0, 13.0), '2.l': (0.0, 32.0), '1.r': (67.0, 13.0), '2.r': (67.0, 32.0)}
BUZ_W, BUZ_H = 17.0 * MM, 20.0 * MM                 # wokwi-buzzer 17 x 20 mm, legs below
BUZ_PINS = {'1': (27.0, 84.0), '2': (37.0, 84.0)}
MEGA_W, MEGA_H = 102.66 * MM, 50.80 * MM
MEGA_PINS = {
    'GND.1': (119, 9), '13': (129, 9), '12': (138, 9), '11': (148, 9), '10': (157.5, 9),
    '9': (167.5, 9), '8': (177, 9), '7': (190, 9), '6': (200, 9), '5': (209.5, 9), '4': (219, 9),
    '3': (228.5, 9), '2': (238, 9), '1': (247.5, 9), '0': (257.5, 9), '14': (270.5, 9),
    '15': (280, 9), '16': (289.5, 9), '17': (299, 9), '18': (308.5, 9), '19': (318.5, 9),
    '20': (328, 9), '21': (337.5, 9),
}
for _i, _x in enumerate([208.5, 218, 227.5, 237.25, 246.75, 256.25, 266, 275.5,
                         290.25, 300, 309.5, 319.25, 328.75, 338.5, 348, 357.75]):
    MEGA_PINS['A%d' % _i] = (_x, 184.5)
for _k, _y in enumerate([17.5, 27.25, 36.75, 46.25, 56, 65.5, 75, 84.5,
                         94.25, 103.75, 113.5, 123, 132.75, 142.25, 152, 161.5]):
    MEGA_PINS[str(22 + 2 * _k)] = (361, _y)       # double header: even pins inner column
    MEGA_PINS[str(23 + 2 * _k)] = (371, _y)       #                odd pins outer column

# ================================================================ layout

TOTAL_ROWS = SCREEN_H + STATUS_ROWS
PX, PY = 44, 46                 # LED pitch: about square, so shapes are not stretched
SX, SY = 160, 240               # top-left LED of the panel (first status bar)
STATUS_GAP = 24                 # space between the status bars and the game screen
LANE = 6                        # spacing of parallel wires

# physical order of the matrix rows, top to bottom: status bars first, then the game screen
PHYS_ROWS = list(range(SCREEN_H, TOTAL_ROWS)) + list(range(SCREEN_H))

def led_xy(x, row):
    """Top-left of the LED in column x of matrix row `row` (rows >= SCREEN_H are status bars)."""
    if row >= SCREEN_H:
        return SX + PX * x, SY + PY * (row - SCREEN_H)
    return SX + PX * x, SY + PY * STATUS_ROWS + STATUS_GAP + PY * row

def led_id(x, row):
    return 'led_%d_%d' % (x, row) if row < SCREEN_H else 'st_%d_%d' % (x, row - SCREEN_H)

def led_colours(row):
    if row >= SCREEN_H:
        return STATUS_COLOURS[row - SCREEN_H]
    return next((light, body) for lo, hi, light, body in GAME_ZONES if lo <= row <= hi)

PANEL_RIGHT = SX + PX * (SCREEN_W - 1) + 40
MEGA_ROT = 180
MX = PANEL_RIGHT + 40 + LANE * TOTAL_ROWS + 30   # room for one lane per row wire
```

```
MY = SY - 10                                    # analog header level with the panel top

def rot(px, py, w, h, deg):
    return (w - px, h - py) if deg == 180 else (px, py)

def mega_pin(name):
    x, y = rot(*MEGA_PINS[name], MEGA_W, MEGA_H, MEGA_ROT)
    return MX + x, MY + y

# ============================================================ pin assignment

# Rows: the double header, read top to bottom on the turned board. At each height the even
# pin sits further in, so its wire arrives 5 px above the odd pin's wire.
# Pin 46 is left out: it is OC5A, the output of Timer5, used by the fourth buzzer.
_row_pins = []
for k in range(15, -1, -1):
    _row_pins += [str(22 + 2 * k), str(23 + 2 * k)]
_used = sorted([p for p in _row_pins if p != '46'], key=int)[:TOTAL_ROWS]
_row_pins = [p for p in _row_pins if p in _used]
ROW_PIN_OF_PHYS = _row_pins                          # physical row i (top to bottom) -> pin
ROW_PINS = [None] * TOTAL_ROWS
for i, row in enumerate(PHYS_ROWS):
    ROW_PINS[row] = ROW_PIN_OF_PHYS[i]
COL_PINS = ['A%d' % x for x in range(SCREEN_W)]      # column x -> Ax (PORTF / PORTK bit order)
KEY_ROW_PINS = ['18', '19', '20', '21'][:KR]
KEY_COL_PINS = ['17', '16', '15', '14'][:KC]
BUZZER_PINS = ['5', '6', '11', '46']                 # OC3A, OC4A, OC1A, OC5A
BUZZER_TIMERS = ['Timer3 OC3A', 'Timer4 OC4A', 'Timer1 OC1A', 'Timer5 OC5A']

# ============================================================ diagram building

parts, wires = [], []

def part(ptype, pid, left, top, attrs=None, rotate=0):
    p = {'type': ptype, 'id': pid, 'top': round(top, 2), 'left': round(left, 2), 'attrs': attrs or {}}
    if rotate:
        p['rotate'] = rotate
    parts.append(p)

def mv(axis, d):
    return '%s%g' % (axis, round(d, 2))

def wire(a, b, colour, route, kind):
    """kind: 'hidden' (inside the panel), 'link' (short helper wire) or 'bus' (to the Mega)."""
    wires.append({'a': a, 'b': b, 'colour': colour, 'route': route, 'kind': kind})

part('wokwi-arduino-mega', 'mega', MX, MY, {}, MEGA_ROT)

# --- LEDs and the hidden wires inside the panel
for row in range(TOTAL_ROWS):
    light, body = led_colours(row)
    for x in range(SCREEN_W):
        lx, ly = led_xy(x, row)
        part('wokwi-led', led_id(x, row), lx, ly, {'color': body, 'lightColor': light, 'gamma': LED_GAMMA, '
    fps': LED_FPS})
for row in range(TOTAL_ROWS):                        # anodes of one row
    for x in range(SCREEN_W - 1):
        wire('%s:A' % led_id(x, row), '%s:A' % led_id(x + 1, row), '', [], 'hidden')
for x in range(SCREEN_W):                            # cathodes of one column
    for a, b in zip(PHYS_ROWS, PHYS_ROWS[1:]):
        wire('%s:C' % led_id(x, a), '%s:C' % led_id(x, b), '', [], 'hidden')

# --- column bus: from the top of each column, nested arcs over the panel into A0-A15.
# The leftmost column takes the highest arc and the rightmost pin, so no two cross.
top_row = PHYS_ROWS[0]
for x in range(SCREEN_W):
    lx, ly = led_xy(x, top_row)
    cx, cy = lx + LED_PINS['C'][0], ly + LED_PINS['C'][1]
    lane_x = lx + 6                                  # just left of the LED body
    h = SY - 16 - LANE * (SCREEN_W - 1 - x)
    px, py = mega_pin(COL_PINS[x])
    wire('%s:C' % led_id(x, top_row), 'mega:%s' % COL_PINS[x], WIRE['col_bus'],
         [mv('h', lane_x - cx), mv('v', h - cy), '*', mv('v', h - py)], 'bus')

# --- row bus: from the right end of each row to its own lane, then to the double header.
approach = []
for i, row in enumerate(PHYS_ROWS):
    px, py = mega_pin(ROW_PIN_OF_PHYS[i])
    approach.append(py - 5 if int(ROW_PIN_OF_PHYS[i]) % 2 == 0 else py)
src_y = [led_xy(SCREEN_W - 1, row)[1] + LED_PINS['A'][1] for row in PHYS_ROWS]
down = [i for i in range(TOTAL_ROWS) if approach[i] > src_y[i]]      # rows above their pin
up = [i for i in range(TOTAL_ROWS) if approach[i] <= src_y[i]]       # rows at or below it
lane_rank = {}
for k, i in enumerate(sorted(down, reverse=True)):   # descending: upper rows take outer lanes
```

```
    lane_rank[i] = k
for k, i in enumerate(sorted(up)):                  # ascending: lower rows take outer lanes
    lane_rank[i] = k
for i, row in enumerate(PHYS_ROWS):
    lx, ly = led_xy(SCREEN_W - 1, row)
    ax, ay = lx + LED_PINS['A'][0], ly + LED_PINS['A'][1]
    lane_x = PANEL_RIGHT + 20 + LANE * lane_rank[i]
    pin = ROW_PIN_OF_PHYS[i]
    route = [mv('h', lane_x - ax)]
    if abs(approach[i] - ay) > 0.01:
        route.append(mv('v', approach[i] - ay))
    if int(pin) % 2 == 0:
        route += ['*', 'v-5']
    wire('%s:A' % led_id(SCREEN_W - 1, row), 'mega:%s' % pin, WIRE['row_bus'], route, 'bus')

# --- keypad and buzzers under the Mega (wires come up into its lower header)
BELOW = MY + MEGA_H                    # lower edge of the turned board
KX, KPX, KPY = MX + 40, 90, 70
BX, BPX = KX + KC * KPX + 30, 85

def fan_heights(items, top, step):
    """items: (lane_x, pin_x, key) of wires coming up from below. Returns a turn height per
    wire so that no two wires of the fan cross (outer wires turn higher)."""
    right = sorted([i for i in items if i[1] >= i[0]], key=lambda i: i[0])
    left = sorted([i for i in items if i[1] < i[0]], key=lambda i: -i[0])
    heights = {}
    for group in (right, left):
        for rank, item in enumerate(group):
            heights[item[2]] = top + step * rank
    return heights

buz_top = BELOW + 16
key_top = buz_top + LANE * 4 + 12
KY = key_top + LANE * (KR + KC) + 30
BY = KY + 10

for r in range(KR):
    for c in range(KC):
        label, key, colour = BUTTONS[r][c]
        part('wokwi-pushbutton', 'btn_%s' % label, KX + KPX * c, KY + KPY * r,
             {'color': colour, 'label': label, 'key': key})
for r in range(KR):                    # contact 1 of each button = its row line
    for c in range(KC - 1):
        wire('btn_%s:1.r' % BUTTONS[r][c][0], 'btn_%s:1.l' % BUTTONS[r][c + 1][0],
             WIRE['key_row'], [], 'link')
for c in range(KC):                    # contact 2 of each button = its column line
    for r in range(KR - 1):
        wire('btn_%s:2.r' % BUTTONS[r][c][0], 'btn_%s:2.r' % BUTTONS[r + 1][c][0],
             WIRE['key_col'], ['h11', '*', 'h11'], 'link')

key_items = []                         # (lane, pin_x, key, src, pin, (x, y), first move, colour)
for r in range(KR):
    sx_, sy_ = KX + BTN_PINS['1.l'][0], KY + KPY * r + BTN_PINS['1.l'][1]
    lane = sx_ - 12 - 8 * r            # lower rows take outer lanes
    key_items.append((lane, mega_pin(KEY_ROW_PINS[r])[0], 'r%d' % r, 'btn_%s:1.l' % BUTTONS[r][0][0],
                      KEY_ROW_PINS[r], (sx_, sy_), mv('h', lane - sx_), WIRE['key_row']))
for c in range(KC):
    sx_, sy_ = KX + KPX * c + BTN_PINS['2.r'][0], KY + BTN_PINS['2.r'][1]
    key_items.append((sx_ + 11, mega_pin(KEY_COL_PINS[c])[0], 'c%d' % c, 'btn_%s:2.r' % BUTTONS[0][c][0],
                      KEY_COL_PINS[c], (sx_, sy_), 'h11', WIRE['key_col']))
turn = fan_heights([(i[0], i[1], i[2]) for i in key_items], key_top, LANE)
for lane, _, key, src, pin, (sx_, sy_), first, colour in key_items:
    _, py = mega_pin(pin)
    wire(src, 'mega:%s' % pin, colour, [first, mv('v', turn[key] - sy_), '*', mv('v', turn[key] - py)], 'bus
    ')

buz_items = []
for i in range(len(BUZZER_PINS)):
    bx = BX + BPX * i
    on_side = int(BUZZER_PINS[i]) >= 22              # its wire goes up beside the board:
    turned = 0 if on_side else 180                   # not turned, so its signal leg is on the right
    part('wokwi-buzzer', 'bz%d' % (i + 1), bx, BY, {'volume': '0.6'}, turned)
    p2 = rot(*BUZ_PINS['2'], BUZ_W, BUZ_H, turned)
    buz_items.append((bx + p2[0], mega_pin(BUZZER_PINS[i])[0], 'b%d' % i, 'bz%d:2' % (i + 1),
                      BUZZER_PINS[i], (bx + p2[0], BY + p2[1]), WIRE['buzzer']))
    if i < len(BUZZER_PINS) - 1:       # ground from buzzer to buzzer (hidden)
        wire('bz%d:1' % (i + 1), 'bz%d:1' % (i + 2), '', [], 'hidden')
p1 = rot(*BUZ_PINS['1'], BUZ_W, BUZ_H, turned)
last = len(BUZZER_PINS) - 1
buz_items.append((BX + last * BPX + p1[0], mega_pin('GND.1')[0], 'gnd', 'bz%d:1' % (last + 1), 'GND.1',
                  (BX + last * BPX + p1[0], BY + p1[1]), WIRE['gnd']))
# A buzzer on the double header (pin 46, the rightmost buzzer) goes straight up beside the
# board and across it at its pin's height; the others fan into the lower header.
side = [i for i in buz_items if i[4].isdigit() and int(i[4]) >= 22]
```

```
fan = [i for i in buz_items if i not in side]
turn = fan_heights([(i[0], i[1], i[2]) for i in fan], buz_top, LANE)
for lane, _, key, src, pin, (sx_, sy_), colour in fan:
    _, py = mega_pin(pin)
    wire(src, 'mega:%s' % pin, colour, [mv('v', turn[key] - sy_), '*', mv('v', turn[key] - py)], 'bus')
for lane, _, key, src, pin, (sx_, sy_), colour in side:
    _, py = mega_pin(pin)
    wire(src, 'mega:%s' % pin, colour, [mv('v', py - sy_)], 'bus')

# ============================================================ geometry helpers for checks

PIN_TABLE = {}
for p in parts:
    if p['type'] == 'wokwi-led':
        for n, (x, y) in LED_PINS.items():
            PIN_TABLE['%s:%s' % (p['id'], n)] = (p['left'] + x, p['top'] + y)
    elif p['type'] == 'wokwi-pushbutton':
        for n, (x, y) in BTN_PINS.items():
            PIN_TABLE['%s:%s' % (p['id'], n)] = (p['left'] + x, p['top'] + y)
    elif p['type'] == 'wokwi-buzzer':
        for n, (x, y) in BUZ_PINS.items():
            rx, ry = rot(x, y, BUZ_W, BUZ_H, p.get('rotate', 0))
            PIN_TABLE['%s:%s' % (p['id'], n)] = (p['left'] + rx, p['top'] + ry)
for n in MEGA_PINS:
    PIN_TABLE['mega:%s' % n] = mega_pin(n)

def apply(pt, moves):
    pts = [pt]
    x, y = pt
    for m in moves:
        d = float(m[1:])
        x, y = (x + d, y) if m[0] == 'h' else (x, y + d)
        pts.append((x, y))
    return pts

def polyline(w):
    route = w['route']
    star = route.index('*') if '*' in route else len(route)
    src = apply(PIN_TABLE[w['a']], route[:star])
    dst = apply(PIN_TABLE[w['b']], list(reversed(route[star + 1:])))
    (x1, y1), (x2, y2) = src[-1], dst[-1]
    mid = [] if (abs(x1 - x2) < 0.01 or abs(y1 - y2) < 0.01) else [(x2, y1)]
    return src + mid + list(reversed(dst))

# ================================================================ checks

def check_nets():
    parent = {}
    def find(a):
        parent.setdefault(a, a)
        while parent[a] != a:
            parent[a] = parent[parent[a]]
            a = parent[a]
        return a
    for w in wires:
        parent[find(w['a'])] = find(w['b'])
    for p in parts:                       # a push button's left and right pins are one contact
        if p['type'] == 'wokwi-pushbutton':
            parent[find(p['id'] + ':1.l')] = find(p['id'] + ':1.r')
            parent[find(p['id'] + ':2.l')] = find(p['id'] + ':2.r')
    nets = {}
    for pin in list(parent):
        nets.setdefault(find(pin), set()).add(pin)
    mega_of = {}
    for members in nets.values():
        megas = sorted(m for m in members if m.startswith('mega:'))
        assert len(megas) <= 1, 'short between Mega pins: %s' % megas
        for m in members:
            mega_of[m] = megas[0][5:] if megas else None
    errors = 0
    for row in range(TOTAL_ROWS):
        for x in range(SCREEN_W):
            pid = led_id(x, row)
            if mega_of.get(pid + ':A') != ROW_PINS[row] or mega_of.get(pid + ':C') != COL_PINS[x]:
                errors += 1
    for r in range(KR):
        for c in range(KC):
            pid = 'btn_%s' % BUTTONS[r][c][0]
            if mega_of.get(pid + ':1.l') != KEY_ROW_PINS[r] or mega_of.get(pid + ':2.l') != KEY_COL_PINS[c]:
                errors += 1
    for i in range(len(BUZZER_PINS)):
        if mega_of.get('bz%d:2' % (i + 1)) != BUZZER_PINS[i] or mega_of.get('bz%d:1' % (i + 1)) != 'GND.1':
            errors += 1
    return errors
```

```
371
372 def count_crossings():
373     segs = []
374     for wi, w in enumerate(wires):
375         if w['kind'] == 'hidden':
376             continue
377         pts = polyline(w)
378         for a, b in zip(pts, pts[1:]):
379             segs.append((wi, a, b))
380     def cross(s, t):
381         (ax1, ay1), (ax2, ay2) = s
382         (bx1, by1), (bx2, by2) = t
383         a_h, b_h = abs(ay1 - ay2) < 0.01, abs(by1 - by2) < 0.01
384         if a_h == b_h:
385             return False
386         h, v = (s, t) if a_h else (t, s)
387         (hx1, hy), (hx2, _) = h
388         (vx, vy1), (_, vy2) = v
389         return (min(hx1, hx2) < vx < max(hx1, hx2)) and (min(vy1, vy2) < hy < max(vy1, vy2))
390     found = []
391     for i in range(len(segs)):
392         for j in range(i + 1, len(segs)):
393             a, b = wires[segs[i][0]], wires[segs[j][0]]
394             if a is not b and a['kind'] == 'bus' and cross(segs[i][1:], segs[j][1:]):
395                 found.append((a['b'], b['b']))
396     return found
397
398 # ============================================================ outputs
399
400 def write_diagram(path):
401     doc = {'version': 1, 'author': 'VOID RUNNER team', 'editor': 'wokwi', 'parts': parts,
402            'connections': [[w['a'], w['b'], w['colour'], w['route']] for w in wires],
403            'dependencies': {}}
404     path.write_text(json.dumps(doc, indent=1), encoding='utf-8', newline='\n')
405
406 def write_pins_h(path):
407     def arr(items):
408         return ', '.join(str(i) for i in items)
409     keys = ',\n  '.join('{%s}' % ', '.join("'%s'" % b[0] for b in row) for row in BUTTONS)
410     text = f"""/*
411  * pins.h -- GENERATED by tools/gen_circuit.py together with diagram.json.
412  * Do not edit by hand: change the generator and run it again, so the circuit
413  * and the code always match.
414  */
415 #pragma once
416 #include <Arduino.h>
417
418 // ---- LED screen: {SCREEN_W} columns x {SCREEN_H} game rows + {STATUS_ROWS} status bars, one big matrix
419 const uint8_t SCREEN_W    = {SCREEN_W};
420 const uint8_t SCREEN_H    = {SCREEN_H};
421 const uint8_t STATUS_ROWS = {STATUS_ROWS};
422 const uint8_t TOTAL_ROWS  = SCREEN_H + STATUS_ROWS;
423
424 // Anode pin of every LED row: rows 0-{SCREEN_H - 1} = game screen top to bottom,
425 // rows {SCREEN_H}-{TOTAL_ROWS - 1} = status bars top to bottom (all on the double header).
426 const uint8_t ROW_PINS[TOTAL_ROWS] = {{
427   {arr(ROW_PINS)}
428 }};
429
430 // Cathode pin of every LED column, left to right: column x is wired to Ax,
431 // so columns 0-7 are PORTF bits 0-7 and columns 8-15 are PORTK bits 0-7.
432 const uint8_t COL_PINS[SCREEN_W] = {{
433   {arr(COL_PINS)}
434 }};
435
436 // ---- {KR} x {KC} push-button keypad: contact 1 = row line, contact 2 = column line
437 const uint8_t KEY_ROWS = {KR}, KEY_COLS = {KC};
438 const uint8_t KEY_ROW_PINS[KEY_ROWS] = {{ {arr(KEY_ROW_PINS)} }};
439 const uint8_t KEY_COL_PINS[KEY_COLS] = {{ {arr(KEY_COL_PINS)} }};
440 const char KEY_NAMES[KEY_ROWS][KEY_COLS] = {{
441   {keys}
442 }};
443
444 // ---- buzzers, each on the "A" output of its own 16-bit timer
445 const uint8_t BUZZER_COUNT = {len(BUZZER_PINS)};
446 const uint8_t BUZZER_PINS[BUZZER_COUNT] = {{ {arr(BUZZER_PINS)} }};   // {', '.join(BUZZER_TIMERS)}
447 """
448     path.write_text(text, encoding='utf-8', newline='\n')
449
450 def write_preview(path, scale=0.5):
451     xs, ys = zip(*(list(PIN_TABLE.values()) + [pt for w in wires for pt in polyline(w)]))
452     x0, y0 = min(xs) - 60, min(ys) - 60
453     W, H = int((max(xs) - x0 + 100) * scale), int((max(ys) - y0 + 100) * scale)
454     img = bytearray(b'\x30\x30\x30' * W * H)            # dark canvas, like Wokwi's dark theme
```

```
    def put(x, y, c):
        if 0 <= x < W and 0 <= y < H:
            i = (y * W + x) * 3
            img[i:i + 3] = bytes(c)
    def line(p, q, c):
        (x1, y1), (x2, y2) = [(int((a - x0) * scale), int((b - y0) * scale)) for a, b in (p, q)]
        n = max(abs(x2 - x1), abs(y2 - y1), 1)
        for k in range(n + 1):
            put(x1 + (x2 - x1) * k // n, y1 + (y2 - y1) * k // n, c)
    def rect(x, y, w, h, c):
        for yy in range(int((y - y0) * scale), int((y + h - y0) * scale)):
            for xx in range(int((x - x0) * scale), int((x + w - x0) * scale)):
                put(xx, yy, c)
    def hexrgb(s, default=(120, 120, 120)):
        named = {'blue': (40, 90, 230), 'black': (10, 10, 10), 'orange': (240, 140, 0), 'purple': (150, 60, 200),
                 'violet': (200, 90, 220), 'green': (40, 190, 60), 'red': (230, 40, 40), 'white': (230, 230, 230),
                 'yellow': (230, 200, 0)}
        if s in named:
            return named[s]
        return tuple(int(s[i:i + 2], 16) for i in (1, 3, 5)) if s.startswith('#') else default
    for p in parts:
        if p['type'] == 'wokwi-led':                    # draw every LED "on" in its light colour
            rect(p['left'] + 12, p['top'] + 4, 16, 22, hexrgb(p['attrs']['lightColor']))
        elif p['type'] == 'wokwi-pushbutton':
            rect(p['left'] + 12, p['top'], 45, 45, (70, 70, 70))
            rect(p['left'] + 22, p['top'] + 10, 25, 25, hexrgb(p['attrs']['color']))
        elif p['type'] == 'wokwi-buzzer':
            rect(p['left'], p['top'], BUZ_W, BUZ_H, (10, 10, 10))
        elif p['type'] == 'wokwi-arduino-mega':
            rect(p['left'], p['top'], MEGA_W, MEGA_H, (0, 110, 150))
    for w in wires:
        if w['colour']:
            pts = polyline(w)
            for a, b in zip(pts, pts[1:]):
                line(a, b, hexrgb(w['colour']))
    raw = b''.join(b'\x00' + bytes(img[y * W * 3:(y + 1) * W * 3]) for y in range(H))
    def chunk(tag, data):
        return struct.pack('>I', len(data)) + tag + data + struct.pack('>I', zlib.crc32(tag + data) & 0xFFFFFFFF)
    png = b'\x89PNG\r\n\x1a\n' + chunk(b'IHDR', struct.pack('>IIBBBBB', W, H, 8, 2, 0, 0, 0))
    path.write_bytes(png + chunk(b'IDAT', zlib.compress(bytes(raw), 9)) + chunk(b'IEND', b''))

if __name__ == '__main__':
    project, sketch = Path(sys.argv[1]), Path(sys.argv[2])
    write_diagram(project / 'diagram.json')
    write_pins_h(sketch / 'pins.h')
    write_preview(project / 'circuit_preview.png')
    leds = sum(p['type'] == 'wokwi-led' for p in parts)
    xs, ys = zip(*PIN_TABLE.values())
    print('parts: %d (%d LEDs), wires: %d (%d visible)' % (
        len(parts), leds, len(wires), sum(1 for w in wires if w['colour'])))
    print('circuit size: about %d x %d px' % (max(xs) - min(xs), max(ys) - min(ys)))
    print('wiring errors: %d' % check_nets())
    crossings = count_crossings()
    print('visible wire crossings: %d' % len(crossings))
    for a, b in crossings[:20]:
        print('   ', a, 'x', b)
```

tools/gen_font.py – مولد فونت

حروف هنر ASCII را به font.h تبدیل می‌کند.

```
#!/usr/bin/env python3
"""
VOID RUNNER - font generator.

The two pixel fonts are drawn below as ASCII art ('#' = LED on). This script turns them
into font.h for the sketch, so the letters stay easy to read and edit here.

  FONT3x5 - small font, 4 pixels per letter: four letters fit across the 16-LED screen
  FONT5x7 - big font, 6 pixels per letter, used for scrolling banners

Each glyph is stored column by column, one byte per column, bit 0 = top row.
Usage: python tools/gen_font.py <sketch_dir>
"""
import sys
from pathlib import Path

SMALL = {
```

```
    'A': ['.#.', '#.#', '###', '#.#', '#.#'], 'B': ['##.', '#.#', '##.', '#.#', '##.'],
    'C': ['.##', '#..', '#..', '#..', '.##'], 'D': ['##.', '#.#', '#.#', '#.#', '##.'],
    'E': ['###', '#..', '##.', '#..', '###'], 'F': ['###', '#..', '##.', '#..', '#..'],
    'G': ['.##', '#..', '#.#', '#.#', '.##'], 'H': ['#.#', '#.#', '###', '#.#', '#.#'],
    'I': ['###', '.#.', '.#.', '.#.', '###'], 'J': ['..#', '..#', '..#', '#.#', '.#.'],
    'K': ['#.#', '#.#', '##.', '#.#', '#.#'], 'L': ['#..', '#..', '#..', '#..', '###'],
    'M': ['#.#', '###', '###', '#.#', '#.#'], 'N': ['##.', '#.#', '#.#', '#.#', '#.#'],
    'O': ['.#.', '#.#', '#.#', '#.#', '.#.'], 'P': ['##.', '#.#', '##.', '#..', '#..'],
    'Q': ['.#.', '#.#', '#.#', '##.', '.##'], 'R': ['##.', '#.#', '##.', '#.#', '#.#'],
    'S': ['.##', '#..', '.#.', '..#', '##.'], 'T': ['###', '.#.', '.#.', '.#.', '.#.'],
    'U': ['#.#', '#.#', '#.#', '#.#', '###'], 'V': ['#.#', '#.#', '#.#', '#.#', '.#.'],
    'W': ['#.#', '#.#', '###', '###', '#.#'], 'X': ['#.#', '#.#', '.#.', '#.#', '#.#'],
    'Y': ['#.#', '#.#', '.#.', '.#.', '.#.'], 'Z': ['###', '..#', '.#.', '#..', '###'],
    '0': ['###', '#.#', '#.#', '#.#', '###'], '1': ['.#.', '##.', '.#.', '.#.', '###'],
    '2': ['###', '..#', '###', '#..', '###'], '3': ['###', '..#', '###', '..#', '###'],
    '4': ['#.#', '#.#', '###', '..#', '..#'], '5': ['###', '#..', '###', '..#', '###'],
    '6': ['###', '#..', '###', '#.#', '###'], '7': ['###', '..#', '.#.', '.#.', '.#.'],
    '8': ['###', '#.#', '###', '#.#', '###'], '9': ['###', '#.#', '###', '..#', '###'],
    ' ': ['...'] * 5, '-': ['...', '...', '###', '...', '...'], '!': ['.#.', '.#.', '.#.', '...', '.#.'],
    ':': ['...', '.#.', '...', '.#.', '...'], '.': ['...', '...', '...', '...', '.#.'],
    '>': ['#..', '##.', '###', '##.', '#..'],
}

BIG = {
    ' ': ['.....'] * 7,
    '!': ['..#..', '..#..', '..#..', '..#..', '..#..', '.....', '..#..'],
    '-': ['.....', '.....', '.....', '#####', '.....', '.....', '.....'],
    '.': ['.....', '.....', '.....', '.....', '.....', '.##..', '.##..'],
    ':': ['.....', '.##..', '.##..', '.....', '.##..', '.##..', '.....'],
    '0': ['.###.', '#...#', '#..##', '#.#.#', '##..#', '#...#', '.###.'],
    '1': ['..#..', '.##..', '..#..', '..#..', '..#..', '..#..', '.###.'],
    '2': ['.###.', '#...#', '....#', '...#.', '..#..', '.#...', '#####'],
    '3': ['#####', '...#.', '..#..', '...#.', '....#', '#...#', '.###.'],
    '4': ['...#.', '..##.', '.#.#.', '#..#.', '#####', '...#.', '...#.'],
    '5': ['#####', '#....', '####.', '....#', '....#', '#...#', '.###.'],
    '6': ['..##.', '.#...', '#....', '####.', '#...#', '#...#', '.###.'],
    '7': ['#####', '....#', '...#.', '..#..', '.#...', '.#...', '.#...'],
    '8': ['.###.', '#...#', '#...#', '.###.', '#...#', '#...#', '.###.'],
    '9': ['.###.', '#...#', '#...#', '.####', '....#', '...#.', '.##..'],
    'A': ['.###.', '#...#', '#...#', '#####', '#...#', '#...#', '#...#'],
    'B': ['####.', '#...#', '#...#', '####.', '#...#', '#...#', '####.'],
    'C': ['.###.', '#...#', '#....', '#....', '#....', '#...#', '.###.'],
    'D': ['####.', '#...#', '#...#', '#...#', '#...#', '#...#', '####.'],
    'E': ['#####', '#....', '#....', '####.', '#....', '#....', '#####'],
    'F': ['#####', '#....', '#....', '####.', '#....', '#....', '#....'],
    'G': ['.###.', '#...#', '#....', '#.###', '#...#', '#...#', '.####'],
    'H': ['#...#', '#...#', '#...#', '#####', '#...#', '#...#', '#...#'],
    'I': ['.###.', '..#..', '..#..', '..#..', '..#..', '..#..', '.###.'],
    'J': ['..###', '...#.', '...#.', '...#.', '...#.', '#..#.', '.##..'],
    'K': ['#...#', '#..#.', '#.#..', '##...', '#.#..', '#..#.', '#...#'],
    'L': ['#....', '#....', '#....', '#....', '#....', '#....', '#####'],
    'M': ['#...#', '##.##', '#.#.#', '#.#.#', '#...#', '#...#', '#...#'],
    'N': ['#...#', '#...#', '##..#', '#.#.#', '#..##', '#...#', '#...#'],
    'O': ['.###.', '#...#', '#...#', '#...#', '#...#', '#...#', '.###.'],
    'P': ['####.', '#...#', '#...#', '####.', '#....', '#....', '#....'],
    'Q': ['.###.', '#...#', '#...#', '#...#', '#.#.#', '#..#.', '.##.#'],
    'R': ['####.', '#...#', '#...#', '####.', '#.#..', '#..#.', '#...#'],
    'S': ['.####', '#....', '#....', '.###.', '....#', '....#', '####.'],
    'T': ['#####', '..#..', '..#..', '..#..', '..#..', '..#..', '..#..'],
    'U': ['#...#', '#...#', '#...#', '#...#', '#...#', '#...#', '.###.'],
    'V': ['#...#', '#...#', '#...#', '#...#', '#...#', '.#.#.', '..#..'],
    'W': ['#...#', '#...#', '#...#', '#.#.#', '#.#.#', '##.##', '#...#'],
    'X': ['#...#', '#...#', '.#.#.', '..#..', '.#.#.', '#...#', '#...#'],
    'Y': ['#...#', '#...#', '.#.#.', '..#..', '..#..', '..#..', '..#..'],
    'Z': ['#####', '....#', '...#.', '..#..', '.#...', '#....', '#####'],
}

def columns(rows):
    out = []
    for c in range(len(rows[0])):
        out.append(sum(1 << r for r in range(len(rows)) if rows[r][c] == '#'))
    return out

def table(name, glyphs, w, h):
    chars = ''.join(glyphs)
    lines = ['// %d x %d font: glyph i is the i-th character of %s_CHARS' % (w, h, name),
             'const char %s_CHARS[] PROGMEM = "%s";' % (name, chars.replace('\\', '\\\\').replace('"', '\\"')),
             'const uint8_t %s[] PROGMEM = {' % name]
    for ch, rows in glyphs.items():
        assert len(rows) == h and all(len(r) == w for r in rows), ch
        lines.append('  ' + ', '.join('0x%02X' % b for b in columns(rows)) + ",  // '%s'" % ch)
    lines.append('};')
    return '\n'.join(lines)
```

```
101
102 if __name__ == '__main__':
103     out = Path(sys.argv[1]) / 'font.h'
104     out.write_text('/*\n * font.h -- GENERATED by tools/gen_font.py (the letters are drawn there as ASCII
     art).\n'
105                    ' * Each glyph is stored column by column, one byte per column, bit 0 = top row.\n */\n'
106                    '#pragma once\n#include <avr/pgmspace.h>\n\n'
107                    + table('FONT3x5', SMALL, 3, 5) + '\n\n' + table('FONT5x7', BIG, 5, 7) + '\n',
108                    encoding='utf-8', newline='\n')
109     print('wrote', out, '-', len(SMALL), 'small and', len(BIG), 'big glyphs')
```

tools/compose_music.py – آهنگ‌ساز

آهنگ‌های داخل بازی با یک نگارش کوتاه نت؛ فهرست نت‌هایشان را در tunes.h می‌نویسد و می‌تواند آن‌ها را برای شنیدن به فایل WAV تبدیل کند.

```
1  #!/usr/bin/env python3
2  """
3  VOID RUNNER - the in-game music (original metal tracks), written in a short notation and
4  turned into the note lists of void_runner/tunes.h (the block between the BEGIN/END
5  markers is replaced; the rest of tunes.h is not touched).
6
7  Usage: python tools/compose_music.py
8
9  Notation: 'E2:2' = note E2 for 2 ticks (1 tick = a 16th note), 'r:4' = rest. Bars are 16
10 ticks. The rhythm guitar (buzzer 4) plays a fifth above the bass in the same rhythm, so
11 bass + rhythm sound like a power chord.
12 """
13 import re
14 from pathlib import Path
15
16 NAMES = {'C': 0, 'C#': 1, 'Db': 1, 'D': 2, 'D#': 3, 'Eb': 3, 'E': 4, 'F': 5, 'F#': 6, 'Gb': 6,
17          'G': 7, 'G#': 8, 'Ab': 8, 'A': 9, 'A#': 10, 'Bb': 10, 'B': 11}
18
19
20 def midi(name):
21     m = re.fullmatch(r'([A-G][#b]?)(\d)', name)
22     return 12 * (int(m.group(2)) + 1) + NAMES[m.group(1)]
23
24
25 def parse(text):
26     notes = []
27     for tok in text.split():
28         n, t = tok.split(':')
29         notes.append((0 if n == 'r' else midi(n), int(t)))
30     return notes
31
32
33 def gallop(n, beats=4):  # 8th + two 16ths per beat
34     return ' '.join(['%s:2 %s:1 %s:1' % (n, n, n)] * beats)
35
36
37 def fifths(notes):
38     return [(p + 7 if p else 0, t) for p, t in notes]
39
40
41 def bars(notes):
42     total = sum(t for _, t in notes)
43     return total / 16
44
45
46 SONGS = {}
47
48 # ------------------------------------------------------------------ phase 1: ROCK BELT
49 # Thrash, E minor, galloping bass (8th + two 16ths), tick 80 ms (about 190 BPM).
50 bass = ' '.join([
51     gallop('E2'),
52     gallop('E2', 2), 'G2:2 G2:1 G2:1 A2:2 A2:1 A2:1',
53     gallop('E2'),
54     gallop('E2', 2), 'Bb2:4 A2:4',
55     gallop('E2'),
56     gallop('E2', 2), 'G2:2 G2:1 G2:1 A2:2 A2:1 A2:1',
57     gallop('C3', 2), gallop('B2', 2),
58     gallop('B2', 2), 'B2:8',
59 ])
60 lead = '''
61 E4:4 G4:2 A4:2 B4:4 A4:2 G4:2
62 A4:4 G4:2 E4:2 D4:4 E4:4
63 E4:4 G4:2 A4:2 B4:4 D5:2 E5:2
64 Bb4:4 A4:4 G4:4 F#4:4
```

```
E5:6 D5:2 B4:4 G4:4
A4:6 B4:2 G4:4 E4:4
E5:2 D5:2 B4:2 A4:2 G4:2 A4:2 B4:2 D5:2
F#4:8 B4:8
'''
SONGS['PHASE1'] = (80, parse(lead), parse(bass), 'Phase 1, ROCK BELT: thrash, E minor, galloping bass')

# ------------------------------------------------------------------ phase 2: DEEP MIST
# Slow and heavy, drop-D chugs (low D2), D minor lead with long notes, tick 100 ms.
chug_a = 'D2:1 D2:1 r:1 D2:1 D2:2 r:2 D2:1 D2:1 r:1 D2:1 F2:2 E2:2'
chug_b = 'D2:1 D2:1 r:1 D2:1 D2:2 r:2 A2:4 G#2:2 G2:2'
bass = ' '.join([chug_a, chug_b, chug_a, chug_b, chug_a, chug_b, chug_a, 'Bb2:8 A2:8'])
lead = '''
r:8 A4:4 F4:4
E4:8 D4:4 r:4
r:8 A4:4 C5:4
Bb4:8 A4:4 r:4
D5:6 C5:2 A4:4 F4:4
G4:6 A4:2 E4:8
F4:4 E4:4 D4:4 C#4:4
D4:12 r:4
'''
SONGS['PHASE2'] = (100, parse(lead), parse(bass), 'Phase 2, DEEP MIST: slow drop-D chugs, D minor')

# ------------------------------------------------------------------ phase 3: THE VOID
# Syncopated heavy groove with a catchy lead, E minor, tick 75 ms.
groove_x = 'E2:1 r:1 E2:1 r:1 E2:1 E2:1 r:2 G2:2 E2:2 Bb2:2 A2:2'
groove_y = 'E2:1 r:1 E2:1 r:1 E2:1 E2:1 r:2 C3:4 B2:4'
bass = ' '.join([groove_x, groove_y, groove_x, groove_y, groove_x, groove_y,
                 ' '.join(['E2:2'] * 8), ' '.join(['E2:1'] * 16)])
lead = '''
B4:4 B4:2 G4:2 A4:4 E4:4
B4:4 B4:2 G4:2 C5:4 B4:4
B4:4 B4:2 G4:2 A4:4 E4:2 G4:2
F#4:4 G4:4 A4:4 B4:4
E5:4 D5:2 B4:2 D5:4 E5:4
G5:4 F#5:2 E5:2 D5:4 B4:4
E5:2 B4:2 G4:2 E4:2 E5:2 B4:2 G4:2 E4:2
E5:1 D5:1 B4:1 A4:1 G4:1 A4:1 B4:1 D5:1 E5:8
'''
SONGS['PHASE3'] = (75, parse(lead), parse(bass), 'Phase 3, THE VOID: syncopated groove, E minor')

# ------------------------------------------------------------------ boss
# Tremolo-picked bass (16ths), chromatic wailing lead, tick 70 ms.
bass = ' '.join([' '.join(['E2:1'] * 16), ' '.join(['F2:1'] * 16),
                 ' '.join(['E2:1'] * 8 + ['G2:1'] * 4 + ['Bb2:1'] * 4),
                 ' '.join(['Bb2:1'] * 8 + ['A2:1'] * 8)])
lead = '''
E5:2 F5:2 E5:2 D#5:2 E5:8
F5:2 G5:2 F5:2 E5:2 F5:8
G5:2 A5:2 Bb5:2 A5:2 G5:4 E5:4
Bb4:4 A4:4 Ab4:4 G4:4
'''
SONGS['BOSS'] = (70, parse(lead), parse(bass), 'Boss fights: tremolo bass, chromatic lead')


def c_array(name, notes):
    rows, line = [], []
    for p, t in notes:
        line.append('{%d, %d}' % (p, t))
        if len(line) == 8:
            rows.append('  ' + ', '.join(line) + ',')
            line = []
    if line:
        rows.append('  ' + ', '.join(line) + ',')
    return 'const Note %s[] PROGMEM = {\n%s\n};' % (name, '\n'.join(rows))


out = []
for key, (tick, lead, bass, title) in SONGS.items():
    rhythm = fifths(bass)
    assert bars(lead) == bars(bass) == bars(rhythm), (key, bars(lead), bars(bass))
    secs = sum(t for _, t in bass) * tick / 1000
    out.append('// ================================================================ %s' % title)
    out.append('// %d bars, 1 tick = %d ms, one loop = %.1f s' % (bars(bass), tick, secs))
    out.append(c_array(key + '_LEAD', lead))
    out.append(c_array(key + '_BASS', bass))
    out.append(c_array(key + '_RHYTHM', rhythm))
    out.append('const Track SONG_%s[BUZZER_COUNT] = {TRACK(%s_LEAD), TRACK(%s_BASS), NO_TRACK, TRACK(%
     s_RHYTHM)};'
               % (key, key, key, key))
    out.append('const uint8_t SONG_%s_TICK_MS = %d;\n' % (key, tick))

BEGIN = '// ---- BEGIN songs generated by tools/compose_music.py (edit the songs there)\n'
```

```
END = '// ---- END songs generated by tools/compose_music.py\n'
path = Path(__file__).resolve().parents[1] / 'void_runner' / 'tunes.h'
text = path.read_text(encoding='utf-8')
start, stop = text.index(BEGIN) + len(BEGIN), text.index(END)
path.write_text(text[:start] + '\n'.join(out) + text[stop:], encoding='utf-8', newline='\n')
print('wrote %d songs into %s' % (len(SONGS), path))
```

tools/render_dumps.py – تصویرساز صفحه

خروجی‌های صفحه (فرمان !d) را به صورت تصویر PNG یا انیمیشن GIF با رنگ‌های واقعی LED می‌کشد.

```
#!/usr/bin/env python3
"""
VOID RUNNER - turns screen dumps ("!d" command, or the PC harness's "record") into
pictures in the real LED colours of the circuit (from gen_circuit.py). Useful to review
animation frames without watching the simulation, and for the documentation.

Usage:
    python tools/render_dumps.py <log> <out.png>               all screens side by side
    python tools/render_dumps.py <log> <out.png> 3 7 12         only screens 3, 7 and 12
    python tools/render_dumps.py <log> <out.gif> [ms]           animation (needs Pillow),
                                                                ms per frame (default 40)
"""
import re
import struct
import sys
import zlib
from pathlib import Path

sys.path.insert(0, str(Path(__file__).parent))
import gen_circuit as gc                    # LED colours and screen size

BACKGROUND = (40, 40, 40)


def hexrgb(s):
    return tuple(int(s[i:i + 2], 16) for i in (1, 3, 5))


def read_dumps(text):
    dumps, cur = [], None
    for line in re.sub(r'\[DUMP\]', '\n[DUMP]', text).splitlines():
        line = line.strip()
        if line.startswith('[DUMP] begin'):
            cur = []
        elif line.startswith('[DUMP] end') and cur is not None:
            dumps.append(cur)
            cur = None
        elif cur is not None and len(line) == gc.SCREEN_W and set(line) <= set('.#'):
            cur.append(line)
    return [d for d in dumps if len(d) == gc.TOTAL_ROWS]


def draw_screen(img, dump, ox, oy, pitch):
    """Paints one screen into img (a list of pixel rows) with its top-left at (ox, oy)."""
    r_on, r_off = pitch * 5 // 14, pitch * 4 // 14
    for i, line in enumerate(dump):                     # dump order: status bars, then game rows
        row = gc.SCREEN_H + i if i < gc.STATUS_ROWS else i - gc.STATUS_ROWS
        light, body = gc.led_colours(row)
        gy = i if i < gc.STATUS_ROWS else i + 1          # one empty row under the status bars
        for x, ch in enumerate(line):
            c = hexrgb(light) if ch == '#' else hexrgb(body)
            cx, cy = ox + x * pitch + pitch // 2, oy + gy * pitch + pitch // 2
            r = r_on if ch == '#' else r_off
            for y in range(cy - r, cy + r + 1):
                for xx in range(cx - r, cx + r + 1):
                    if (xx - cx) ** 2 + (y - cy) ** 2 <= r * r:
                        img[y][xx] = c


def screen_size(pitch):
    return gc.SCREEN_W * pitch, (gc.TOTAL_ROWS + 1) * pitch


def render(dumps, path, pitch=14, gap=24):
    fw, fh = screen_size(pitch)
    W, H = len(dumps) * (fw + gap) + gap, fh + 2 * gap
    img = [[BACKGROUND] * W for _ in range(H)]
    for n, dump in enumerate(dumps):
        draw_screen(img, dump, gap + n * (fw + gap), gap, pitch)
    raw = b''.join(b'\x00' + bytes(v for px in row for v in px) for row in img)
```

```
    def chunk(tag, data):
        return struct.pack('>I', len(data)) + tag + data + struct.pack('>I', zlib.crc32(tag + data) & 0
    xFFFFFFFF)
    png = b'\x89PNG\r\n\x1a\n' + chunk(b'IHDR', struct.pack('>IIBBBBB', W, H, 8, 2, 0, 0, 0))
    Path(path).write_bytes(png + chunk(b'IDAT', zlib.compress(raw, 9)) + chunk(b'IEND', b''))


def render_gif(dumps, path, ms=40, pitch=10, gap=10):
    from PIL import Image                           # Pillow: pip install pillow
    fw, fh = screen_size(pitch)
    W, H = fw + 2 * gap, fh + 2 * gap
    frames = []
    for dump in dumps:
        img = [[BACKGROUND] * W for _ in range(H)]
        draw_screen(img, dump, gap, gap, pitch)
        frame = Image.new('RGB', (W, H))
        frame.putdata([px for row in img for px in row])
        frames.append(frame.convert('P', palette=Image.ADAPTIVE, colors=32))
    frames[0].save(path, save_all=True, append_images=frames[1:], duration=ms, loop=0, optimize=True)


if __name__ == '__main__':
    dumps = read_dumps(Path(sys.argv[1]).read_text(encoding='utf-8', errors='replace'))
    out = sys.argv[2]
    if out.endswith('.gif'):
        render_gif(dumps, out, int(sys.argv[3]) if len(sys.argv) > 3 else 40)
    else:
        if len(sys.argv) > 3:                       # pick screens by number (1 = first)
            dumps = [dumps[int(n) - 1] for n in sys.argv[3:]]
        render(dumps, out)
    print('rendered %d screens to %s' % (len(dumps), out))
```

tools/draw_wiring.py – نمودار سیم‌کشی

نمودار ساده‌شدهٔ سیم‌کشی را می‌کشد.

```
#!/usr/bin/env python3
"""
VOID RUNNER - draws docs/media/wiring.png: a simplified wiring diagram of the circuit (what
connects to which Mega pin), in the wire colours of diagram.json. The pin lists come from
gen_circuit.py, so the picture always matches the real circuit.

Usage: python tools/draw_wiring.py     (needs Pillow)
"""
import sys
from pathlib import Path

from PIL import Image, ImageDraw, ImageFont

sys.path.insert(0, str(Path(__file__).parent))
import contextlib, io
with contextlib.redirect_stdout(io.StringIO()):
    import gen_circuit as gc                    # pin lists and colours

W, H = 1500, 960
BG, FG, DIM = (40, 40, 40), (230, 230, 230), (150, 150, 150)
ORANGE, BLUE, VIOLET, GREEN, GREY, BLACK = (240, 150, 30), (70, 120, 255), (200, 90, 230), (60, 200, 80),
     (170, 170, 170), (15, 15, 15)
MEGA = (0, 110, 150)
img = Image.new('RGB', (W, H), BG)
d = ImageDraw.Draw(img)


def font(size, bold=False):
    for name in (('arialbd.ttf' if bold else 'arial.ttf'), 'DejaVuSans.ttf'):
        try:
            return ImageFont.truetype(name, size)
        except OSError:
            pass
    return ImageFont.load_default()


F_TITLE, F_HEAD, F, F_SMALL = font(30, True), font(19, True), font(16), font(14)


def text(xy, s, f=F, fill=FG, anchor='la'):
    d.text(xy, s, font=f, fill=fill, anchor=anchor)


def line(points, fill, width=3):
    d.line(points, fill=fill, width=width, joint='curve')
```

```
45
46
47  def pin_range(pins):
48      """'22-45, 47-49' from a list of pin numbers."""
49      nums = sorted(int(p) for p in pins)
50      parts, start = [], nums[0]
51      for a, b in zip(nums, nums[1:] + [None]):
52          if b != a + 1:
53              parts.append('%d' % start if start == a else '%d-%d' % (start, a))
54              start = b
55      return ', '.join(parts)
56
57
58  text((30, 20), 'VOID RUNNER - wiring', F_TITLE)
59  text((30, 60), 'Simplified: every LED, key and buzzer of the real circuit (diagram.json) is wired this way.'
        , F, DIM)
60
61  # ------------------------------------------------------------------ Mega
62  MX, MY, MW, MH = 560, 150, 360, 560
63  d.rounded_rectangle((MX, MY, MX + MW, MY + MH), 14, fill=MEGA)
64  text((MX + MW / 2, MY + 22), 'Arduino Mega 2560', F_HEAD, anchor='ma')
65  headers = [  # (y, label, colour)
66      (MY + 90, 'A0 - A15  -  16 LED columns (-)', BLUE),
67      (MY + 200, 'pins %s  -  27 LED rows (+)' % pin_range(gc.ROW_PINS), ORANGE),
68      (MY + 330, 'pins %s-%s  -  keypad rows' % (gc.KEY_ROW_PINS[0], gc.KEY_ROW_PINS[-1]), VIOLET),
69      (MY + 390, 'pins %s-%s  -  keypad columns' % (gc.KEY_COL_PINS[-1], gc.KEY_COL_PINS[0]), GREEN),
70      (MY + 480, 'pins %s  -  buzzers' % ', '.join(gc.BUZZER_PINS), VIOLET),
71      (MY + 545, 'GND  -  buzzers (-)', GREY),
72  ]
73  for y, label, colour in headers:
74      d.rectangle((MX + 12, y - 9, MX + 24, y + 9), fill=colour)
75      text((MX + 34, y), label, F_SMALL, anchor='lm')
76
77  # ------------------------------------------------------------------ LED matrix (corner shown)
78  LX, LY, P = 60, 170, 70                       # 5 x 5 LEDs drawn, pitch P
79  rows_shown = [('row 1 (red bar)', (255, 60, 60)), ('row 2 (yellow bar)', (255, 210, 60)),
80                ('row 3 (green bar)', (60, 255, 80)), ('row 4 (game, red)', (255, 60, 60)),
81                ('...', DIM)]
82  text((LX, LY - 85), 'LED screen: 27 rows x 16 columns = 432 LEDs', F_HEAD)
83  for r, (name, colour) in enumerate(rows_shown):
84      y = LY + r * P
85      line([(LX + 10, y), (LX + 380, y)], ORANGE, 2)                    # row line (anodes)
86  for c in range(5):
87      x = LX + 40 + c * P
88      line([(x + 12, LY - 20), (x + 12, LY + 5 * P - 30)], BLUE, 2)     # column line (cathodes)
89  for r in range(4):
90      for c in range(5):
91          x, y = LX + 40 + c * P, LY + r * P
92          colour = rows_shown[r][1]
93          d.ellipse((x - 9, y + 4, x + 9, y + 22), fill=colour if (r + c) % 3 == 0 else (70, 70, 70), outline=
        FG)
94          line([(x, y), (x, y + 4)], ORANGE, 2)                         # anode leg to the row
95          line([(x + 6, y + 18), (x + 12, y + 18)], BLUE, 2)            # cathode leg to the column
96  text((LX + 40, LY + 5 * P - 25), 'col 1   col 2   col 3   col 4   ...  col 16', F_SMALL, DIM)
97  # the bundles to the Mega
98  line([(LX + 380, LY), (LX + 380, MY + 200), (MX, MY + 200)], ORANGE, 6)
99  text((LX + 392, MY + 170), '27 row wires', F_SMALL, ORANGE)
100 line([(LX + 52, LY - 20), (LX + 52, LY - 40), (LX + 460, LY - 40), (LX + 460, MY + 90), (MX, MY + 90)], BLUE
        , 6)
101 text((LX + 300, LY - 62), '16 column wires', F_SMALL, BLUE)
102 text((LX, LY + 5 * P + 10),
103      'Each LED: + leg on its row wire, - leg on its column wire.\n'
104      'The Mega switches ONE row on at a time (71 times a second for\n'
105      'the whole screen) and pulls the columns of the LEDs that\n'
106      'should light LOW. Your eye sees a steady picture.', F, FG)
107
108 # ------------------------------------------------------------------ keypad
109 KX, KY, KP = 1000, 150, 70
110 text((KX, KY - 45), 'Keypad: %d push buttons, %d x %d' % (gc.KR * gc.KC, gc.KR, gc.KC), F_HEAD)
111 labels = [b[0] for row in gc.BUTTONS for b in row]
112 for r in range(gc.KR):
113     y = KY + 20 + r * KP
114     line([(KX - 30, y), (KX + gc.KC * KP - 20, y)], VIOLET, 2)
115     text((KX + gc.KC * KP - 10, y), 'row %d -> pin %s' % (r + 1, gc.KEY_ROW_PINS[r]), F_SMALL, VIOLET, 'lm')
116 for c in range(gc.KC):
117     x = KX + 20 + c * KP
118     line([(x + 18, KY), (x + 18, KY + gc.KR * KP + 10)], GREEN, 2)
119     text((x + 18, KY + gc.KR * KP + 14), 'pin %s' % gc.KEY_COL_PINS[c], F_SMALL, GREEN, 'ma')
120 for r in range(gc.KR):
121     for c in range(gc.KC):
122         x, y = KX + 20 + c * KP, KY + 20 + r * KP
123         d.rounded_rectangle((x - 16, y - 16, x + 16, y + 16), 5, fill=(70, 70, 70), outline=FG)
124         text((x, y), labels[r * gc.KC + c], F_HEAD, anchor='mm')
125 line([(KX - 30, KY + 20), (KX - 30, MY + 330), (MX + MW, MY + 330)], VIOLET, 6)
```

```
line([(KX + 38, KY + gc.KR * KP + 40), (KX + 38, MY + 390), (MX + MW, MY + 390)], GREEN, 6)
text((KX + 60, KY + gc.KR * KP + 45),
     'A button connects its row to its column.\n'
     'The Mega drives one row LOW at a time and\n'
     'reads the columns: a LOW column = that key\n'
     'is pressed.', F, FG)

# ------------------------------------------------------------------ buzzers
BXp, BYp = 1000, 700
jobs = ['lead', 'bass', 'effects', 'rhythm']
text((BXp, BYp - 110), 'Buzzers: 4, one hardware timer each', F_HEAD)
for i, pin in enumerate(gc.BUZZER_PINS):
    x = BXp + 20 + i * 115
    y = BYp - 18 - i * 12                       # each buzzer has its OWN wire to its own pin
    line([(x, BYp), (x, y), (MX + MW, y)], VIOLET, 3)
    d.ellipse((x - 26, BYp, x + 26, BYp + 52), fill=BLACK, outline=FG)
    text((x, BYp + 26), 'B%d' % (i + 1), F_HEAD, anchor='mm')
    line([(x, BYp + 52), (x, BYp + 80)], GREY, 3)                      # other leg: ground
    text((x + 6, BYp + 92), 'pin %s' % pin, F_SMALL, VIOLET)
    text((x + 6, BYp + 110), jobs[i], F_SMALL, DIM)
line([(BXp + 20, BYp + 80), (BXp + 20 + 3 * 115, BYp + 80)], GREY, 3)
line([(BXp + 20, BYp + 80), (MX + MW + 20, BYp + 80), (MX + MW + 20, MY + 545), (MX + MW, MY + 545)], GREY,
     6)
text((BXp, BYp + 140),
     'Signal leg -> its own pin; each pin is the output of a timer\n'
     '(Timer3, Timer4, Timer1, Timer5). Other legs -> GND together.', F, FG)

# ------------------------------------------------------------------ legend
text((60, 660), 'Thick line = a bundle of separate wires side by side\n'
                '(one wire per LED row, LED column, key row or key column).', F, DIM)

text((30, H - 40), 'Parts: 1 Arduino Mega, 432 LEDs, 9 push buttons, 4 buzzers. No resistors, no modules, no
      libraries.',
     F, DIM)
out = Path(__file__).resolve().parents[1] / 'docs' / 'media' / 'wiring.png'
img.save(out)
print('wrote', out)
```

عکس مدار – tools/render_circuit.py

کل مدار را با تصاویر خود قطعه‌های Wokwi می‌کشد و با یک تصویر بازی روشن می‌کند.

```
"""
render_circuit.py -- a "photo" of the whole circuit as Wokwi draws it: the parts of the
generated circuit (tools/gen_circuit.py) with Wokwi's own part drawings (@wokwi/elements),
every visible wire, and the LEDs lit with one real game picture from a screen dump.

Usage (from the project folder):
    python tools/render_circuit.py <dump log> <dump number> <out.png> [zoom]
e.g. python tools/render_circuit.py build/rec_phase1.txt 120 docs/media/circuit_photo.png 2

Writes a web page next to the picture and lets Microsoft Edge (headless) take the screenshot;
the page loads @wokwi/elements from the internet.
"""
import importlib.util
import json
import subprocess
import sys
from pathlib import Path

ROOT = Path(__file__).resolve().parent.parent
EDGE = r'C:\Program Files (x86)\Microsoft\Edge\Application\msedge.exe'
SCREEN_W, SCREEN_H = 16, 24

spec = importlib.util.spec_from_file_location('gen_circuit', ROOT / 'tools' / 'gen_circuit.py')
gen = importlib.util.module_from_spec(spec)
spec.loader.exec_module(gen)                # builds parts, wires and PIN_TABLE (no files written)


def read_dump(log, number):
    """Lit pixels of dump `number` (1 = first): {led id: True}."""
    blocks = Path(log).read_text(encoding='utf-8').split('[DUMP] begin')[1:]
    rows = [r for r in blocks[number - 1].splitlines()[1:] if r and not r.startswith('[')]
    bars, game = rows[:3], [r for r in rows[3:] if not r.startswith('-')]
    lit = {}
    for k, r in enumerate(bars):
        for x, c in enumerate(r):
            if c == '#':
                lit['st_%d_%d' % (x, k)] = True
    for y, r in enumerate(game[:SCREEN_H]):
        for x, c in enumerate(r):
```

```
            if c == '#':
                lit['led_%d_%d' % (x, y)] = True
    return lit


def page(lit, zoom):
    pts = list(gen.PIN_TABLE.values()) + [pt for w in gen.wires for pt in gen.polyline(w)]
    xs, ys = zip(*pts)
    x0, y0 = min(xs) - 80, min(ys) - 80
    w, h = max(xs) - x0 + 120, max(ys) - y0 + 120
    parts = []
    for p in gen.parts:
        a = dict(p.get('attrs', {}))
        tag = p['type']
        attrs = ''.join(' %s="%s"' % (k, v) for k, v in a.items() if k not in ('gamma', 'fps', 'key'))
        if tag == 'wokwi-led' and lit.get(p['id']):
            attrs += ' data-lit="1"'
        rot = p.get('rotate', 0)
        style = 'left:%.1fpx;top:%.1fpx;%s' % (p['left'] - x0, p['top'] - y0,
                                               'transform:rotate(%ddeg);' % rot if rot else '')
        parts.append('<%s class="p" style="%s"%s></%s>' % (tag, style, attrs, tag))
    lines = []
    for wire in gen.wires:
        if not wire['colour']:
            continue
        d = ' '.join('%.1f,%.1f' % (x - x0, y - y0) for x, y in gen.polyline(wire))
        lines.append('<polyline points="%s" stroke="%s"/>' % (d, wire['colour']))
    return f'''<!doctype html><html><head><meta charset="utf-8">
<style>html,body{{margin:0;background:#2b2b2b}}#c{{position:relative;width:{w:.0f}px;height:{h:.0f}px;
transform:scale({zoom});transform-origin:0 0}}.p{{position:absolute}}
svg{{position:absolute;left:0;top:0;pointer-events:none}}
polyline{{fill:none;stroke-width:2.2;stroke-linejoin:round;opacity:.9}}</style>
<script type="module">import 'https://cdn.jsdelivr.net/npm/@wokwi/elements@1.9.2/+esm';
customElements.whenDefined('wokwi-led').then(() =>
  document.querySelectorAll('[data-lit]').forEach(e => e.value = true));</script>
</head><body><div id="c">{''.join(parts)}
<svg width="{w:.0f}" height="{h:.0f}">{''.join(lines)}</svg></div></body></html>''', w * zoom, h * zoom


def main():
    log, number, out = sys.argv[1], int(sys.argv[2]), Path(sys.argv[3]).resolve()
    zoom = float(sys.argv[4]) if len(sys.argv) > 4 else 2
    html, w, h = page(read_dump(log, number), zoom)
    page_file = out.with_suffix('.html')
    page_file.write_text(html, encoding='utf-8', newline='\n')
    subprocess.run([EDGE, '--headless=new', '--disable-gpu', '--hide-scrollbars',
                    '--virtual-time-budget=15000', '--window-size=%d,%d' % (w, h),
                    '--screenshot=%s' % out, page_file.as_uri()], check=True,
                   stdout=subprocess.DEVNULL, stderr=subprocess.DEVNULL)
    page_file.unlink()
    print('wrote', out, '%dx%d' % (w, h))


if __name__ == '__main__':
    main()
```

tools/make_doc.py – همین سند

این سند را از روی کد و خود بازی می‌سازد.

```
"""
make_doc.py -- builds the project documentation docs/VOID_RUNNER_documentation.docx
(open it in Google Docs: Drive -> New -> File upload, then "Open with Google Docs").

Parts: 1 cover page, 2 the hardware (a picture of the whole circuit), 3 project performance
(how the device works, with pictures of every screen), 4 the full code with explanations.

All pictures come from the real code: the PC harness plays the game (tools/doc_record.script)
and its screen dumps are drawn in the real LED colours (render_dumps.py); the circuit is
drawn with Wokwi's own part drawings (render_circuit.py, needs Edge and the internet).

Usage (from the project folder, after `python tests/host/run_tests.py` built build/sim.exe):
    python tools/make_doc.py
Needs python-docx and Pillow (pip install python-docx pillow).
"""
import re
import subprocess
import sys
from pathlib import Path

from docx import Document
```

```
from docx.enum.section import WD_SECTION
from docx.enum.table import WD_TABLE_ALIGNMENT
from docx.enum.text import WD_ALIGN_PARAGRAPH, WD_BREAK
from docx.oxml import OxmlElement
from docx.oxml.ns import qn
from docx.shared import Cm, Inches, Pt, RGBColor
from PIL import Image, ImageDraw

ROOT = Path(__file__).resolve().parent.parent
sys.path.insert(0, str(ROOT / 'tools'))
import render_dumps as rd                                       # noqa: E402

BUILD = ROOT / 'build'
MEDIA = BUILD / 'doc_media'
OUT = ROOT / 'docs' / 'VOID_RUNNER_documentation.docx'

# ---- cover page data (fill in)
COVER = {
    'university': '[University name]',
    'faculty': '[Faculty / Department]',
    'course': 'Digital Systems 2 (Microprocessors)',
    'project': 'Project 1',
    'student': '[Student name]',
    'student_id': '[Student ID]',
    'teacher': '[Teacher name]',
    'semester': '[Semester, e.g. Fall 2026]',
    'date': '[Submission date]',
    'repo': 'https://github.com/Arash1Kazemi/void-runner',
}

ACCENT = RGBColor(0x1F, 0x3A, 0x5F)
GREY = RGBColor(0x60, 0x60, 0x60)

# ================================================================ pictures
DUMP_NAMES = [
    'title', 'title_push', 'menu', 'hangar_bolt', 'hangar_dart', 'hangar_twin',
    'opt_lite', 'opt_snd', 'opt_diff', 'opt_test', 'led1', 'led2', 'led3', 'led4',
    'best_empty', 'zone1', 'rockbelt', 'go', 'play1', 'play2', 'pause_score', 'pause_sign',
    'warn1', 'warn2', 'warden1', 'warden2', 'bossdown', 'zonedone', 'pts', 'lifeup',
    'phase2a', 'phase2b', 'hunter1', 'hunter2', 'phase3a', 'phase3b', 'king', 'king2',
    'vic_a', 'vic_b', 'vic_c', 'vic_d', 'over1', 'over2', 'best1', 'best2', 'best3',
]


def screen_png(dump, name, pitch=14):
    path = MEDIA / (name + '.png')
    rd.render([dump], path, pitch=pitch, gap=10)
    return path


def make_media():
    MEDIA.mkdir(parents=True, exist_ok=True)
    sim = BUILD / ('sim.exe' if sys.platform == 'win32' else 'sim')
    log = subprocess.run([str(sim), 'tools/doc_record.script'], cwd=ROOT, capture_output=True,
                         text=True, errors='replace').stdout
    dumps = rd.read_dumps(log)
    assert len(dumps) == len(DUMP_NAMES), 'got %d dumps' % len(dumps)
    pics = {n: screen_png(d, n) for n, d in zip(DUMP_NAMES, dumps)}
    logo = rd.read_dumps((BUILD / 'doc_logo.txt').read_text(encoding='utf-8'))
    for name, t in [('logo_warp', 600), ('logo_ship', 1600), ('logo_letters', 3100),
                    ('logo_runner', 4200), ('logo_flash', 4900), ('logo_glow', 5400)]:
        pics[name] = screen_png(logo[min(t // 100, len(logo) - 1)], name)
    # busy moments from the clips of docs/media (tools/media_record.script)
    subprocess.run([str(sim), 'tools/media_record.script'], cwd=ROOT, capture_output=True)
    for clip, picks in [('phase1', [44, 120, 200, 300]), ('warden', [66, 108, 148]),
                        ('king', [60, 140, 213])]:
        clipdumps = rd.read_dumps((BUILD / ('rec_%s.txt' % clip)).read_text(encoding='utf-8'))
        for k, i in enumerate(picks):
            pics['%s_%d' % (clip, k)] = screen_png(clipdumps[min(i, len(clipdumps)) - 1],
                                                   '%s_%d' % (clip, k))
    # the whole circuit, lit with a boss-fight picture, and close-ups of its parts
    photo = MEDIA / 'circuit_photo.png'
    subprocess.run([sys.executable, 'tools/render_circuit.py', 'build/rec_warden.txt', '66',
                    str(photo), '2'], cwd=ROOT, check=True)
    pics['circuit'] = photo
    pics.update(circuit_closeups(photo))
    pics['wiring'] = ROOT / 'docs' / 'media' / 'wiring.png'
    pics.update(sprite_sheets())
    return pics


def circuit_closeups(photo):
    """Crops the LED panel, the Mega, the keypad and the buzzers out of the circuit photo."""
    import render_circuit as rc
```

```
    gen = rc.gen
    pts = list(gen.PIN_TABLE.values()) + [pt for w in gen.wires for pt in gen.polyline(w)]
    xs, ys = zip(*pts)
    x0, y0, zoom = min(xs) - 80, min(ys) - 80, 2
    im = Image.open(photo)
    boxes = {}
    for kind, key in [('wokwi-led', 'cu_leds'), ('wokwi-pushbutton', 'cu_keypad'),
                      ('wokwi-buzzer', 'cu_buzzers'), ('wokwi-arduino-mega', 'cu_mega')]:
        ps = [p for p in gen.parts if p['type'] == kind]
        size = {'wokwi-led': (40, 50), 'wokwi-pushbutton': (70, 50), 'wokwi-buzzer': (70, 80),
                'wokwi-arduino-mega': (400, 200)}[kind]
        l = min(p['left'] for p in ps) - 30
        t = min(p['top'] for p in ps) - 30
        r = max(p['left'] for p in ps) + size[0] + 30
        b = max(p['top'] for p in ps) + size[1] + 30
        box = tuple(int((v - o) * zoom) for v, o in ((l, x0), (t, y0), (r, x0), (b, y0)))
        path = MEDIA / (key + '.png')
        im.crop(box).save(path)
        boxes[key] = path
    return boxes


def parse_art():
    """The sprites of art.h: {NAME: list of row strings ('#' / '.')}."""
    text = (ROOT / 'void_runner' / 'art.h').read_text(encoding='utf-8')
    art = {}
    for m in re.finditer(r'const uint16_t (\w+)\[\d+\] PROGMEM = \{(.*?)\};', text, re.S):
        rows = [int(b, 2) for b in re.findall(r'0b([01]{16})', m.group(2))]
        if not rows:
            continue
        width = max(16 - (r & -r).bit_length() + 1 for r in rows if r)
        art[m.group(1)] = [''.join('#' if r & (0x8000 >> x) else '.' for x in range(width))
                           for r in rows]
    return art


def draw_sprite(rows, colour, pitch=26):
    w, h = len(rows[0]), len(rows)
    pad = pitch // 2
    im = Image.new('RGB', (w * pitch + 2 * pad, h * pitch + 2 * pad), (40, 40, 40))
    d = ImageDraw.Draw(im)
    for y, row in enumerate(rows):
        for x, c in enumerate(row):
            cx, cy = pad + x * pitch + pitch // 2, pad + y * pitch + pitch // 2
            r = pitch * 5 // 14 if c == '#' else pitch * 4 // 14
            d.ellipse((cx - r, cy - r, cx + r, cy + r), fill=colour if c == '#' else (58, 58, 58))
    return im


def sprite_sheets():
    art = parse_art()
    out = {}
    red, white, green = (255, 70, 70), (240, 240, 240), (70, 255, 90)
    for name, colour in [('SHIP_BOLT', green), ('SHIP_DART', green), ('SHIP_TWIN', green),
                         ('ENEMY_DRONE', red), ('ENEMY_WEAVER', red), ('ENEMY_MINER', red),
                         ('ENEMY_CRUISER', red), ('ROCK_SMALL', white), ('ROCK_BIG', white),
                         ('PICKUP_AMMO', white), ('PICKUP_LIFE', white), ('BOSS_WARDEN', red),
                         ('BOSS_HUNTER', red), ('BOSS_KING', red), ('BOSS_KING_ANGRY', red),
                         ('WARNING_SIGN', white)]:
        path = MEDIA / ('sprite_%s.png' % name.lower())
        draw_sprite(art[name], colour).save(path)
        out['sprite_' + name.lower()] = path
    return out


# ============================================================== document helpers
def shade(paragraph_or_cell, fill):
    el = paragraph_or_cell._p if hasattr(paragraph_or_cell, '_p') else paragraph_or_cell._tc
    pr = el.get_or_add_pPr() if hasattr(el, 'get_or_add_pPr') else el.get_or_add_tcPr()
    shd = OxmlElement('w:shd')
    shd.set(qn('w:val'), 'clear')
    shd.set(qn('w:color'), 'auto')
    shd.set(qn('w:fill'), fill)
    pr.append(shd)


class Doc:
    def __init__(self):
        self.d = Document()
        sec = self.d.sections[0]
        sec.page_width, sec.page_height = Cm(21), Cm(29.7)              # A4
        sec.left_margin = sec.right_margin = Cm(2)
        sec.top_margin = sec.bottom_margin = Cm(2)
        normal = self.d.styles['Normal']
```

```
        normal.font.name = 'Arial'
        normal.font.size = Pt(10.5)
        normal.paragraph_format.space_after = Pt(5)
        normal.paragraph_format.line_spacing = 1.15
        for lvl, size in [(1, 20), (2, 14), (3, 12)]:
            st = self.d.styles['Heading %d' % lvl]
            st.font.name = 'Arial'
            st.font.size = Pt(size)
            st.font.bold = True
            st.font.color.rgb = ACCENT
            st.paragraph_format.space_before = Pt(14 if lvl > 1 else 0)
            st.paragraph_format.space_after = Pt(6)
            st.paragraph_format.keep_with_next = True
        self.width = Cm(17)
        self.fig = 0
        self.tab = 0

    def h(self, text, level):
        return self.d.add_heading(text, level)

    def p(self, text='', bold_lead=None, size=None, align=None, italic=False, colour=None):
        para = self.d.add_paragraph()
        if bold_lead:
            r = para.add_run(bold_lead)
            r.bold = True
            if size:
                r.font.size = Pt(size)
        r = para.add_run(text)
        r.italic = italic
        if size:
            r.font.size = Pt(size)
        if colour:
            r.font.color.rgb = colour
        if align:
            para.alignment = align
        return para

    def rich(self, text):
        """A paragraph where **bold** and `code` parts are formatted."""
        para = self.d.add_paragraph()
        for part in re.split(r'(\*\*.+?\*\*|`.+?`)', text):
            if part.startswith('**'):
                para.add_run(part[2:-2]).bold = True
            elif part.startswith('`'):
                r = para.add_run(part[1:-1])
                r.font.name = 'Consolas'
                r.font.size = Pt(9.5)
            elif part:
                para.add_run(part)
        return para

    def bullets(self, items):
        for it in items:
            para = self.rich(it)
            para.style = self.d.styles['List Bullet']
            para.paragraph_format.space_after = Pt(2)

    def caption(self, text):
        self.fig += 1
        para = self.p('Figure %d. %s' % (self.fig, text), size=9, align=WD_ALIGN_PARAGRAPH.CENTER,
                      italic=True, colour=GREY)
        para.paragraph_format.space_after = Pt(10)

    def picture(self, path, width_cm, caption=None):
        self.d.add_picture(str(path), width=Cm(width_cm))
        para = self.d.paragraphs[-1]
        para.alignment = WD_ALIGN_PARAGRAPH.CENTER
        para.paragraph_format.keep_with_next = bool(caption)
        para.paragraph_format.space_after = Pt(2)
        if caption:
            self.caption(caption)

    def gallery(self, items, per_row, width_cm, caption=None):
        """A row of pictures, each with a short label under it (items: (path, label))."""
        rows = (len(items) + per_row - 1) // per_row
        t = self.d.add_table(rows=rows * 2, cols=per_row)
        t.alignment = WD_TABLE_ALIGNMENT.CENTER
        for i, (path, label) in enumerate(items):
            r, c = divmod(i, per_row)
            cell = t.cell(r * 2, c)
            para = cell.paragraphs[0]
            para.alignment = WD_ALIGN_PARAGRAPH.CENTER
            para.add_run().add_picture(str(path), width=Cm(width_cm))
            lab = t.cell(r * 2 + 1, c).paragraphs[0]
```

```
            lab.alignment = WD_ALIGN_PARAGRAPH.CENTER
            run = lab.add_run(label)
            run.font.size = Pt(8.5)
            run.font.color.rgb = GREY
        if caption:
            self.caption(caption)
        else:
            self.p('')

    def table(self, header, rows, widths=None, caption=None, size=9.5):
        t = self.d.add_table(rows=1 + len(rows), cols=len(header))
        t.style = self.d.styles['Table Grid']
        t.alignment = WD_TABLE_ALIGNMENT.CENTER
        for c, text in enumerate(header):
            cell = t.cell(0, c)
            shade(cell, '1F3A5F')
            run = cell.paragraphs[0].add_run(text)
            run.bold = True
            run.font.size = Pt(size)
            run.font.color.rgb = RGBColor(0xFF, 0xFF, 0xFF)
        for r, row in enumerate(rows, 1):
            for c, text in enumerate(row):
                cell = t.cell(r, c)
                if r % 2 == 0:
                    shade(cell, 'EEF2F7')
                para = cell.paragraphs[0]
                for part in re.split(r'(\*\*.+?\*\*)', str(text)):
                    if not part:
                        continue
                    run = para.add_run(part.strip('*') if part.startswith('**') else part)
                    run.bold = part.startswith('**')
                    run.font.size = Pt(size)
        if widths:
            for row in t.rows:
                for c, w in enumerate(widths):
                    row.cells[c].width = Cm(w)
        if caption:
            self.tab += 1
            para = self.p('Table %d. %s' % (self.tab, caption), size=9,
                          align=WD_ALIGN_PARAGRAPH.CENTER, italic=True, colour=GREY)
            para.paragraph_format.space_after = Pt(10)
        else:
            self.p('')
        return t

    def code(self, text, lang):
        """Full source, one paragraph per line: line numbers, comments in green."""
        lines = text.replace('\t', '    ').split('\n')
        if lines and lines[-1] == '':
            lines.pop()
        in_block = False
        digits = len(str(len(lines)))
        for n, line in enumerate(lines, 1):
            para = self.d.add_paragraph()
            pf = para.paragraph_format
            pf.space_after = pf.space_before = Pt(0)
            pf.line_spacing = 1.0
            shade(para, 'F6F8FA')
            num = para.add_run(str(n).rjust(digits) + '  ')
            num.font.name = 'Consolas'
            num.font.size = Pt(7.5)
            num.font.color.rgb = RGBColor(0xA0, 0xA0, 0xA0)
            for chunk, kind in split_code(line, lang, in_block):
                r = para.add_run(chunk)
                r.font.name = 'Consolas'
                r.font.size = Pt(7.5)
                r.font.color.rgb = {'comment': RGBColor(0x2E, 0x7D, 0x32),
                                    'pre': RGBColor(0x8E, 0x24, 0xAA),
                                    'string': RGBColor(0xB2, 0x3A, 0x1D),
                                    'code': RGBColor(0x1A, 0x1A, 0x1A)}[kind]
            in_block = block_state(line, lang, in_block)
        self.p('')

    def page_break(self):
        self.d.add_paragraph().add_run().add_break(WD_BREAK.PAGE)


def block_state(line, lang, in_block):
    if lang != 'c':
        return False
    s = line
    while True:
        if in_block:
            end = s.find('*/')
```

```
            if end < 0:
                return True
            s, in_block = s[end + 2:], False
        else:
            s = re.sub(r'"(\\.|[^"\\])*"', '""', s)
            start, lc = s.find('/*'), s.find('//')
            if start < 0 or (0 <= lc < start):
                return False
            s, in_block = s[start + 2:], True


def split_code(line, lang, in_block):
    """Splits one line into (text, kind) parts: comment, pre(processor), string or code."""
    if lang == 'c' and in_block:
        end = line.find('*/')
        if end < 0:
            return [(line, 'comment')]
        return [(line[:end + 2], 'comment')] + split_code(line[end + 2:], lang, False)
    if lang == 'c' and line.lstrip().startswith('#'):
        return [(line, 'pre')]
    comment = '//' if lang == 'c' else '#'
    out, i, start = [], 0, 0
    while i < len(line):
        ch = line[i]
        if ch in '"\'' and not (lang == 'c' and ch == "'" and False):
            j = i + 1
            while j < len(line) and line[j] != ch:
                j += 2 if line[j] == '\\' else 1
            out += [(line[start:i], 'code'), (line[i:j + 1], 'string')]
            i = start = j + 1
            continue
        if line.startswith(comment, i) or (lang == 'c' and line.startswith('/*', i)):
            out.append((line[start:i], 'code'))
            if lang == 'c' and line.startswith('/*', i):
                end = line.find('*/', i + 2)
                if end >= 0:
                    out.append((line[i:end + 2], 'comment'))
                    i = start = end + 2
                    continue
            out.append((line[i:], 'comment'))
            return [p for p in out if p[0]]
        i += 1
    out.append((line[start:], 'code'))
    return [p for p in out if p[0]]


def functions_of(text):
    """(signature, description) of every function: the // comment lines just above it."""
    lines = text.split('\n')
    found = []
    for i, line in enumerate(lines):
        m = re.match(r'^(?!\s)(?:static\s+)?[\w:<>\*&]+(?:\s+[\w:<>\*&]+)*\s+\**(\w+)\(([^)]*)\)\s*\{', line
    )
        if not m or m.group(1) in ('if', 'for', 'while', 'switch'):
            continue
        desc, k = [], i - 1
        while k >= 0 and lines[k].startswith('//'):
            line_text = lines[k][2:].strip()
            if re.match(r'^[=\-]{3,}', line_text):          # a section divider, not a description
                break
            desc.insert(0, line_text)
            k -= 1
        found.append(('%s(%s)' % (m.group(1), m.group(2).strip()), ' '.join(desc)))
    return found


# ============================================================== the document
def cover(doc):
    d = doc.d
    for _ in range(3):
        doc.p('')
    doc.p(COVER['university'], size=16, align=WD_ALIGN_PARAGRAPH.CENTER).runs[-1].bold = True
    doc.p(COVER['faculty'], size=12, align=WD_ALIGN_PARAGRAPH.CENTER)
    doc.p('')
    doc.p(COVER['course'], size=13, align=WD_ALIGN_PARAGRAPH.CENTER)
    doc.p(COVER['project'], size=12, align=WD_ALIGN_PARAGRAPH.CENTER, colour=GREY)
    for _ in range(2):
        doc.p('')
    t = doc.p('VOID RUNNER', size=40, align=WD_ALIGN_PARAGRAPH.CENTER)
    t.runs[-1].bold = True
    t.runs[-1].font.color.rgb = ACCENT
    doc.p('A vertical space shooter on an Arduino Mega', size=14,
          align=WD_ALIGN_PARAGRAPH.CENTER, italic=True)
    doc.p('432 single LEDs · a 9-button keypad · 4 buzzers · no modules, no libraries', size=10.5,
```

```
          align=WD_ALIGN_PARAGRAPH.CENTER, colour=GREY)
    for _ in range(3):
        doc.p('')
    info = [('Student', COVER['student']), ('Student ID', COVER['student_id']),
            ('Teacher', COVER['teacher']), ('Course', COVER['course']),
            ('Semester', COVER['semester']), ('Date', COVER['date']),
            ('Platform', 'Arduino Mega 2560, simulated in Wokwi'), ('Source code', COVER['repo'])]
    t = d.add_table(rows=len(info), cols=2)
    t.alignment = WD_TABLE_ALIGNMENT.CENTER
    for r, (k, v) in enumerate(info):
        a, b = t.cell(r, 0), t.cell(r, 1)
        a.width, b.width = Cm(4), Cm(10)
        ra = a.paragraphs[0].add_run(k)
        ra.bold = True
        ra.font.size = Pt(11)
        ra.font.color.rgb = ACCENT
        b.paragraphs[0].add_run(v).font.size = Pt(11)
    doc.page_break()


def hardware_page(doc, pics):
    doc.h('The hardware', 1)
    doc.picture(pics['circuit'], 17, 'The whole circuit in Wokwi: 432 LEDs (left), Arduino Mega 2560 '
                '(top), 3 × 3 push-button keypad and 4 buzzers (right). The LEDs show a real '
                'moment of the game: the WARDEN boss fight.')
    doc.page_break()


def performance(doc, pics):
    P, R = doc.p, doc.rich
    doc.h('3. Project performance', 1)
    R('**VOID RUNNER** is a complete arcade game built only from the parts the course allows: '
      'one Arduino Mega 2560, single LEDs, single push buttons and buzzers. There are no ready-made '
      'modules (no LED matrix module, no keypad module) and no libraries; the screen, the keypad and '
      'the four-voice music are all driven by our own code. The player flies a small ship at the '
      'bottom of a 16 × 24 LED screen, shoots enemies and space rocks, catches ammo crates and '
      'extra lives, and fights a boss at the end of each of the three phases. The project runs in '
      'the Wokwi simulator (Wokwi for VS Code and wokwi.com).')

    doc.h('3.1 Parts and connections', 2)
    doc.table(['Part', 'Count', 'Connection to the Mega'], [
        ['Arduino Mega 2560', '1', '–'],
        ['Single LEDs (wokwi-led), one matrix', '432', '16 × 24 game screen + 3 status bars of 16. '
         '27 row wires (anodes) on pins −2245 and −4749, 16 column wires (cathodes) on −A0A15'],
        ['Push buttons (wokwi-pushbutton), 3 × 3 matrix', '9', 'rows on pins −1820, columns on −1517'],
        ['Buzzers (wokwi-buzzer)', '4', 'pins 5, 6, 11, 46 (outputs of Timer3, Timer4, Timer1, Timer5)'],
    ], [5, 1.5, 10.5], 'The parts of the device.')
    R('53 of the Mega\'s pins are used, and every header has one job: the double header drives the '
      'LED rows, the analog header the LED columns, the communication header the keypad and the PWM '
      'header the buzzers. No resistors are needed in the simulation. The circuit file '
      '(`diagram.json`) and the pin list of the code (`pins.h`) are both generated by one program '
      '(`tools/gen_circuit.py`), which also checks every wire, so the circuit and the code always '
      'agree.')
    doc.picture(pics['wiring'], 17, 'Simplified wiring: how every LED, key and buzzer is connected.')

    doc.h('3.2 The LED screen', 2)
    R('All 432 LEDs form **one matrix** of 27 rows × 16 columns: the + leg of every LED is on its '
      'row wire, the − leg on its column wire. The Mega switches on **one row at a time** and pulls '
      'the columns of the LEDs that should light LOW. A Timer2 interrupt moves to the next row about '
      '1900 times per second, so the whole screen is redrawn 71 times per second and the eye sees a '
      'steady picture. The columns are written with two port registers (`PORTF`, `PORTK`) at once: '
      'this costs about 3 % of the processor, where `digitalWrite` would cost about 35 %.')
    R('The game draws into a picture in memory (`frame`, one 16-bit word per row) and copies it to '
      'the screen when it is finished, so a half-drawn picture is never shown.')
    doc.table(['Area', 'LED colour', 'Use in the game'], [
        ['Status bar 1', 'red', 'phase progress, then the boss\'s health'],
        ['Status bar 2', 'yellow', 'ammo (blinks when low)'],
        ['Status bar 3', 'green', 'lives (one block of 3 LEDs per life)'],
        ['Game rows −05', 'red', 'where enemies and bosses enter, "WARN", "ZONE"'],
        ['Game rows −617', 'white', 'open space, message pages'],
        ['Game rows −1823', 'green', 'the player\'s zone'],
    ], [4, 3, 10], 'LED colours. Each LED has a fixed colour, like the colour strips of the 1978 '
       'Space Invaders cabinet.')
    doc.picture(pics['cu_leds'], 6.5, 'The LED panel in Wokwi during a boss fight.')
    R('**Brightness.** Each LED is lit only 1/27 of the time. Wokwi shows brightness as '
      '(share of time on)^(1/gamma); with the default gamma a lit LED looked only 32 % bright, which '
      'was hard to see. Every LED therefore has gamma = 30 (90 %), which is what a real multiplexed '
      'display does by driving each LED harder in its short time slot. Every LED also has fps = 300, '
      'so moving objects stay sharp, and everything that blinks stays on and off for at least '
      '160 ms so the blink is visible.')
    R('**Text** never scrolls (scrolling letters smeared into a white block in the simulator). '
      'Every message is a still **page** of short words, at most four small letters per line, '
      'shown for 0.9 s, with big digits and signs where a word is not needed.')

```

```
    doc.h('3.3 The keypad and the controls', 2)
    R('The 9 push buttons form a 3 × 3 matrix, one button for each key the game uses. The code drives one row LOW at a time and reads the '
      'three columns with the internal pull-ups, so a pressed key reads LOW. The rows that are not '
      'being read are switched to inputs, so two pressed keys can never short a HIGH and a LOW '
      'output together. Every key is debounced. The buttons are labelled like keyboard keys and also '
      'react to the PC keyboard in Wokwi.')
    doc.picture(pics['cu_keypad'], 8, 'The keypad in Wokwi.')
    doc.table(['Key', 'Action'], [
        ['W A S D', 'move (tap = one pixel, hold = glide)'],
        ['R', 'fire (tap = one bullet, hold = auto-fire) · OK in the menus'],
        ['Q', 'back · pause in the game'],
        ['P', 'pause / continue'],
        ['M', 'sound on / off (any screen, saved)'],
        ['B', 'brightness 100 / 50 / 20 % (any screen, saved)'],
    ], [3, 14], 'The keys.')
    R('**Firing:** press R for one bullet; keep holding and another follows every 0.2 s (a chirp '
      'when auto-fire starts, and the ship\'s nose blinks). **Moving:** a tap moves one pixel, a '
      'hold makes the ship glide after 0.17 s. The newest key wins: a move key stops the fire, and '
      'while R is held the ship does not glide.')

    doc.h('3.4 The four buzzers', 2)
    R('Each buzzer is connected to the output pin of its own 16-bit hardware timer. In CTC mode with '
      '"toggle on compare match" the timer flips the pin by itself, so a note costs no processor time '
      'and **four notes can sound at once** (Arduino\'s `tone()` can play only one). The timers run '
      'on a slow clock (÷256), which keeps notes up to about C7 within 1 % of their pitch.')
    doc.picture(pics['cu_buzzers'], 8, 'The four buzzers in Wokwi.')
    doc.table(['Buzzer', 'Pin / timer', 'Job'], [
        ['1', '5 / Timer3', 'lead guitar (melody)'],
        ['2', '6 / Timer4', 'bass'],
        ['3', '11 / Timer1', 'every sound effect and menu sound (music only in short jingles)'],
        ['4', '46 / Timer5', 'rhythm guitar: a fifth above the bass (bass + rhythm = a power chord)'],
    ], [2, 3.5, 11.5], 'The voices.')

    doc.h('3.5 Start-up logo and welcome music', 2)
    R('When the device starts, a 5.6-second logo plays in sync with the welcome melody: the picture '
      'runs on the song\'s own clock, so every movement lands on a note. "VOID" is a vertical sign '
      'of bold 10 × 5 letters, and the status bars fill up like a start-up progress bar. Any key '
      'skips the logo.')
    doc.gallery([(pics['logo_warp'], '0.6 s warp'), (pics['logo_ship'], '1.6 s the ship'),
                 (pics['logo_letters'], '3.1 s letters'), (pics['logo_runner'], '4.2 s RUNNER'),
                 (pics['logo_flash'], '4.9 s flash'), (pics['logo_glow'], '5.4 s the sign')],
                6, 2.6, 'The start-up logo.')
    doc.table(['Time', 'Picture', 'Sound'], [
        ['0.0 – 1.2 s', 'warp: star streaks speed up', 'rising whoosh + low A2 drone'],
        ['1.2 – 2.0 s', 'the ship rises and brakes', 'braking notes E4 C4 A3'],
        ['2.0 – 2.4 s', 'the ship shoots up and out', 'quick rising glide'],
        ['2.4 – 3.6 s', 'V, O, I, D light up one by one, flickering on; drones fly past',
         'A4 C5 E5 A5, a crackle on each flicker'],
        ['3.6 – 4.8 s', '"RUNNER" crosses on a dark ribbon, towed by the ship',
         'melody + harmony + bass line'],
        ['4.8 – 5.6 s', 'the whole screen flashes, then the sign glows', 'A-minor chord'],
    ], [2.5, 8, 6.5], 'Timeline of the logo.')

    doc.h('3.6 Title screen, demo and menu', 2)
    R('The title screen keeps the VOID sign lit while ships fly past it, and every 7 seconds a '
      'banner shows the pages "PUSH", a big R, "TO", "PLAY". If nobody touches a key for 20 seconds '
      'a **demo** starts: the autopilot plays the game by itself until any key is pressed. R opens '
      'the menu: PLAY, SHIP, OPTS and BEST (W/S choose, R open, Q back); the chosen item is '
      'underlined.')
    doc.gallery([(pics['title'], 'title'), (pics['title_push'], 'banner'), (pics['menu'], 'menu')],
                3, 3.4, 'Title screen and main menu.')

    doc.h('3.7 Hangar and options', 2)
    R('In the **hangar** the player chooses one of three ships with A/D. The ship is shown three '
      'times bigger, and the three status bars show its speed, ammo and fire power. The **options** '
      'are pages: LITE (brightness), SND (sound), DIFF (EASY / NORM / HARD) and TEST (the LED test). '
      'W/S choose a page, A/D or R change it, page dots at the bottom show where you are. Every '
      'setting is saved in the EEPROM.')
    doc.gallery([(pics['hangar_bolt'], 'BOLT'), (pics['hangar_dart'], 'DART'),
                 (pics['hangar_twin'], 'TWIN')], 3, 3.4, 'The hangar.')
    doc.table(['Ship', 'Speed', 'Fire', 'Ammo', 'Note'], [
        ['BOLT', '70 ms / pixel', 'every 0.20 s', '60', 'balanced'],
        ['DART', '45 ms / pixel', 'every 0.22 s', '40', 'fastest, less ammo'],
        ['TWIN', '95 ms / pixel', 'every 0.26 s', '80', 'two bullets per shot (2 ammo), slowest'],
    ], [2.5, 3, 3, 2, 6.5], 'The three ships.')
    doc.gallery([(pics['opt_lite'], 'LITE'), (pics['opt_snd'], 'SND'), (pics['opt_diff'], 'DIFF'),
                 (pics['opt_test'], 'TEST')], 4, 3, 'The option pages.')

    doc.h('3.8 Playing the game', 2)
    R('A game has three phases. Each phase starts with the pages "ZONE" and a big phase number, the '
      'phase name and "GO!" with a fanfare. Then the enemies and rocks of the phase arrive from its '
      'spawn list. When the list is finished and the screen is empty, "WARN" and a blinking warning '
      'sign appear with a siren while the red bar charges up, and the boss comes with its own music. '
```

```
    'When the boss explodes, the pages "ZONE DONE", the bonus points and "LIFE UP" follow, and the '
    'next phase begins. After the last boss the victory screen comes straight away.')
doc.gallery([(pics['zone1'], 'ZONE 1'), (pics['rockbelt'], 'phase name'), (pics['go'], 'GO!'),
             (pics['phase1_0'], 'phase 1'), (pics['phase1_1'], 'phase 1'),
             (pics['phase1_3'], 'phase 1')], 6, 2.6, 'Start of phase 1, ROCK BELT, and play.')
doc.table(['Topic', 'Rule'], [
    ['Lives', 'EASY 4, NORMAL 3, HARD 3 (at most 4). A hit: explosion, screen shake and 2 s of '
     'blinking shield. +1 life after each phase; extra-life pickups.'],
    ['Ammo', 'Per ship (60 / 40 / 80), full at the start of every phase. Ammo crates give '
     '+20 / 15 / 12 by difficulty. At 5 or less a warning beeps, the yellow bar blinks and a '
     'crate is always sent. Empty: a dry click.'],
    ['Enemies', 'All slower than the player; at most 4 / 5 / 6 on the screen at once (phase '
     '1 / 2 / 3). They shoot only from the upper rows and never right next to the ship, and '
     'they never move onto each other, so the small screen stays readable.'],
    ['Space rocks', 'Hollow, lumpy shapes (small 3 × 3, big 4 × 3) that fall slowly and drift; '
     'a big rock takes 2 hits and breaks into two small ones. They hurt on contact.'],
    ['Explosions', 'Only the bosses and the player\'s ship explode into flying pixels; enemies '
     'just vanish with a boom (flying debris looked like bullets).'],
    ['Collisions', 'Pixel-exact: a hit counts only when lit pixels touch.'],
    ['Score', 'Drone 10, weaver 15, miner 20, cruiser 40, rocks 5 / 10, mine 2, pickup 5, '
     'bosses 200 / 300 / 500, phase bonus 100 × phase; at most 9999.'],
], [3, 14], 'The rules of the game.')
items = [(pics['sprite_enemy_drone'], 'drone'), (pics['sprite_enemy_weaver'], 'weaver'),
         (pics['sprite_enemy_miner'], 'mine-layer'), (pics['sprite_enemy_cruiser'], 'cruiser'),
         (pics['sprite_rock_small'], 'small rock'), (pics['sprite_rock_big'], 'big rock'),
         (pics['sprite_pickup_ammo'], 'ammo crate'), (pics['sprite_pickup_life'], 'extra life')]
doc.gallery(items, 8, 1.6, 'Enemies, rocks and pickups, pixel by pixel.')
doc.table(['Enemy', 'Behaviour'], [
    ['Drone', 'sinks slowly, shoots straight down'],
    ['Weaver', 'sinks while zig-zagging, shoots now and then'],
    ['Mine-layer', 'crosses the top of the screen and drops mines (mines can be shot)'],
    ['Cruiser', '5 hits; stops near the top, slides sideways, fires shots aimed at the player, '
     'drops an extra life'],
    ['Rocks', 'fall and drift sideways; a big rock breaks into two'],
], [3, 14], 'Enemy types.')

doc.h('3.9 The status bars', 2)
R('The three bars above the game screen show the state of the game at a glance. Red: how far '
  'the phase has come; during the warning it charges up, and in the boss fight it shows the '
  'boss\'s health, dropping with every hit. Yellow: the ammo left (it blinks when 5 or fewer are '
  'left). Green: the lives, one block of three LEDs per life.')

doc.h('3.10 The three phases and their bosses', 2)
doc.table(['Phase', 'Enemies', 'Boss'], [
    ['1 – ROCK BELT', 'drones and many rocks', '**WARDEN**: wide (10 × 4), slides along the top, '
     '3-way spread, drops rocks; below half health faster with a 5-way spread'],
    ['2 – DEEP MIST', 'weavers, mine-layers, drones', '**HUNTER**: small and fast; dashes to a '
     'new spot, fires an aimed pair, and every 7 s blinks and dives at the player'],
    ['3 – THE VOID', 'cruisers, everything else, rock showers', '**VOID KING**: huge (12 × 5), '
     '5-way spread, calls in drones; at half health its eye opens (roar, shake), then aimed '
     'triple volleys and rock rain'],
], [3, 4.5, 9.5], 'Phases and bosses. Boss health: 24 / 22 / 40, scaled by the difficulty.')
doc.gallery([(pics['warn1'], 'WARN'), (pics['warn2'], 'warning sign'),
             (pics['warden_0'], 'WARDEN'), (pics['warden_1'], 'WARDEN'),
             (pics['bossdown'], 'boss down'), (pics['zonedone'], 'ZONE DONE')], 6, 2.6,
            'Phase 1: the warning, the WARDEN fight and the end of the phase.')
doc.gallery([(pics['pts'], 'bonus'), (pics['lifeup'], 'LIFE UP'), (pics['phase2a'], 'phase 2'),
             (pics['phase2b'], 'phase 2'), (pics['hunter1'], 'HUNTER'),
             (pics['hunter2'], 'HUNTER')], 6, 2.6, 'Phase 2, DEEP MIST, and the HUNTER.')
doc.gallery([(pics['phase3a'], 'phase 3'), (pics['phase3b'], 'phase 3'),
             (pics['king_0'], 'VOID KING'), (pics['king'], 'VOID KING'),
             (pics['king_2'], 'eye open'), (pics['king2'], 'form 2')], 6, 2.6,
            'Phase 3, THE VOID, and the VOID KING in both forms.')
doc.gallery([(pics['sprite_boss_warden'], 'WARDEN'), (pics['sprite_boss_hunter'], 'HUNTER'),
             (pics['sprite_boss_king'], 'VOID KING'),
             (pics['sprite_boss_king_angry'], 'VOID KING, form 2')], 4, 3.5,
            'The bosses, pixel by pixel.')
doc.table(['Difficulty', 'Lives', 'Enemy fire', 'Boss health', 'Ammo crate'], [
    ['EASY', '4', '1.5 × slower', '80 %', '+20'],
    ['NORMAL', '3', 'normal', '100 %', '+15'],
    ['HARD', '3', '1.33 × faster', '130 %', '+12'],
], [3, 2, 4, 3.5, 3], 'Difficulty levels (OPTS → DIFF).')

doc.h('3.11 Pause, game over, victory and best score', 2)
R('**P** (or Q) pauses the game: the game clock stops, the score and a big pause sign are shown, '
  'and the pages "P:GO" / "Q:EX" explain the keys. When the last life is lost, **GAME OVER** '
  'shows the score (blinking for a new record) and the best score. After the VOID KING the '
  '**victory** screen shows fireworks and the pages "YOU WIN!", "VOID SAFE" and the score. '
  'The **BEST** page shows the high score, how far that game got (ZONE −13, or WIN) and its '
  'difficulty; it is kept in the EEPROM, so it survives a power cut on a real Arduino.')
doc.gallery([(pics['pause_score'], 'pause'), (pics['pause_sign'], 'pause'),
             (pics['over1'], 'game over'), (pics['over2'], 'game over'),
             (pics['best_empty'], 'no record yet')], 5, 2.9, 'Pause and game over.')
doc.gallery([(pics['vic_d'], 'YOU WIN!'), (pics['vic_a'], 'VOID SAFE'), (pics['vic_c'], 'score'),
```

```
                (pics['best1'], 'BEST'), (pics['best2'], 'how far'), (pics['best3'], 'difficulty')],
               6, 2.6, 'Victory and the best score.')

    doc.h('3.12 Sound and music', 2)
    R('All music is written as note lists, one per buzzer, stored in flash. The in-game songs are '
      'original metal tracks written for this project in a short notation '
      '(`tools/compose_music.py`): buzzer 1 plays the lead guitar, buzzer 2 the bass and buzzer 4 a '
      'rhythm guitar a fifth above the bass, which together sound like a power chord. Buzzer 3 is '
      'kept free for sound effects, so an effect never cuts the music.')
    doc.table(['Song', 'Style', 'Character'], [
        ['ROCK BELT (phase 1)', 'fast thrash, E minor, about 190 BPM, loop 10.2 s',
         'the gallop rhythm on low E; a question-and-answer melody'],
        ['DEEP MIST (phase 2)', 'slow and heavy, drop-D, half-time, loop 12.8 s',
         'short muted chugs with gaps; sparse, spooky lead'],
        ['THE VOID (phase 3)', 'syncopated groove, E minor, loop 9.6 s',
         'off-beat stabs; a hook you can hum'],
        ['Boss (all three)', 'tremolo picking, chromatic, about 210 BPM, loop 4.5 s',
         'nonstop 16th notes; a wailing lead figure'],
    ], [4, 6, 7], 'The in-game songs.')
    R('Other music: the start-up melody, the phase fanfare, phase clear, victory and game over. '
      'Sound effects use priorities, so an important sound is never cut by a small one: shot, '
      'auto-fire chirp, empty click, hit, explosion, big explosion, player hit, pickup, extra life, '
      'low ammo, warning siren, boss roar and the LED-test sweep. Explosions are noise (a random '
      'frequency every 6 ms); the other effects slide between two frequencies.')

    doc.h('3.13 LED test', 2)
    R('OPTS → TEST checks the hardware: every LED on, then a row sweep (status bars first), a column '
      'sweep and a checkerboard, with rising beeps. A broken LED or wire is easy to spot.')
    doc.gallery([(pics['led1'], 'all on'), (pics['led2'], 'rows'), (pics['led3'], 'columns'),
                 (pics['led4'], 'checkerboard')], 4, 3, 'The LED test.')

    doc.h('3.14 Reliability and measurements', 2)
    doc.bullets([
        '**Nothing blocks:** there is no `delay()` in the game. A new picture is made every 20 ms, '
        'and each part of the program does one small step per picture. The game has its own clock '
        '(`gameMs`) that stops while paused.',
        '**Screen:** the Timer2 interrupt shows the picture whatever the game code is doing; '
        '3 % of the processor.',
        '**Simulation speed:** the timers run on slow clocks and unused timers are stopped, because '
        'Wokwi spends time on every timer count. Measured: about 93 % of real time during the '
        'logo and 91 % with every LED lit.',
        '**Memory:** only fixed-size arrays (no `malloc`), so nothing can run out during a game. '
        '33 KB of 248 KB flash and 2.0 KB of 8 KB RAM are used; fonts, pixel art, music and spawn '
        'lists are kept in flash.',
        '**Fairness:** at most -46 enemies at once, no shots from close range, a crate always '
        'comes when the ammo runs low, and every phase was checked to be winnable.',
    ])

    doc.h('3.15 Testing', 2)
    R('Besides playing it in Wokwi, the real game code is compiled on the PC together with a small '
      'stand-in for the Arduino (registers as variables, a simulated clock, a simulated keypad). '
      'Test scripts press keys and check the Serial output and the screen, so a whole game runs in '
      'under a second. An **autopilot** that plays like a careful player was used to check that '
      'every phase can be won, and to tune the difficulty.')
    doc.table(['Test', 'What it checks', 'Result'], [
        ['controls', 'tap, glide, row limit, single shot, auto-fire rate, move cancels fire, '
         'no glide while firing', 'pass'],
        ['screens', 'logo skip, title, menu, hangar, options, LED test, best, pause, game over and '
         'new record, global keys, power cycle (EEPROM), demo', 'pass'],
        ['playthrough', 'all three phases and bosses, VOID KING form 2, victory', 'pass'],
        ['balance', 'autopilot without shield, reacting only every 250 ms (roughly a human), '
         '48 games per difficulty', 'EASY 47/48, NORMAL 38/48, HARD 27/48 won'],
        ['QA run', 'four test agents played and stress-tested every part (1000+ games and '
         'random key runs)', 'no crash or hang; findings fixed or listed'],
    ], [2.5, 10, 4.5], 'Automatic tests.')
    R('Serial test commands (typed in the Wokwi terminal, starting with `!`) help with testing: '
      '`!d` shows the screen as text, `!s` the game state, -`!1``!3` start at a phase, `!b` skips '
      'to the boss, `!i` gives a shield and `!x` turns on the autopilot.')


CODE_FILES = [
    ('void_runner/void_runner.ino', 'The main file',
     'The sketch that Wokwi compiles; every other file is a tab of it (one translation unit). '
     '`setup()` stops the unused timers, starts the screen, the keypad and the sound, and loads '
     'the saved settings. `loop()` makes one picture every 20 ms: it reads the keys, handles the '
     'global keys M and B, runs the current screen and plays the sound. The screens form a state '
     'machine (logo → title → menu → game → pause / game over / victory …): each screen function '
     'returns the screen to show next. The Serial test commands (`!d`, `!s`, …) are handled here too.',
     ['menu']),
    ('void_runner/config.h', 'Settings',
     'All settings in one place: the frame time, the names of the keys, the list of screens, the '
     'difficulty tables (lives, enemy fire speed, boss health, ammo per crate) and game constants '
     'such as the number of lives and the phase bonus. Changing the balance of the game only needs '
     'this file.', []),
```

```
    ('void_runner/pins.h', 'Pin numbers (generated)',
     'Generated together with the circuit by `tools/gen_circuit.py`, so the pins in the code always '
     'match the wires of the circuit: the 27 LED row pins, the 16 LED column pins (the bits of '
     'PORTF and PORTK), the keypad row and column pins and the four buzzer pins.', ['wiring']),
    ('void_runner/display.h', 'The LED screen',
     'The Timer2 interrupt that lights one LED row at a time (71 full pictures per second), the '
     'picture in memory (`frame`) and every drawing function: pixels, rectangles, bitmaps, letters '
     'of the two fonts, numbers, message pages and the status bars. Brightness (100 / 50 / 20 %) is '
     'made by switching the row off early in its time slot.', ['cu_leds']),
    ('void_runner/input.h', 'The keypad',
     'Scans the 3 × 3 push-button matrix row by row, as taught in the course, and debounces every '
     'key. It remembers which keys are held and which were just pressed or released, so the other '
     'parts can ask "was R just pressed?" or "is D held?".', ['cu_keypad']),
    ('void_runner/sound.h', 'The sound engine',
     'Drives the four buzzers with four 16-bit timers in CTC toggle mode, so each buzzer plays its '
     'note without using processor time. A small music engine plays songs written as note lists '
     '(one per voice, looping or once), and an effect engine on voice 3 plays the sound effects with '
     'priorities. Mute (M) silences everything.', ['cu_buzzers']),
    ('void_runner/tunes.h', 'Songs and sound effects',
     'The note lists of every song and the parts of every sound effect, all stored in flash. The '
     'four in-game songs are generated by `tools/compose_music.py` from a short note notation; the '
     'jingles (fanfare, clear, victory, game over) and the effects are written here directly.', []),
    ('void_runner/storage.h', 'EEPROM: settings and best score',
     'Saves the chosen ship, the difficulty, the brightness, the sound setting and the best score '
     '(with the zone it reached and its difficulty) in the Mega\'s EEPROM, using the EEPROM '
     'registers directly. A check byte tells whether the EEPROM holds valid data.',
     ['best1', 'best3']),
    ('void_runner/font.h', 'Fonts (generated)',
     'Two pixel fonts: small 3 × 5 letters (four fit on a line) and big 5 × 7 letters and digits. '
     'They are drawn as ASCII art in `tools/gen_font.py`, which writes this file.',
     ['zonedone', 'vic_d']),
    ('void_runner/art.h', 'Pixel art',
     'Every picture of the game as binary numbers: one 16-bit word per row, the 1s are the lit '
     'pixels. The three ships, the enemies, the rocks, the pickups, the bosses, the warning sign and '
     'the letters of the logo.',
     ['sprite_ship_bolt', 'sprite_ship_dart', 'sprite_ship_twin', 'sprite_enemy_cruiser',
      'sprite_boss_warden']),
    ('void_runner/logo.h', 'Start-up logo and welcome melody',
     'The 5.6-second logo animation and its melody. The picture is driven by the song\'s own clock, '
     'so every movement lands on a note: warp, the ship, the VOID letters, "RUNNER" on a ribbon, '
     'the flash and the glowing sign.', ['logo_ship', 'logo_letters', 'logo_runner']),
    ('void_runner/title.h', 'Title screen',
     'The VOID sign stays lit, ships keep flying past it, and every 7 seconds a banner shows the '
     'pages "PUSH", a big R, "TO", "PLAY". After 20 s without a key the demo starts.',
     ['title', 'title_push']),
    ('void_runner/menu.h', 'Main menu',
     'The menu PLAY, SHIP, OPTS, BEST: W/S move the underline, R opens the item, Q goes back to '
     'the title.', ['menu']),
    ('void_runner/world.h', 'Everything on the game screen',
     'The data of the game world in fixed-size pools: the player, bullets and mines, enemies and '
     'rocks, pickups, explosion particles and the boss, with the tables of the three ships and the '
     'enemy types and small helpers to create them. There is no `malloc`, so nothing can run out '
     'during a game.', ['phase1_1']),
    ('void_runner/player.h', 'The player\'s ship',
     'The key rules for moving and firing (tap, hold, auto-fire, newest key wins), ammo and the '
     'low-ammo warning, getting hit (a life, explosion, shake, shield) and drawing the ship.',
     ['hangar_bolt', 'hangar_dart', 'hangar_twin']),
    ('void_runner/enemies.h', 'Enemies and rocks',
     'How each enemy type moves and shoots, and the rule that keeps them apart: a move may not bring '
     'an enemy closer than one empty pixel to another one, so it steps aside, turns or waits. New '
     'enemies take the nearest free column.',
     ['sprite_enemy_drone', 'sprite_enemy_weaver', 'sprite_enemy_miner', 'sprite_rock_small',
      'sprite_rock_big']),
    ('void_runner/levels.h', 'The three phases',
     'The spawn list of each phase (wait, what, where), its enemy limit, its name, its song and its '
     'boss. The lists are stored in flash.', ['zone1', 'rockbelt', 'go']),
    ('void_runner/boss.h', 'The bosses',
     'The behaviour of the WARDEN, the HUNTER (a small state machine: dash, aim, charge) and the '
     'VOID KING (two forms), their health and their drawing.',
     ['warden_1', 'hunter1', 'king2']),
    ('void_runner/game.h', 'One game',
     'Runs one game: the stages of a phase (intro, waves, warning, boss, boss down, clear), the '
     'spawner, all collisions (bullets, enemies, rocks, mines, pickups, boss), the score, the '
     'messages on top of the game and the three status bars.', ['warn2', 'bossdown', 'pts']),
    ('void_runner/autopilot.h', 'Autopilot',
     'A bot that plays like a careful player. It is used by the title screen\'s demo and by the '
     'automatic tests: for every column it works out how soon something would hit the ship there, '
     'flies to the safest column near its target and fires when lined up.', ['phase1_3']),
    ('void_runner/screens.h', 'The other screens',
     'The hangar, the options (with the LED test), the best score, pause, game over and victory. '
     'Each screen function handles its keys, draws one picture and returns the next screen.',
     ['opt_diff', 'pause_sign', 'over1', 'led4']),
]
```

```
TOOL_FILES = [
    ('tools/gen_circuit.py', 'Circuit generator',
     'Generates `diagram.json` (432 LEDs, 9 buttons, 4 buzzers and every wire) and `pins.h`, '
     'routes the wires so they never cross, and checks every connection.'),
    ('tools/gen_font.py', 'Font generator', 'Turns the ASCII-art letters into `font.h`.'),
    ('tools/compose_music.py', 'Music composer',
     'The in-game songs in a short note notation; writes their note lists into `tunes.h` and '
     'can render them as WAV files to listen to.'),
    ('tools/render_dumps.py', 'Screen renderer',
     'Draws screen dumps (the `!d` command) as PNG pictures or GIF animations in the real LED colours.'),
    ('tools/draw_wiring.py', 'Wiring diagram', 'Draws the simplified wiring diagram.'),
    ('tools/render_circuit.py', 'Circuit photo',
     'Draws the whole circuit with Wokwi\'s own part pictures, lit with a game picture.'),
    ('tools/make_doc.py', 'This document', 'Builds this document from the code and the game itself.'),
    ('tests/host/Arduino.h', 'PC stand-in for Arduino',
     'Registers as variables, a simulated clock and keypad, so the real game code runs on a PC.'),
    ('tests/host/sim.cpp', 'PC test runner', 'Runs the game code from test scripts (keys, Serial, dumps).'),
    ('tests/host/run_tests.py', 'Test runner', 'Builds the PC version and runs all tests and the balance
     check.'),
    ('tests/host/controls.txt', 'Test: controls', 'The key rules.'),
    ('tests/host/screens.txt', 'Test: screens', 'Every screen and the EEPROM.'),
    ('tests/host/playthrough.txt', 'Test: whole game', 'All phases to the victory.'),
]


def code_part(doc, pics):
    doc.page_break()
    doc.h('4. Project code', 1)
    R = doc.rich
    R('The program is written in C++ for the Arduino Mega (Arduino core functions plus direct '
      'register access where speed or timing needs it; no libraries). It is one sketch, '
      '`void_runner.ino`, with one header file per module; in Wokwi every file is a tab. All files '
      'together are compiled as one unit. The game logic advances in steps of 20 ms; the screen and '
      'the sound run on hardware timers.')
    rows = []
    for path, title, _, _ in CODE_FILES:
        n = len((ROOT / path).read_text(encoding='utf-8').splitlines())
        rows.append([Path(path).name, title, str(n)])
    total = sum(int(r[2]) for r in rows)
    rows.append(['**total**', '', '**%d**' % total])
    doc.table(['File', 'Contents', 'Lines'], rows, [4.5, 10.5, 2], 'The files of the program.')
    R('Each file below starts with a short explanation and the list of its functions (taken from the '
      'description written above every function), followed by the full source code.')
    for i, (path, title, text, pic_names) in enumerate(CODE_FILES, 1):
        src = (ROOT / path).read_text(encoding='utf-8')
        doc.page_break()
        doc.h('4.%d %s – %s' % (i, Path(path).name, title), 2)
        R(text)
        if pic_names:
            per = len(pic_names)
            width = {1: 3.6, 2: 3.4, 3: 3.2, 4: 3, 5: 2.8}[per]
            if pic_names[0] in ('wiring', 'cu_leds', 'cu_keypad', 'cu_buzzers'):
                doc.picture(pics[pic_names[0]], {'wiring': 15, 'cu_leds': 5}.get(pic_names[0], 7),
                            'Belongs to %s.' % Path(path).name)
            else:
                doc.gallery([(pics[n], '') for n in pic_names], per, width,
                            'What %s draws or uses.' % Path(path).name)
        funcs = functions_of(src)
        if funcs:
            doc.table(['Function', 'What it does'], [[f, d or '–'] for f, d in funcs], [6, 11],
                      size=8.5)
        doc.h('Source code', 3)
        doc.code(src, 'c')

    doc.page_break()
    doc.h('4.%d Development tools and tests' % (len(CODE_FILES) + 1), 2)
    R('These programs are not part of the Arduino sketch. They generate parts of it (the circuit, '
      'the pin list, the font, the music), make the pictures, and test the game on the PC.')
    doc.table(['File', 'Job'], [[p, t + ': ' + e] for p, t, e in TOOL_FILES], [5, 12], size=9)
    for path, title, text in TOOL_FILES:
        src = (ROOT / path).read_text(encoding='utf-8')
        doc.h('%s – %s' % (path, title), 3)
        R(text)
        doc.code(src, 'c' if path.endswith(('.h', '.cpp')) else 'py')


def main():
    pics = make_media()
    doc = Doc()
    cover(doc)
    hardware_page(doc, pics)
    performance(doc, pics)
    code_part(doc, pics)
    OUT.parent.mkdir(exist_ok=True)
```

```
    doc.d.save(OUT)
    print('wrote', OUT)


if __name__ == '__main__':
    main()
```

tests/host/Arduino.h – جایگزین آردوینو روی رایانه

رجیسترها به صورت متغیر، ساعت و صفحه‌کلید شبیه‌سازی‌شده، تا کد واقعی بازی روی رایانه اجرا شود.

```
/*
 * Arduino.h (PC version) -- lets the real VOID RUNNER code compile and run on a PC for
 * automated tests (tests/host/sim.cpp). It is NOT used for the Arduino build.
 *
 * Everything the sketch takes from Arduino is imitated just well enough:
 *   - flash access (PROGMEM, pgm_read_..., PSTR, F) reads normal memory
 *   - timer and port registers are plain variables; the harness reads the buzzer
 *     timers back to log the notes
 *   - the EEPROM registers drive a 4 KB array
 *   - millis()/micros() come from the harness's simulated clock
 *   - digitalRead() of a keypad column answers from the keys the test script holds
 *   - random() is avr-libc's generator, so runs are repeatable
 */
#pragma once
#include <cctype>
#include <cstdint>
#include <cstdio>
#include <cstring>
#include <cstdlib>
#include <string>

// ---- flash memory = normal memory on a PC
#define PROGMEM
#define PSTR(s) (s)
class __FlashStringHelper;
#define F(s) (reinterpret_cast<const __FlashStringHelper*>(s))
#define pgm_read_byte(p) (*(const uint8_t*)(p))
#define pgm_read_word(p) (*(const uint16_t*)(p))
#define pgm_read_ptr(p) (*(const void* const*)(p))
#define memcpy_P memcpy
#define strchr_P strchr
#define strlen_P strlen

// ---- pins and basic helpers
const uint8_t LOW = 0, HIGH = 1;
const uint8_t INPUT = 0, OUTPUT = 1, INPUT_PULLUP = 2;
const uint8_t A0 = 54, A1 = 55, A2 = 56, A3 = 57, A4 = 58, A5 = 59, A6 = 60, A7 = 61,
              A8 = 62, A9 = 63, A10 = 64, A11 = 65, A12 = 66, A13 = 67, A14 = 68, A15 = 69;
#define _BV(bit) (1 << (bit))
#define constrain(amt, low, high) ((amt) < (low) ? (low) : ((amt) > (high) ? (high) : (amt)))
#define lowByte(w) ((uint8_t)((w) & 0xff))
#define highByte(w) ((uint8_t)((w) >> 8))
inline bool isAlpha(int c) { return isalpha(c) != 0; }
inline void noInterrupts() {}
inline void interrupts() {}
inline void delayMicroseconds(unsigned) {}
#define ISR(vector) void vector()
const unsigned long F_CPU = 16000000UL;

extern uint8_t pinModes[70], pinLevels[70];
inline void pinMode(uint8_t pin, uint8_t mode) { pinModes[pin] = mode; }
inline void digitalWrite(uint8_t pin, uint8_t level) { pinLevels[pin] = level; }
int digitalRead(uint8_t pin);            // in sim.cpp (keypad)
inline int analogRead(uint8_t) { return 0; }

// ---- simulated clock
extern uint64_t simMicros;
inline unsigned long millis() { return (unsigned long)(simMicros / 1000); }
inline unsigned long micros() { return (unsigned long)simMicros; }

// ---- random(): the same generator as avr-libc
extern long randomState;
inline long avrRandom() {
  long x = randomState ? randomState : 123459876L;
  long hi = x / 127773L, lo = x % 127773L;
  x = 16807L * lo - 2836L * hi;
  if (x < 0) x += 0x7fffffffL;
  randomState = x;
  return x;
}
```

```
inline long random(long howBig) { return howBig ? avrRandom() % howBig : 0; }
inline long random(long howSmall, long howBig) {
  return howSmall >= howBig ? howSmall : howSmall + random(howBig - howSmall);
}
inline void randomSeed(unsigned long seed) { if (seed) randomState = (long)seed; }

// ---- registers (timers 1-5, ports, EEPROM)
#define REG8(name) inline volatile uint8_t name = 0
#define REG16(name) inline volatile uint16_t name = 0
REG8(TCCR1A); REG8(TCCR1B); REG16(OCR1A); REG16(TCNT1);
REG8(TCCR2A); REG8(TCCR2B); REG8(OCR2A); REG8(OCR2B); REG8(TIMSK2);
REG8(TCCR3A); REG8(TCCR3B); REG16(OCR3A); REG16(TCNT3);
REG8(TCCR4A); REG8(TCCR4B); REG16(OCR4A); REG16(TCNT4);
REG8(TCCR5A); REG8(TCCR5B); REG16(OCR5A); REG16(TCNT5);
REG8(PORTF); REG8(PORTK);
const uint8_t WGM12 = 3, CS12 = 2, COM1A0 = 6;
const uint8_t WGM21 = 1, CS22 = 2, CS21 = 1, OCIE2A = 1, OCIE2B = 2;

inline uint8_t eepromData[4096];
inline volatile uint16_t EEAR = 0;
inline volatile uint8_t EEDR = 0;
const uint8_t EERE = 0, EEPE = 1, EEMPE = 2;
struct EecrRegister {                    // setting EERE reads, setting EEPE writes
  operator uint8_t() const { return 0; } // never busy
  EecrRegister& operator|=(int bits) {
    if (bits & _BV(EERE)) EEDR = eepromData[EEAR % 4096];
    if (bits & _BV(EEPE)) eepromData[EEAR % 4096] = EEDR;
    return *this;
  }
};
inline EecrRegister EECR;

// ---- Serial: prints to the harness, reads the commands of the test script
void serialWrite(const std::string& text);   // in sim.cpp
extern std::string serialInput;
struct SerialPort {
  void begin(unsigned long) {}
  int available() { return (int)serialInput.size(); }
  int read() {
    if (serialInput.empty()) return -1;
    char c = serialInput[0];
    serialInput.erase(0, 1);
    return (unsigned char)c;
  }
  void print(const __FlashStringHelper* s) { serialWrite(reinterpret_cast<const char*>(s)); }
  void print(const char* s) { serialWrite(s); }
  void print(char c) { serialWrite(std::string(1, c)); }
  void print(int n) { serialWrite(std::to_string(n)); }
  void print(unsigned n) { serialWrite(std::to_string(n)); }
  void print(long n) { serialWrite(std::to_string(n)); }
  void print(unsigned long n) { serialWrite(std::to_string(n)); }
  void print(unsigned char n) { serialWrite(std::to_string(n)); }
  template <typename T> void println(T value) { print(value); serialWrite("\n"); }
  void println() { serialWrite("\n"); }
};
inline SerialPort Serial;
```

tests/host/sim.cpp – اجراکنندهٔ آزمون روی رایانه

کد بازی را با اسکریپت‌های آزمون اجرا می‌کند (کلیدها، Serial، خروجی صفحه).

```
/*
 * sim.cpp -- runs the real VOID RUNNER code on a PC, driven by a test script.
 * No Wokwi minutes needed: a whole game takes a few seconds.
 *
 * Build (from the project folder, MSYS2 g++):
 *   g++ -std=c++17 -O2 -Itests/host -o build/sim.exe tests/host/sim.cpp
 * Run:
 *   build/sim.exe tests/host/<script>.txt > log.txt
 *
 * Script commands (one per line, # = comment):
 *   run <ms>                 let the simulated time run
 *   down <key> / up <key>    hold / release a keypad key (W, A, R, ...)
 *   tap <key> [ms]           press a key for ms (default 60), then wait 60 ms
 *   send <text>              type text into Serial (test commands like !d, !s)
 *   until <text> [ms]        run until the Serial output shows text (default limit 60 s)
 *   dump                     print the screen (same as send !d)
 *   record <file> <ms>       from now on, write the screen to <file> every <ms>
 *   stop                     stop recording
 *   sound <file>             log every buzzer frequency change to <file>
 *   reset                    power off and on again (the EEPROM keeps its data)
```

```
 *   seed <n>                start the random generator at n (another game)
 *   times                   show the time (ms) in front of every Serial line
 * A failed "until" prints [SIM] FAIL and ends with exit code 1.
 */
#include "Arduino.h"
#include "../../void_runner/void_runner.ino"
#include <fstream>
#include <iostream>
#include <sstream>

uint8_t pinModes[70], pinLevels[70];
uint64_t simMicros = 0;
long randomState = 1;
std::string serialInput;

// ---- Serial output: printed, and kept so "until" can search it
std::string serialOutput;
size_t searchFrom = 0;                  // "until" only looks at output after this point

bool showTimes = false;                 // "times": put the time in front of every line
bool lineStart = true;

void serialWrite(const std::string& text) {
  for (char c : text) {
    if (showTimes && lineStart) std::cout << '[' << millis() << "] ";
    std::cout << c;
    lineStart = c == '\n';
  }
  serialOutput += text;
}

// ---- keypad: a column reads LOW when its key is held and its row is driven LOW
bool keyDown[KEY_ROWS][KEY_COLS];

int digitalRead(uint8_t pin) {
  for (uint8_t c = 0; c < KEY_COLS; c++) {
    if (KEY_COL_PINS[c] != pin) continue;
    for (uint8_t r = 0; r < KEY_ROWS; r++) {
      uint8_t rowPin = KEY_ROW_PINS[r];
      if (keyDown[r][c] && pinModes[rowPin] == OUTPUT && pinLevels[rowPin] == LOW) return LOW;
    }
    return HIGH;
  }
  return HIGH;
}

bool setKey(char key, bool down) {
  for (uint8_t r = 0; r < KEY_ROWS; r++)
    for (uint8_t c = 0; c < KEY_COLS; c++)
      if (KEY_NAMES[r][c] == key) {
        keyDown[r][c] = down;
        return true;
      }
  return false;
}

// ---- screen recording, in the same text format as the !d dump
std::ofstream recordFile;
uint32_t recordEveryMs = 0, recordNextMs = 0;

void recordScreen() {
  recordFile << "[DUMP] begin t=" << millis() << "\n";
  for (uint8_t i = 0; i < TOTAL_ROWS; i++) {
    uint8_t r = (i < STATUS_ROWS) ? SCREEN_H + i : i - STATUS_ROWS;
    if (i == STATUS_ROWS) recordFile << "----------------\n";
    for (uint8_t x = 0; x < SCREEN_W; x++) recordFile << ((shown[r] >> x) & 1 ? '#' : '.');
    recordFile << "\n";
  }
  recordFile << "[DUMP] end\n";
}

// ---- sound log: the frequency each buzzer timer plays (0 = silent)
std::ofstream soundFile;
uint16_t lastHz[BUZZER_COUNT];

void logSound() {
  for (uint8_t v = 0; v < BUZZER_COUNT; v++) {
    const TimerRegs& t = VOICE_TIMER[v];
    bool on = (*t.tccrB & 7) && (*t.tccrA & _BV(COM1A0));
    uint16_t hz = on ? F_CPU / (2UL * 256 * (*t.ocrA + 1)) : 0;
    if (hz != lastHz[v]) {
      lastHz[v] = hz;
      soundFile << millis() << " " << (int)v << " " << hz << "\n";
    }
```

```
  }
}

// ---- one millisecond of the Arduino's life
void tick() {
  simMicros += 1000;
  loop();
  if (recordFile.is_open() && millis() >= recordNextMs) {
    recordScreen();
    recordNextMs = millis() + recordEveryMs;
  }
  if (soundFile.is_open()) logSound();
}

void runMs(uint32_t ms) {
  for (uint32_t i = 0; i < ms; i++) tick();
}

bool runUntil(const std::string& text, uint32_t limitMs) {
  for (uint32_t i = 0; i <= limitMs; i++) {
    size_t at = serialOutput.find(text, searchFrom);
    if (at != std::string::npos) {
      searchFrom = at + text.size();
      return true;
    }
    tick();
  }
  return false;
}

int main(int argc, char** argv) {
  if (argc < 2) {
    std::cerr << "usage: sim <script>\n";
    return 2;
  }
  std::ifstream script(argv[1]);
  if (!script) {
    std::cerr << "cannot open " << argv[1] << "\n";
    return 2;
  }
  memset(eepromData, 0xFF, sizeof(eepromData));   // a new chip: EEPROM erased
  setup();
  std::string line;
  int lineNo = 0;
  while (std::getline(script, line)) {
    lineNo++;
    if (!line.empty() && line.back() == '\r') line.pop_back();
    std::istringstream in(line);
    std::string cmd;
    if (!(in >> cmd) || cmd[0] == '#') continue;
    std::string arg;
    std::getline(in >> std::ws, arg);
    if (cmd == "run") {
      runMs(std::stoul(arg));
    } else if (cmd == "down" || cmd == "up") {
      if (!setKey(arg[0], cmd == "down")) std::cout << "[SIM] unknown key " << arg << "\n";
    } else if (cmd == "tap") {
      std::istringstream a(arg);
      char key;
      uint32_t ms = 60;
      a >> key >> ms;
      setKey(key, true);
      runMs(ms);
      setKey(key, false);
      runMs(60);
    } else if (cmd == "send") {
      serialInput += arg;
      runMs(5);
    } else if (cmd == "dump") {
      serialInput += "!d";
      runMs(5);
    } else if (cmd == "until") {
      uint32_t limit = 60000;
      size_t q1 = arg.find('"'), q2 = arg.rfind('"');
      std::string text = arg;
      if (q1 != std::string::npos && q2 > q1) {
        text = arg.substr(q1 + 1, q2 - q1 - 1);
        std::istringstream rest(arg.substr(q2 + 1));
        rest >> limit;
      }
      if (!runUntil(text, limit)) {
        std::cout << "\n[SIM] FAIL line " << lineNo << ": no \"" << text << "\" within "
                  << limit << " ms (t=" << millis() << ")\n";
        return 1;
```

```
      }
    } else if (cmd == "record") {
      size_t lastSpace = arg.rfind(' ');           // the file name may contain spaces
      recordEveryMs = std::stoul(arg.substr(lastSpace + 1));
      recordFile.open(arg.substr(0, lastSpace));
      recordNextMs = millis();
    } else if (cmd == "stop") {
      recordFile.close();
    } else if (cmd == "sound") {
      soundFile.open(arg);
    } else if (cmd == "times") {
      showTimes = true;
    } else if (cmd == "seed") {
      randomState = std::stol(arg);
    } else if (cmd == "reset") {
      memset((void*)keyDown, 0, sizeof(keyDown));
      setup();
    } else {
      std::cout << "[SIM] unknown command on line " << lineNo << ": " << line << "\n";
      return 2;
    }
  }
  std::cout << "\n[SIM] PASS t=" << millis() << "\n";
  return 0;
}
```

tests/host/run_tests.py – اجراکنندهٔ آزمون‌ها

نسخهٔ رایانه را می‌سازد و همهٔ آزمون‌ها و بررسی تعادل را اجرا می‌کند.

```
#!/usr/bin/env python3
"""
VOID RUNNER - automated tests on the PC (no Wokwi minutes needed).

Builds tests/host/sim.cpp (the real game code + a PC stand-in for Arduino) with g++ and
runs every test script in tests/host/*.txt. Each script presses keys, sends Serial test
commands and waits for the game's Serial messages; see sim.cpp for the commands.

    python tests/host/run_tests.py              build + run all test scripts
    python tests/host/run_tests.py --balance    also: autopilot games without the shield
                                                on EASY / NORMAL / HARD (wins per level)

Needs g++ (MSYS2 UCRT64 on this PC: C:\\msys64\\ucrt64\\bin). Logs go to build/.
"""
import os
import shutil
import subprocess
import sys
from pathlib import Path

ROOT = Path(__file__).resolve().parents[2]
HOST = ROOT / 'tests' / 'host'
BUILD = ROOT / 'build'
EXE = '.exe' if os.name == 'nt' else ''


def find_gpp():
    gpp = shutil.which('g++')
    if not gpp and Path(r'C:\msys64\ucrt64\bin\g++.exe').exists():
        gpp = r'C:\msys64\ucrt64\bin\g++.exe'
    if not gpp:
        sys.exit('g++ not found (install MSYS2 UCRT64 or add it to PATH)')
    return gpp


def build(name, defines=()):
    exe = BUILD / (name + EXE)
    cmd = [find_gpp(), '-std=c++17', '-O2', '-static', '-I', str(HOST),
           *('-D' + d for d in defines), '-o', str(exe), str(HOST / 'sim.cpp')]
    subprocess.run(cmd, check=True, cwd=ROOT)
    return exe


def run(exe, script_text, log):
    script = BUILD / (log.stem + '.script')
    script.write_text(script_text, encoding='utf-8')
    result = subprocess.run([str(exe), str(script)], capture_output=True, text=True, cwd=ROOT)
    log.write_text(result.stdout, encoding='utf-8')
    return result.returncode == 0, result.stdout


```

```
def run_tests():
    exe = build('sim')
    failed = 0
    for script in sorted(HOST.glob('*.txt')):
        ok, out = run(exe, script.read_text(encoding='utf-8'), BUILD / ('test_' + script.stem + '.log'))
        last = [l for l in out.splitlines() if l.startswith('[SIM]')][-1:]
        print('%-6s %-12s %s' % ('PASS' if ok else 'FAIL', script.stem, last[0] if last else ''))
        failed += not ok
    return failed


# Autopilot games without the shield. The autopilot here "thinks" only every 250 ms,
# a rough stand-in for a human's reaction time, so the result says how hard each level is.
def balance(seeds=48, react_ms=250):
    exe = build('sim_balance', ['AUTOPILOT_REACT_MS=%d' % react_ms])
    for level, key in (('EASY', 'tap A'), ('NORMAL', ''), ('HARD', 'tap D')):
        wins, bosses = 0, []
        for seed in range(1, seeds + 1):
            script = '\n'.join([
                'seed %d' % seed, 'until "[VR] screen logo"', 'tap R', 'until "[VR] screen title"',
                'tap R', 'until "[VR] screen menu"', 'tap S', 'tap S', 'tap R',
                'until "[VR] screen options"', 'tap S', 'tap S', key, 'tap Q',
                'until "[VR] screen menu"', 'send !x', 'send !1', 'until "[VR] phase 1"',
                'until "[VR] screen victory" 900000', ''])
            ok, out = run(exe, script, BUILD / 'balance.log')
            wins += ok
            bosses.append(out.count('[VR] boss down'))
        print('%-6s wins %2d/%d   bosses beaten per game: %s' % (level, wins, seeds, ' '.join(map(str,
     bosses))))


if __name__ == '__main__':
    BUILD.mkdir(exist_ok=True)
    failed = run_tests()
    if '--balance' in sys.argv:
        balance()
    sys.exit(1 if failed else 0)
```

tests/host/controls.txt – آزمون: کنترل‌ها

قواعد کلیدها.

```
# The agreed key rules, pressed on the real (simulated) keypad during phase 1's intro,
# before any enemy arrives. The ship starts at x=6 y=20 with 60 ammo (BOLT).
until "[VR] screen logo"
send !i
send !1
until "[VR] phase 1"
send !s
until "ammo=60 x=6 y=20"

# tap = one pixel
tap D
send !s
until "ammo=60 x=7 y=20"

# hold = glide (first pixel at once, then after 170 ms one pixel every 70 ms)
down A
run 500
up A
run 50
send !s
until "ammo=60 x=2 y=20"

# up is limited to row 9, so the ship stays in the lower part of the screen
down W
run 1500
up W
run 50
send !s
until "x=2 y=9"
down S
run 1500
up S
run 50

# tap R = one bullet
tap R
send !s
until "ammo=59 x=2 y=21"

```

```
# hold R = auto-fire, one bullet every 200 ms (0, 200, 400, 600, 800 ms)
down R
run 900
up R
run 50
send !s
until "ammo=54 "

# a move key stops the fire, even with R still held; the ship moves instead
down R
run 300
down D
run 400
up D
run 400
up R
run 50
send !s
until "ammo=52 x=6 y=21"

# while R is held, a held move key does not glide; letting go of R lets it glide again
down D
run 300
down R
run 400
up R
run 200
up D
run 50
send !s
until "ammo=50 x=12 y=21"
```

tests/host/screens.txt – آزمون: صفحه‌ها

همهٔ صفحه‌ها و EEPROM.

```
# Every screen with the real keys: logo, title, menu, hangar, options, LED test, best,
# a game with pause, game over, the global keys, and a power cycle (EEPROM).
until "[VR] saved: best=0 ship=0 difficulty=1"
until "[VR] screen logo"
run 2000
tap R
until "[VR] screen title"
run 500
dump
tap R
until "[VR] screen menu"
dump

# SHIP: the hangar, choose DART
tap S
tap R
until "[VR] screen hangar"
run 400
dump
tap D
run 400
dump
tap R
until "[VR] ship DART"
until "[VR] screen menu"

# OPTS: difficulty HARD, then the LED test
tap S
tap R
until "[VR] screen options"
dump
tap S
tap S
tap D
until "[VR] option DIFF 2"
dump
tap S
tap R
until "[VR] screen ledtest"
run 800
dump
run 1500
dump
run 2500
dump
```

```
run 1500
dump
until "[VR] screen options" 10000
tap Q
until "[VR] screen menu"

# BEST before any game
tap S
tap R
until "[VR] screen best"
dump
tap Q
until "[VR] screen menu"

# PLAY with DART on HARD: 3 lives, 40 ammo; pause and continue; lose
tap W
tap W
tap W
tap R
until "[VR] phase 1"
send !s
until "lives=3 ammo=40"
send !i
send !x
run 15000
tap P
until "[VR] screen pause"
run 1000
dump
tap P
until "[VR] screen game"
run 1000
send !k
until "[VR] game over score="
until "[VR] screen gameover" 5000
until "[VR] new best" 100
run 1500
dump
run 1500
dump
tap R
until "[VR] screen menu"

# global keys
tap B
until "[VR] brightness 50"
tap M
until "[VR] sound off"
tap M
until "[VR] sound on"

# BEST after the game
tap S
tap S
tap S
tap R
until "[VR] screen best"
dump

# power off and on: settings and best score come back from the EEPROM
reset
until "[VR] saved: best="
until " ship=1 difficulty=2"

# demo: the title screen untouched for 20 s starts a demo game; any key ends it
until "[VR] screen title" 10000
until "[VR] demo" 25000
run 4000
dump
tap S
until "[VR] screen title"
```

tests/host/playthrough.txt – آزمون: کل بازی

همهٔ مرحله‌ها تا پیروزی.

```
# Whole game played by the autopilot (shield on, normal speed): all three phases,
# warnings, bosses (with the Void King's second form) and the victory screen.
until "[VR] screen logo"
send !i
send !x
```

```
send !1
until "[VR] phase 1"
run 3000
dump
until "[VR] warning" 200000
send !s
until "[VR] boss" 10000
run 3000
dump
send !s
until "[VR] boss down" 120000
until "[VR] phase clear" 10000
until "[VR] phase 2" 10000
until "[VR] warning" 200000
send !s
until "[VR] boss" 10000
run 3000
dump
until "[VR] boss down" 120000
until "[VR] phase 3" 10000
until "[VR] warning" 200000
send !s
until "[VR] boss" 10000
run 3000
dump
until "[VR] boss form 2" 120000
run 500
dump
until "[VR] boss down" 120000
until "[VR] screen victory" 10000
until "[VR] victory score=" 100
run 2000
dump
```